Polynomial-Resource Classification of Quantum Circuit Families via Classical Shadows

Andrew Maciejunes
Virginia Modeling, Analysis, and Simulation Center
Old Dominion University
Norfolk, VA, USA
amacieju@odu.edu

Ross Gore
Center for Secure and Intelligent Critical Systems
Old Dominion University
Norfolk, VA, USA
rgore@odu.edu

Sachin Shetty
Center for Secure and Intelligent Critical Systems
Old Dominion University
Norfolk, VA, USA
sshetty@odu.edu

Barry Ezell
Virginia Modeling, Analysis, and Simulation Center
Old Dominion University
Norfolk, VA, USA
bezell@odu.edu

***Abstract*—We compare four polynomial-resource measurement strategies, (I) Z-basis-only, (II) nearest-neighbor ZZ (NN), (III) multi-basis (Z, X, Y), and (IV) classical shadows, for classifying three quantum circuit families: IQP, Clifford, and Clifford+T. We find Z-only measurements outperform multi-basis and classical shadows across all qubit counts and all four classifiers evaluated, and the $O(n)$-feature NN strategy matches Z-only to within 0.02 in Random Forest accuracy. The best result is a Random Forest accuracy of 0.91 at 4–5 qubits under Z-only (0.89 for NN, 0.85 for multi-basis, 0.67 for shadows). All four strategies collapse to near-chance accuracy (≈ 0.33) above approximately 12 qubits under the quadratic shot budget $s = 16n^2$. These findings indicate that the discriminative signal between these circuit families is concentrated in local, nearest-neighbor Z-basis correlations, consistent with the diagonal gate structure of IQP circuits, and that additional Pauli correlator types or long-range correlations carry no compensating discriminative power for this task. These results establish that a quadratic shot budget is insufficient for reliable classification above approximately 12 qubits, but do not rule out the existence of a subquadratic or otherwise more efficient polynomial-resource strategy; whether any polynomial measurement protocol can classify these families at large qubit counts remains an open question.**

***Index Terms*—classical shadows, quantum circuit families, IQP circuits, Clifford circuits, polynomial resources, distribution classification, Pauli correlators, quantum machine learning**

I. Introduction

A fundamental question in quantum information is whether the output distributions of quantum circuits, distributions that cannot be efficiently represented classically, can be meaningfully characterized using only polynomially many measurements [1]. Quantum state tomography, originally proposed by Vogel and Risken (1989) [2] and first demonstrated experimentally by Smithey et al. (1993) [3], provides a complete reconstruction of the quantum state but at prohibitive cost. Haah et al. (2016) [4] rigorously established this cost with a lower bound of $\Omega(d^2/\delta)$ copies, where d is the Hilbert space dimension and δ is the desired precision. Since $d = 2^n$ for an n-qubit system, full tomography requires exponentially many measurements in the number of qubits, rendering it infeasible for systems of practical interest. This exponential barrier motivates the search for protocols that extract meaningful information about quantum states without full reconstruction.

Quantum circuit families provide a principled testbed for this question. IQP, Clifford, and Clifford+T circuits produce distributions with qualitatively different statistical signatures, rooted in their distinct computational complexity properties. Clifford circuits are classically simulable; IQP sampling is believed to be classically hard under plausible complexity-theoretic conjectures [5]; Clifford+T circuits, a universal gate set [6], [7], interpolate between the two. If these families can be distinguished with polynomially many measurements, it suggests that their distributional signatures are encoded in low-order statistics that a polynomial measurement protocol can access.

The key methodological challenge is choosing the right measurement protocol. Measuring in a single basis (Z-only) gives access to ZZ correlators but misses the X and Y components of the Pauli correlation structure. Measuring in three global bases (Z, X, Y) recovers ZZ, XX, and YY correlators but requires $3\times$ the shot budget and still misses mixed-basis correlators (XY, XZ, YZ). Classical shadows resolve this. By applying a random single-qubit Clifford rotation before measurement, all six two-qubit Pauli correlators can be estimated from a single unified protocol with sample complexity $O(\log n^2) = O(\log n)$ to predict all pairwise correlators simultaneously, significantly more efficient than the $O(n^2)$ shots required to estimate each correlator type independently. In this work, all four measurement strategies share the same $O(n^2)$ shot budget to ensure a fair experimental comparison; under this budget classical shadows accesses all six Pauli correlator types simultaneously, while Z-only, NN, and multi-basis access fewer.

Contributions:

- An empirical comparison of four measurement strategies

(Z-only, nearest-neighbor ZZ, multi-basis, and classical shadows) for classifying IQP, Clifford, and Clifford+T circuit families, showing that Z-only and NN outperform multi-basis and shadows and inverting the hypothesis that richer Pauli correlation structure would benefit classification.
- Evidence that the discriminative signal is concentrated in local, nearest-neighbor ZZ correlations: an $O(n)$-feature NN strategy matches the $O(n^2)$-feature Z-only strategy to within 0.02 in Random Forest accuracy, consistent with the diagonal computational-basis structure of IQP circuits.
- Characterization of a scaling collapse near 12 qubits at which all implemented polynomial strategies degrade to near-chance performance under the quadratic shot budget, establishing a practical limit for this feature set and shot scaling law.

II. Background

A. Circuit Families as Distribution Classes

We consider three quantum circuit families that span a range of computational complexity.

a) Clifford Circuits: Generated by $\{H, S, \mathrm{CNOT}\}$, Clifford circuits are efficiently simulable classically via the stabilizer formalism [8]. Their output distributions possess structured pairwise correlations reflecting the underlying stabilizer group geometry.

b) Clifford+T Circuits: Adding $T = \mathrm{diag}(1, e^{i\pi/4})$ yields a universal gate set [6]. Sufficient T-gate density breaks the stabilizer structure and moves the circuit outside the efficiently simulable regime, producing a distributional signature intermediate between Clifford and IQP.

c) Instantaneous Quantum Polynomial Circuits: IQP circuits apply diagonal gates in the computational (Z) basis, sandwiched by Hadamard layers [9]. Classical hardness of IQP sampling is supported by complexity-theoretic arguments [5], and their parity structure produces a distributional fingerprint qualitatively distinct from the Clifford family.

B. Classical Shadows

Classical shadows [10] provide an efficient protocol for estimating many properties of a quantum state from a single randomized measurement dataset. For each measurement shot, a random single-qubit unitary U_i is applied to each qubit i before measurement in the computational basis, and the rotation choice is recorded alongside the outcome. The measurement channel can then be inverted classically to produce unbiased estimators for arbitrary observables.

For a single-qubit Pauli $P_i \in \{X, Y, Z\}$, the shadow estimator is:

$$\hat{P}_i = 3 \cdot (-1)^{b_i} \cdot \mathbf{1}[U_i \text{ matches } P_i\text{'s basis}], \tag{1}$$

where the factor of 3 corrects for the $1/3$ probability of any given basis being selected. For a two-qubit correlator $P_i P_j$, the estimator is the product of single-qubit estimators, yielding a factor of 9 and requiring both U_i and U_j to match their respective Pauli bases.

The connected correlator $\langle P_i P_j \rangle_c = \langle P_i P_j \rangle - \langle P_i \rangle \langle P_j \rangle$ can be estimated by combining single- and two-qubit shadow estimators. For K Pauli operators, the required number of shadows scales as $O(K/\varepsilon^2)$ for bounded observables, independent of system size [10]. For all $6 \cdot \binom{n}{2}$ two-qubit Pauli correlators, this yields a total shot cost of $O(n^2/\varepsilon^2)$—polynomial in n.

C. Distribution Classification

Distribution testing and quantum state discrimination provide the theoretical foundations for circuit family classification. Classical distribution testing asks whether two sample sequences were drawn from the same distribution, with sample complexity that depends on the alphabet size and closeness notion [11]. In the quantum setting, quantum state discrimination minimizes the probability of misidentifying one of several candidate states given a fixed number of copies [12], while quantum hypothesis testing establishes error exponents for distinguishing between two states in the asymptotic copy limit [13]. These frameworks are information-theoretically tight but assume access to the full quantum state; when only classical measurement outcomes are available the problem reduces to distinguishing between high-dimensional probability distributions from samples.

More directly related is the body of work on circuit fingerprinting and spoofing detection. Aaronson and Chen [14] propose linear cross-entropy benchmarking as a statistical test for quantum supremacy claims, exploiting the anticorrelation between a classical simulator's probability assignments and typical bitstring frequencies. Barak et al. [15] show that low-degree polynomial estimators cannot efficiently distinguish random quantum circuit outputs from uniform noise at large system size, establishing hardness results for feature-based discrimination. Hangleiter et al. [16] study anticoncentration and show that IQP and random circuit families exhibit qualitatively different concentration behavior, a property reflected in Hamming-weight statistics. The present work complements these results by providing a systematic empirical comparison of four measurement strategies — Z-only, nearest-neighbor ZZ, multi-basis, and classical shadows — for circuit family classification, and is, to our knowledge, the first study to directly benchmark all four strategies against each other on the IQP, Clifford, and Clifford+T families across a range of qubit counts.

III. Methods

A. Circuit Generation

We use the Qiskit SDK [17] for all of our research. Using Qiskit, we craft random circuits for each of the three previously mentioned circuit families, Clifford, Clifford+T, and IQP. For the first two groups, we define a value N_c, which is the number of gates in a given circuit. We then apply N_c randomly selected gates from the appropriate circuit family to act on randomly selected qubits. For the Clifford family

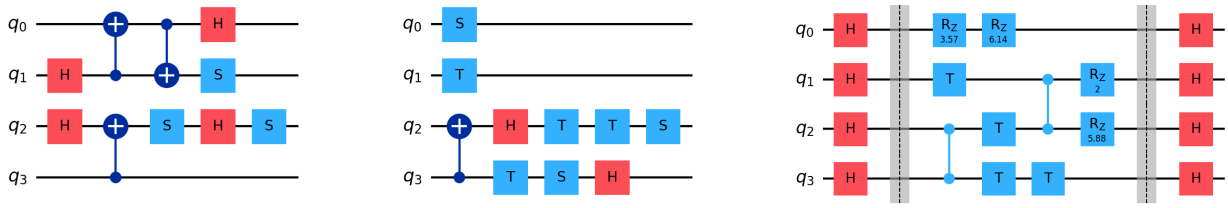

(a) Clifford (b) Clifford+T (c) IQP

Fig. 1. We illustrate an example Clifford, Clifford+T, and IQP circuits for the reader with four qubits and N_c = 10. (a) The Clifford circuit is comprised of gates from the clifford gate as defined above. (b) We observe a disproportionate amount of T gates for the Clifford+T example. This is done to ensure distinctness from the Clifford circuit family. (c) We show an example IQP circuit. It is clear that N_c for IQP circuits refers to the number of operations between the Hadamard gates.

of circuits, each gate has an equal chance of being selected. For the Clifford+T family, the gates have chances of being selected as outlined in Table III-A. The qubit(s) each gate acts on is selected randomly with no preference to any particular qubit, except in the case of two qubit gates, where the control and target must be different.

TABLE I
CLIFFORD+T GATE SELECTION PROBABILITIES. ALL OTHER FAMILIES USED EQUAL PROBABILITIES.

Gate	Probability
S	0.2
CNOT	0.2
H	0.2
T	0.4

IQP circuits are created similarly. The only difference, beside the gate set used, is that the operator $H^{\otimes n}$ is applied at the beginning and end of the circuit, as shown in Figure 1, where n is the number of qubits. We scale the number of qubits from 4 up to 20 qubits. At each qubit count, we generate 1000 circuits of each type. IQP circuits are defined by with any combination of z - diagonal gates. In this work, we specifically use $\{T, RZ, \mathrm{CZ}\}$. The rotation angle for the RZ gate is determined randomly for each instance of the gate in each circuit.

TABLE II
EXPERIMENTAL PARAMETER SWEEP.

Parameter	Values
Circuit families	IQP, Clifford, Clifford+T
Qubit counts	4–20
Shot budget	$16n^2$ (quadratic)
Circuits per family per qubit count	1000
Operations per circuit	1000
Simulator	Qiskit Aer (statevector, GPU)
Measurement strategies	Z-only, NN, multi-basis, shadows
Train/test splits	10 repeated random 80/20

B. Shot Budget Design

The estimation cost of a statistical feature determines the minimum shot budget needed to estimate it reliably.

a) Polynomial-cost features: The Hamming-weight histogram bins all 2^n outcomes into $n+1$ weight classes, requiring $O(n/\varepsilon^2)$ shots. Single-qubit marginals $P(x_i = 1)$ and parity bias require $O(n/\varepsilon^2)$ and $O(1/\varepsilon^2)$ shots respectively. Connected two-qubit Pauli correlations across all $\binom{n}{2}$ pairs require $O(n^2/\varepsilon^2)$ shots in total for any single correlator type (e.g., ZZ, XX, YY). By the classical shadows result, *all* $6\binom{n}{2}$ two-qubit Pauli correlators (ZZ, XX, YY, XY, XZ, YZ) can be estimated simultaneously at the same $O(n^2/\varepsilon^2)$ cost using the shadow protocol.

b) Excluded exponential-cost features: The purpose of this work is to classify quantum circuit families using only polynomial measurement resources. If exponential resources were available, full quantum state tomography could exactly reconstruct the output distribution, rendering classification trivial. In that vein, several prominent statistical measures are excluded from our feature set due to their exponential shot requirements. Shannon entropy [18] $H = -\sum_x \hat{p}(x) \log_2 \hat{p}(x)$ requires $O(2^n/n)$ shots because the empirical frequency estimator is biased whenever bitstrings go unobserved. Collision probability $\mathcal{C} = \sum_x p(x)^2$ requires $\Theta(2^{n/2})$ shots [11]. Rényi entropies of order $\alpha \neq 1$ require at minimum $\Theta(2^{n/2})$ shots for integer $\alpha > 1$ and up to $\Theta(2^n)$ shots for non-integer $\alpha > 1$ or $\alpha < 1$ [19], all exponential in the number of qubits n. Total variation distance to uniformity requires observing a representative fraction of the 2^n outcomes, also at exponential cost. All such features are incompatible with the polynomial-resource constraint central to this work and are therefore disregarded.

c) Quadratic shot scaling: The most expensive retained features are the two-qubit Pauli correlators, requiring $O(n^2)$ shots. We adopt a quadratic shot scaling law $s = \lambda n^2$, where s is the total shot budget, n is the number of qubits, and λ is a constant prefactor controlling the statistical quality of the estimators. We arbitrarily set $\lambda = 16$, giving 256 shots at $n = 4$ and 6400 shots at $n = 20$. For the multi-basis strategy, each of the three basis runs receives $s/3$ shots; the total shot budget remains $s = \lambda n^2$.

C. Measurement Strategies

We compare four measurement protocols, each operating within the same $s = 16n^2$ total shot budget.

a) Z-only baseline: All shots are taken in the computational basis. Features extracted: Hamming-weight histogram, Z-basis single-qubit marginals, parity bias, and all-pairs connected ZZ correlations. This is the minimal polynomial-resource strategy and serves as the baseline.

b) Multi-basis: Shots are divided equally among three global basis rotations: identity (Z basis), Hadamard on all qubits (X basis), and $S^\dagger H$ on all qubits (Y basis), with $s/3$ shots per basis. Features extracted: Hamming-weight histogram, Z/X/Y single-qubit marginals, parity bias, and all-pairs connected ZZ, XX, and YY correlations. This gives three of the six Pauli pair correlator types at the same total shot cost, at the expense of $3\times$ fewer shots per basis run. Mixed-basis correlators (XY, XZ, YZ) are not accessible with global rotations.

c) Classical shadows: For each of the s measurement shots, a random basis (Z, X, or Y) is independently selected for each qubit, and the circuit is measured after applying the corresponding single-qubit rotation. All six two-qubit Pauli correlator types (ZZ, XX, YY, XY, XZ, YZ) are estimated from the resulting shadow dataset using the unbiased shadow estimators described in Section II. This achieves the full Pauli correlation structure at the same total shot budget as the Z-only baseline.

d) Nearest-neighbor ZZ: All shots are taken in the computational basis, identical to the Z-only strategy. However, only the $n-1$ adjacent qubit pairs are used for connected ZZ correlations rather than all $\binom{n}{2}$ pairs. Features extracted: Hamming-weight histogram, Z-basis single-qubit marginals, parity bias, and nearest-neighbor connected ZZ correlations. This reduces the feature dimension from $O(n^2)$ to $O(n)$ and tests whether the discriminative signal is concentrated in local, spatially adjacent correlations or requires long-range pairs.

D. Feature Extraction

a) Z-only features: The feature vector concatenates: Hamming-weight histogram ($n+1$ values), Z-marginals (n values), parity bias (1 value), and all-pairs ZZ connected correlations ($\binom{n}{2}$ values):

$$d_{\mathrm{Z}} = (n+1) + n + 1 + \tfrac{n(n-1)}{2} = \tfrac{n^2+3n+4}{2}. \tag{2}$$

This grows as $O(n^2)$, dominated by the all-pairs ZZ term.

b) Multi-basis features: The feature vector extends the Z-only set by appending X-marginals and all-pairs XX correlations, then Y-marginals and all-pairs YY correlations:

$$d_{\mathrm{MB}} = d_{\mathrm{Z}} + 2n + n(n-1) = O(n^2). \tag{3}$$

c) Shadow features: The feature vector concatenates Z/X/Y single-qubit expectations ($3n$ values) and all six Pauli pair connected correlations across all $\binom{n}{2}$ pairs ($6\cdot\binom{n}{2}$ values):

$$d_{\mathrm{S}} = 3n + 6\cdot\tfrac{n(n-1)}{2} = 3n^2. \tag{4}$$

d) Nearest-neighbor ZZ features: The feature vector matches the Z-only set but replaces all-pairs ZZ correlations with only the $n-1$ adjacent-pair ZZ correlations:

$$d_{\mathrm{NN}} = (n+1) + n + 1 + (n-1) = 3n+1. \tag{5}$$

This feature vector scales as $O(n)$, linear in the number of qubits, in contrast to the $O(n^2)$ scaling of the other three strategies.

E. Classification Pipeline

We evaluate four classifiers from scikit-learn: Logistic Regression (L-BFGS, `max_iter`=1000), Decision Tree (unlimited depth), Random Forest (100 estimators), and Support Vector Machine (RBF kernel). For each qubit count and strategy, accuracy is estimated over 10 repeated random 80/20 train/test splits; the mean is reported and the standard deviation is shown as error bars in all figures. Each classifier is independently trained and evaluated for each measurement strategy and qubit count.

a) Logistic Regression: Logistic Regression models the log-odds of class membership as a linear function of the input features. Given feature vector $\mathbf{x}$, the probability assigned to class k is $P(y=k \mid \mathbf{x}) = \mathrm{softmax}(\mathbf{W}\mathbf{x}+\mathbf{b})_k$, and parameters $\mathbf{W}, \mathbf{b}$ are fit by minimizing cross-entropy via L-BFGS. The decision boundary is a hyperplane in feature space, making the model fast to train and easy to interpret, but limited to linearly separable classes.

b) Decision Tree: A Decision Tree recursively partitions the feature space by selecting, at each node, the feature threshold that maximises the reduction in Gini impurity among the training samples reaching that node. Predictions for a new sample are made by routing it through the learned splits to a leaf, where the majority class label is returned. With unlimited depth, the tree can perfectly partition any finite training set, capturing highly non-linear boundaries at the cost of a tendency to overfit. Unlike Logistic Regression, the decision boundary is piecewise axis-aligned rather than a single hyperplane.

c) Random Forest: A Random Forest is an ensemble of decision trees, each trained on an independently drawn bootstrap sample of the training data. At every split, each tree considers only a random subset of features, decorrelating the trees and reducing variance relative to a single deep tree. The final prediction is the majority vote across all 100 trees. Random Forest therefore inherits the non-linear expressivity of individual trees while substantially improving generalisation, at the cost of reduced interpretability compared to a single tree.

d) Support Vector Machine: A Support Vector Machine (SVM) finds the maximum-margin separating hyperplane in a (possibly kernel-lifted) feature space. We use the Radial Basis Function (RBF) kernel $K(\mathbf{x},\mathbf{x}') = \exp(-\gamma\|\mathbf{x}-\mathbf{x}'\|^2)$, which implicitly maps inputs into an infinite-dimensional space, allowing highly non-linear decision boundaries. Only the support vectors, the training samples closest to the margin,

determine the boundary, making SVMs effective in high-dimensional settings where the number of features is large relative to the number of samples.

e) Key differences: The four classifiers span two primary axes of variation. First, *linearity*: Logistic Regression assumes a linear boundary, while the other three can represent non-linear separations. Second, *variance–bias trade-off*: a single Decision Tree has low bias but high variance; Random Forest reduces variance through ensemble averaging; SVMs control both through the margin objective and the choice of kernel bandwidth. Evaluating all four allows us to assess whether the circuit family discrimination task is linearly separable in the chosen feature space, or whether the non-linear structure of the classifiers is necessary at larger qubit counts.

IV. Results

A. Measurement Strategy Comparison

Figures 2–3 show classifier accuracy as a function of qubit count for each measurement strategy. Error bars show the standard deviation over 10 repeated random 80/20 train/test splits. Table III summarizes the peak accuracy achieved by each classifier under each measurement strategy.

The ordering Z-only $\approx$ NN $>$ multi-basis $>$ shadows is consistent across all classifiers and all qubit counts where any strategy achieves above-chance accuracy. The near-equivalence of Z-only and NN is a key finding: reducing the ZZ feature set from all $\binom{n}{2}$ pairs to only the $n-1$ adjacent pairs costs less than 0.02 in Random Forest accuracy, indicating that the discriminative signal is concentrated in local, nearest-neighbor correlations. This result inverts the original hypothesis that richer Pauli correlation structure would improve classification.

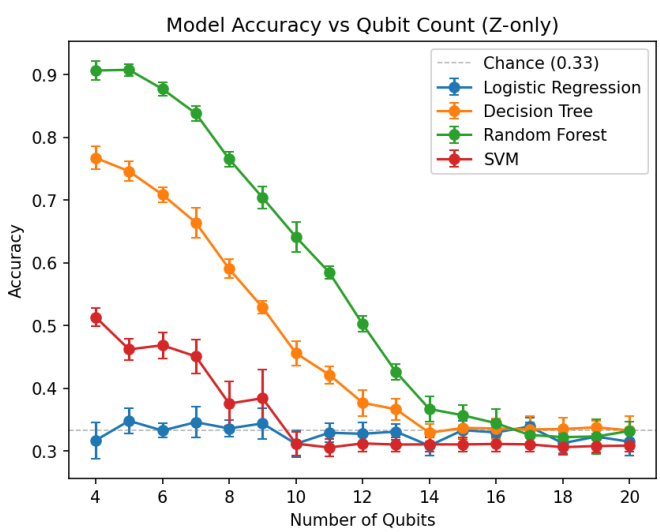

Fig. 2. Classifier accuracy vs. qubit count under the Z-only measurement strategy (4–20 qubits). Error bars show std over 10 repeated train/test splits.

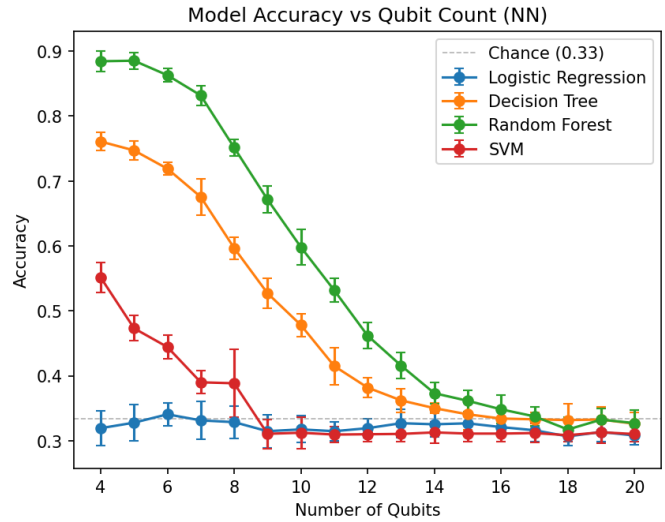

Fig. 3. Classifier accuracy vs. qubit count under the nearest-neighbor ZZ measurement strategy (4–20 qubits). Error bars show std over 10 repeated train/test splits.

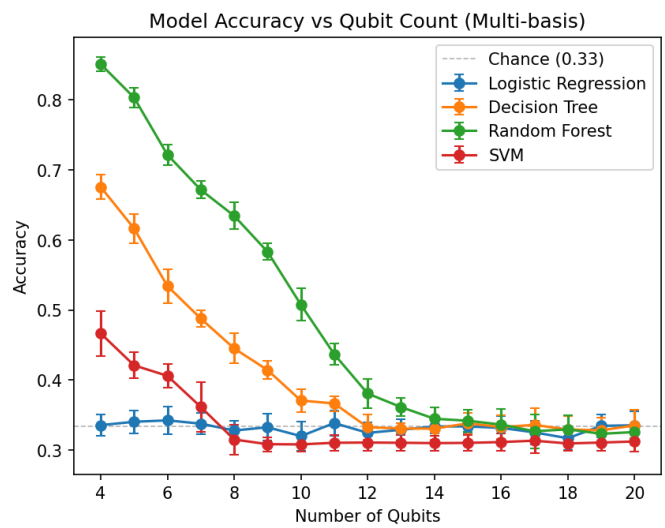

Fig. 4. Classifier accuracy vs. qubit count under the multi-basis measurement strategy (4–20 qubits). Error bars show std over 10 repeated train/test splits.

B. Scaling Collapse

All four strategies show a clear degradation in accuracy as qubit count increases, with a collapse to near-chance performance (≈ 0.33) above approximately 12–14 qubits. This collapse is visible in all four classifiers under all four measurement strategies: even the best-performing Random Forest under Z-only reaches chance accuracy by 14 qubits. Below 10 qubits, tree-based methods (Decision Tree and Random Forest) maintain clearly above-chance accuracy under Z-only and NN; above 12 qubits no classifier reliably exceeds chance under any strategy. The collapse is consistent with the quadratic shot budget $s = 16n^2$ becoming insufficient to resolve the class-separating correlations as system size grows: the same

TABLE III
PEAK CLASSIFIER ACCURACY BY MEASUREMENT STRATEGY.

Strategy	Random Forest	Decision Tree	SVM	Logistic Regression
Z-only	**0.91**	**0.80**	0.52	0.39
NN (ZZ)	0.89	0.78	**0.56**	0.36
Multi-basis	0.85	0.70	0.49	0.36
Classical shadows	0.67	0.50	0.52	0.39

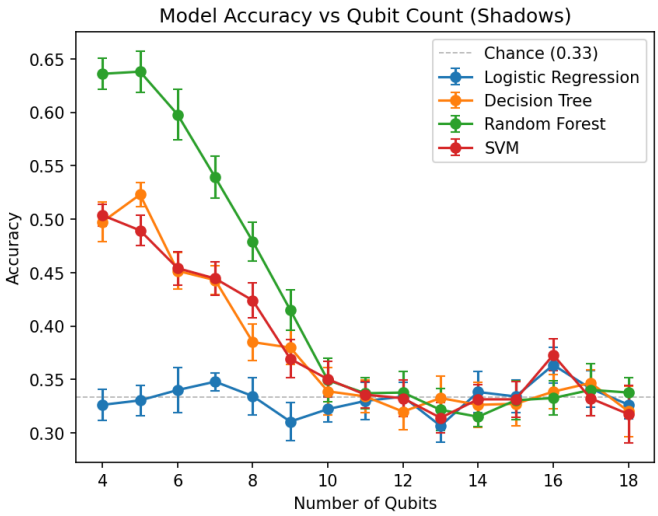

Fig. 5. Classifier accuracy vs. qubit count under the classical shadows measurement strategy (4–18 qubits). Shadows data is unavailable for 19–20 qubits due to incomplete simulation runs. Error bars show std over 10 repeated train/test splits.

constant prefactor $\lambda = 16$ that provides adequate statistics at $n = 4$ (256 shots) is no longer sufficient at $n = 14$ (3136 shots) where the number of all-pairs correlators has grown as $\binom{n}{2}$. Notably, the NN strategy uses only $O(n)$ features, so each nearest-neighbor correlator receives more shots per estimate under the same total budget; this does not prevent the scaling collapse, suggesting the bottleneck is distributional overlap between families rather than estimator variance alone.

C. Linear Separability

Logistic Regression is flat at approximately 0.36–0.39 across all four strategies and all qubit counts, performing at or near the three-class chance level throughout. This indicates that the class boundary separating IQP, Clifford, and Clifford+T circuits is nonlinear in the Pauli correlator feature space: a single hyperplane cannot separate the three families regardless of how many correlator types are included in the feature vector. The strong performance of Random Forest and Decision Tree relative to Logistic Regression and SVM confirms that the discriminative structure is captured by axis-aligned partitions in feature space rather than by a linear function of the features. SVM with the RBF kernel performs between the linear and tree-based methods, indicating that the kernel-induced feature mapping captures some but not all of the relevant nonlinear structure.

V. DISCUSSION

A. Why Z-Only and NN Outperform Multi-Basis and Shadows

The central finding: Z-only outperforms both multi-basis and classical shadows — is explained by the structure of IQP circuits. IQP circuits are defined by diagonal gates in the computational basis sandwiched between Hadamard layers; their distinguishing statistical signatures therefore appear most prominently in Z-basis correlations. The all-pairs connected ZZ correlations captured by the Z-only strategy directly probe the diagonal interaction structure of the IQP family, giving classifiers a maximally informative feature set for this specific discrimination task.

Classical shadows, by contrast, dilutes the Z-basis shot budget by a factor of approximately $1/3$ per qubit per shot: in the random single-qubit Clifford protocol, each qubit is measured in the Z basis only one-third of the time on average, so each ZZ correlator estimate is derived from roughly $s/9$ shots rather than s shots. The shadow protocol compensates by simultaneously estimating five additional correlator types (XX, YY, XY, XZ, YZ), but those types carry no additional discriminative power for the IQP/Clifford/Clifford+T classification task. The result is that shadows pays a statistical cost relative to Z-only without receiving a compensating accuracy benefit. Multi-basis measurements sit between the two: ZZ correlators receive $s/3$ shots rather than s, and the additional XX and YY correlators are similarly uninformative, yielding performance intermediate between Z-only and shadows.

B. Nearest-Neighbor ZZ and the Locality of the Discriminative Signal

The near-equivalence of Z-only and NN is the most surprising finding of this comparison. Z-only computes all $\binom{n}{2}$ pairwise ZZ correlations ($O(n^2)$ features), while NN retains only the $n-1$ adjacent-pair correlations ($O(n)$ features), yet the Random Forest accuracy gap is less than 0.02 across the full qubit range. This indicates that the discriminative signal distinguishing IQP, Clifford, and Clifford+T families is predominantly carried by local, nearest-neighbor ZZ correlations; the long-range pairs included in the Z-only feature set contribute negligible additional classification power under this shot budget.

The locality of the signal also has a practical implication: under the same shot budget $s = 16n^2$, each NN correlator estimate is derived from far more shots than each all-pairs correlator estimate in the Z-only strategy, since the budget is spread over only $n-1$ pairs rather than $\binom{n}{2}$. The fact

that NN still does not outperform Z-only suggests that the marginal long-range correlations in the Z-only feature set, though individually weak, provide a net benefit that offsets their higher estimator variance.

C. Why Logistic Regression Fails

Logistic Regression's flat performance at near-chance accuracy across all strategies indicates that the three circuit families are not linearly separable in the Pauli correlator feature space. Tree-based methods (Random Forest, Decision Tree) substantially outperform both Logistic Regression and SVM because axis-aligned recursive partitioning can capture the non-linear class boundaries that separate IQP, Clifford, and Clifford+T distributions in this feature space. The failure of SVM (RBF kernel) to match Random Forest suggests that the discriminative structure is not well-approximated by radial similarity in the correlator space, but is instead captured by threshold conditions on individual features or small feature subsets — precisely the type of structure that decision trees exploit.

D. Scaling Collapse and Shot Budget

The collapse of all strategies to chance accuracy above approximately 12–14 qubits reflects a fundamental tension between the quadratic shot budget and the growing dimensionality of the feature space. As n increases, the number of all-pairs ZZ correlators grows as $\binom{n}{2} \approx n^2/2$, while the shot budget grows as $16n^2$. The ratio of shots per correlator therefore remains roughly constant at $\lambda = 16$, but the absolute number of shots per correlator ($\approx$ 32 at all qubit counts) is insufficient to resolve the increasingly subtle distributional differences between circuit families as system size grows. Increasing the prefactor λ beyond 16 would shift the collapse threshold to larger qubit counts, at the cost of a proportionally larger total shot budget.

E. Limitations

This study uses noiseless classical simulation. Real device noise will alter the output distributions of all three circuit families and likely degrade classification accuracy, potentially in family-dependent ways. Extending to noisy simulation via Aer noise models, or to real hardware, is a natural next step.

The shot budget prefactor $\lambda = 16$ is heuristic. A principled choice requires knowing the signal-to-noise ratio of the class-separating correlators, which depends on circuit family, qubit count, and gate depth, and is not known a priori.

The scaling collapse above 12 qubits establishes that a quadratic shot budget $s = 16n^2$ is insufficient for reliable classification at large qubit counts, but this result does not rule out the existence of a more efficient polynomial-resource strategy. A subquadratic shot budget, a different feature representation, or an adaptive measurement protocol could in principle recover discriminative power at larger system sizes; this work makes no claim about the fundamental hardness of the classification task, only about the specific strategies evaluated here.

Classical shadows results are unavailable for 19–20 qubits due to incomplete HPC simulation runs. The missing data points fall in the regime where all strategies already operate at near-chance accuracy; the scaling collapse characterization is therefore not materially affected by this gap.

VI. Future Work

Several directions follow naturally from this work.

a) Extended circuit families: IQP circuits are defined by diagonal gates in the Z basis; one can analogously define circuit families diagonal in the X or Y basis by conjugating the diagonal layer with $H^{\otimes n}$ or $(SH)^{\otimes n}$, respectively. These families would carry qualitatively different distributional signatures under Z-basis measurement and could serve as additional classification targets, extending the four-strategy comparison evaluated here. Whether such families are distinguishable from each other and from IQP, Clifford, and Clifford+T under polynomial measurement resources is an open question.

b) Noisy simulation and hardware: All experiments here use noiseless classical simulation. Realistic device noise will alter the output distributions of all three circuit families in ways that may depend on family identity, qubit count, and gate depth. Extending to Aer noise models or real hardware would establish whether the Z-only advantage and the scaling collapse threshold persist under realistic conditions.

c) Shot budget scaling: The collapse to chance accuracy above approximately 12 qubits is tied to the fixed prefactor $\lambda = 16$. Increasing λ would shift the collapse threshold to larger qubit counts; a principled choice of λ requires understanding the signal-to-noise ratio of the class-separating correlators as a function of system size, which remains an open problem. Another approach is to increase the exponent of n such that the shot scaling is no longer quadratic, but perhaps cubic or quartic. As all of the features grow quadratically, this could ensure an appropriate (polynomial) number of shots are used to accurately observe features.

VII. Conclusion

We compared four polynomial-resource measurement strategies: Z-basis-only, nearest-neighbor ZZ, multi-basis (Z, X, Y), and classical shadows for classifying IQP, Clifford, and Clifford+T circuit families across 4–20 qubits under a quadratic shot budget $s = 16n^2$.

Contrary to our initial hypothesis, Z-only measurements outperform multi-basis and classical shadows across all qubit counts and all four classifiers evaluated, and the $O(n)$-feature nearest-neighbor ZZ (NN) strategy matches Z-only to within 0.02 in Random Forest accuracy. Peak Random Forest accuracies are 0.91 (Z-only), 0.89 (NN), 0.85 (multi-basis), and 0.67 (classical shadows). The near-equivalence of Z-only and NN is the most striking finding: reducing the feature set from all $\binom{n}{2}$ pairwise correlators to only the $n-1$ adjacent-pair correlators costs less than 0.02 in accuracy, indicating that the discriminative signal is spatially local. This result is explained by the structure of IQP circuits: their distinguishing statistical signatures are concentrated in Z-basis correlations, so the additional Pauli correlator types accessed by multi-basis and shadow measurements carry no compensating discriminative

power for this task — while diluting the ZZ correlator shot budget.

All strategies collapse to near-chance accuracy (≈ 0.33) above approximately 12–14 qubits under the quadratic shot budget. The scaling collapse reflects the fixed ratio of shots per correlator becoming insufficient to resolve increasingly subtle distributional differences between circuit families at larger system sizes.

Logistic Regression performs at chance across all strategies and qubit counts, confirming that the class boundaries are nonlinear in the Pauli correlator feature space. Tree-based methods (Random Forest, Decision Tree) substantially outperform both Logistic Regression and SVM, indicating that the discriminative structure is captured by threshold conditions on individual features rather than linear functionals of the feature vector.

These findings establish that the relevant distributional distinction between IQP, Clifford, and Clifford$+T$ families lies in Z-basis correlations accessible with the simplest possible polynomial-resource measurement strategy, and that richer Pauli correlation structure provides no benefit for this classification task under a fixed polynomial shot budget.

Acknowledgments

The authors thank the Virginia Modeling, Analysis and Simulation Center (VMASC), the Center for Secure and Intelligent Critical Systems (CSICS), and Old Dominion University for institutional support. This research was supported by the Research Computing clusters at Old Dominion University. The Wahab cluster is supported in part by National Science Foundation grant CNS-1828593, "MRI Acquisition: A Reconfigurable Computing Infrastructure Enabling Interdisciplinary and Collaborative Research in Hampton Roads."

References

[1] A. Montanaro and R. De Wolf, "A survey of quantum property testing," *arXiv preprint arXiv:1310.2035*, 2013.

[2] K. Vogel and H. Risken, "Determination of quasiprobability distributions in terms of probability distributions for the rotated quadrature phase," *Physical Review A*, vol. 40, no. 5, p. 2847, 1989.

[3] D. T. Smithey, M. Beck, M. G. Raymer, and A. Faridani, "Measurement of the wigner distribution and the density matrix of a light mode using optical homodyne tomography: Application to squeezed states and the vacuum," *Physical review letters*, vol. 70, no. 9, p. 1244, 1993.

[4] J. Haah, A. W. Harrow, Z. Ji, X. Wu, and N. Yu, "Sample-optimal tomography of quantum states," in *Proceedings of the forty-eighth annual ACM symposium on Theory of Computing*, 2016, pp. 913–925.

[5] M. J. Bremner, A. Montanaro, and D. J. Shepherd, "Average-case complexity versus approximate simulation of commuting quantum computations," *Physical review letters*, vol. 117, no. 8, p. 080501, 2016.

[6] P. O. Boykin, T. Mor, M. Pulver, V. Roychowdhury, and F. Vatan, "On universal and fault-tolerant quantum computing," *arXiv preprint quant-ph/9906054*, 1999.

[7] S. Bravyi and A. Kitaev, "Universal quantum computation with ideal clifford gates and noisy ancillas," *Physical Review A—Atomic, Molecular, and Optical Physics*, vol. 71, no. 2, p. 022316, 2005.

[8] D. Gottesman, *Stabilizer codes and quantum error correction*. California Institute of Technology, 1997.

[9] D. Shepherd and M. J. Bremner, "Instantaneous quantum computation," *arXiv preprint arXiv:0809.0847*, 2008.

[10] H.-Y. Huang, R. Kueng, and J. Preskill, "Predicting many properties of a quantum system from very few measurements," *Nature Physics*, vol. 16, no. 10, pp. 1050–1057, 2020.

[11] C. L. Canonne, "A survey on distribution testing: Your data is big. but is it blue?" *Theory of Computing*, vol. 9, pp. 1–100, 2020.

[12] S. M. Barnett and S. Croke, "Quantum state discrimination," *Advances in Optics and Photonics*, vol. 1, no. 2, pp. 238–278, 2009.

[13] K. M. R. Audenaert, J. Calsamiglia, R. Muñoz-Tapia, E. Bagan, L. Masanes, A. Acin, and F. Verstraete, "Discriminating states: The quantum Chernoff bound," *Physical Review Letters*, vol. 98, no. 16, p. 160501, 2007.

[14] S. Aaronson and L. Chen, "Complexity-theoretic foundations of quantum supremacy experiments," in *Proceedings of the 32nd Computational Complexity Conference (CCC)*, 2017, pp. 22:1–22:67.

[15] B. Barak, C.-N. Chou, and X. Gao, "Spoofing linear cross-entropy benchmarking in shallow quantum circuits," *arXiv preprint arXiv:2005.02421*, 2021.

[16] D. Hangleiter, J. Bermejo-Vega, M. Schwarz, and J. Eisert, "Anticoncentration theorems for schemes showing a quantum speedup," *Quantum*, vol. 2, p. 65, 2018.

[17] A. Javadi-Abhari, M. Treinish, K. Krsulich, C. J. Wood, J. Lishman, J. Gacon, S. Martiel, P. D. Nation, L. S. Bishop, A. W. Cross, B. R. Johnson, and J. M. Gambetta, "Quantum computing with Qiskit," 2024.

[18] P. Bromiley, N. Thacker, and E. Bouhova-Thacker, "Shannon entropy, renyi entropy, and information," *Statistics and Inf. Series (2004-004)*, vol. 9, no. 2004, pp. 2–8, 2004.

[19] J. Acharya, A. Orlitsky, A. T. Suresh, and H. Tyagi, "Estimating renyi entropy of discrete distributions," *IEEE Transactions on Information Theory*, vol. 63, no. 1, pp. 38–56, 2017.