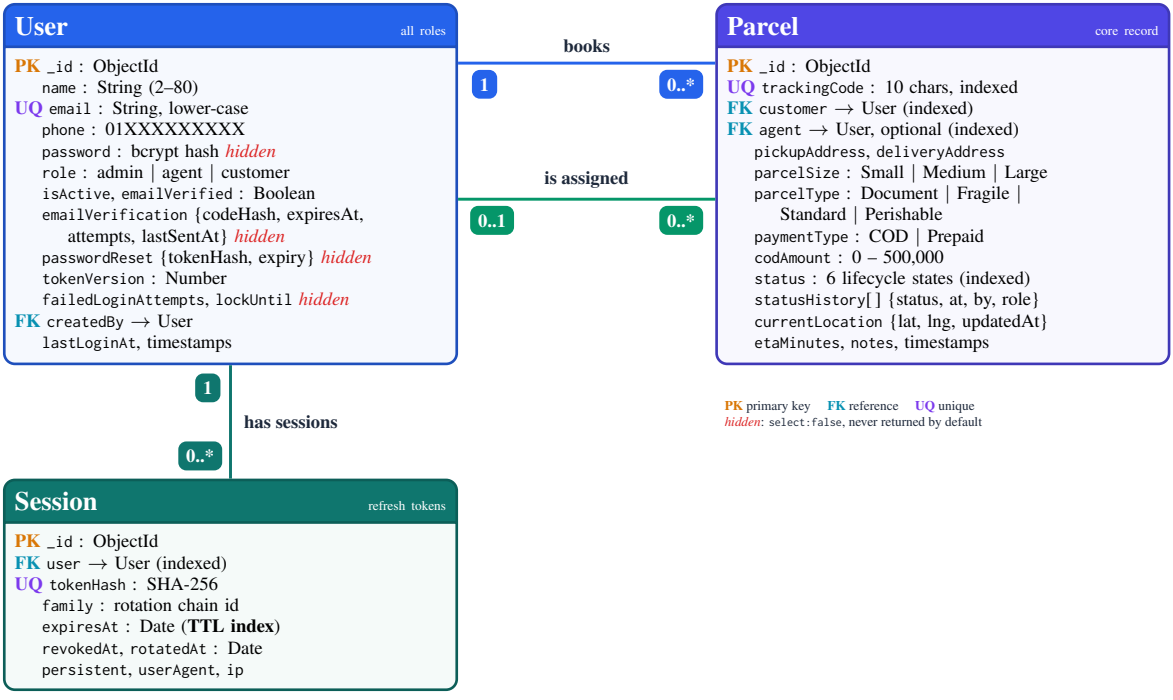
User
all roles
PK _id : ObjectId
name : String (2–80)
UQ email : String, lower-case
phone : 01XXXXXXXXX
password : bcrypt hash hidden
role : admin | agent | customer
isActive, emailVerified : Boolean
emailVerification {codeHash, expiresAt, attempts, lastSentAt} hidden
passwordReset {tokenHash, expiry} hidden
tokenVersion : Number
failedLoginAttempts, lockUntil hidden
FK createdBy → User
lastLoginAt, timestamps
books
1
0..*
is assigned
0..1
0..*
Parcel
core record
PK _id : ObjectId
UQ trackingCode : 10 chars, indexed
FK customer → User (indexed)
FK agent → User, optional (indexed)
pickupAddress, deliveryAddress
parcelSize : Small | Medium | Large
parcelType : Document | Fragile | Standard | Perishable
paymentType : COD | Prepaid
codAmount : 0 – 500,000
status : 6 lifecycle states (indexed)
statusHistory[ ] {status, at, by, role}
currentLocation {lat, lng, updatedAt}
etaMinutes, notes, timestamps
1
has sessions
0..*
Session
refresh tokens
PK _id : ObjectId
FK user → User (indexed)
UQ tokenHash : SHA-256
family : rotation chain id
expiresAt : Date (TTL index)
revokedAt, rotatedAt : Date
persistent, userAgent, ip
PK primary key FK reference UQ unique
hidden: select:false, never returned by default