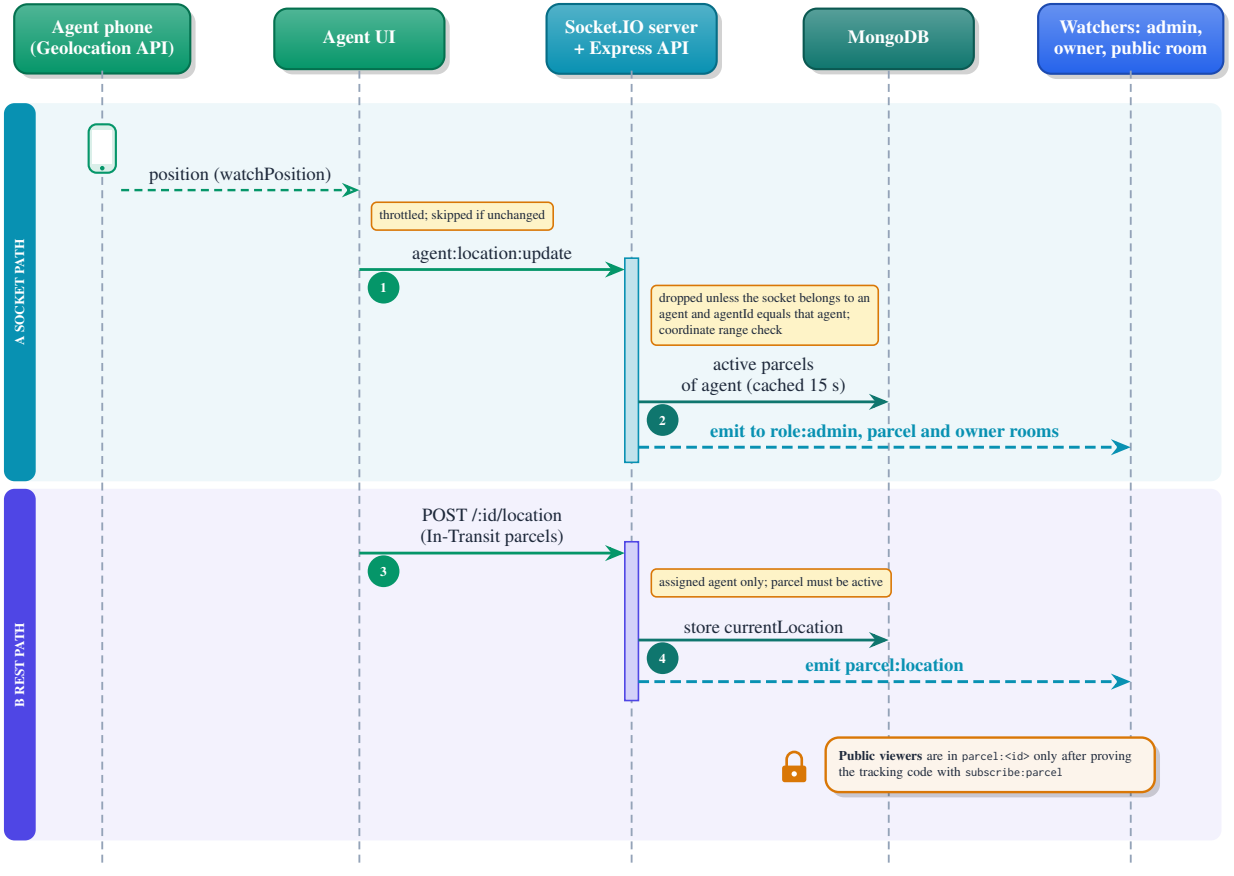
Agent phone (Geolocation API)
Agent UI
Socket.IO server + Express API
MongoDB
Watchers: admin, owner, public room
A SOCKET PATH
position (watchPosition)
throttled; skipped if unchanged
agent:location:update
1
dropped unless the socket belongs to an agent and agentId equals that agent; coordinate range check
active parcels of agent (cached 15 s)
2
emit to role:admin, parcel and owner rooms
B REST PATH
POST /:id/location (In-Transit parcels)
3
assigned agent only; parcel must be active
store currentLocation
4
emit parcel:location
Public viewers are in parcel:<id> only after proving the tracking code with subscribe:parcel