One connection. Two confirmed events.

Their team operates payment and the door. Your website keeps attendance and prepares certificates.

API = the interface. Webhook = an automatic event notification sent to that interface.

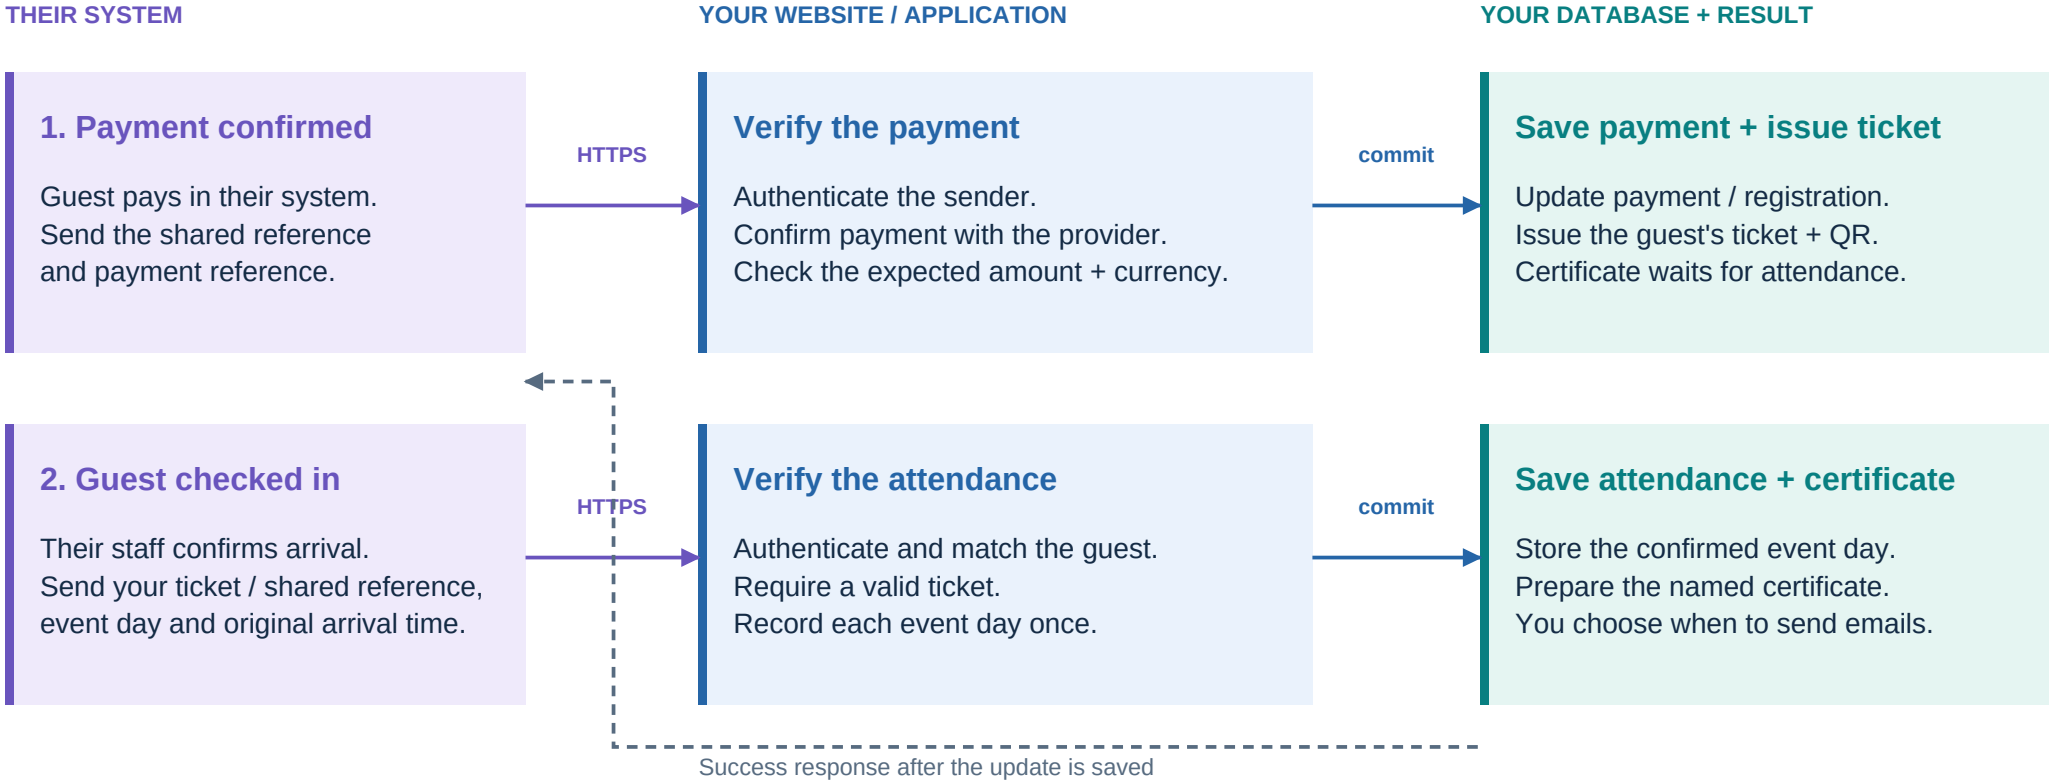

Shared identity is essential: use your reference / ticket number. Payment alone does not earn a certificate.

Option A / Direct API calls

Their application calls your endpoint and waits for a result. Both operations use the same internal services.

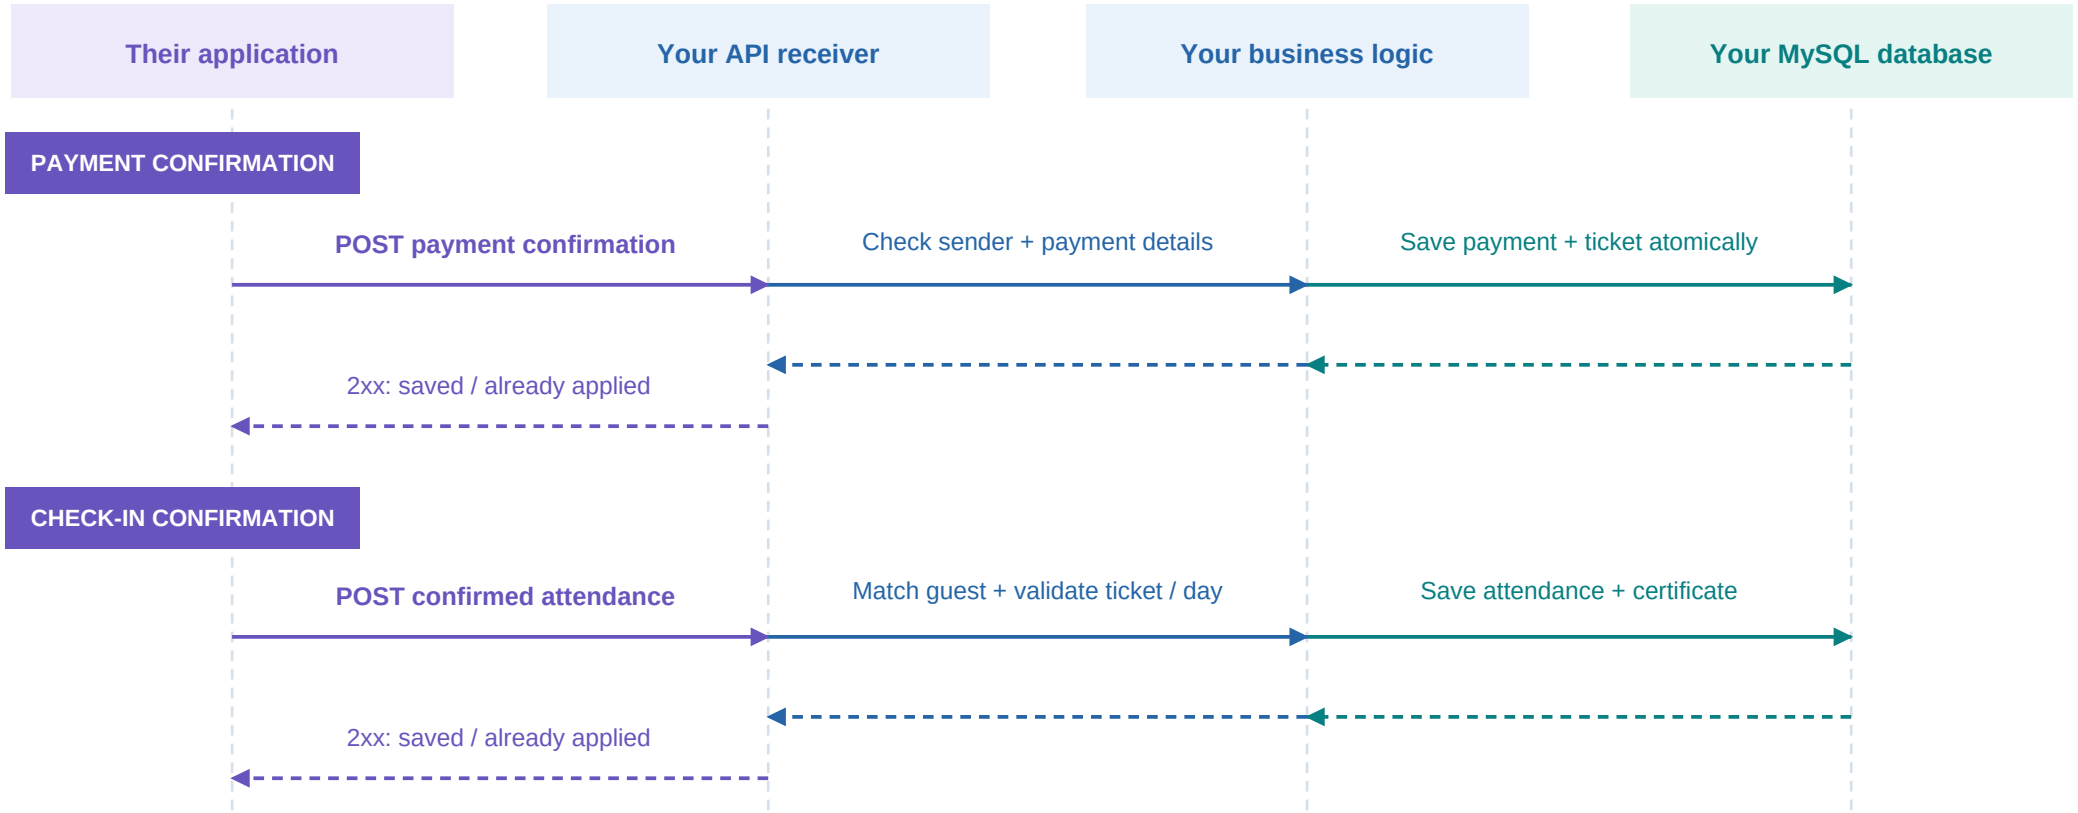

Proposed endpoint examples

```
POST /api/integrations/payment.php
POST /api/integrations/checkin.php
```

When the request times out

Retry with the same request ID. The receiver returns the existing result instead of creating another ticket or arrival.

Option B / Automatic webhooks

Recommended if supported: their system sends confirmed events automatically, with retry delivery.

payment.confirmed **attendance.checked_in**

Two event types. Two routes or one dispatcher.

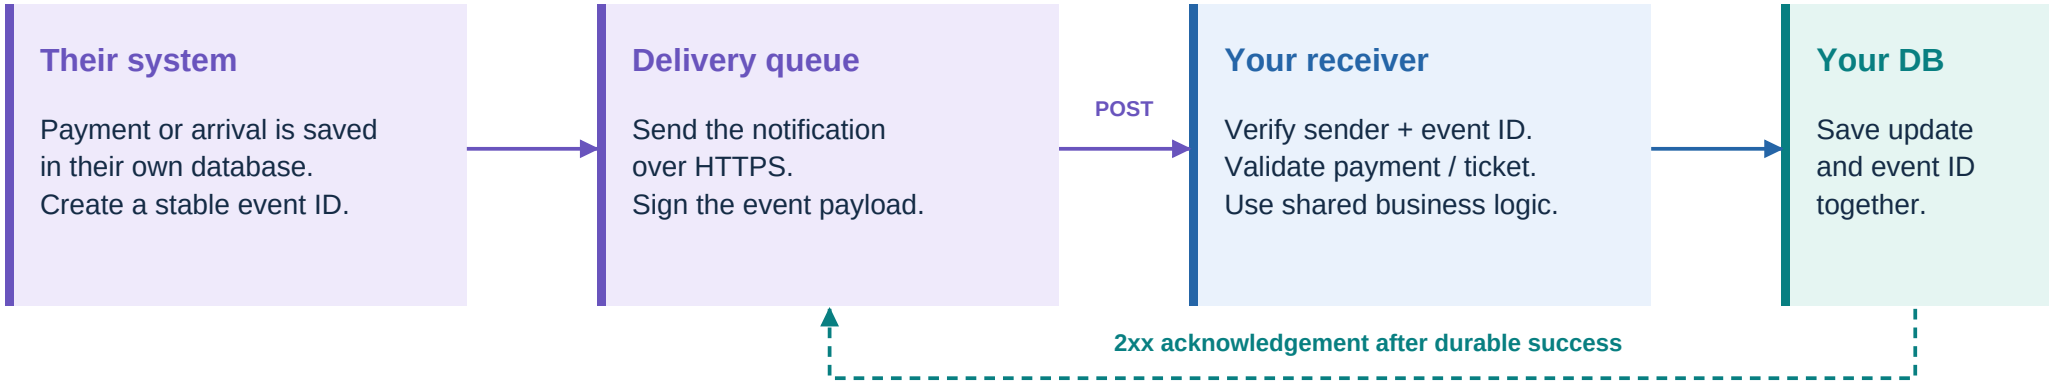

If delivery fails

Timeout / temporary error: retry the same event.
Invalid data: log and correct before resending.

If an event is repeated

Recognize its event ID. Return success.
One arrival per ticket per day; one certificate.

If events arrive out of order

Hold an unmatched arrival for review / retry.
Apply it after a valid ticket is available.

Recommended for this project

Payment: existing POST /api/webhook.php, using the configured provider adapter and payment verification.
Attendance: proposed POST /api/checkin-webhook.php. Add partner authentication and a shared attendance service.
Recovery: compare with their attendance / payment API or export, if available, to recover missed notifications.

What both developers should agree on

This is a design proposal. Endpoint names and partner event fields must be confirmed before implementation.

Contract	Payment confirmation	Check-in confirmation
Identity	Your checkout / registration reference + their payment reference	Your ticket number or shared reference + their attendance event ID
Event details	Confirmed status, amount, currency, original payment time	Event day (1 or 2), original check-in time with timezone, confirmed arrival
Validation	Verify provider status; match the expected order, amount and currency	Require a current, valid ticket. Match the guest and event day.
Duplicate protection	Stable request / event ID + unique provider payment reference	Stable request / event ID + unique ticket / event-day attendance

Trust + delivery

API: partner credentials / scoped token.
Webhook: provider signature + freshness.
Acknowledge only saved or duplicate events.
Keep an audit log and retry failed delivery.

Guest + day matching

Share your reference before payment.
Map their ticket to your registration.
Use event time in Iraq's timezone.
Preserve the original day on delayed events.

Certificate rule

Current rule: attendance on either day qualifies once the ticket is valid.
Payment does not create a certificate.
Certificate email is sent on your command.

Next: obtain their API / webhook docs, sample events and a test account; test payment, arrival, retries and missed events.