



API Flow Documentation

Integration Guide - KSA Apricart

Version 1.0.0

Kashaf Arshad

July 8, 2024

Contents

1	Introduction	4
	1.1 Behind the Scenes:	4
	1.2 Understanding Functionalities:	4
	1.3 Benefits:	5
	1.4 Next Steps:	5
	1.5 Diagram	6
	1.6 Figma	6
2	Architectural Diagram	7
	2.1 Over view	7
	2.2 Diagram	7
3	Authentication	8
	3.1 Creating Your Account	8
	3.1.1 Registration	8
	3.1.2 OTP Verification	9
	3.1.3 Resend OTP	9
	3.2 Sign In	10
	3.2.1 Login	10
	3.3 Forgot Password	10
	3.3.1 Generate OTP	11
	3.3.2 Forgot Password via OTP	11
	3.4 Update Password	11
4	Profile	12
	4.1 Update Profile	12
	4.2 Get Profile	12
5	City.	13
	5.1 Select Your City	13
	5.1.1 Active Cities	13
	5.1.2 Select City	14
6	OnBoard	15
	6.1 OnBoarding	15
	6.1.1 Get OnBoarding Details	15
7	Home.	16
	7.1 Banners	17
	7.1.1 Active Banners	17
	7.1.2 Positioned Banners	17

7.2	Browse by Category:	18
7.2.1	Categories	18
7.3	View Home Products	18
7.3.1	Home Details	18
7.3.2	Product Details	18
7.4	Browse Categories and Subcategories	19
7.4.1	Products By Category	19
7.4.2	Products By Subcategory	19
7.4.3	Similar Products	19
7.5	View Associated Brands	19
7.5.1	Active Brands	19
7.6	Search for Specific Products	20
7.6.1	Search	20
7.7	Request Missing Product	20
7.8	Provide Feedback	20
8	Warehouse	21
8.1	Warehouses	21
8.1.1	Active Warehouse	21
8.1.2	Warehouse By Id	21
8.1.3	Warehouse By City Id	22
8.1.4	Warehouse By Coordinates	22
9	Category	23
9.1	Categories	23
9.1.1	Category By Warehouse	23
10	Subcategory	24
10.1	Subcategories	24
10.1.1	Sub Categories By Category Id	24
11	Product Details	25
11.1	Product	25
11.1.1	Product Details	25
11.1.2	Products By Category Id	26
11.1.3	Products By Subcategory Id	26
11.2	Similar Products	27
11.2.1	Similar Products	27
11.3	Manage Carts and Wishlists	28
11.3.1	Add Wish List	28
11.3.2	Remove Wish List	29
11.3.3	Remove Product	29
11.3.4	Clear Wish List	29

12	Customer Order Management	30
12.1	Checkout	30
12.1.1	Validate Coupon	30
12.2	Address	31
12.2.1	Customer Addresses	31
12.2.2	Address Management	31
12.2.3	Remove Address	32
12.3	Order	32
12.3.1	Place Order	32
12.3.2	Order History	33
12.3.3	Cancel Order	33
13	Account Management	34
13.1	My Orders	34
13.2	Wish List	34
13.3	My Address	34
13.4	Change Password	35
13.5	Request Missing Product	35
13.6	Provide Feedback	35
13.7	City	35
14	Product Request	36
14.1	Request for Missing Products	36
14.1.1	Product Request	36
15	Feedback	37
15.1	Provide Feedback	37
15.1.1	Submit Feedback	37
16	Settings.	38
16.1	Settings By Warehouse	38
17	Frequently Asked Questions (FAQs)	39

1 Introduction

This guide provides a comprehensive overview of the Apricart KSA app's architecture and data flow. It's designed for developers and individual seeking to understand the inner workings of the app and how different sections interact to deliver a seamless user experience.

1.1 Behind the Scenes:

- **Modular Design:** We'll delve into the app's modular structure, exploring how independent sections like user management, order processing, and product recommendations work together seamlessly.
- **Data Flow Analysis:** We'll trace the journey of user data, from initial login and profile creation to order placement, feedback integration, and personalization algorithms.
- **Security and Scalability:** We'll explore the security measures implemented to protect user data and ensure the app's scalability to accommodate a growing user base.

1.2 Understanding Functionalities:

- **User Management:** Explore user registration, authentication, and profile management functionalities, including data storage and retrieval mechanisms.
- **Order Processing:** Gain insights into the order placement flow, including product selection, cart management, payment processing, and order fulfillment.
- **Personalization Engine:** Discover how the app leverages user data and purchase history to generate personalized product recommendations and targeted promotions.
- **Feedback Integration:** Learn how user feedback, product ratings, and wishlist creation are integrated into the system to enhance the overall user experience.

1.3 Benefits:

By understanding these aspects, developers can gain valuable insights for app optimization, feature development, and troubleshooting. CEOs will gain a deeper appreciation for the app's technical foundation, enabling them to make informed decisions about future development and resource allocation.

1.4 Next Steps:

This guide serves as a roadmap for a deeper exploration of the Apricart KSA app's technical intricacies. We encourage you to delve into specific sections to gain a comprehensive understanding of each functionality and its role within the larger ecosystem.

1.5 Diagram

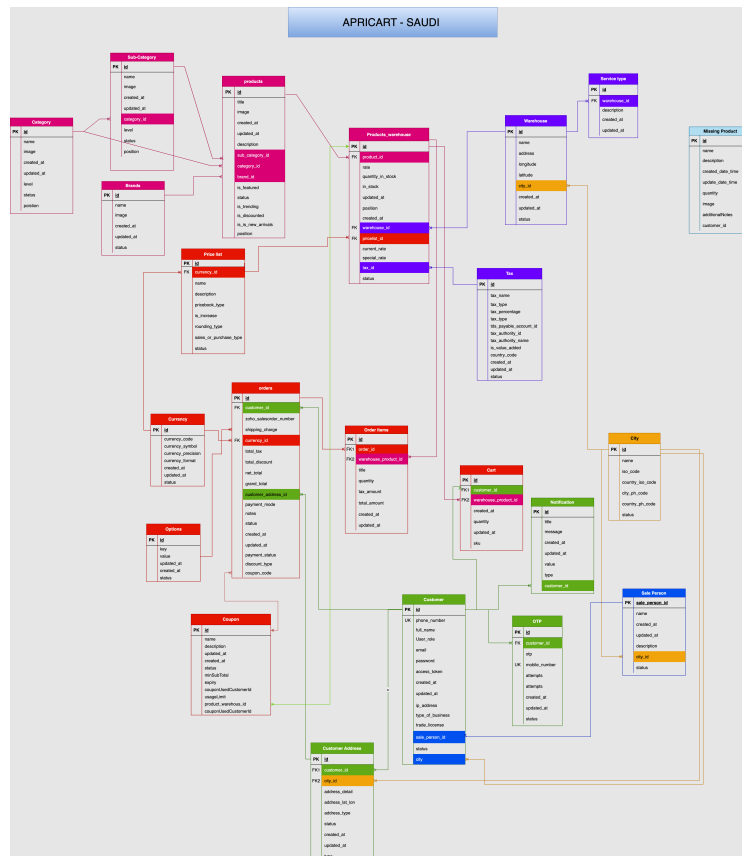


Figure 1: Entity-Relationship Diagram - ERD

Link: [Click here to see Apricart ERD .](#)

1.6 Figma

Link: [Click here to see Apricart Figma .](#)

2 Architectural Diagram

2.1 Over view

An architectural diagram is like a map that shows how different parts of a building or system fit together. It visually represents the structure, components, and connections within a system or building. It helps people understand how everything works together and how to navigate through it. Just like a blueprint for a house shows where the rooms are and how they connect, an architectural diagram shows how different parts of a system or building relate to each other.

2.2 Diagram

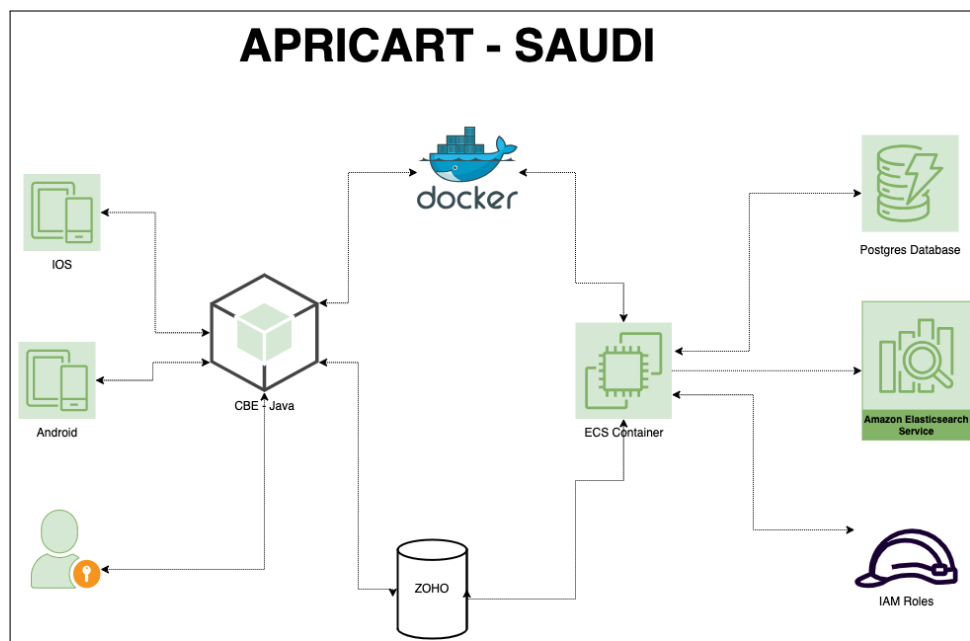


Figure 2: Architectural Diagram

3 Authentication

This section provides a comprehensive guide to the user authentication processes implemented within the Apricart KSA platform. It outlines the steps involved in user registration, login, password recovery, and password reset. This documentation serves as a user manual to ensure secure access and management of accounts on Apricart. The outlined authentication process verifies user identities and safeguards sensitive information through robust security measures, including one-time passcode (OTP) verification and secure password management practices.

3.1 Creating Your Account

This section outlines the steps to create a new Apricart KSA account:

1. The user fills a registration form with essential details
2. Upon form submission, the system sends a one-time passcode (OTP) via SMS for verification.
3. User enters the OTP to confirm phone number and complete account creation.
4. An automated email notification is sent to the user's registered email address.

3.1.1 Registration

Method: POST

Authorization: NONE

Endpoint: /auth/open/register

Postman Collection Folder: Sign Up - User Registration

Description: To register for an Apricart KSA account, you'll be asked for some basic information to set up your profile: contact details, preferred delivery city, and business details.

Note: OTP & email is automatically generated

3.1.2 OTP Verification

Method: POST

Authorization: NONE

Endpoint: /auth/open/otp/verify

Postman Collection Folder: OTP - Verify Phone OTP

Description: After submitting your registration details, an additional security step is triggered to verify your phone number. It verifies a one-time passcode (OTP) that was sent to the phone number you provided in above step.

3.1.3 Resend OTP

Method: POST

Authorization: NONE

Endpoint: /auth/open/otp/generate

Postman Collection Folder: OTP - Generate OTP

Description: If the initial OTP hasn't been received within 1 minute, the system will call this endpoint to generate a new OTP. The system validates the resend request to ensure it falls within a reasonable timeframe, such as 2-3 minutes, from the initial OTP generation.

3.2 Sign In

This section outlines the steps to login into an account

3.2.1 Login

Method: POST

Authorization: NONE

Endpoint: /auth/open/login

Postman Collection Folder: Sign Up - Login

Description: Users authenticate by submitting their phone number and password through the login form to gain system access.

3.3 Forgot Password

This section outlines the steps for forget password:

1. Upon requesting a password reset, the system generates a unique, time-limited OTP.
2. The OTP is sent to the user's registered phone number.
3. The user enters the received OTP along with their desired new password.
4. The system validates the OTP and, if correct, resets the user's password to the new one.
5. Once the process is successful, an automated email notification is sent to the user's registered email address.

3.3.1 Generate OTP

Method: POST

Authorization: NONE

Endpoint: /auth/open/otp/generate

Postman Collection Folder: OTP - Generate OTP

Description: This flow prioritizes security by requiring an initial (OTP) sent to the user's phone number for verification.

3.3.2 Forgot Password via OTP

Method: POST

Authorization: NONE

Endpoint: /auth/open/password/forgot

Postman Collection Folder: Sign In - Forgot Password - Enter via OTP

Description: This process allows users to reset their password when forgotten. They'll need to provide their registered phone number, along with the newly chosen password & the received OTP sent to their phone for verification.

3.4 Update Password

Method: POST

Authorization: NONE

Endpoint: /auth/open/password/forgot

Postman Collection Folder: Sign In - Update Password

Description: This step allows users to update their password. They'll need to provide their current password and the desired new password for verification.

4 Profile

The Profile section offers comprehensive tools for managing user-related data within the Apricart KSA project. Users can access and modify their personal information, including details such as their name, email address, and phone number. This functionality is designed to facilitate seamless updates, ensuring that users can maintain accurate information crucial for personalized services and secure communication.

4.1 Update Profile

Method: POST

Authorization: BEARER TOKEN

Endpoint: /profile

Postman Collection Folder: Profile - Update Profile

Description: This step allows users to modify their name, email, phone number and other details. The request requires both updated information and a valid authentication token for security.

4.2 Get Profile

Method: GET

Authorization: BEARER TOKEN

Endpoint: /profile

Postman Collection Folder: Profile - Get Profile

Description: This step allows users to get their profile details i.e. name, email, and phone number.

5 City

The City section provides information on managing city-related data within the Apricart KSA project. This section includes endpoints to retrieve information about active cities and specific city details by ID. This functionality is crucial for services that depend on geographical information, such as delivery areas.

5.1 Select Your City

1. The system to show them a list of available cities.
2. The user selects a particular city.
3. The system retrieves more detailed information about the selected city using the city Id.
4. The system updates the user's screen to display the chosen city and its details.

5.1.1 Active Cities

Endpoint: /auth/open/cities/active

Method: GET

Authorization: NONE

Postman Collection Folder: City - Get Active Cities

Description: This endpoint retrieves a list of all active cities. An active city is one where services are currently available.

5.1.2 Select City

Endpoint: /auth/open/cities/{id}

Method: GET

Authorization: NONE

Postman Collection Folder: City - Get City By Id

Description: This endpoint retrieves detailed information about a specific city, identified by its ID. The response includes comprehensive details about the city, such as its name, state, country, and any other relevant attributes. This information is useful for displaying detailed city information in the application and for other functionalities that require specific city data.

6 OnBoard

The OnBoard section provides a comprehensive guide to managing the onboarding process for new users within the Apricart KSA project. This section includes endpoints to retrieve information about the various onboarding steps. The onboarding process is designed to help new users understand the features and functionalities of the Apricart platform, ensuring a smooth and efficient user experience from the start.

6.1 OnBoarding

1. The system displays a series of screens that introduce the user to the system and its features.
2. The user goes through these onboarding screens to learn how to use the system.

6.1.1 Get OnBoarding Details

Endpoint: /auth/open/onboards

Method: GET

Authorization: NONE

Postman Collection Folder: OnBoard - Get All OnBoardings

Description: This feature helps new users get acquainted with the Apricart App. It fetches a list of all onboarding steps, including titles, descriptions, and even images! This way, new users can easily navigate through the onboarding process and get all the information and guidance they need to start using the app effectively.

7 Home

This section dives into the essential tools for managing your platform's home page. These APIs empower you to tailor the user experience by location. You can control which products are displayed on the home page of each warehouse, ensuring users see items relevant to their area. Additionally, you can showcase all active brands on the platform, allowing users to explore popular choices. Finally, these APIs facilitate a powerful search function, enabling users to find products using keywords and filtering by specific warehouse locations.

Home Functionalities

1. Banners
2. Browse by Category.
3. View Home Product.
4. Browse Categories and Subcategories.
5. View Associated Brands.
6. Search for Specific Products.
7. Request Missing Products.
8. Provide Feedback.

7.1 Banners

The system retrieves active banners and arranges them according to their designated positions, highlighting specific products or promotions.

7.1.1 Active Banners

Endpoint: /auth/open/banners/active

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Banner - Get Active Banners

Description: This endpoint retrieves all active banners to be displayed on the home page. These banners are used to showcase promotions, new products, or important updates, enhancing the user experience by providing relevant and timely information.

7.1.2 Positioned Banners

Endpoint: /auth/open/banners/position/{position}

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Banner - Get Banner By Position

Description: This endpoint retrieves banners based on their position on the home page (e.g., TOP, MIDDLE, BOTTOM, POPUP). It helps in organizing and displaying banners at specific locations on the home page, ensuring a structured and user-friendly layout.

7.2 Browse by Category:

The system retrieves a list of active categories, allowing users to navigate and explore products within their preferred categories.

7.2.1 Categories

- As discussed in Section 9.1, the user can explore and manage different product categories. This helps in navigating the entire product range more efficiently, allowing users to find items based on broad classifications.

7.3 View Home Products

Users can browse through details of various products displayed on the home page and category listings with the city selected.

7.3.1 Home Details

Endpoint: /auth/open/home/{warehouseid}

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Home - Get Home Details

Description: This endpoint retrieves the products to be displayed on the home page for a specific warehouse, identified by the warehouse ID. The response includes categorized products, new arrivals, and trending items, enhancing the user experience by showcasing a variety of products.

7.3.2 Product Details

- As discussed in Section 11.1.1, the user can view and manage detailed information about a specific product, including specifications, pricing, and availability. This section provides all the necessary information to make an informed purchase decision.

7.4 Browse Categories and Subcategories

The system facilitates navigation through different product categories and subcategories, allowing users to refine their search.

7.4.1 Products By Category

- As discussed in Section 11.1.2, the user can browse and manage subcategories within a specific category. This allows them to explore a range of items that fit their particular interests or needs.

7.4.2 Products By Subcategory

- As discussed in Section 11.1.3, the user can browse and manage products within a specific subcategory. This helps them find more precisely categorized items within broader product categories.

7.4.3 Similar Products

- As discussed in Section 11.2.1, the user can explore and manage products similar to a selected item. This feature provides alternative or complementary options, enhancing the shopping experience.

7.5 View Associated Brands

The system displays a list of active brands.

7.5.1 Active Brands

Endpoint: /auth/open/brands/active

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Brand - Get Active Brands

Description: This endpoint retrieves a list of all active brands.
The response includes brand details such as the brand ID, name, Arabic name, status, and an image URL.

7.6 Search for Specific Products

Users can leverage the search bar to find products using keywords.

7.6.1 Search

Endpoint: /auth/open/search/product

Request Parameters: query, warehouseId

HTTP Method: GET

Postman Collection Folder: Search - Search By Product

Authorization: NONE

Description: This endpoint allows users to search for products based on a query string. The search results are filtered by the specified warehouse ID, ensuring the availability of products in the selected warehouse.

7.7 Request Missing Product

- As discussed in Section 14, the user can submit a request for products that are not currently available in the inventory. This helps the system understand customer demand and potentially stock the requested products in the future.

7.8 Provide Feedback

- As discussed in Section 15, the user can provide feedback about their experience using the system. This feedback is valuable for making improvements and ensuring customer satisfaction. Users can report issues, suggest features, or leave general comments.

8 Warehouse

The Warehouse section provides a detailed guide to managing and retrieving product-related data within the Apricart KSA project.

8.1 Warehouses

1. The system fetches available warehouses for the selected city
2. Users can browse through different products available in the active warehouses.

8.1.1 Active Warehouse

Endpoint: /auth/open/warehouses/active

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Warehouse - Get Active Warehouse

Description: This endpoint retrieves details of the currently active warehouse. The response includes warehouse details such as the warehouse ID, name, location, status, and city.

8.1.2 Warehouse By Id

Endpoint: /warehouses/{warehouseId}

HTTP Method: GET

Authorization: Bearer Token

Postman Collection Folder: Warehouse - Get Warehouse By Id

Description: This endpoint retrieves details of a specific warehouse by its ID. The response includes warehouse details such as the warehouse ID, name, location, status, and contact information.

8.1.3 Warehouse By City Id

Endpoint: /warehouses/city/{cityId}

HTTP Method: GET

Authorization: Bearer Token

Postman Collection Folder: Warehouse - Get Warehouse By City Id

Description: This endpoint retrieves details of warehouses in a specific city. The response includes warehouse details such as the warehouse ID, name, location, status, and contact information.

8.1.4 Warehouse By Coordinates

Endpoint: /auth/open/warehouses/coordinates/{lat}/{long}

Request Parameters: cityId

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Warehouse - Get Warehouse By Coordinates

Description: This endpoint retrieves details of warehouses near specific coordinates. The response includes warehouse details such as the warehouse ID, name, location, status, and contact information.

9 Category

The Category section provides a detailed guide to managing and retrieving product-related data within the Apricart KSA project.

9.1 Categories

1. The system displays available categories for browsing.
2. Users can choose a category and search for specific products within it.
3. Users can refine their products by applying filters (category, brand) or sorting by price (low to high or high to low).

9.1.1 Category By Warehouse

Endpoint: `/auth/open/categories/{warehouseId}`

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Category - Get Categories By Warehouse Id

Description: This endpoint retrieves a list of all product categories available in a specific warehouse. The response includes category details such as the category ID, name, Arabic name, level, position, status, and an image URL.

10 Subcategory

The Product Details section offers a comprehensive guide to managing and retrieving detailed information about products within the Apricart KSA project.

10.1 Subcategories

1. The system organizes products into subcategories within each main category, facilitating easier navigation and more precise searches for users.
2. For each subcategory, the system provides a comprehensive list of products, including detailed information such as specifications, pricing, and discounts. This helps users quickly find the products they are interested in.
3. Users can add products from any subcategory directly to their cart for immediate purchase or to their wishlist for future consideration, streamlining the shopping process.

10.1.1 Sub Categories By Category Id

Endpoint: /auth/open/categories/{categoryId}/subcategories

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Sub Category - Get Sub Categories By Category Id

Description: This endpoint retrieves a list of subcategories under a specific category, identified by the category ID. The response includes subcategory details such as the subcategory ID, name, Arabic name, level, position, status, image URL, and the associated category ID.

11 Product Details

The Product Details section offers a comprehensive guide to managing and retrieving detailed information about products within the Apricart KSA project.

11.1 Product

1. The system provides comprehensive details for the selected product, including specifications, pricing, and availability.
2. Users have the option to add the product directly to their cart for immediate purchase or to their wishlist for future consideration.
3. The system suggests related products, allowing users to explore alternatives or complementary items based on their preferences and browsing history.

11.1.1 Product Details

Endpoint: /auth/open/products/details/{productId}

Request Parameter: WarehouseID

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Product - Get Product Details By Product Id

Description: This endpoint retrieves detailed information about a specific product, identified by its product ID and the warehouse ID. The response includes product details such as the product ID, SKU, title, Arabic title, weight, image URL, position, description, Arabic description, and various status flags (e.g., isActive, isFeatured). It also includes information on the product's category, subcategory, brand, stock status, and pricing.

11.1.2 Products By Category Id

Endpoint: /auth/open/products/category/{categoryId}

Request Parameter: WarehouseID

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Product - Get Products By Category Id

Description: This endpoint retrieves a list of products under a specific category identified by the category ID and warehouse ID. The response includes product details such as the product ID, SKU, title, Arabic title, weight, image URL, position, description, Arabic description, and various status flags (e.g., isActive, isFeatured). This endpoint returns products from the product warehouse table that are associated with the given category ID.

11.1.3 Products By Subcategory Id

Endpoint: /auth/open/products/subcategory/{id}

Request Parameter: WarehouseID

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Product - Get Products By Subcategory Id

Description: This endpoint retrieves a list of products under a specific subcategory, identified by the subcategory ID and warehouse ID. The response includes product details such as the product ID, SKU, title, Arabic title, weight, image URL, position, description, Arabic description, and various status flags (e.g., isActive, isFeatured). It also includes information on the product's category, subcategory, brand, stock status, and pricing.

11.2 Similar Products

1. The system suggests related products, allowing users to explore alternatives or complementary items based on the selected item. This enhances the user experience by offering more choices and potential matches for their needs.
2. Users have the option to add any similar product directly to their cart for immediate purchase or to their wishlist for future consideration.

11.2.1 Similar Products

Endpoint: /auth/open/products/similar-items

Request Parameters: CategoryId, SubCategoryId,
ProductId, WarehouseId, Limit

Authorization: NONE

HTTP Method: GET

Postman Collection Folder: Similar Product - Get Similar Products

Description: This endpoint retrieves a list of products that are similar to a specified product, based on the provided category ID, subcategory ID, product ID, and warehouse ID. The response includes detailed information about each similar product, such as product ID, SKU, title, Arabic title, weight, image URL, description, Arabic description, and various status flags (e.g., isActive, isFeatured). Additionally, it provides information on the product's category, subcategory, brand, stock status, and pricing.

11.3 Manage Carts and Wishlists

Users can add and remove products from their carts and wishlists.

Wish List

1. The user must be logged in to add items to the wishlist. This ensures that the items are saved to the user's account and can be accessed later.
2. The user can remove a specific wishlist by specifying the wishlist's ID. This allows for precise management of the wishlist.
3. The user can remove a specific product from the wishlist by specifying the product's ID.
4. The user has the option to clear the entire wishlist. This will remove all items from the wishlist at once. Use this feature with caution, as it cannot be undone.

11.3.1 Add Wish List

Endpoint: /wish/list

HTTP Method: POST

Authorization: BEARER TOKEN

Postman Collection Folder: WishList - Add WishList By Customer

Description: Use this endpoint to add a new item to the wishlist. Ensure the request body contains necessary details about the item being added.

11.3.2 Remove Wish List

Endpoint: /wish/list/{id}

HTTP Method: DELETE

Authorization: BEARER TOKEN

Postman Collection Folder: WishList - Remove WishList By Id

Description: Specify the id to be removed in the endpoint URL to delete that specific wishlist.

11.3.3 Remove Product

Endpoint: /wish/list/product/{productId}

HTTP Method: DELETE

Authorization: BEARER TOKEN

Postman Collection Folder: WishList - Remove WishList By Product Id

Description: Specify the id of the item to be removed in the endpoint URL to delete that specific item from the wishlist.

11.3.4 Clear Wish List

Endpoint: /wish/list/clear

HTTP Method: DELETE

Authorization: BEARER TOKEN

Postman Collection Folder: WishList - Clear WishList By Customer - All

Description: This endpoint clears all items from the wishlist. Use with caution as this action cannot be undone.

12 Customer Order Management

This section outlines the various endpoints and processes involved in managing customer orders within the system. It provides a comprehensive and structured approach to handling all order-related tasks, including validation, processing, tracking, and cancellation.

Order Features

1. Checkout
2. Address Management
3. Order

12.1 Checkout

1. Users can apply a promo code for discounts during checkout. Valid codes will be reflected in the order total.
2. If the coupon is validated successfully user will get a discount that will be added to the total.
3. Users can choose their preferred delivery date and time.

12.1.1 Validate Coupon

Endpoint: /coupons/validate

HTTP Method: GET

Authorization: BEARER TOKEN

Request Parameters: couponCode, subtotal

Postman Collection Folder: Promo Code Coupon - Validate Coupon

Description: This endpoint is used to validate a coupon by checking its status and details. It ensures the coupon is active and meets the necessary conditions for use. The coupon validation process involves verifying the customer ID and phone number to ensure that the coupon applies to the specific user.

12.2 Address

1. The system retrieves the user's address for order fulfillment
2. User can also add, update, or manage their addresses.

12.2.1 Customer Addresses

Endpoint: /address/customer

HTTP Method: GET

Authorization: BEARER TOKEN

Postman Collection Folder: Address - Get Address By Customer

Description: This endpoint retrieves the addresses associated with a specific customer. The response includes detailed information about each address.

12.2.2 Address Management

Endpoint: /address/saveOrUpdate

HTTP Method: POST

Authorization: BEARER TOKEN

Postman Collection Folder: Address - Add / Update Address

Description: This endpoint is used to add a new address or update an existing address for a customer.

12.2.3 Remove Address

Endpoint: /address/{id}

HTTP Method: DELETE

Authorization: BEARER TOKEN

Postman Collection Folder: Address - Delete Address By Address Id

Description: This endpoint is used to delete an address specified by its unique address ID. Upon successful deletion, the address will no longer be available for the customer.

12.3 Order

1. The system will place the order upon successful validation.
2. A confirmation email will be sent to the user's registered email address.
3. Users can track the status of their order.
4. Users have the option to cancel their order if desired.
5. A cancellation email will be sent to the user's registered email address.

12.3.1 Place Order

Endpoint: /orders

HTTP Method: POST

Authorization: BEARER TOKEN

Postman Collection Folder: Order - Place Order

Description: This endpoint is used to place an order by providing order details and items. It includes parameters like total tax, discounts, subtotals, grand total, delivery charges, payment details, and order items.

12.3.2 Order History

Endpoint: /orders/history

HTTP Method: GET

Authorization: BEARER TOKEN

Postman Collection Folder: Order - Get Customer Order History

Description: This endpoint retrieves a customer's order history, including details such as order ID, status, customer ID, warehouse ID, totals (net, grand, delivery charges, tax, discount), coupon code, Zoho Sales Order number, payment mode and status, order status, delivery date and time, currency, customer address, and order items.

12.3.3 Cancel Order

Endpoint: /orders/{orderId}

HTTP Method: DELETE

Authorization: BEARER TOKEN

Postman Collection Folder: Order - Cancel Order

Description: This endpoint is used to cancel an existing order identified by orderId. Upon successful cancellation, the order status transitions to "canceled," and a cancellation email is sent to the customer.

13 Account Management

This section outlines the various features and processes involved in managing customer accounts within the system. It provides a comprehensive and structured approach to handling all account-related tasks, including managing orders, wish lists, addresses, password changes, product requests, and feedback forms.

Account Features

1. Orders
2. Wish List
3. Address
4. Change password
5. Product Request
6. Feedback Form

13.1 My Orders

- As discussed in Section 12.3.2, the user can view all their current and past orders. They can track the status of each order, view order details, and initiate returns or cancellations if needed.

13.2 Wish List

- As discussed in Section 11.3, the user can add items to their wish list for future purchase consideration. They can also share their wish list with friends and family or move items to their cart when they are ready to buy.

13.3 My Address

- As discussed in Section 12.2, the user can manage their saved addresses. This includes adding new addresses, updating existing ones, and deleting those no longer needed. These addresses can be used for billing and shipping purposes.

13.4 Change Password

- As discussed in Section 3.4, the user can change their account password. This involves entering the current password, followed by the new password, and confirming the new password to ensure accuracy.

13.5 Request Missing Product

- As discussed in Section 14, the user can submit a request for products that are not currently available in the inventory. This helps the system understand customer demand and potentially stock the requested products in the future.

13.6 Provide Feedback

- As discussed in Section 15, the user can provide feedback about their experience using the system. This feedback is valuable for making improvements and ensuring customer satisfaction. Users can report issues, suggest features, or leave general comments.

13.7 City

- As discussed in Section 5, the user can change their city information. This allows the system to provide accurate service delivery and relevant location-based features.

14 Product Request

The Product Details section offers a comprehensive guide to managing and retrieving detailed information about products within the Apricart KSA project.

14.1 Request for Missing Products

Users can inform the system about missing products they'd like to see offered.

1. The system provides comprehensive details for the selected product, including specifications, pricing, and availability.
2. Users have the option to add the product directly to their cart for immediate purchase or to their wishlist for future consideration.
3. The system suggests related products, allowing users to explore alternatives or complementary items based on their preferences and browsing history.

14.1.1 Product Request

Endpoint: /missing/product

HTTP Method: POST

Authorization: BEARER TOKEN

Postman Collection Folder: Product Request - Save Product Request

Description: This endpoint allows users to submit a request for a product that is missing from the catalogue. The request body should include an image of the requested product, the product name, a description of the product, and the quantity being requested.

15 Feedback

The Feedback section of the API enables users to submit feedback regarding the application or service. Users can provide their name, email, phone number, and a message detailing their feedback.

15.1 Provide Feedback

Users have the ability to submit quick feedback about their experience.

1. The system provides comprehensive details for the selected product, including specifications, pricing, and availability.
2. Users have the option to add the product directly to their cart for immediate purchase or to their wishlist for future consideration.
3. The system suggests related products, allowing users to explore alternatives or complementary items based on their preferences and browsing history.

15.1.1 Submit Feedback

Endpoint: /auth/open/feedbacks

HTTP Method: POST

Authorization: NONE

Postman Collection Folder: Feedback - Submit Feedback

Description: This endpoint allows users to submit a feedback to share feedback with the system. This could involve rating your experience, suggesting improvements, or reporting any issues you encounter.

16 Settings

The Settings section of the API allows retrieval and management of various configuration settings related to an application or service. These settings typically include privacy policies, app branding, social media links, delivery information, contact numbers, FAQs, and more.

16.1 Settings By Warehouse

Endpoint: /auth/open/settings/warehouse/{id}

HTTP Method: GET

Authorization: NONE

Postman Collection Folder: Setting - Get Setting By Warehouse Id

Description: Retrieves settings specific to a warehouse identified by id. The response includes comprehensive details such as privacy policy, app branding (name, version, splash screen URL), social media URLs, delivery charges, minimum order value, status indicators, FAQs with questions and answers, delivery timings, and contact numbers for different regions (KSA, UK, Pakistan, UAE).

17 Frequently Asked Questions (FAQs)

1. What is an OTP (One-Time Password)?

An OTP is a unique, temporary code sent to your phone via SMS. It adds an extra layer of security to the registration process by ensuring the phone number you provided is valid and accessible to you, the authorized user creating the account.

2. Why do we use OTP verification?

By requiring an OTP, we help prevent unauthorized account creation using your phone number. This protects your privacy and ensures the security of your future Apricart KSA account.

3. How can I create an account on Apricart KSA App?

You can create an account by visiting the registration screen, entering your personal details, and verifying your phone number using an OTP (One-Time Password) sent via SMS.

4. What should I do if I forget my password?

If you forget your password, you can use the 'Forgot Password' feature to generate an OTP. This OTP will be sent to your registered phone number, which you can use to reset your password.

5. How can I change my account password?

To change your account password, go to the 'Change Password' section in your account settings. Enter your current password followed by the new password, and confirm the new password to complete the process.

6. How do I manage my addresses?

You can manage your addresses by visiting the 'My Address' section in your account settings. Here, you can add new addresses, update existing ones, or delete addresses that are no longer needed.

7. What is the 'Wish List' feature?

The 'Wish List' feature allows you to add items for future purchase consideration. You can also share your wish list with friends and family or move items to your cart when you are ready to buy.

8. How can I provide feedback on my experience?

You can provide feedback by visiting the 'Provide Feedback' section in your account. This feedback is valuable for making improvements and ensuring customer satisfaction.

9. What should I do if a product I want is not available?

If a product you want is not available, you can submit a request for the missing product. This helps the system understand customer demand and potentially stock the requested products in the future.

10. How do I change my city information?

To change your city information, go to the 'City' section in your account settings. This allows the system to provide accurate service delivery and relevant location-based features.

11. What is an HTTP method?

HTTP methods are a set of request methods to indicate the desired action to be performed for a given resource in a web server. Common HTTP methods include GET, POST, PUT, DELETE, etc.

12. What is the GET method and when is it used?

The GET method is used to request data from a specified resource. It is one of the most common HTTP methods and is used for retrieving data without making any changes to the server.

13. What is the POST method and when is it used?

The POST method is used to send data to a server to create or update a resource. It is commonly used for submitting form data or uploading files.

14. What is the PUT method and when is it used?

The PUT method is used to update a current resource with new data. If the resource does not exist, it can create a new resource.

15. What is the DELETE method and when is it used?

The DELETE method is used to delete a specified resource from the server.

16. What is the GET method and when is it used?

The GET method is used to request data from a specified resource. It is one of the most common HTTP methods and is used for retrieving data without making any changes to the server.

17. Can I change the Language of the Apricart KSA App?

Yes, you can change the language of the Apricart KSA app. Simply navigate to the 'Language' section within your account tab.