



Banner Module: Responses


1. Add Banner:

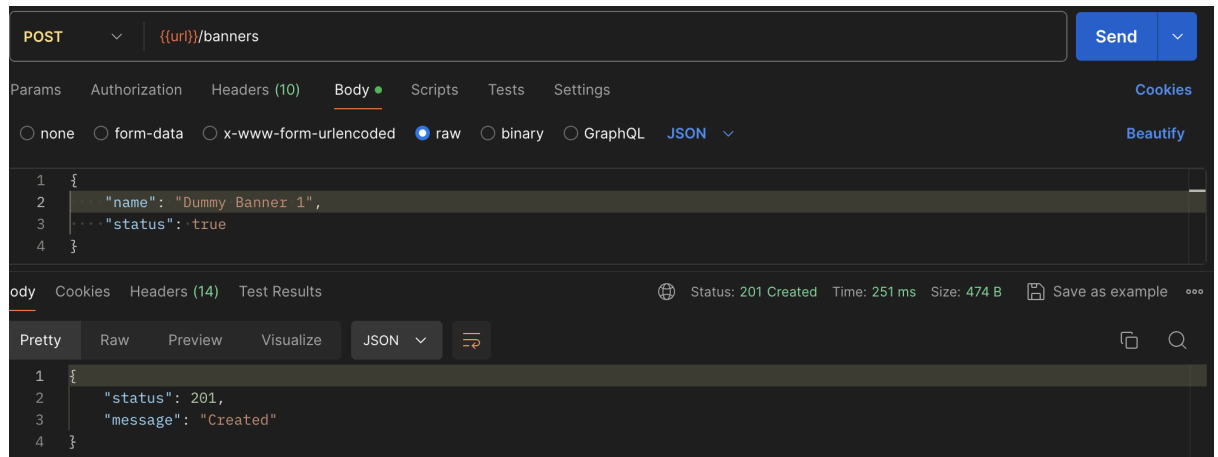


2. Update Banner

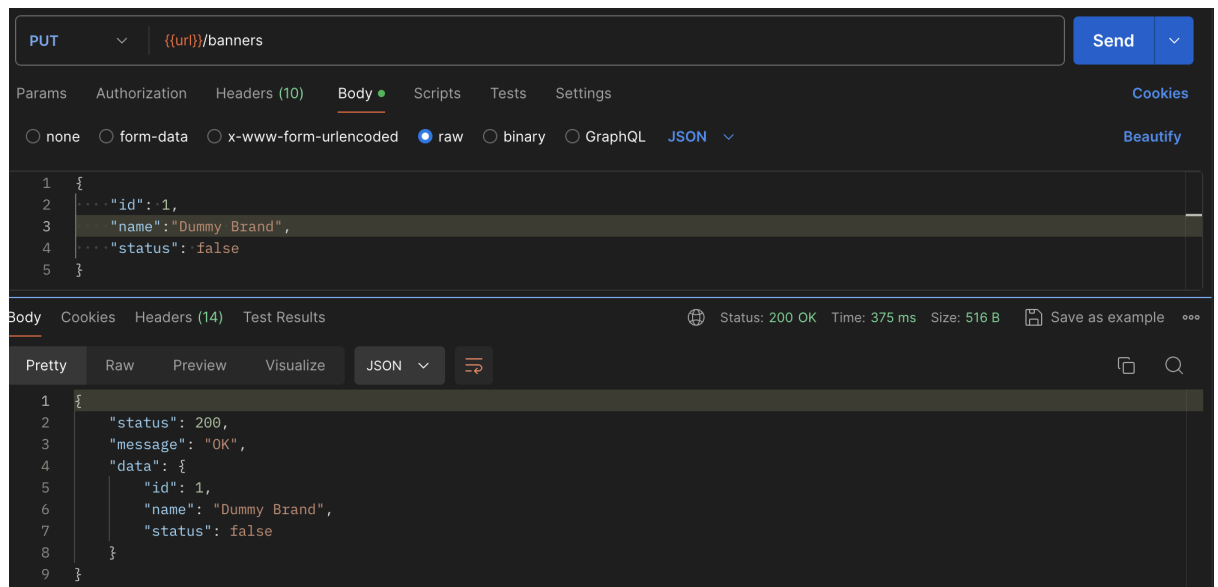

3. Get Banner By Id

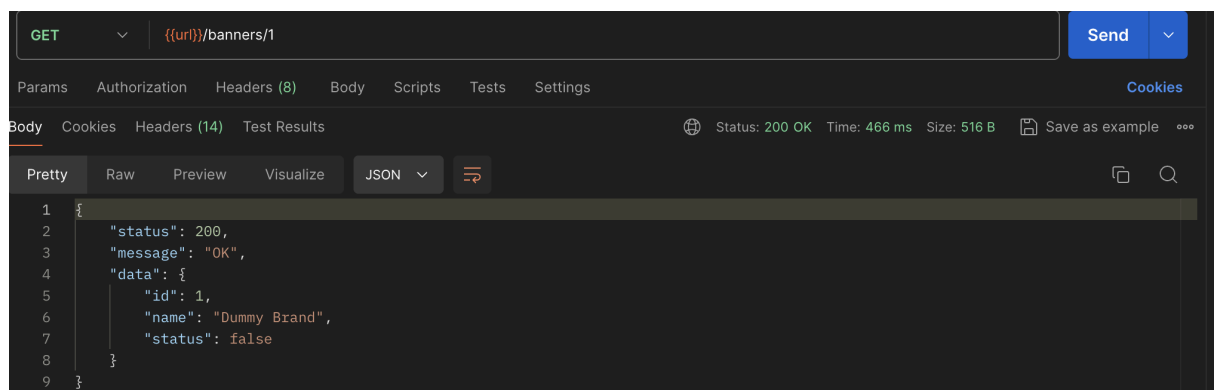

4. Get Active Banners

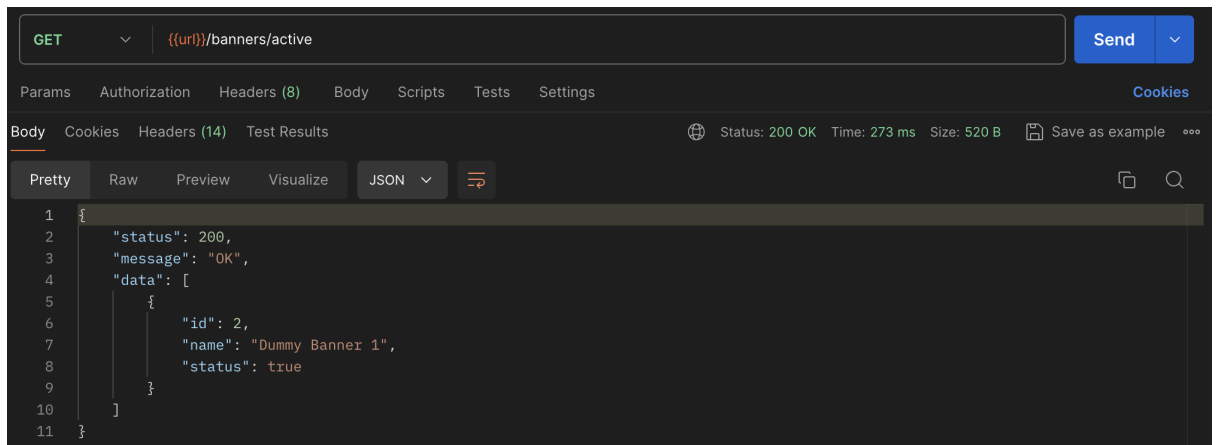


```
GET {{url}}/banners/active

Status: 200 OK Time: 273 ms Size: 520 B Save as example

{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 2,
      "name": "Dummy Banner 1",
      "status": true
    }
  ]
}
```

5. Delete Banner

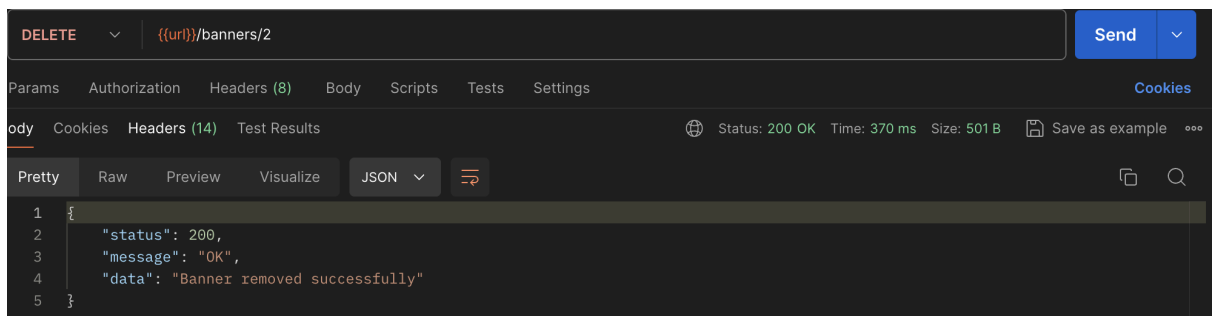


```
DELETE {{url}}/banners/2

Status: 200 OK Time: 370 ms Size: 501 B Save as example

{
  "status": 200,
  "message": "OK",
  "data": "Banner removed successfully"
}
```

6. Get All Banners

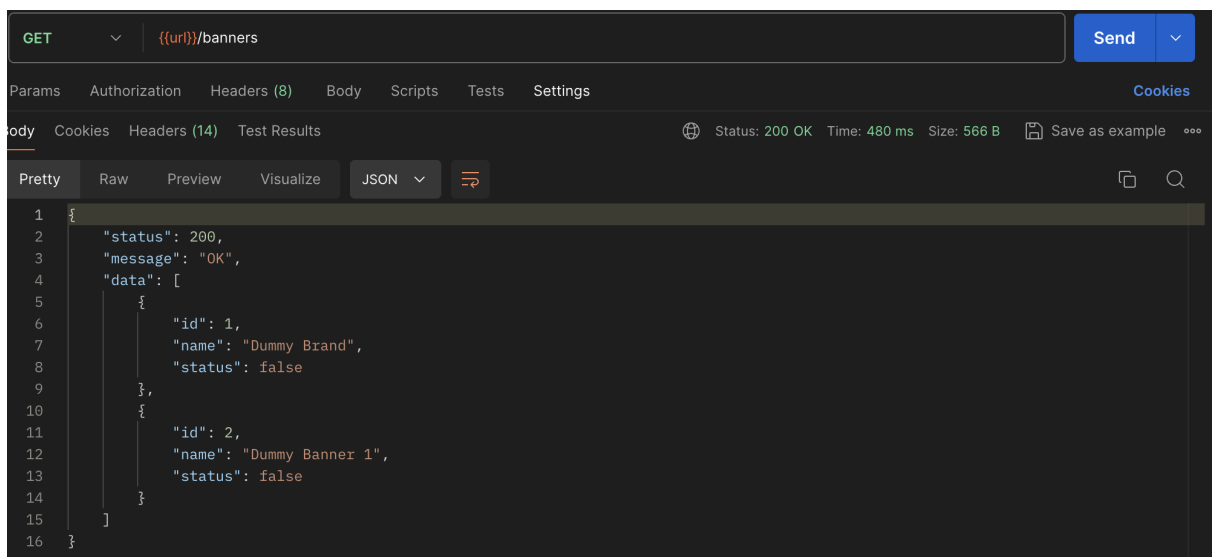

```
GET {{url}}/banners

Status: 200 OK Time: 480 ms Size: 566 B Save as example

{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 1,
      "name": "Dummy Brand",
      "status": false
    },
    {
      "id": 2,
      "name": "Dummy Banner 1",
      "status": false
    }
  ]
}
```

7. Update Banner Image

The screenshot shows a REST client interface with a POST request to `{{url}}/banners/image/update/1`. The request body is set to `form-data`. A table lists the form data with a key `image` and a file value. The response status is 200 OK, and the JSON body contains a success message and the image data.

Key	Value	Description
☒ image	File <code>cfef90df53abf4d9cfdec83fd07770d...</code>	
Key	Text	Value

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Image uploaded successfully"
5 }
```

8. Get Banner Image By Id

The screenshot shows a REST client interface with a GET request to `{{url}}/banners/image/1`. The response status is 200 OK, and the JSON body contains the image URL.

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "https://staging.apricart.pk/cfef90df53abf4d9cfdec83fd07770d6ea941203_2024-05-02T13_52_14.438201.jpeg"
5 }
```

9. Get Banners By Position Type

The screenshot shows a REST client interface with a GET request to `{{url}}/banners/position/TOP`. The response status is 200 OK, and the JSON body contains an array of banner objects.

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "name": "Dummy Banner 1",
8       "status": false,
9       "level": "ONE",
10      "position": "TOP"
11    }
12  ]
13 }
```

10. Get Banners By Level Type

GET{{url}}/banners/level/TWO

Send

ParamsAuthorizationHeaders (8)BodyScriptsTestsSettingsCookies

bodyCookiesHeaders (14)Test Results


Status: 200 OKTime: 1006 msSize: 636 BSave as example

PrettyRawPreviewVisualizeJSON


```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1,
7       "name": "Dummy Brand",
8       "status": false,
9       "image": "/cfef90df53abf4d9cfdec83fd07770d6ea941203_2024-05-02T13_52_14.438201.jpeg",
10      "level": "TWO",
11      "position": "BOTTOM"
12    }
13  ]
14 }
```

Banner Module: Arabic Responses


1. Add Banner

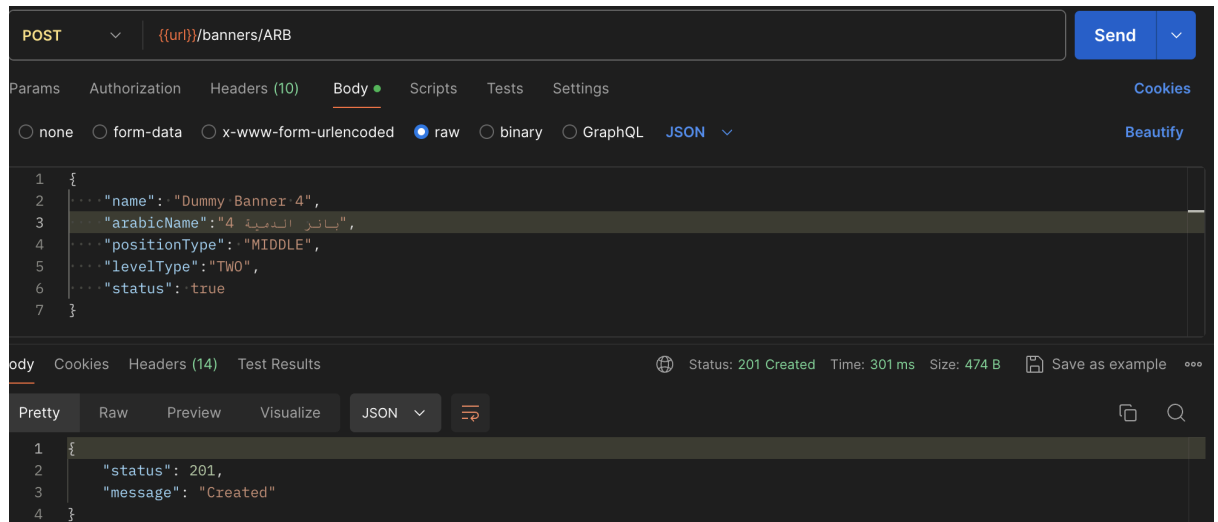


2. Update Banner

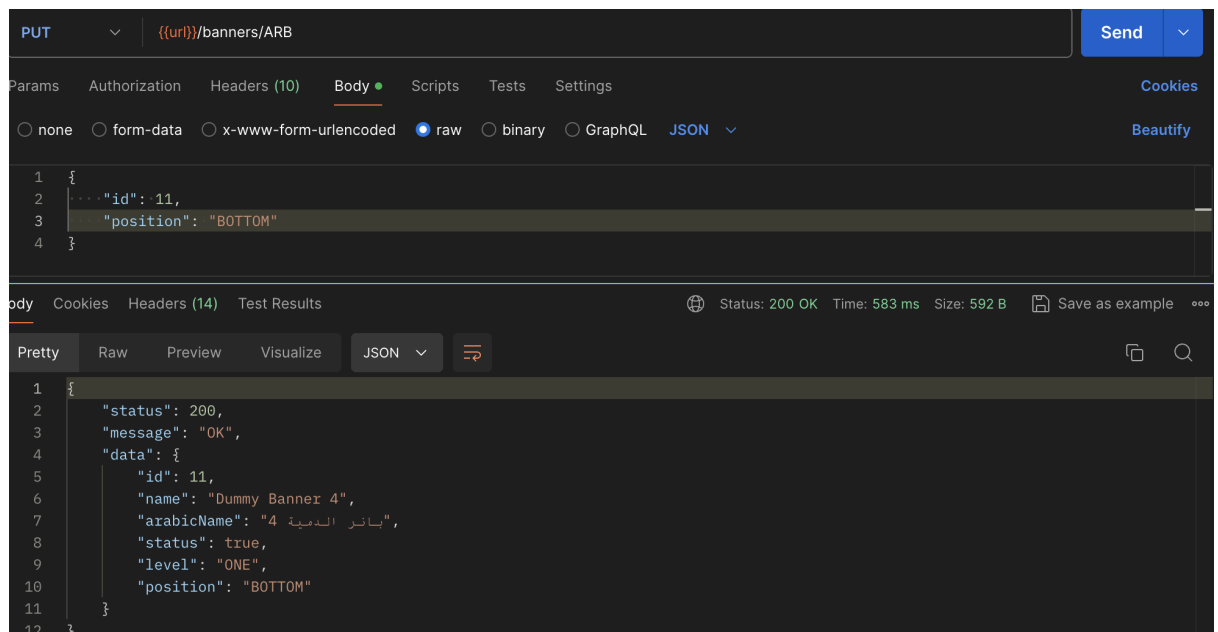

3. Delete Banner

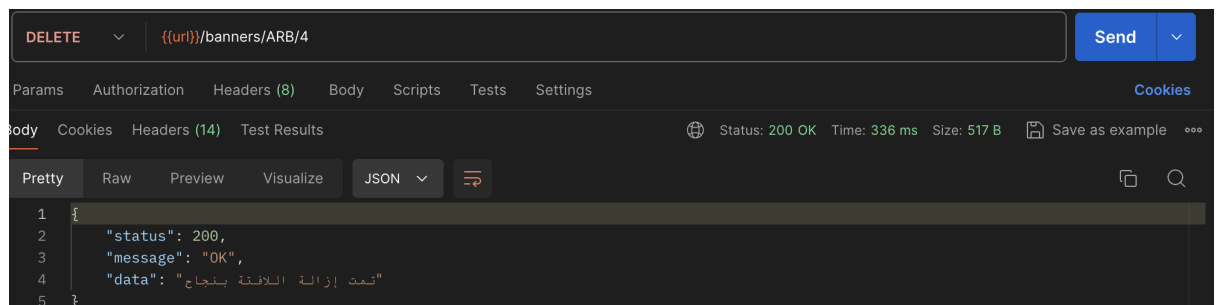

4. Get All Banners

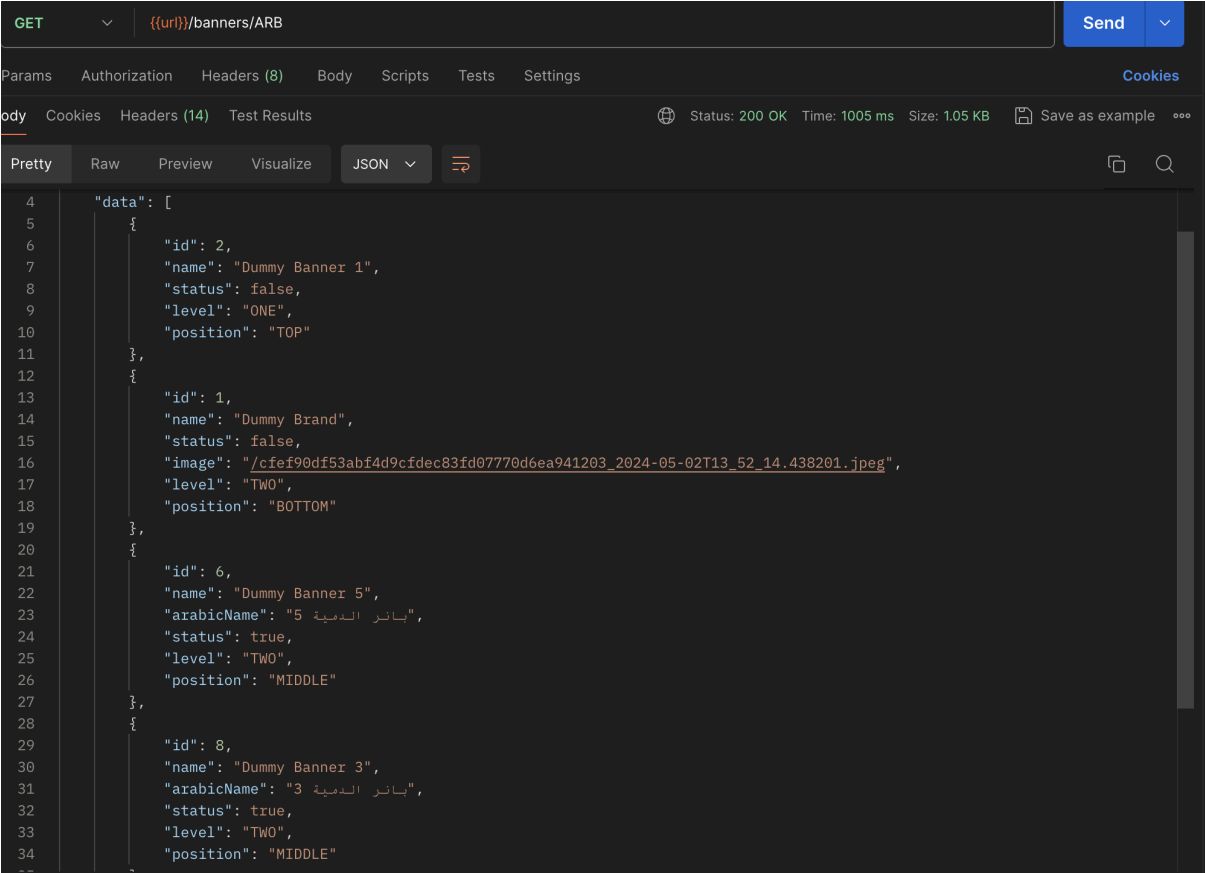


```
GET {{url}}/banners/ARB

Status: 200 OK Time: 1005 ms Size: 1.05 KB Save as example

Pretty Raw Preview Visualize JSON

{
  "data": [
    {
      "id": 2,
      "name": "Dummy Banner 1",
      "status": false,
      "level": "ONE",
      "position": "TOP"
    },
    {
      "id": 1,
      "name": "Dummy Brand",
      "status": false,
      "image": "/cfef90df53abf4d9cdfec83fd07770d6ea941203_2024-05-02T13_52_14.438201.jpeg",
      "level": "TWO",
      "position": "BOTTOM"
    },
    {
      "id": 6,
      "name": "Dummy Banner 5",
      "arabicName": "بانر الدمية 5",
      "status": true,
      "level": "TWO",
      "position": "MIDDLE"
    },
    {
      "id": 8,
      "name": "Dummy Banner 3",
      "arabicName": "بانر الدمية 3",
      "status": true,
      "level": "TWO",
      "position": "MIDDLE"
    }
  ]
}
```

5. Get Active Banner

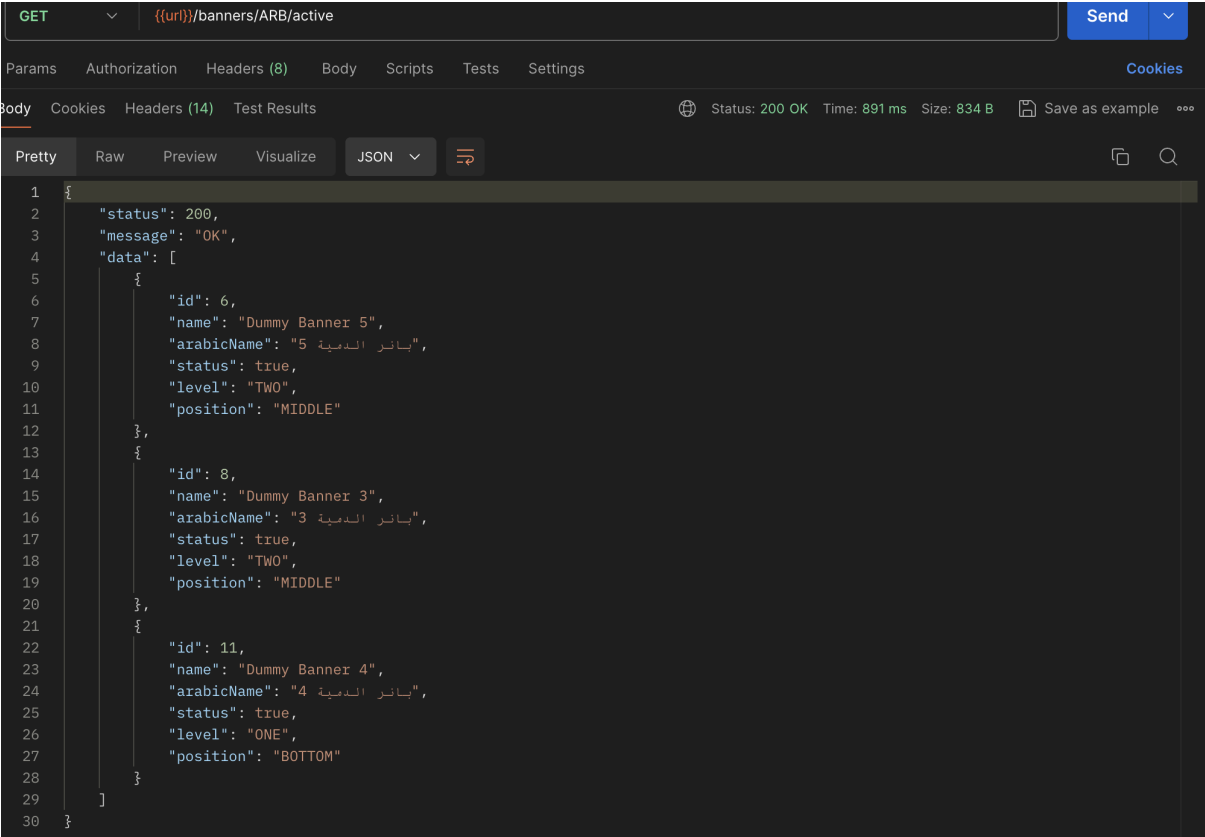


```
GET {{url}}/banners/ARB/active

Status: 200 OK Time: 891 ms Size: 834 B Save as example

Pretty Raw Preview Visualize JSON

{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 6,
      "name": "Dummy Banner 5",
      "arabicName": "بانر الدمية 5",
      "status": true,
      "level": "TWO",
      "position": "MIDDLE"
    },
    {
      "id": 8,
      "name": "Dummy Banner 3",
      "arabicName": "بانر الدمية 3",
      "status": true,
      "level": "TWO",
      "position": "MIDDLE"
    },
    {
      "id": 11,
      "name": "Dummy Banner 4",
      "arabicName": "بانر الدمية 4",
      "status": true,
      "level": "ONE",
      "position": "BOTTOM"
    }
  ]
}
```

6. Get Banner By Id

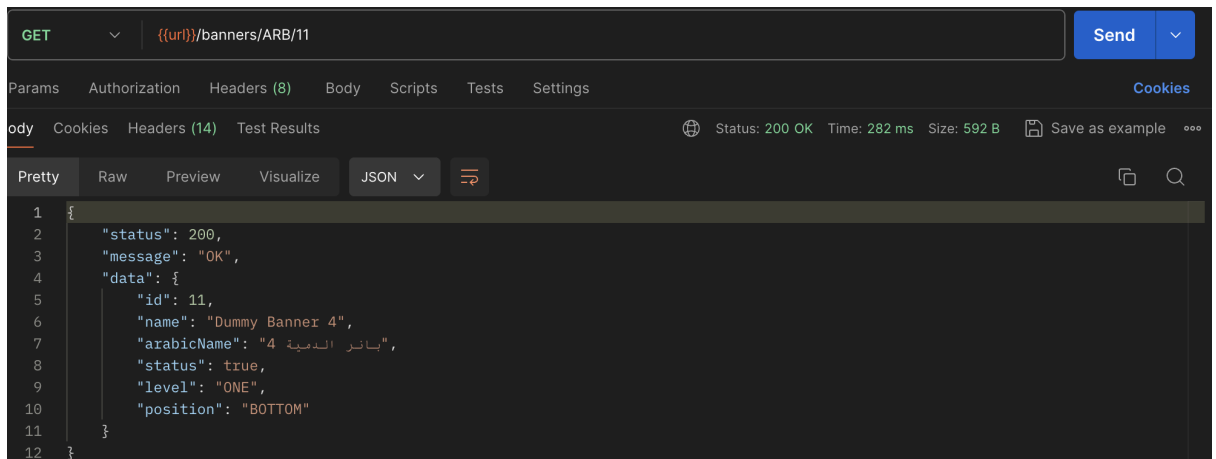


```
GET {{url}}/banners/ARB/11

Status: 200 OK Time: 282 ms Size: 592 B Save as example

{
  "status": 200,
  "message": "OK",
  "data": {
    "id": 11,
    "name": "Dummy Banner 4",
    "arabicName": "بانر الدمية 4",
    "status": true,
    "level": "ONE",
    "position": "BOTTOM"
  }
}
```

7. Get Banners By Position

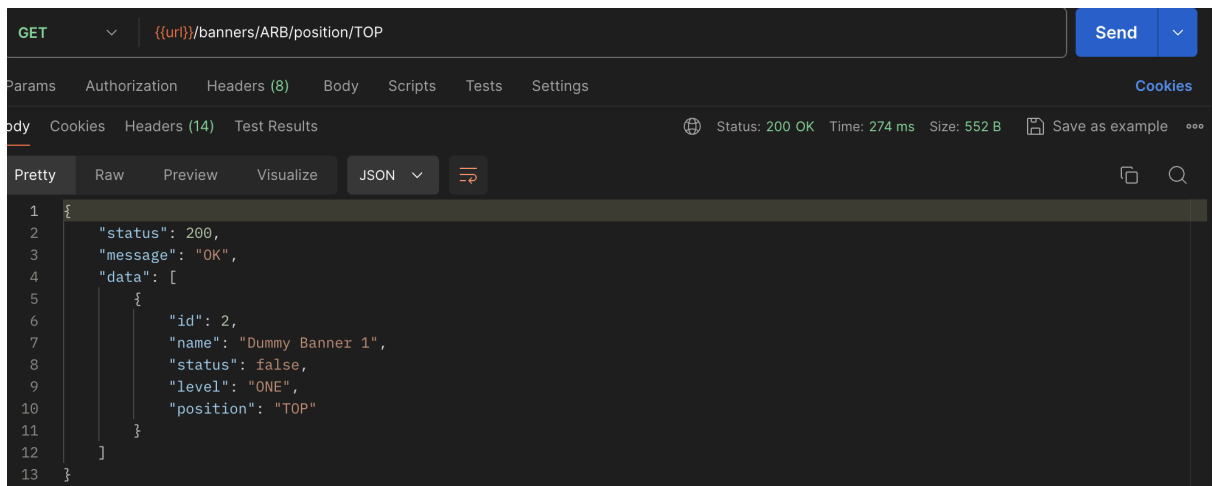


```
GET {{url}}/banners/ARB/position/TOP


Status: 200 OK Time: 274 ms Size: 552 B Save as example

{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 2,
      "name": "Dummy Banner 1",
      "status": false,
      "level": "ONE",
      "position": "TOP"
    }
  ]
}
```

8. Get Banners By Level

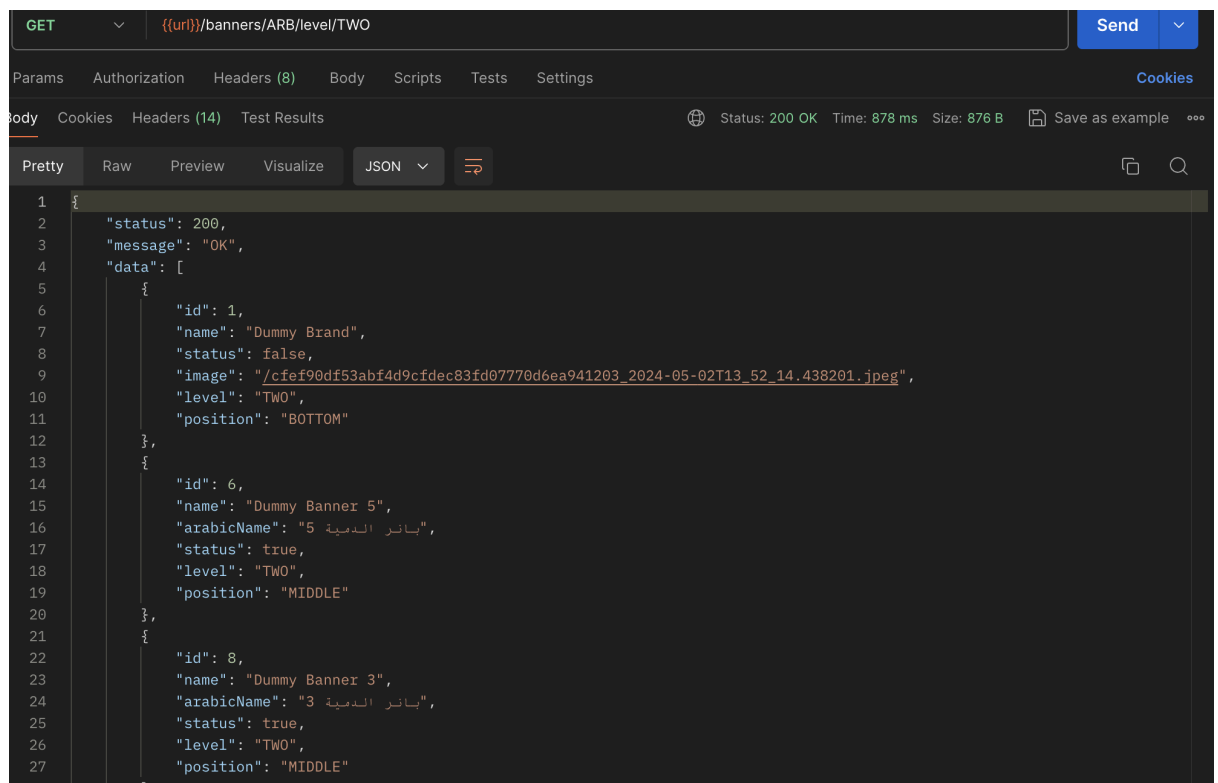

9. Update Banner Image

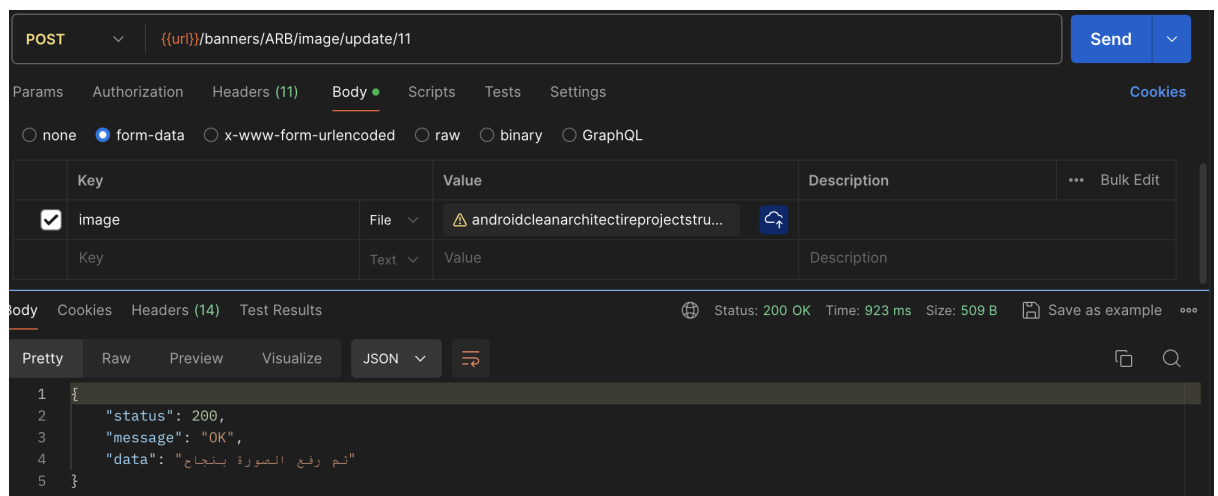

10. Get Banner Image By Id

