

Brand Module: Responses

1. Add Brand:

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active endpoint is "Brand / Add Brand". The request method is "POST" and the URL is "{{url}}/brands". The request body is a JSON object:

```
{ 1: { 2:   "name": "Dummy Brand 5", 3:   "status": true 4: }
```

. The response status is "201 Created", the time taken is "521 ms", and the size is "474 B". The response body is a JSON object:

```
1: { 2:   "status": 201, 3:   "message": "Created" 4: }
```

2. Update Brand

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active endpoint is "Brand / Update Brand". The request method is "PUT" and the URL is "{{url}}/brands". The request body is a JSON object:

```
1: { 2:   "id": 6, 3:   "name": "Dummy Brand Updated 5", 4:   "status": false 5: }
```

. The response status is "200 OK", the time taken is "326 ms", and the size is "526 B". The response body is a JSON object:

```
1: { 2:   "status": 200, 3:   "message": "OK", 4:   "data": { 5:     "id": 6, 6:     "name": "Dummy Brand Updated 5", 7:     "status": false 8:   } 9: }
```

3. Delete Brand

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Brand / Delete Brand". The HTTP method is set to "DELETE" and the URL is "{{url}}/brands/5". The "Send" button is visible. Below the request bar, the "Body" tab is active, displaying a JSON response in "Pretty" format. The response indicates a successful deletion with a status of 200 OK.

```
{
  "status": 200,
  "message": "OK",
  "data": "Brand removed successfully"
}
```

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 3.52 s Size: 500 B Save as example

Pretty Raw Preview Visualize JSON

4. Get All Brands

The screenshot shows the same REST client interface, but for the endpoint "Brand / Get All Brands". The HTTP method is set to "GET" and the URL is "{{url}}/brands". The "Send" button is visible. Below the request bar, the "Body" tab is active, displaying a JSON response in "Pretty" format. The response lists four dummy brands with their respective IDs, names, statuses, and image URLs.


```
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 4,
      "name": "Dummy Brand 3",
      "status": false,
      "image": "/dummy-image_2024-03-29T15_24_13.914167.png"
    },
    {
      "id": 2,
      "name": "Dummy Brand 1",
      "status": true,
      "image": "/dummy-image_2024-03-29T15_24_33.695093.png"
    },
    {
      "id": 3,
      "name": "Dummy Brand 2",
      "status": true,
      "image": "/dummy-image_2024-03-29T15_24_36.992852.png"
    },
    {
      "id": 6,
      "name": "Dummy Brand Updated 5",
      "status": false
    }
  ]
}
```

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 2.22 s Size: 829 B Save as example

Pretty Raw Preview Visualize JSON

5. Get Active Brands

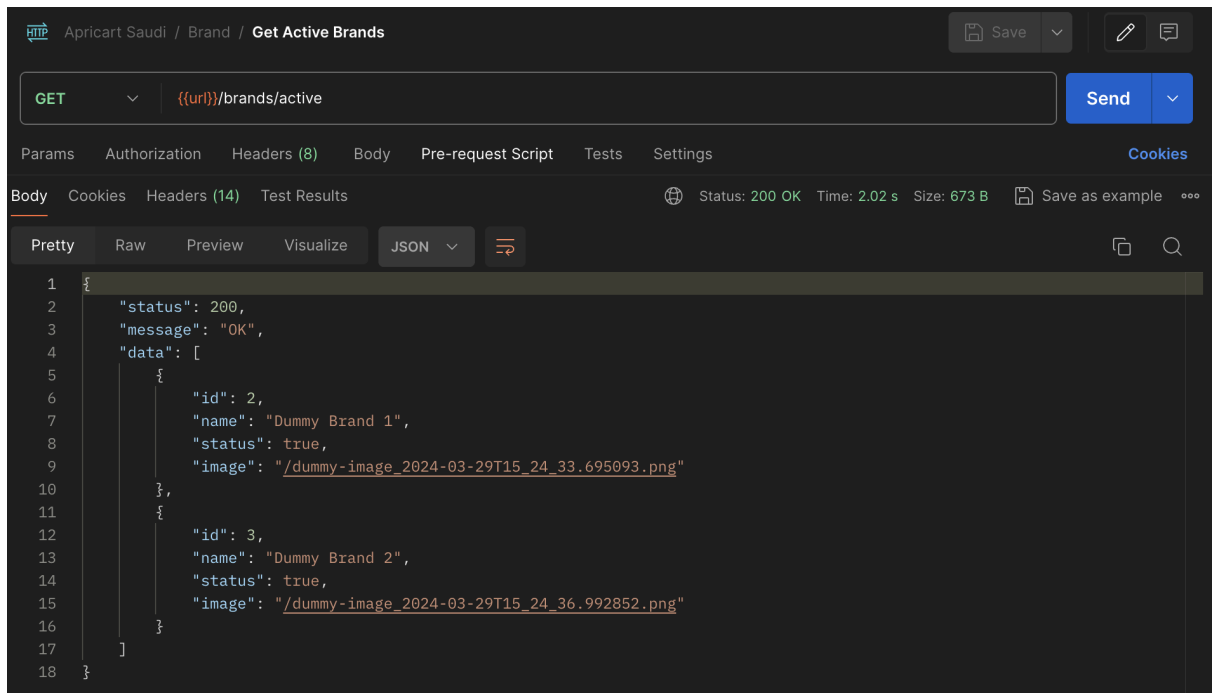

Apricart Saudi / Brand / Get Active Brands

GET `{{url}}/brands/active` Send


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 2.02 s Size: 673 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "name": "Dummy Brand 1",
8       "status": true,
9       "image": "/dummy-image_2024-03-29T15_24_33.695093.png"
10    },
11    {
12      "id": 3,
13      "name": "Dummy Brand 2",
14      "status": true,
15      "image": "/dummy-image_2024-03-29T15_24_36.992852.png"
16    }
17  ]
18 }
```

6. Get Brand by Brand ID

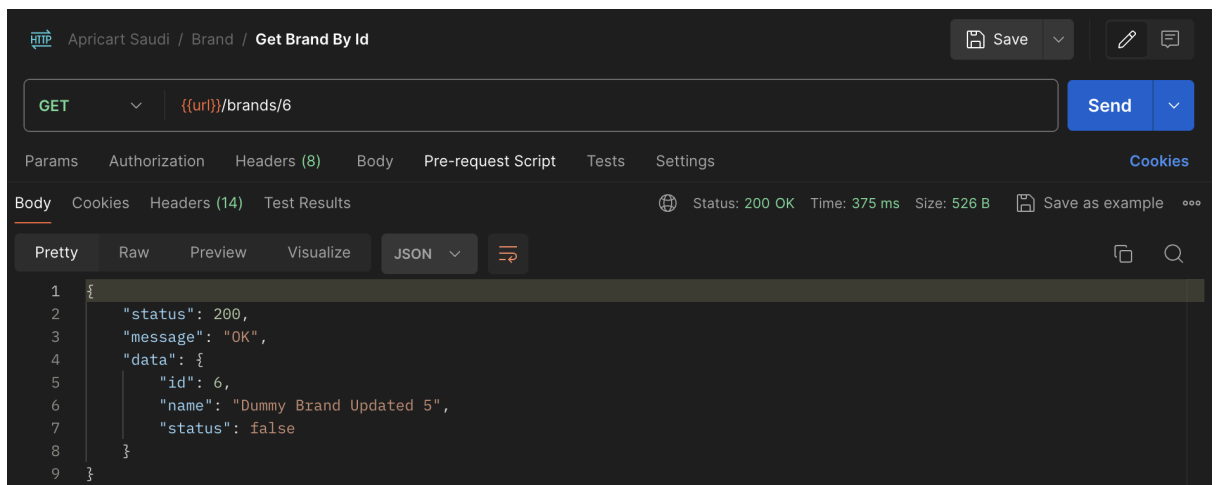

Apricart Saudi / Brand / Get Brand By Id

GET `{{url}}/brands/6` Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 375 ms Size: 526 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 6,
6     "name": "Dummy Brand Updated 5",
7     "status": false
8   }
9 }
```

7. Get Brand by Brand Name

The screenshot shows a REST client interface for a project named "Apricart Saudi". The request is a GET method to the endpoint `{{url}}/brands/name/Dummy Brand Updated 5`. The response status is 200 OK, with a time of 295 ms and a size of 526 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 6,
6     "name": "Dummy Brand Updated 5",
7     "status": false
8   }
9 }
```

8. Update Brand Image

The screenshot shows a REST client interface for a project named "Apricart Saudi". The request is a POST method to the endpoint `{{url}}/brands/image/update/6`. The request body is set to "form-data". The response status is 200 OK, with a time of 832 ms and a size of 501 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Image uploaded successfully"
5 }
```

9. Get Brand Image by Brand ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The request is a GET method to the endpoint `{{url}}/brands/image/6`. The response status is 200 OK, with a time of 2.23 s and a size of 544 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "https://staging.apricart.pk/dummy-image_2024-03-30T01_23_05.448474.png"
5 }
```

Brand Module: Arabic Responses

1. Add Brand

POST {{uri}}/brands/ARB

Params Authorization Headers (10) **Body** Scripts Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON Beautify

```
1 {
2   "name": "Dummy Brand 6",
3   "arabicName": "6 العلامة التجارية البهاء",
4   "status": true
5 }
```

Body Cookies Headers (14) Test Results Status: 201 Created Time: 878 ms Size: 474 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 201,
3   "message": "Created"
4 }
```

2. Update Brand

PUT {{uri}}/brands/ARB

Params Authorization Headers (10) **Body** Scripts Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON Beautify

```
1 {
2   "id": 7,
3   "name": "Dummy Brand Updated 6",
4   "status": false
5 }
```

Body Cookies Headers (14) Test Results Status: 200 OK Time: 346 ms Size: 590 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 7,
6     "name": "Dummy Brand Updated 6",
7     "arabicName": "6 العلامة التجارية البهاء",
8     "status": false
9   }
10 }
```

3. Delete Brand

DELETE {{uri}}/brands/ARB/7


Params Authorization Headers (8) **Body** Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 283 ms Size: 534 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "تمت إزالة العلامة التجارية بنجاح"
5 }
```


4. Get All Brands

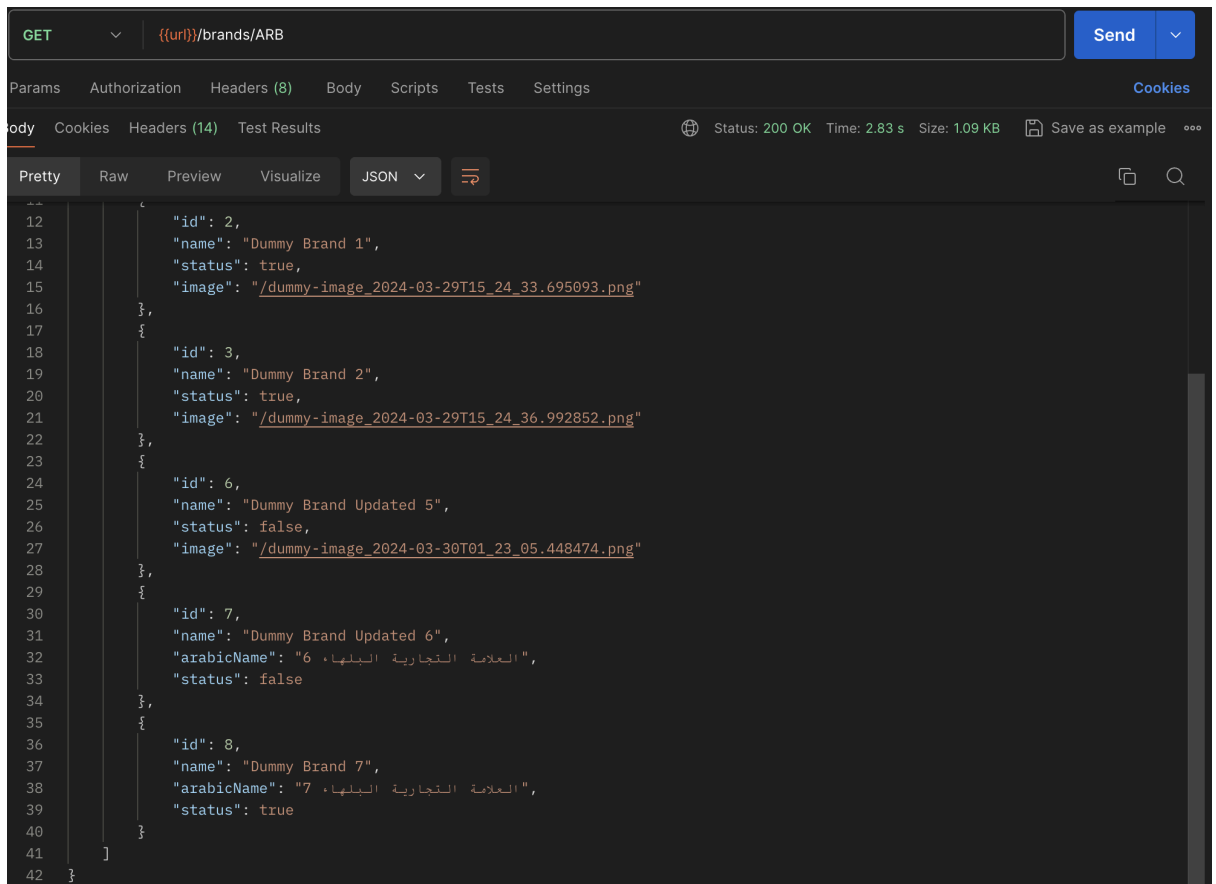

```
GET {{url}}/brands/ARB
Send

Params Authorization Headers (8) Body Scripts Tests Settings Cookies
body Cookies Headers (14) Test Results
Status: 200 OK Time: 2.83 s Size: 1.09 KB Save as example
Pretty Raw Preview Visualize JSON
{
  "id": 2,
  "name": "Dummy Brand 1",
  "status": true,
  "image": "/dummy-image_2024-03-29T15_24_33.695093.png"
},
{
  "id": 3,
  "name": "Dummy Brand 2",
  "status": true,
  "image": "/dummy-image_2024-03-29T15_24_36.992852.png"
},
{
  "id": 6,
  "name": "Dummy Brand Updated 5",
  "status": false,
  "image": "/dummy-image_2024-03-30T01_23_05.448474.png"
},
{
  "id": 7,
  "name": "Dummy Brand Updated 6",
  "arabicName": "6 العلامة التجارية البيضاء",
  "status": false
},
{
  "id": 8,
  "name": "Dummy Brand 7",
  "arabicName": "7 العلامة التجارية البيضاء",
  "status": true
}
]
```


5. Get Active Brands

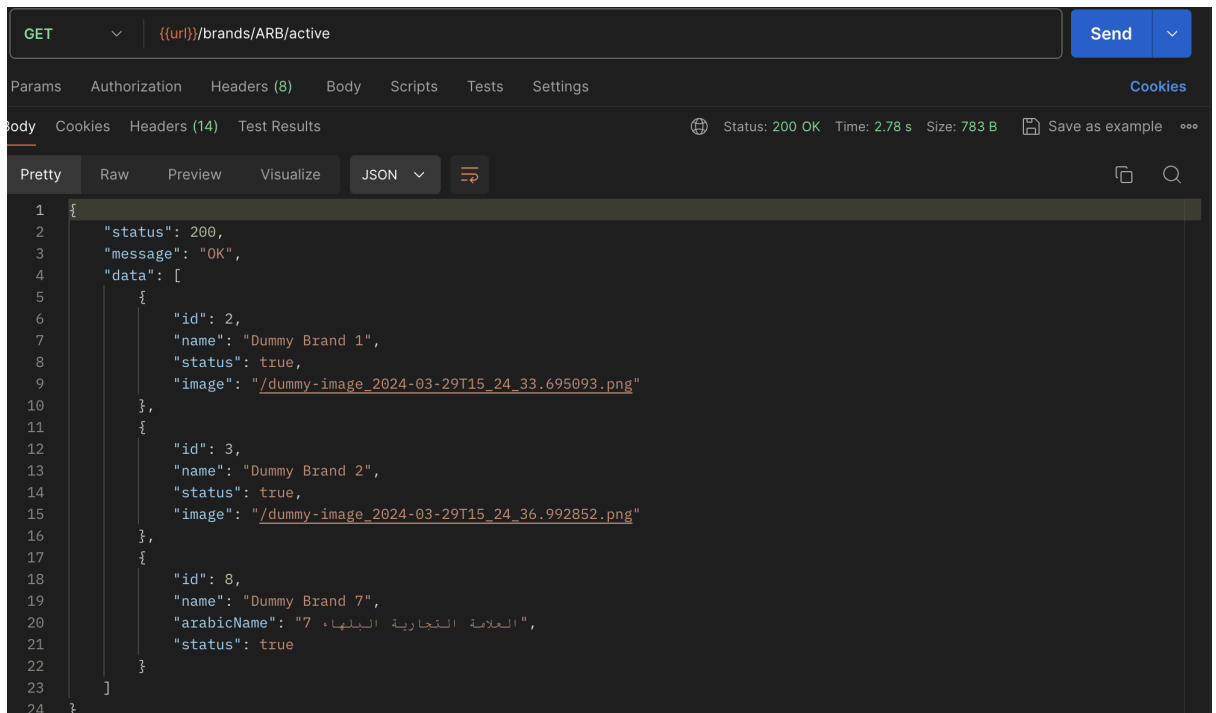

```
GET {{url}}/brands/ARB/active
Send

Params Authorization Headers (8) Body Scripts Tests Settings Cookies
body Cookies Headers (14) Test Results
Status: 200 OK Time: 2.78 s Size: 783 B Save as example
Pretty Raw Preview Visualize JSON
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 2,
      "name": "Dummy Brand 1",
      "status": true,
      "image": "/dummy-image_2024-03-29T15_24_33.695093.png"
    },
    {
      "id": 3,
      "name": "Dummy Brand 2",
      "status": true,
      "image": "/dummy-image_2024-03-29T15_24_36.992852.png"
    },
    {
      "id": 8,
      "name": "Dummy Brand 7",
      "arabicName": "7 العلامة التجارية البيضاء",
      "status": true
    }
  ]
}
```


6. Get Brand by Brand ID

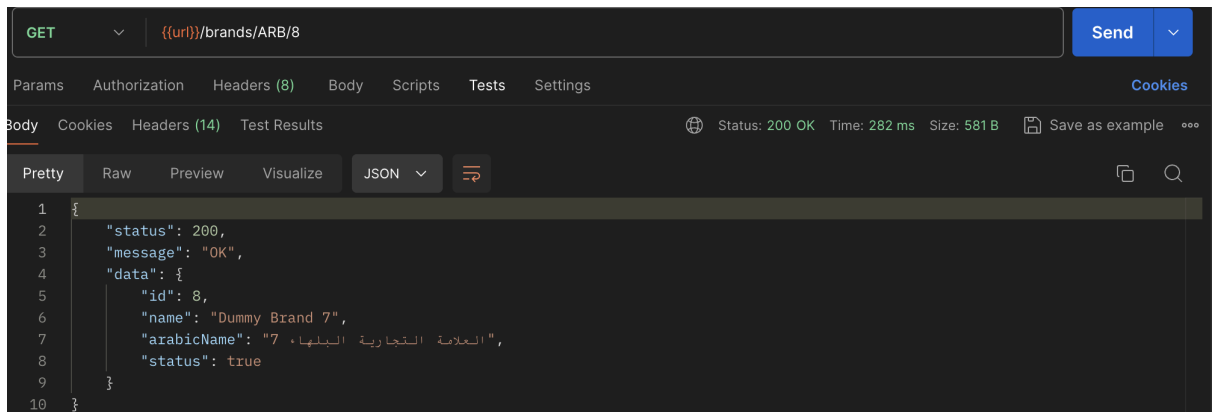

```
GET {{url}}/brands/ARB/8

Params Authorization Headers (8) Body Scripts Tests Settings Cookies
Body Cookies Headers (14) Test Results Status: 200 OK Time: 282 ms Size: 581 B Save as example
Pretty Raw Preview Visualize JSON
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 8,
6     "name": "Dummy Brand 7",
7     "arabicName": "7 العلامة التجارية البلهاء",
8     "status": true
9   }
10 }
```


7. Get Brand by Brand Name

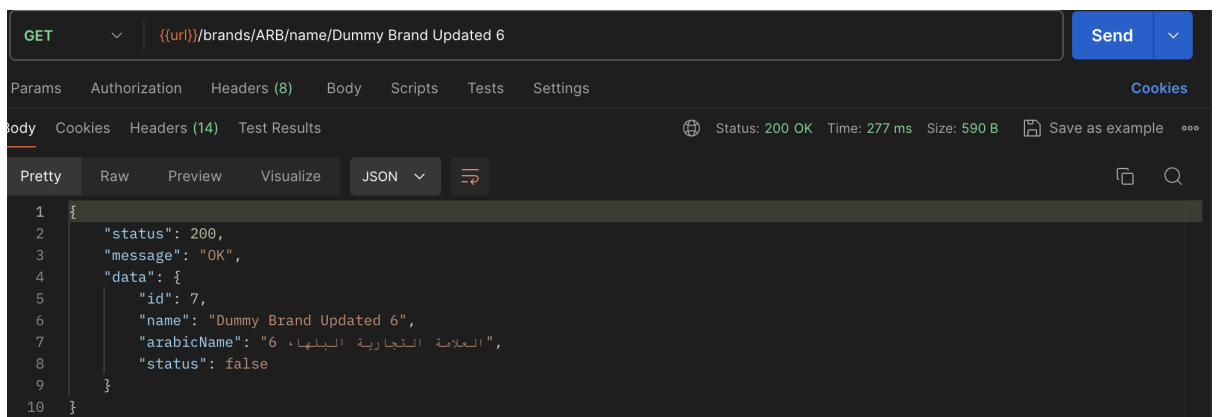

```
GET {{url}}/brands/ARB/name/Dummy Brand Updated 6

Params Authorization Headers (8) Body Scripts Tests Settings Cookies
Body Cookies Headers (14) Test Results Status: 200 OK Time: 277 ms Size: 590 B Save as example
Pretty Raw Preview Visualize JSON
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 7,
6     "name": "Dummy Brand Updated 6",
7     "arabicName": "6 العلامة التجارية البلهاء",
8     "status": false
9   }
10 }
```

8. Get Brand by Arabic Name

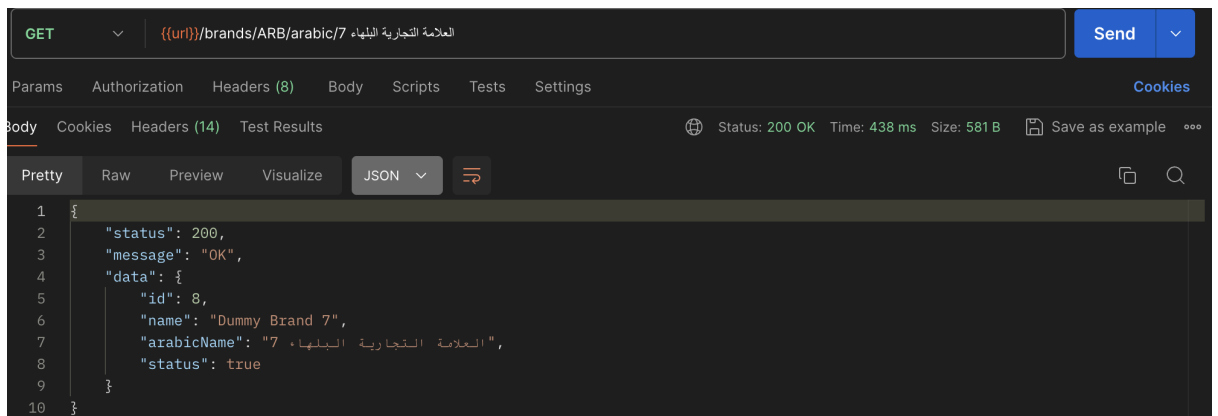

```
GET {{url}}/brands/ARB/arabic/7 العلامة التجارية البلهاء

Params Authorization Headers (8) Body Scripts Tests Settings Cookies
Body Cookies Headers (14) Test Results Status: 200 OK Time: 438 ms Size: 581 B Save as example
Pretty Raw Preview Visualize JSON
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 8,
6     "name": "Dummy Brand 7",
7     "arabicName": "7 العلامة التجارية البلهاء",
8     "status": true
9   }
10 }
```

9. Update Brand Image

The screenshot shows a REST client interface with a POST request to `{{url}}/brands/ARB/image/update/8`. The request body is set to 'form-data' and contains a single key-value pair: 'image' with a file named 'Android Clean Architecture Project S...'. The response status is 200 OK, with a time of 875 ms and a size of 509 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "تم رفع الصورة بنجاح"
5 }
```

10. Get Brand Image by Brand Id

The screenshot shows a REST client interface with a GET request to `{{url}}/brands/ARB/image/8`. The response status is 200 OK, with a time of 894 ms and a size of 574 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "https://staging.apricart.pk/androidcleanarchitectureprojectstructure_2024-05-06T09_54_57.844202.jpeg"
5 }
```