

Cart Module: Responses

1. Add Cart Item:

POST {{url}}/carts

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON Beautify

```
1 {
2   ... "quantity": "50",
3   ... "productId": 2,
4   ... "productWarehouseId": 1
5 }
```

Body Cookies Headers (14) Test Results

Status: 201 Created Time: 441 ms Size: 474 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 201,
3   "message": "Created"
4 }
```

2. Update Cart Quantity By Product ID & Customer ID:

PUT {{url}}/carts

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON Beautify

```
1 {
2   ... "quantity": "250",
3   ... "productId": 1,
4   ... "productWarehouseId": 1
5 }
```


Body Cookies Headers (14) Test Results

Status: 200 OK Time: 398 ms Size: 550 B Save as example


Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "quantity": "250",
7     "customerId": 1,
8     "productId": 1,
9     "productWarehouseId": 1
10  }
11 }
```


3. Remove Cart Item By Product ID

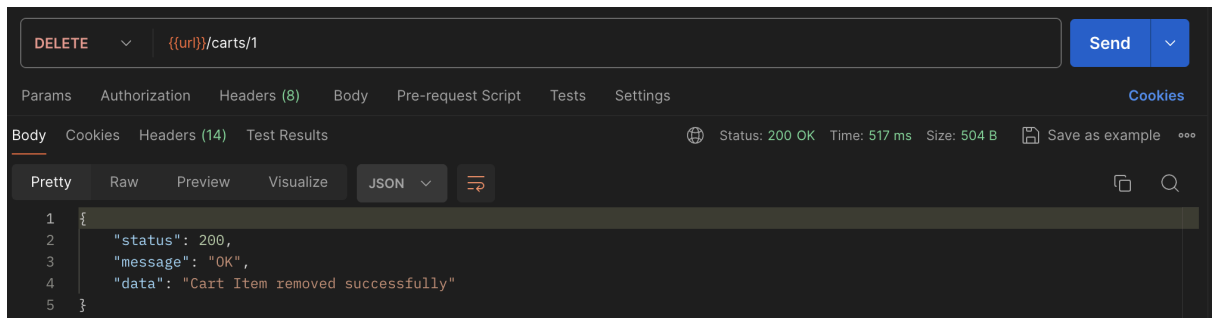


4. Get Cart Items By Customer ID

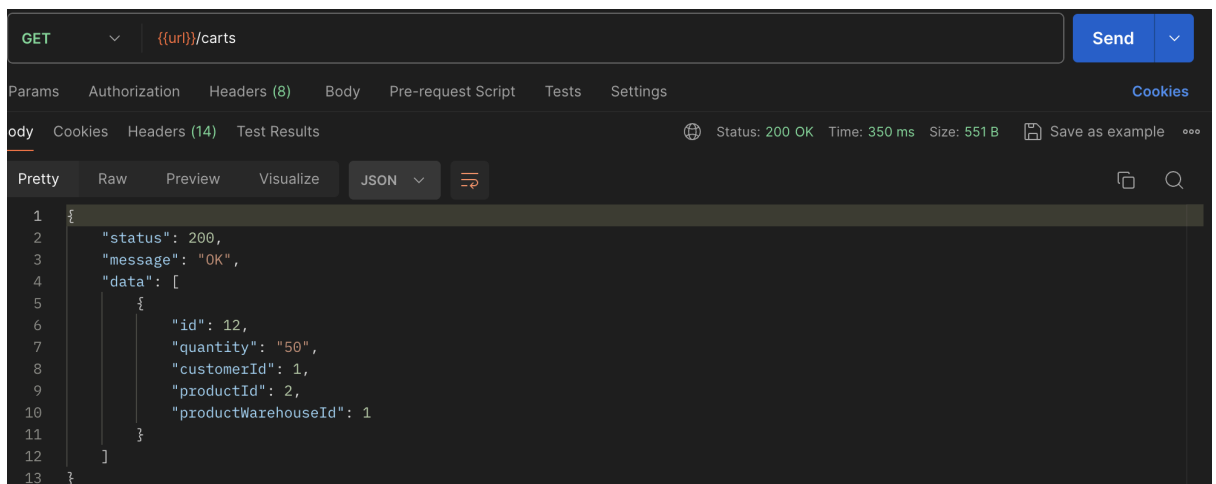

5. Calculate Cart Total

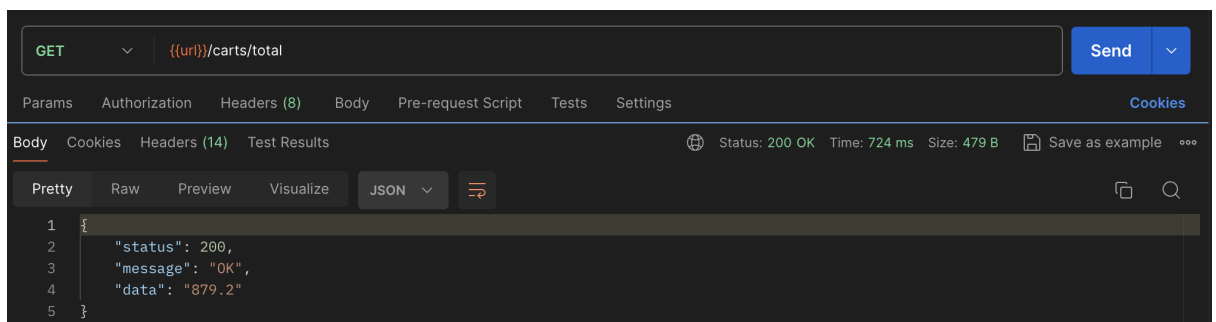


6. Clear Cart

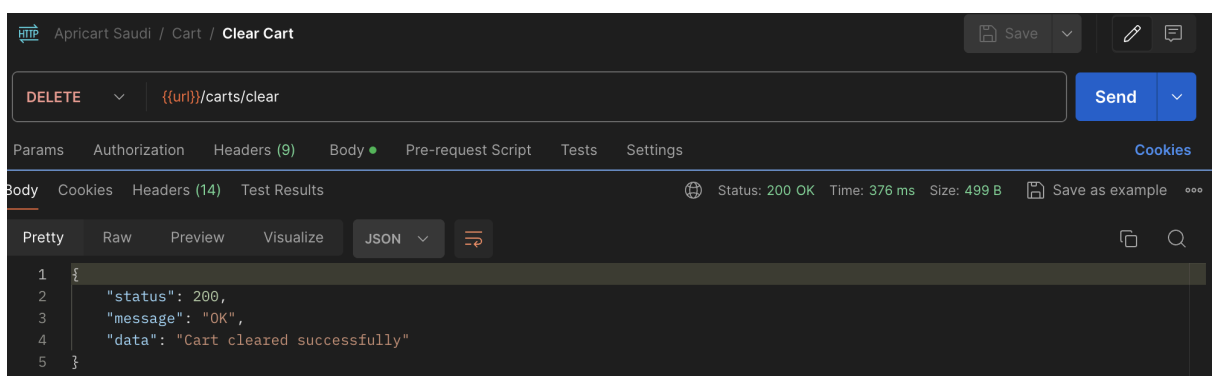


Cart Module: Arabic Responses

1. Add Cart Item:

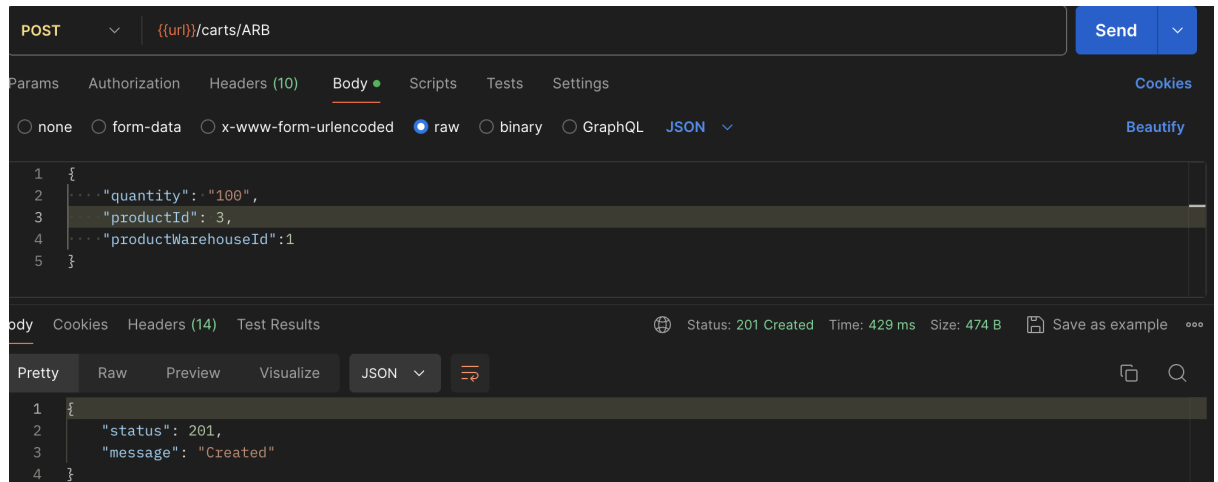

2. Update Cart Quantity By Product ID & Customer ID:

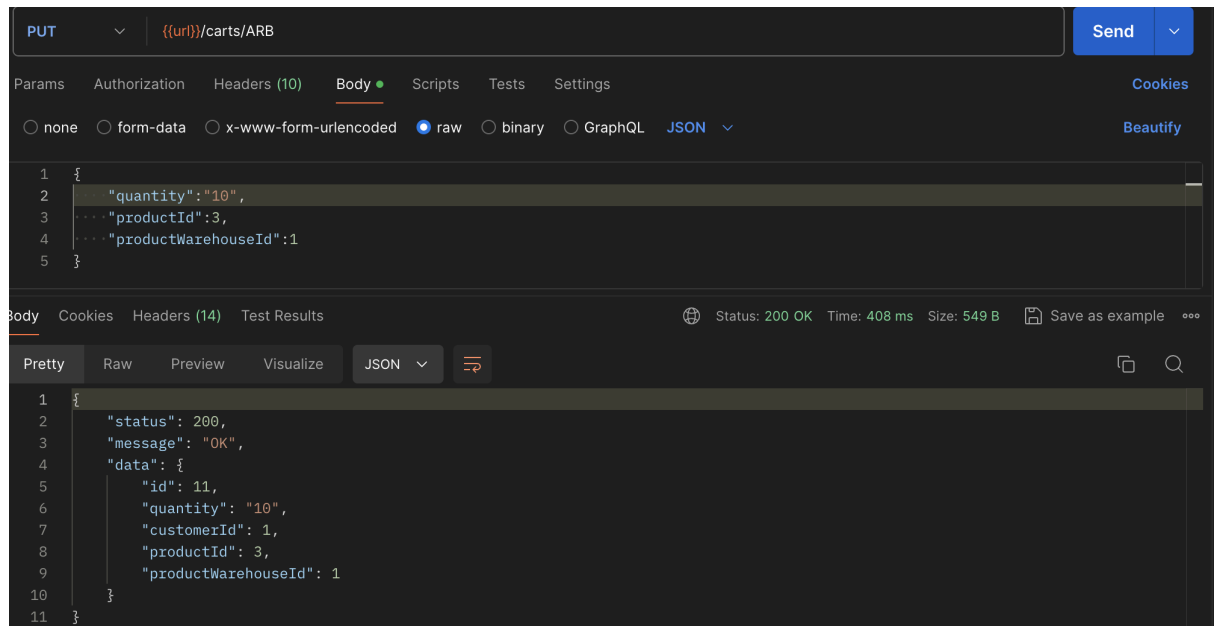

3. Remove Cart Item By Product ID

The screenshot shows a REST client interface with a DELETE request to `{{url}}/carts/ARB/11`. The response is a JSON object with status 200, message "OK", and a confirmation message in Arabic: "تمت إزالة عنصر السلة بنجاح".

```
DELETE {{url}}/carts/ARB/11
```

Params Authorization Headers (8) Body Scripts Tests Settings Cookies

body Cookies Headers (14) Test Results Status: 200 OK Time: 356 ms Size: 522 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "تمت إزالة عنصر السلة بنجاح"
5 }
```

4. Get Cart Items By Customer ID

The screenshot shows a REST client interface with a GET request to `{{url}}/carts/ARB`. The response is a JSON object with status 200, message "OK", and an array of three cart items. Each item contains its ID, quantity, customer ID, product ID, and product warehouse ID.

```
GET {{url}}/carts/ARB
```


Params Authorization Headers (8) Body Scripts Tests Settings Cookies

body Cookies Headers (14) Test Results Status: 200 OK Time: 357 ms Size: 706 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1,
7       "quantity": "250",
8       "customerId": 1,
9       "productId": 1,
10      "productWarehouseId": 1
11    },
12    {
13      "id": 8,
14      "quantity": "50",
15      "customerId": 1,
16      "productId": 2,
17      "productWarehouseId": 1
18    },
19    {
20      "id": 11,
21      "quantity": "10",
22      "customerId": 1,
23      "productId": 3,
24      "productWarehouseId": 1
25    }
26  ]
27 }
```

5. Calculate Cart Total

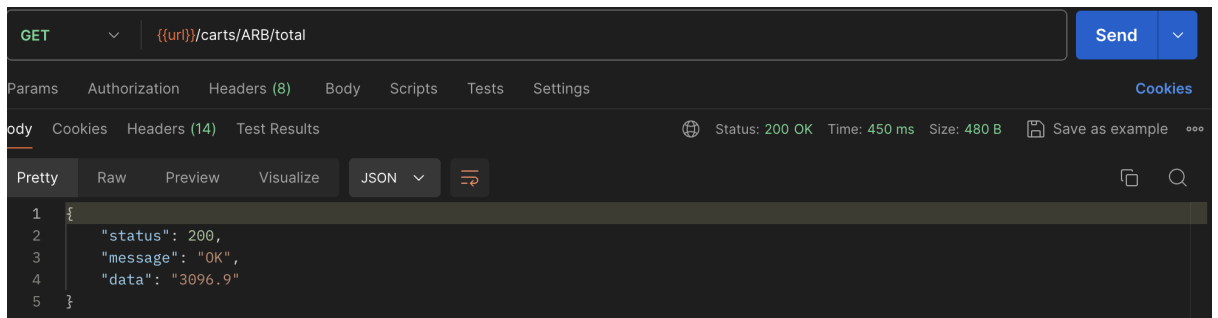

6. Clear Cart

