

Case 1: discountType is null and couponCode is null

Description: No discount type and no coupon code provided.

Outcome: The server should process this order successfully, and return a status of 201 Created with the order details in the response.

The screenshot displays the Postman interface for an API collection named 'Apricart Collection - Admin Portal / Order / Add Order'. The request is a POST to '({url})/orders' with a raw JSON body. The response is a 201 Created status with a JSON body containing order details.

Request Body (Raw):

```
1 {
2   ... "totalTax": 1200.00,
3   ... "totalDiscount": 550.0,
4   ... "subTotal": 25000.00,
5   ... "grandTotal": 25600.0,
6   ... "deliveryCharges": 500.0,
7   ... "minOrderValue": 100.0,
8   ... "paymentMode": "CASH",
9   ... "notes": "Please deliver before 5 PM",
10  ... "discountType": null,
11  ... "couponCode": null,
12  ... "orderStatus": "PENDING",
13  ... "paymentStatus": "PAID",
14  ... "status": true,
15  ... "deliveryDate": "2024-07-28",
16  ... "deliveryTime": "19:00 PM",
17  ... "warehouseId": 1,
```


Response Body (Pretty):

```
1 {
2   "status": 201,
3   "message": "Created",
4   "data": {
5     "id": "240726140215325",
6     "notes": "Please deliver before 5 PM",
7     "status": true,
8     "customerId": 77,
9     "warehouseId": 1,
```

Case 2: discountType is COUPON_CODE and couponCode is null

Description: The discount type is specified as COUPON_CODE, but no coupon code is provided.

Outcome: The server will likely return an error indicating that the coupon code is required. This matches the error message: {"status": 500, "message": "Coupon code is required.", "data": null}.

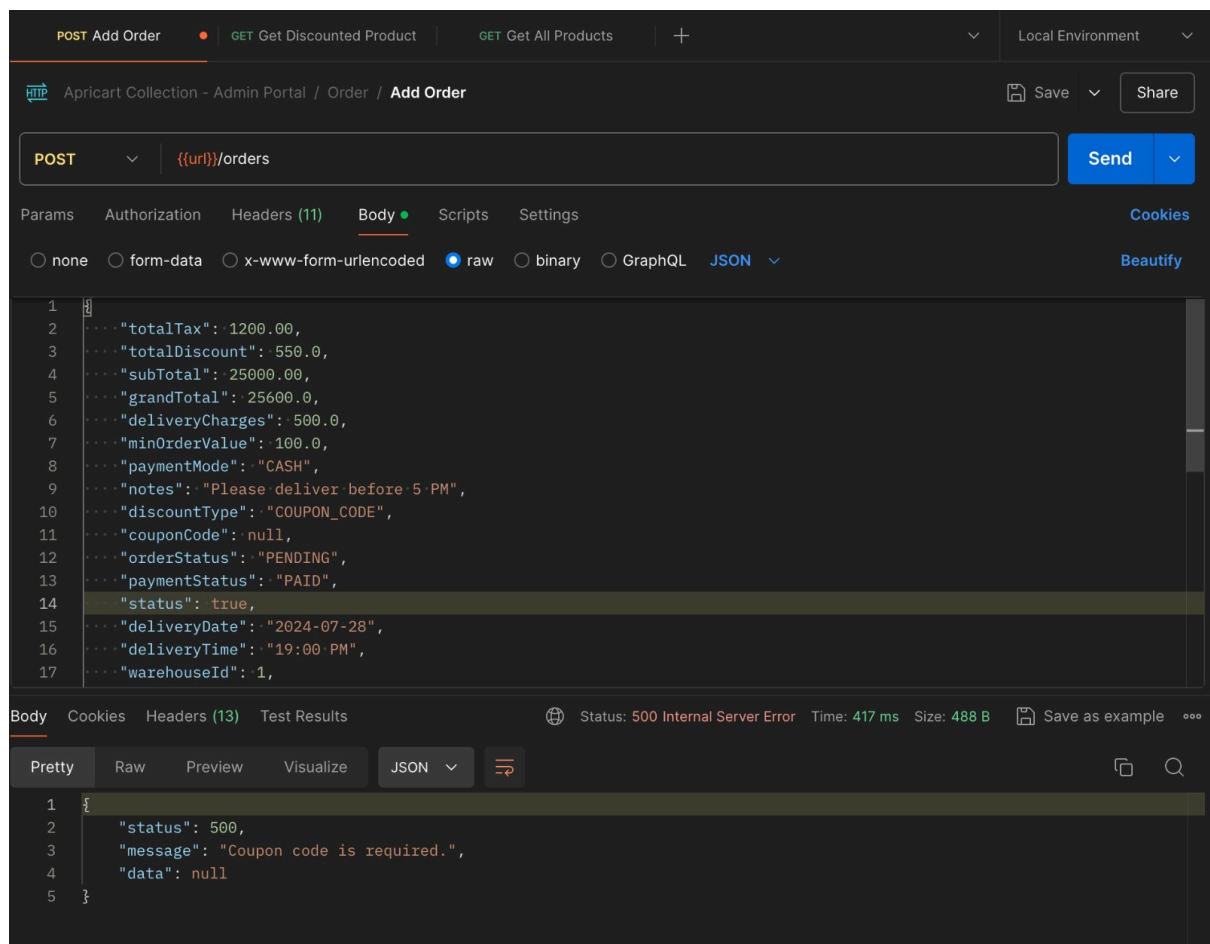

The screenshot shows a REST client interface with the following details:

- Request:** POST to `{{url}}/orders`. The body is raw JSON with the following content:


```
1 {
2   "totalTax": 1200.00,
3   "totalDiscount": 550.0,
4   "subTotal": 25000.00,
5   "grandTotal": 25600.0,
6   "deliveryCharges": 500.0,
7   "minOrderValue": 100.0,
8   "paymentMode": "CASH",
9   "notes": "Please deliver before 5 PM",
10  "discountType": "COUPON_CODE",
11  "couponCode": null,
12  "orderStatus": "PENDING",
13  "paymentStatus": "PAID",
14  "status": true,
15  "deliveryDate": "2024-07-28",
16  "deliveryTime": "19:00 PM",
17  "warehouseId": 1,
```
- Response:** Status: 500 Internal Server Error. Time: 417 ms. Size: 488 B. The response body is JSON:

```
1 {
2   "status": 500,
3   "message": "Coupon code is required.",
4   "data": null
5 }
```

Case 3: discountType is null and couponCode is empty string

Description: Discount type is specified as null, and no coupon code is an empty string provided.

Outcome: The server should process this order successfully, and return a status of 201 Created with the order details in the response.

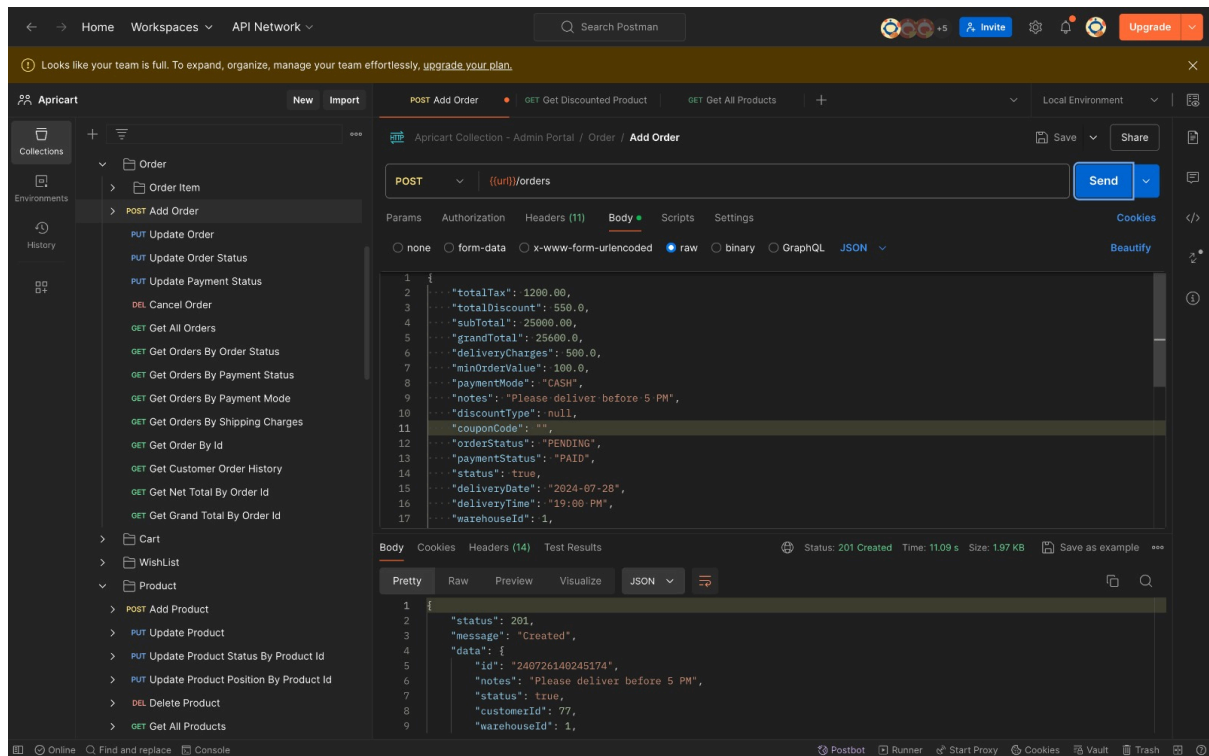

Case 4: discountType is COUPON_CODE and couponCode is a valid string (e.g., “SAVE10”)

Description: The discount type is specified as COUPON_CODE, and a valid coupon code is provided.

Outcome: The server should process this order successfully, apply the relevant discount, and return a status of 201 Created with the order details in the response.

The screenshot shows the Postman interface for an API collection named 'Apricart'. The selected endpoint is 'POST Add Order' with the URL '[[url]]orders'. The request body is a JSON object with the following details:

```
1 {
2   "totalTax": 1200.00,
3   "totalDiscount": 550.0,
4   "subTotal": 25000.00,
5   "grandTotal": 25600.0,
6   "deliveryCharges": 500.0,
7   "minOrderValue": 100.0,
8   "paymentMode": "CASH",
9   "notes": "Please deliver before 5 PM",
10  "discountType": "COUPON_CODE",
11  "couponCode": "DUMMYCODE2",
12  "orderStatus": "PENDING",
13  "paymentStatus": "PAID",
14  "status": true,
15  "deliveryDate": "2024-07-28",
16  "deliveryTime": "19:00 PM",
17  "warehouseId": 1,
18 }
```


The response is a 201 Created status with the following JSON body:

```
1 {
2   "status": 201,
3   "message": "Created",
4   "data": {
5     "id": "2489726140457432",
6     "notes": "Please deliver before 5 PM",
7     "status": true,
8     "customerId": 77,
9     "warehouseId": 1,
10  }
11 }
```

Case 5: discountType is COUPON_CODE and couponCode is a string (e.g., "SAVE10")

Description: The discount type is specified as COUPON_CODE, but an invalid coupon code is provided.


Outcome: The server will likely return an error indicating that the coupon code is required. This matches the error message: {"status": 500, "message": "Coupon usage limit has been reached.", "data": null}.

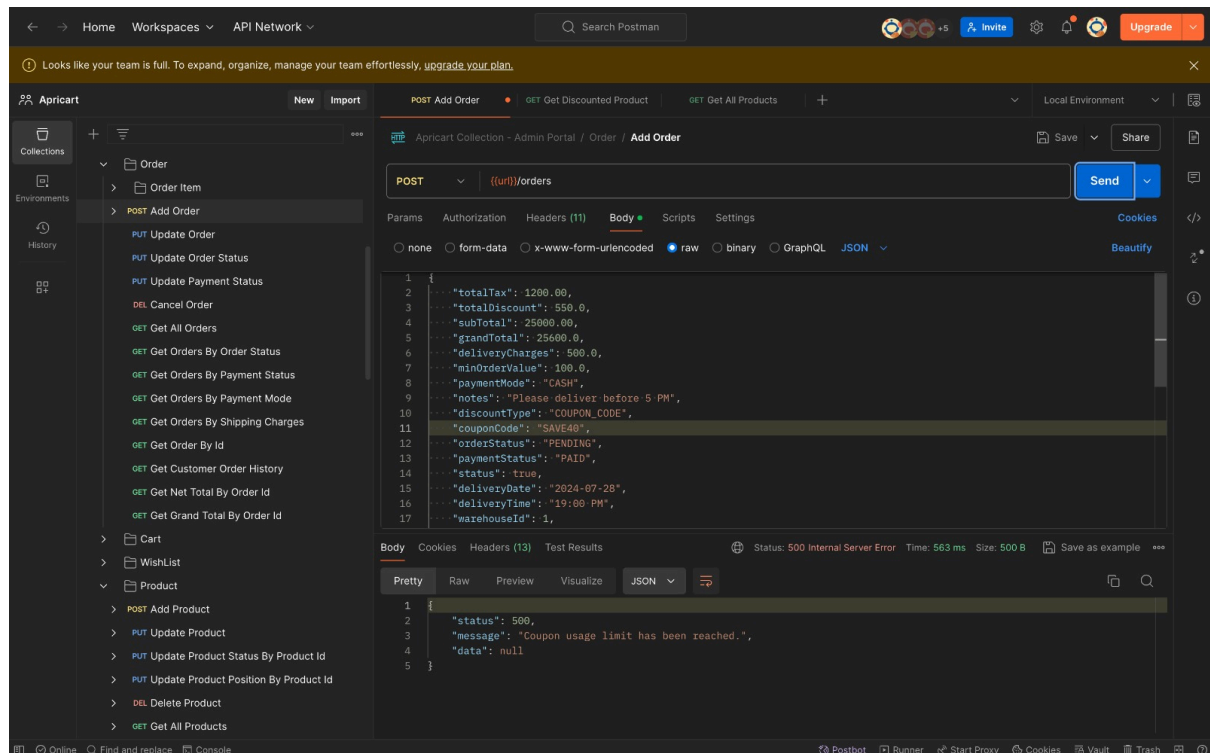

Case 6: discountType is null and couponCode is a valid string (e.g., “SAVE10”)

Description: No discount type is provided, but a coupon code is given.


Outcome: This is an ambiguous case. The server might still require a valid discountType to be set to COUPON_CODE for the coupon code to be applied, and thus return an error.

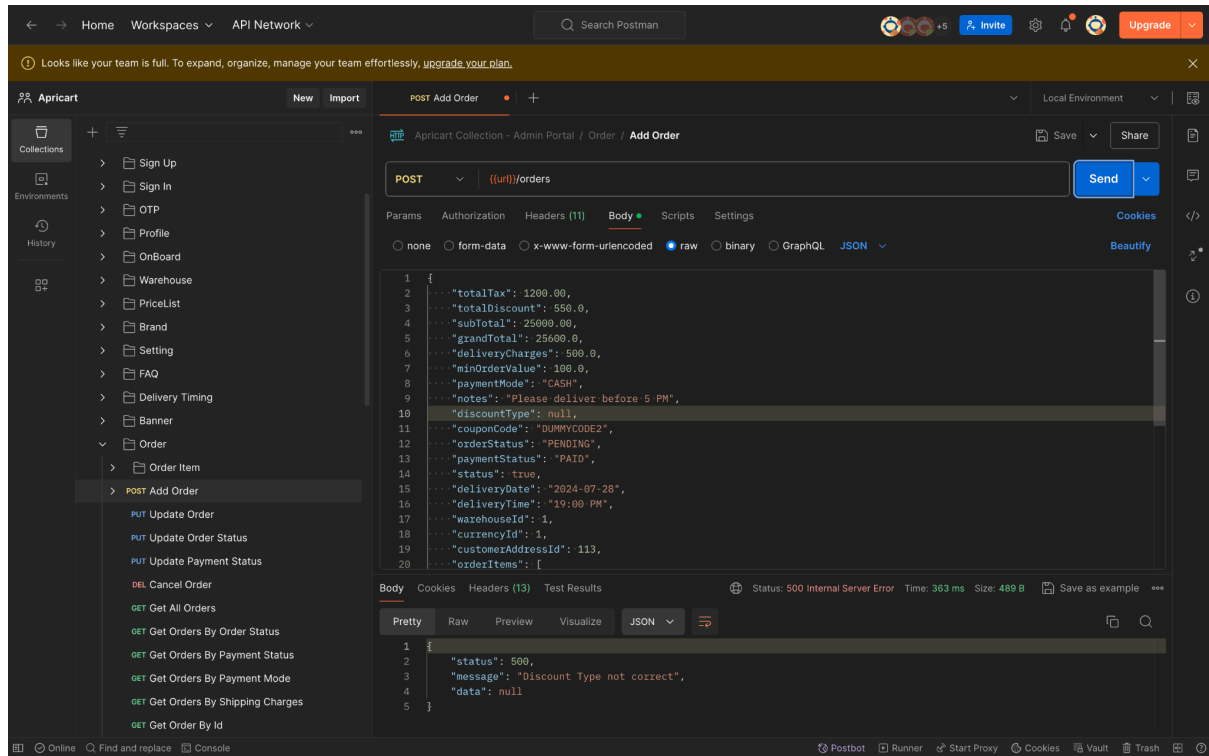

Case 7: discountType is not COUPON_CODE (e.g., “SALE”) and couponCode is null

Description: Discount type is specified as something other than COUPON_CODE (e.g., “SALE”), and no coupon code is provided.

Outcome: The server should process this order without expecting a coupon code, as the discount type doesn’t depend on a coupon code.

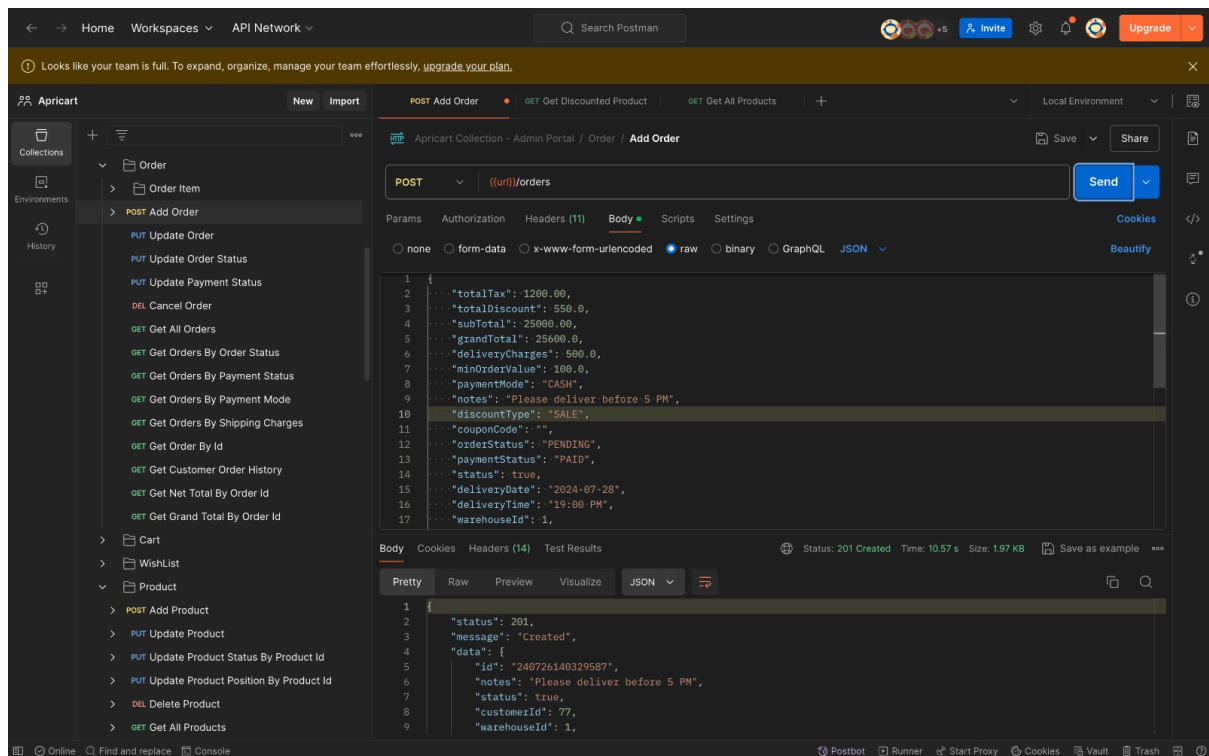

Case 8: discountType is not COUPON_CODE (e.g., "SALE") and couponCode is a valid string (e.g., "SAVE10")

Description: Discount type is specified as something other than COUPON_CODE, but a coupon code is provided.

Outcome: The server might still require a valid discountType to be set to COUPON_CODE for the coupon code to be applied, and thus return an error.

The screenshot shows the Postman interface with a collection named 'Apricart' and a folder 'Order'. A POST request to 'Add Order' is shown with the following JSON body:

```
1 {
2   ... "totalTax": 1200.00,
3   ... "totalDiscount": 550.0,
4   ... "subTotal": 25000.00,
5   ... "grandTotal": 25600.0,
6   ... "deliveryCharges": 500.0,
7   ... "minOrderValue": 100.0,
8   ... "paymentMode": "CASH",
9   ... "notes": "Please deliver before 5 PM",
10  ... "discountType": "SALE",
11  ... "couponCode": "DUMMYCODE2",
12  ... "orderStatus": "PENDING",
13  ... "paymentStatus": "PAID",
14  ... "status": true,
15  ... "deliveryDate": "2024-07-28",
16  ... "deliveryTime": "19:00 PM",
17  ... "warehouseId": 1,
18  ... "currencyId": 1,
19  ... "customerAddressId": 113,
20  ... "orderItems": [

```

The response status is 500 Internal Server Error. The response body is:

```
1 {
2   "status": 500,
3   "message": "Discount Type not correct",
4   "data": null
5 }

```

Case 9: discountType is not COUPON_CODE (e.g., “SALE”) and couponCode is null.

Description: Discount type is specified as something other than COUPON_CODE, but coupon code is null.

Outcome: The server might ignore the coupon code as it isn’t required or relevant to the specified discount type, and should process the order successfully.

