

Coupon Module: Responses

1. Add Coupon:

The screenshot shows a REST client interface for the 'Add Coupon' endpoint. The request is a POST to `{{url}}/coupons` with a JSON body. The response is a 201 status with a 'Created' message and no data.

Request:

```
POST {{url}}/coupons
```

Body (raw):

```
{
  "code": "SAVE70",
  "description": "This is a dummy coupon description.",
  "arabicDescription": "هذه وصفة تجريبية",
  "minSubTotal": 60.0,
  "expiry": "2024-06-31",
  "couponDiscount": 100,
  "usageLimit": 1,
  "status": true
}
```

Response:

```
{
  "status": 201,
  "message": "Created",
  "data": null
}
```

2. Add Coupon Detail

The screenshot shows a REST client interface for the 'Add Coupon Detail' endpoint. The request is a POST to `{{url}}/coupons/detail` with a JSON body. The response is a 201 status with a 'Created' message and no data.

Request:

```
POST {{url}}/coupons/detail
```

Body (raw):

```
{
  "couponId": 10,
  "phoneNumber": "+92312345678",
  "orderId": "",
  "warehouseId": 1
}
```

Response:

```
{
  "status": 201,
  "message": "Created",
  "data": null
}
```

3. Update Coupon Detail

The screenshot shows a REST client interface for the 'Update Coupon Detail' endpoint. The method is PUT and the URL is {{url}}/coupons/detail/10. The response status is 200 OK, with a time of 516 ms and a size of 746 B. The response body is displayed in JSON format, showing a successful update of the coupon details.

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "code": "SAVE70",
7     "couponDiscount": 100.0,
8     "description": "This is a dummy coupon description.",
9     "arabicDescription": "هذه وصف قسيمة تجريبية.",
10    "minSubTotal": 60.0,
11    "expiry": "2024-07-01T00:00:00.000+00:00",
12    "usageLimit": "1",
13    "status": true,
14    "couponDetailId": 12
15  }
16 }
```

4. Update Coupon

The screenshot shows a REST client interface for the 'Update Coupon' endpoint. The method is PUT and the URL is {{url}}/coupons. The request body is displayed in raw format, showing the coupon details to be updated. The response status is 200 OK, with a time of 377 ms and a size of 746 B. The response body is displayed in JSON format, showing a successful update of the coupon details.

Request Body (Raw):

```
1 {
2   "id": 10,
3   "minSubTotal": 70.0,
4   "expiry": "2024-12-31",
5   "usageLimit": "6"
6 }
```

Response Body (JSON):

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "code": "SAVE70",
7     "couponDiscount": 100.0,
8     "description": "This is a dummy coupon description.",
9     "arabicDescription": "هذه وصف قسيمة تجريبية.",
10    "minSubTotal": 70.0,
11    "expiry": "2024-12-31T00:00:00.000+00:00",
12    "usageLimit": "6",
13    "status": true,
14    "couponDetailId": 12
15  }
16 }
```

5. Delete Coupon

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Coupon / Delete Coupon". The HTTP method is set to "DELETE" and the URL is "{{url}}/coupons/1". The "Send" button is visible. Below the request bar, the "Body" tab is active, displaying a JSON response in "Pretty" format. The response indicates a successful deletion with a status of 200 OK, a message of "OK", and a data field stating "Coupon removed successfully".

```
DELETE {{url}}/coupons/1

{"status": 200, "message": "OK", "data": "Coupon removed successfully"}
```

6. Get All Coupons

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Admin APIs / Coupon / Get All Coupons". The HTTP method is set to "GET" and the URL is "{{url}}/coupons". The "Send" button is visible. Below the request bar, the "Body" tab is active, displaying a JSON response in "Pretty" format. The response is an array of three coupon objects, each containing details like id, code, discount, description, expiry, and usage limit.

```
GET {{url}}/coupons

[{"id": 9, "code": "SAVE60", "couponDiscount": 100.0, "description": "This is a dummy coupon description.", "arabicDescription": "هذه وصف قسيمة تجريبية", "minSubTotal": 15.0, "expiry": "2024-12-01T00:00:00.000+00:00", "usageLimit": "1", "status": true, "couponDetailId": 9}, {"id": 8, "code": "SAVE60", "couponDiscount": 100.0, "description": "This is a dummy coupon description.", "arabicDescription": "هذه وصف قسيمة تجريبية", "minSubTotal": 60.0, "expiry": "2024-07-01T00:00:00.000+00:00", "usageLimit": "1", "status": true, "couponDetailId": 11}, {"id": 10, "code": "SAVE70", "couponDiscount": 100.0, "description": "This is a dummy coupon description.", "arabicDescription": "هذه وصف قسيمة تجريبية", "minSubTotal": 70.0, "expiry": "2024-12-31T00:00:00.000+00:00", "usageLimit": "6", "status": true, "couponDetailId": 12}]
```

7. Get Coupon By Coupon Code

The screenshot shows a REST client interface for the endpoint `GET {{url}}/coupons/code/SAVE70`. The response is a JSON object with the following structure:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "code": "SAVE70",
7     "couponDiscount": 100.0,
8     "description": "This is a dummy coupon description.",
9     "arabicDescription": "هذه وصف قسيمة تجريبية.",
10    "minSubTotal": 60.0,
11    "expiry": "2024-07-01T00:00:00.000+00:00",
12    "usageLimit": "1",
13    "status": true,
14    "couponDetailId": 12
15  }
16 }
```

8. Get Coupons By Status

The screenshot shows a REST client interface for the endpoint `GET {{url}}/coupons/status/true`. The response is a JSON array of coupon objects:

```
47 [
48   {
49     "minSubTotal": 15.0,
50     "expiry": "2024-12-01T00:00:00.000+00:00",
51     "usageLimit": "1",
52     "status": true,
53     "couponDetailId": 9
54   },
55   {
56     "id": 8,
57     "code": "SAVE60",
58     "couponDiscount": 100.0,
59     "description": "This is a dummy coupon description.",
60     "arabicDescription": "هذه وصف قسيمة تجريبية.",
61     "minSubTotal": 60.0,
62     "expiry": "2024-07-01T00:00:00.000+00:00",
63     "usageLimit": "1",
64     "status": true,
65     "couponDetailId": 11
66   },
67   {
68     "id": 10,
69     "code": "SAVE70",
70     "couponDiscount": 100.0,
71     "description": "This is a dummy coupon description.",
72     "arabicDescription": "هذه وصف قسيمة تجريبية.",
73     "minSubTotal": 70.0,
74     "expiry": "2024-12-31T00:00:00.000+00:00",
75     "usageLimit": "6",
76     "status": true,
77     "couponDetailId": 12
78   }
79 ]
```

9. Get Coupons By Expiry

HTTP

Apricart Saudi / Admin APIs / Coupon / Get Coupon By Expiry

Save

GET{{url}}/coupons/expiry/241201050000000Send


ParamsAuthorizationHeaders (9)BodyScriptsTestsSettingsCookies

BodyCookiesHeaders (14)Test ResultsStatus: 200 OKTime: 532 msSize: 1.19 KBSave as example

PrettyRawPreviewVisualizeJSON

```
9      "description": "This is a dummy coupon description.",
10      "arabicDescription": null,
11      "minSubTotal": 20.0,
12      "expiry": "2024-12-01T00:00:00.000+00:00",
13      "usageLimit": "3",
14      "status": true,
15      "couponDetailId": 1
16    },
17    {
18      "id": 3,
19      "code": "DUMMYCODE2",
20      "couponDiscount": 25.0,
21      "description": "This is a dummy coupon description.",
22      "arabicDescription": null,
23      "minSubTotal": 15.0,
24      "expiry": "2024-12-01T00:00:00.000+00:00",
25      "usageLimit": "100",
26      "status": true,
27      "couponDetailId": 1
28    },
29    {
30      "id": 6,
31      "code": "SAVE40",
32      "couponDiscount": 80.0,
33      "description": "This is a dummy coupon description.",
34      "arabicDescription": "هذه وصف قسيمة تجريبية",
35      "minSubTotal": 15.0,
36      "expiry": "2024-12-01T00:00:00.000+00:00",
37      "usageLimit": "1",
38      "status": true,
39      "couponDetailId": 9
40    }
41  }
```


10. Get Coupons By Usage Limit

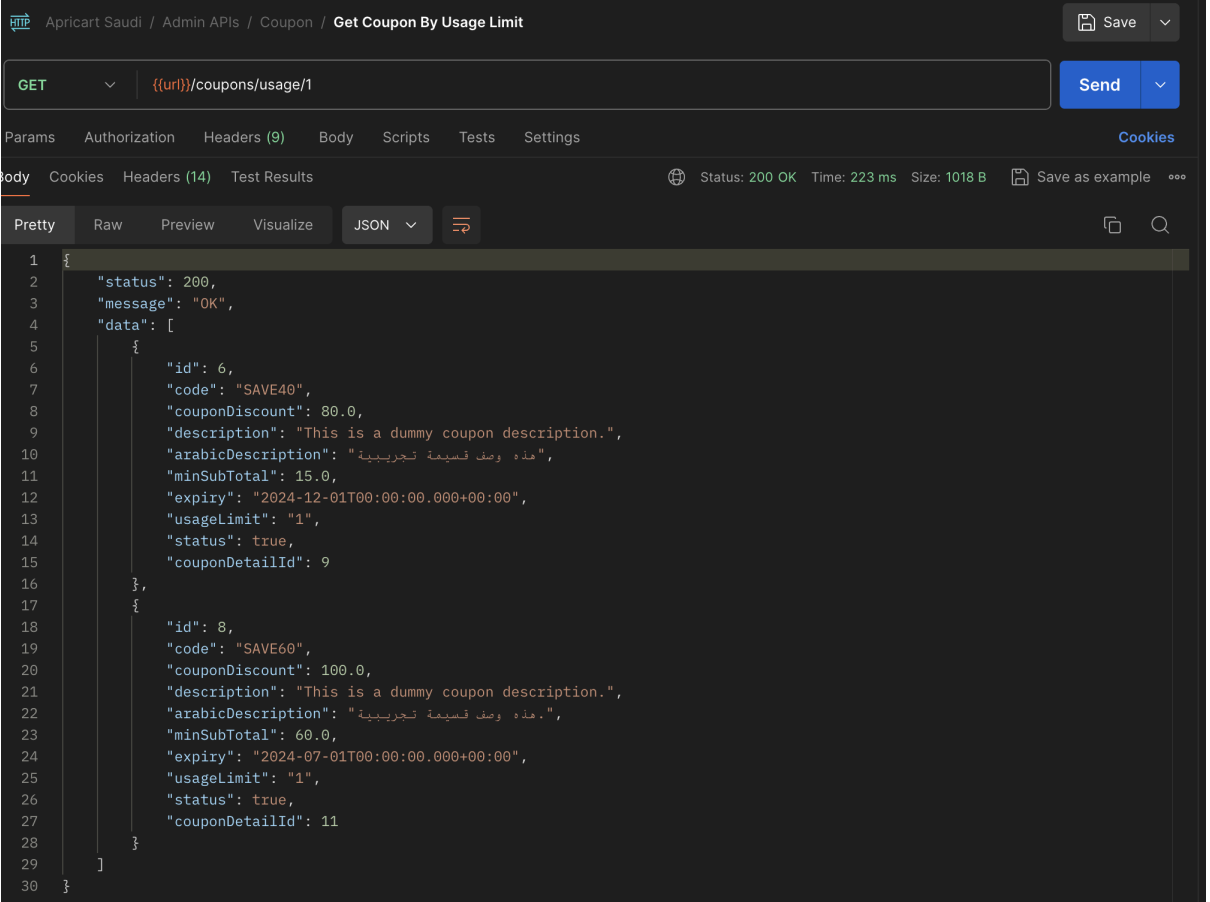

The screenshot shows a REST client interface for the endpoint `GET {{url}}/coupons/usage/1`. The response status is 200 OK. The JSON response is as follows:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 6,
7       "code": "SAVE40",
8       "couponDiscount": 80.0,
9       "description": "This is a dummy coupon description.",
10      "arabicDescription": "هذه وصف قسيمة تجريبية",
11      "minSubTotal": 15.0,
12      "expiry": "2024-12-01T00:00:00.000+00:00",
13      "usageLimit": "1",
14      "status": true,
15      "couponDetailId": 9
16    },
17    {
18      "id": 8,
19      "code": "SAVE60",
20      "couponDiscount": 100.0,
21      "description": "This is a dummy coupon description.",
22      "arabicDescription": "هذه وصف قسيمة تجريبية",
23      "minSubTotal": 60.0,
24      "expiry": "2024-07-01T00:00:00.000+00:00",
25      "usageLimit": "1",
26      "status": true,
27      "couponDetailId": 11
28    }
29  ]
30 }
```

11. Get Coupons By Min SubTotal

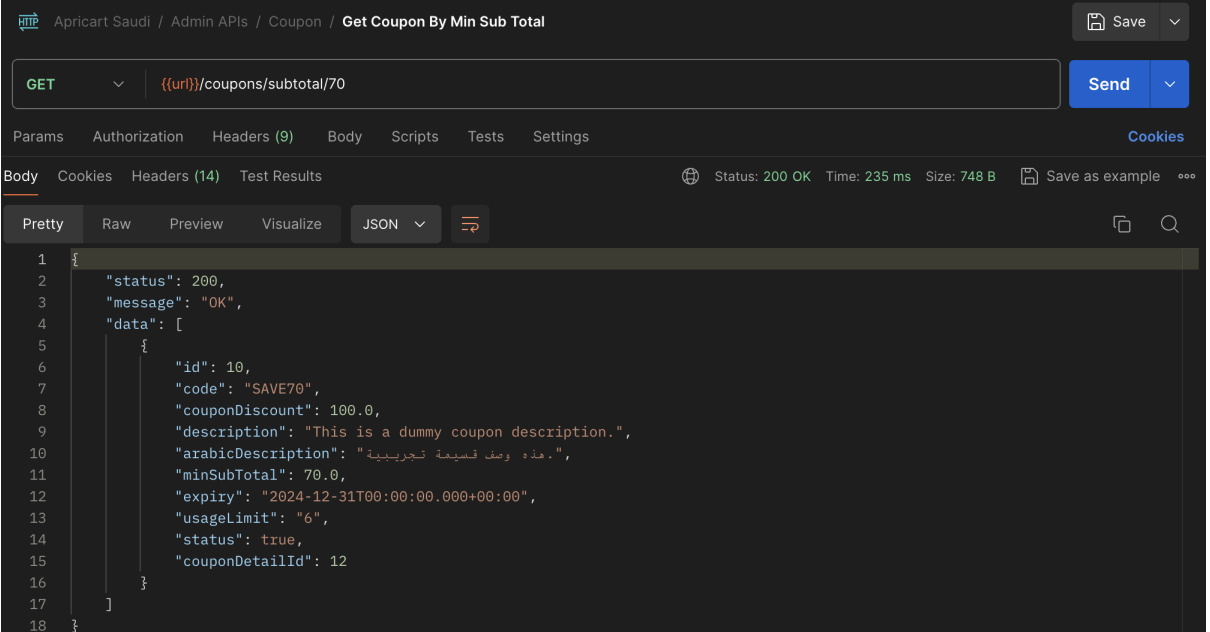

The screenshot shows a REST client interface for the endpoint `GET {{url}}/coupons/subtotal/70`. The response status is 200 OK. The JSON response is as follows:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 10,
7       "code": "SAVE70",
8       "couponDiscount": 100.0,
9       "description": "This is a dummy coupon description.",
10      "arabicDescription": "هذه وصف قسيمة تجريبية",
11      "minSubTotal": 70.0,
12      "expiry": "2024-12-31T00:00:00.000+00:00",
13      "usageLimit": "6",
14      "status": true,
15      "couponDetailId": 12
16    }
17  ]
18 }
```

12. Get Coupons By Coupon ID

Apricart Saudi / Admin APIs / Coupon / **Get Coupon By Id**

GET {{url}}/coupons/10

Send

Params Authorization Headers (9) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results

Status: 200 OK Time: 258 ms Size: 746 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "code": "SAVE70",
7     "couponDiscount": 100.0,
8     "description": "This is a dummy coupon description.",
9     "arabicDescription": "هذه وصف قسيمة تجريبية.",
10    "minSubTotal": 70.0,
11    "expiry": "2024-12-31T00:00:00.000+00:00",
12    "usageLimit": "6",
13    "status": true,
14    "couponDetailId": 12
15  }
16 }
```

13. Validate Coupon

Apricart Saudi / Admin APIs / Coupon / **Validate Coupon**

GET {{url}}/coupons/validate?couponCode=SAVE70&phoneNumber=966550123456&subtotal=800

Send

Params Authorization Headers (9) Body Scripts Tests Settings Cookies

Query Params

☒	Key	Value	Description	...	Bulk Edit
☒	couponCode	SAVE70			
☒	phoneNumber	966550123456			
☒	subtotal	800			
	Key	Value	Description		

Body Cookies Headers (14) Test Results

Status: 200 OK Time: 341 ms Size: 486 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "Valid Coupon",
4   "data": null
5 }
```

Coupon Module: Arabic Responses

14.Add Coupon:

The screenshot shows a REST client interface for the 'Add Coupon' endpoint. The request is a POST to `{{url}}/coupons` with a JSON body. The response is a 201 Created status with a JSON body indicating success.

Request:

```
1 {
2   "code": "SAVE70",
3   "description": "This is a dummy coupon description.",
4   "arabicDescription": "هذه وصفة تجريبية",
5   "minSubTotal": 60.0,
6   "expiry": "2024-06-31",
7   "couponDiscount": 100,
8   "usageLimit": 1,
9   "status": true
10 }
```

Response:

```
1 {
2   "status": 201,
3   "message": "Created",
4   "data": null
5 }
```

15.Add Coupon Detail

The screenshot shows a REST client interface for the 'Add Coupon Detail' endpoint. The request is a POST to `{{url}}/coupons/detail` with a JSON body. The response is a 201 Created status with a JSON body indicating success.


Request:

```
1 {
2   "couponId": 10,
3   "phoneNumber": "+92312345678",
4   "orderId": "",
5   "warehouseId": 1
6 }
```


Response:

```
1 {
2   "status": 201,
3   "message": "Created",
4   "data": null
5 }
```


16.Update Coupon Detail

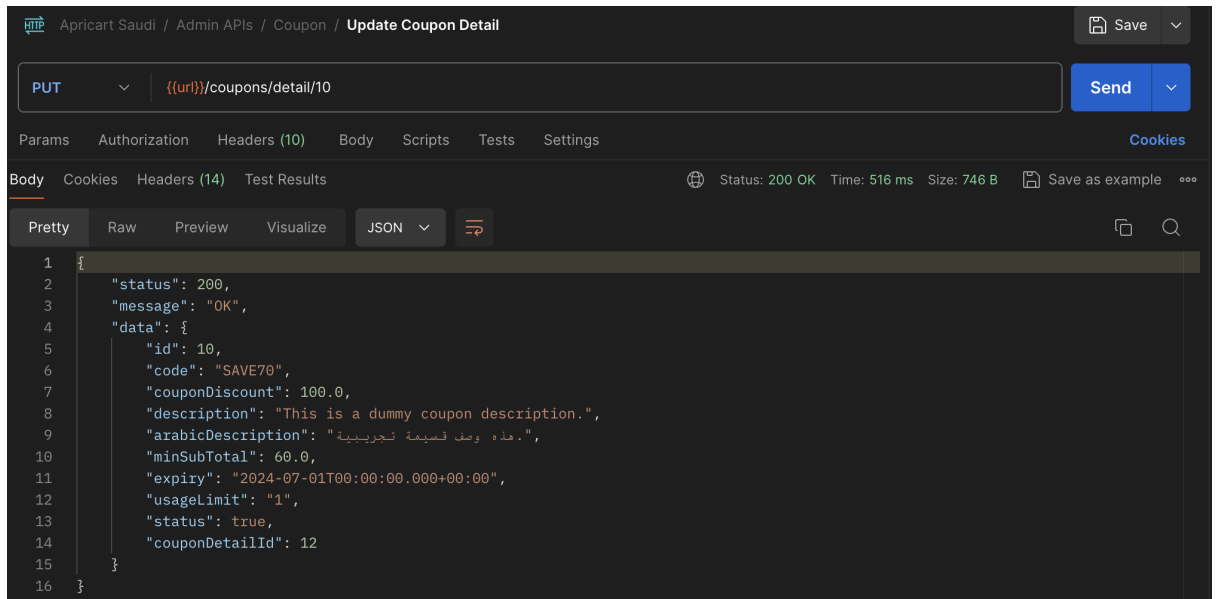


17. Update Coupon

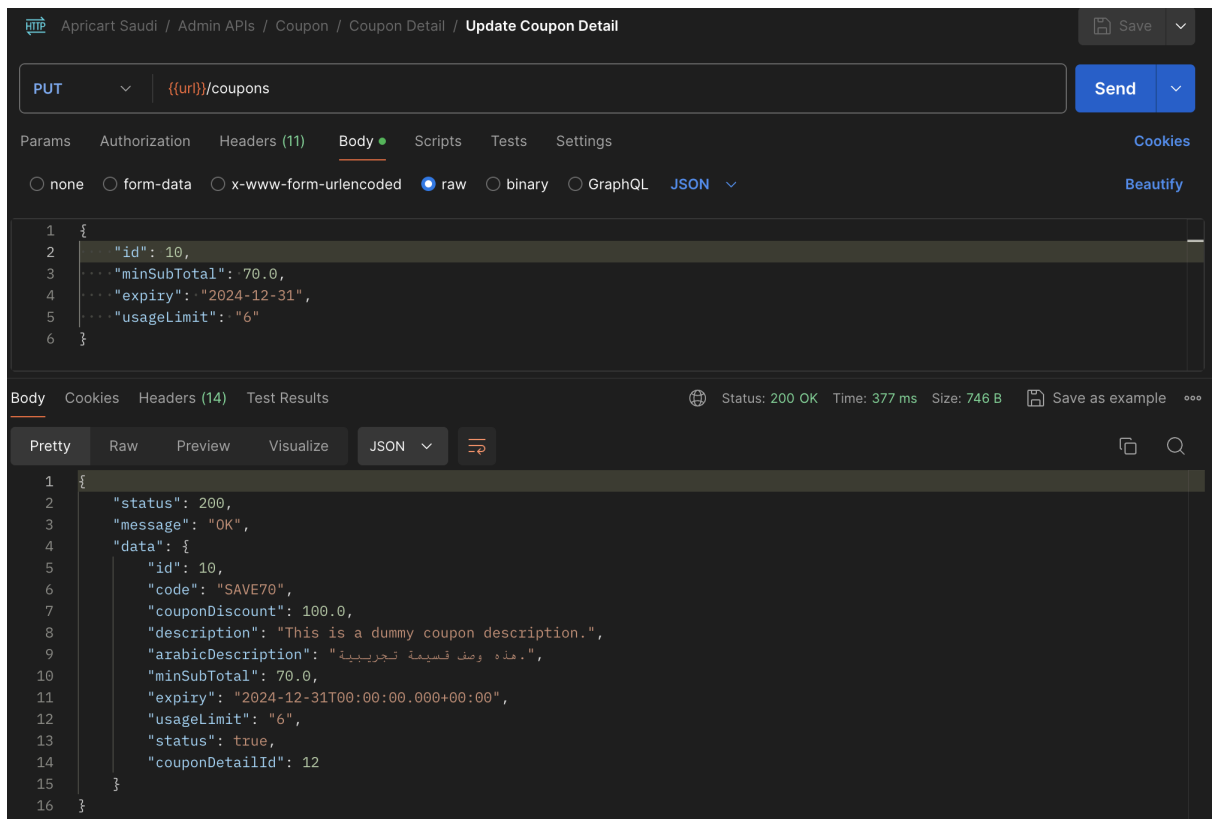


18. Delete Coupon

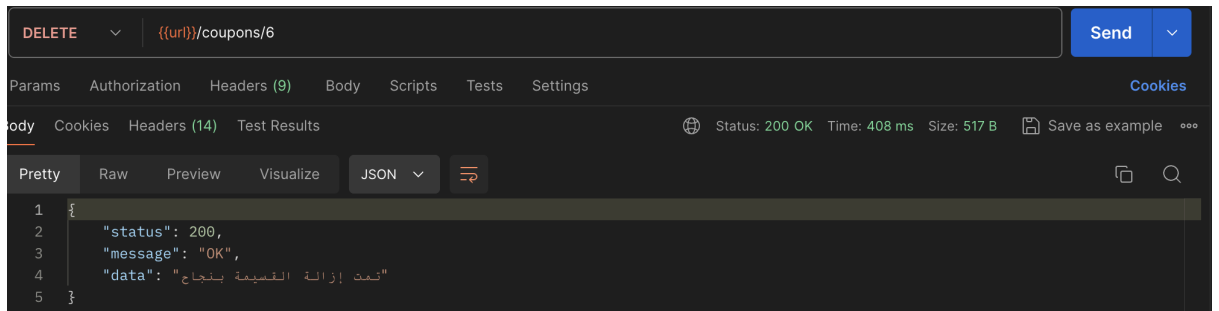


19. Get All Coupons

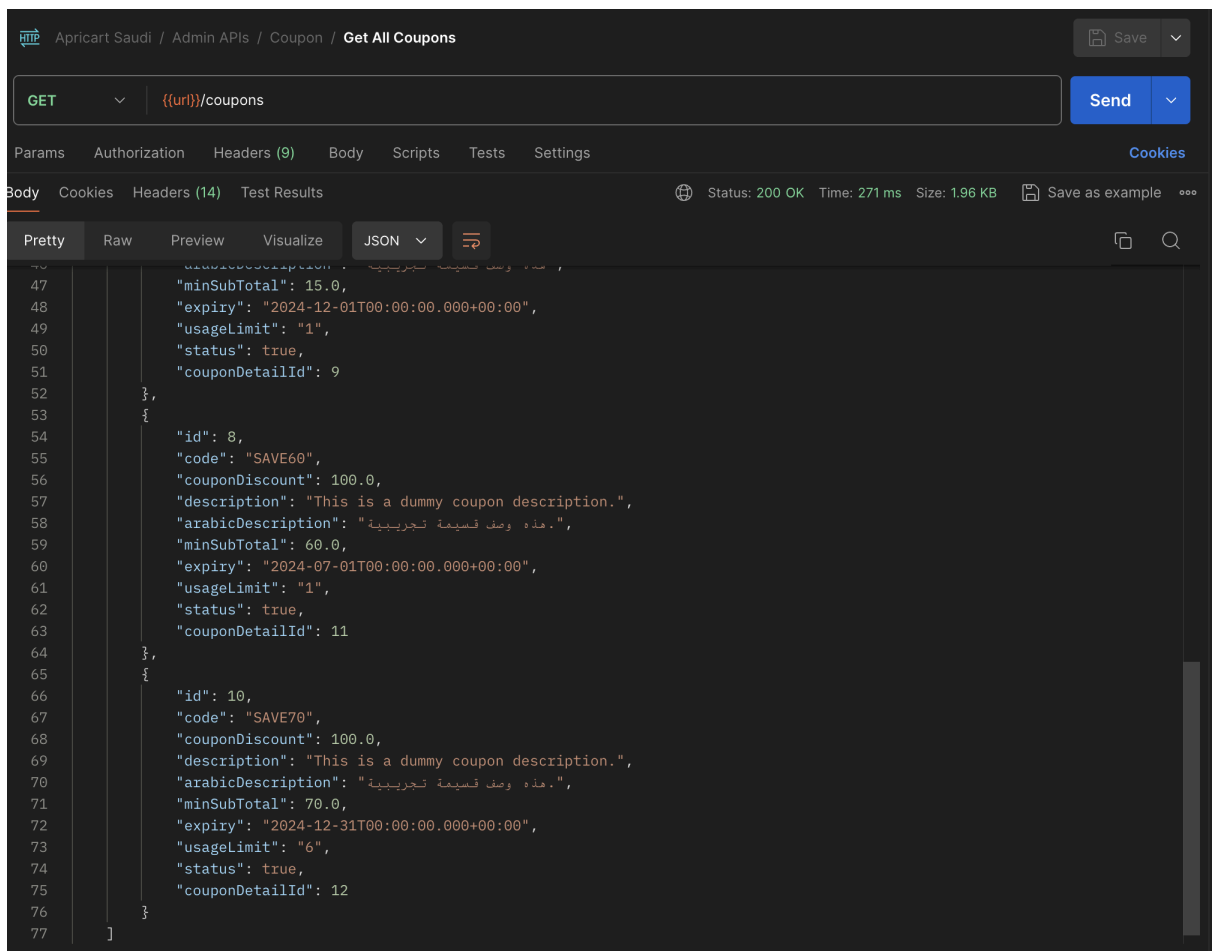

20. Get Coupon By Coupon Code

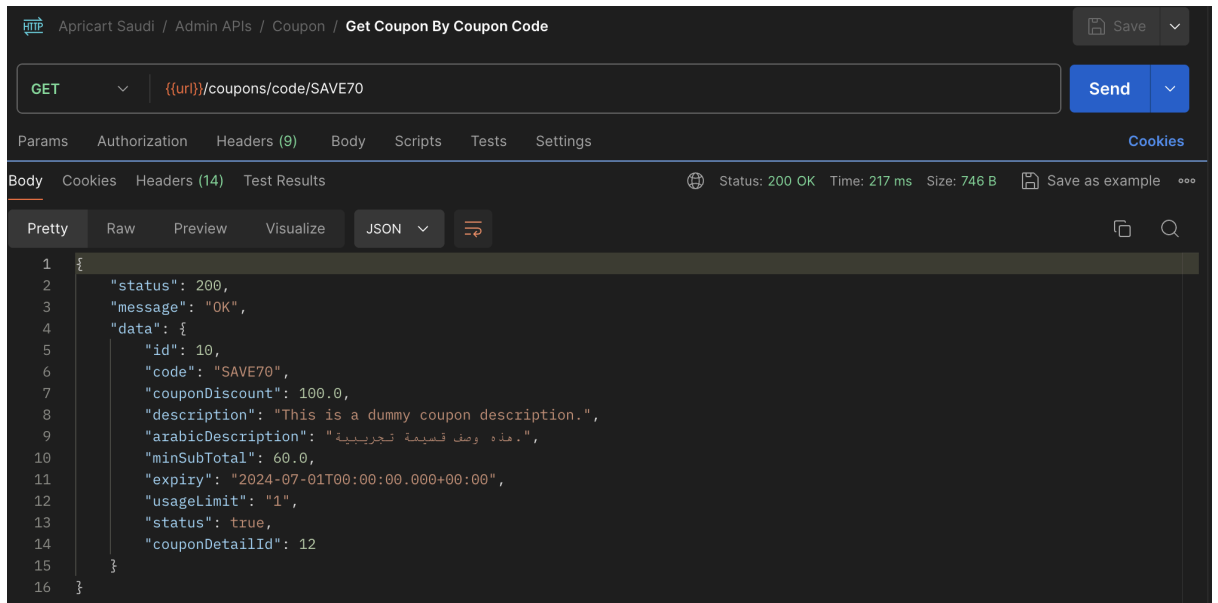

21. Get Coupons By Status

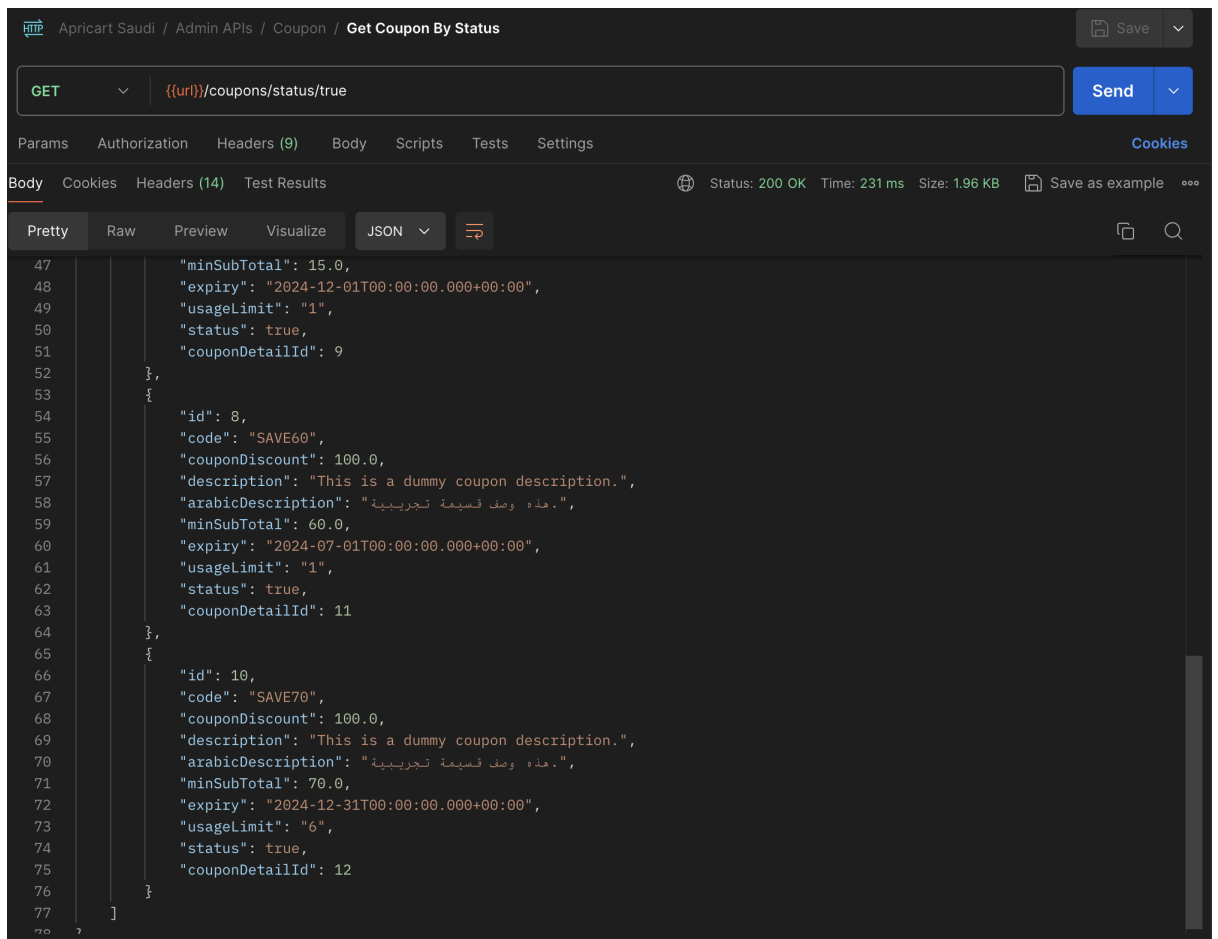

22. Get Coupons By Expiry

HTTP Apricart Saudi / Admin APIs / Coupon / Get Coupon By Expiry

GET {{uri}}/coupons/expiry/241201050000000

Send


Params Authorization Headers (9) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 532 ms Size: 1.19 KB Save as example


Pretty Raw Preview Visualize JSON

```
9      "description": "This is a dummy coupon description.",
10      "arabicDescription": null,
11      "minSubTotal": 20.0,
12      "expiry": "2024-12-01T00:00:00.000+00:00",
13      "usagelimit": "3",
14      "status": true,
15      "couponDetailId": 1
16    },
17    {
18      "id": 3,
19      "code": "DUMMYCODE2",
20      "couponDiscount": 25.0,
21      "description": "This is a dummy coupon description.",
22      "arabicDescription": null,
23      "minSubTotal": 15.0,
24      "expiry": "2024-12-01T00:00:00.000+00:00",
25      "usagelimit": "100",
26      "status": true,
27      "couponDetailId": 1
28    },
29    {
30      "id": 6,
31      "code": "SAVE40",
32      "couponDiscount": 80.0,
33      "description": "This is a dummy coupon description.",
34      "arabicDescription": "هذه وصف قسيمة تجريبية",
35      "minSubTotal": 15.0,
36      "expiry": "2024-12-01T00:00:00.000+00:00",
37      "usagelimit": "1",
38      "status": true,
39      "couponDetailId": 9
40    }
41  }
```

23. Get Coupons By Usage Limit

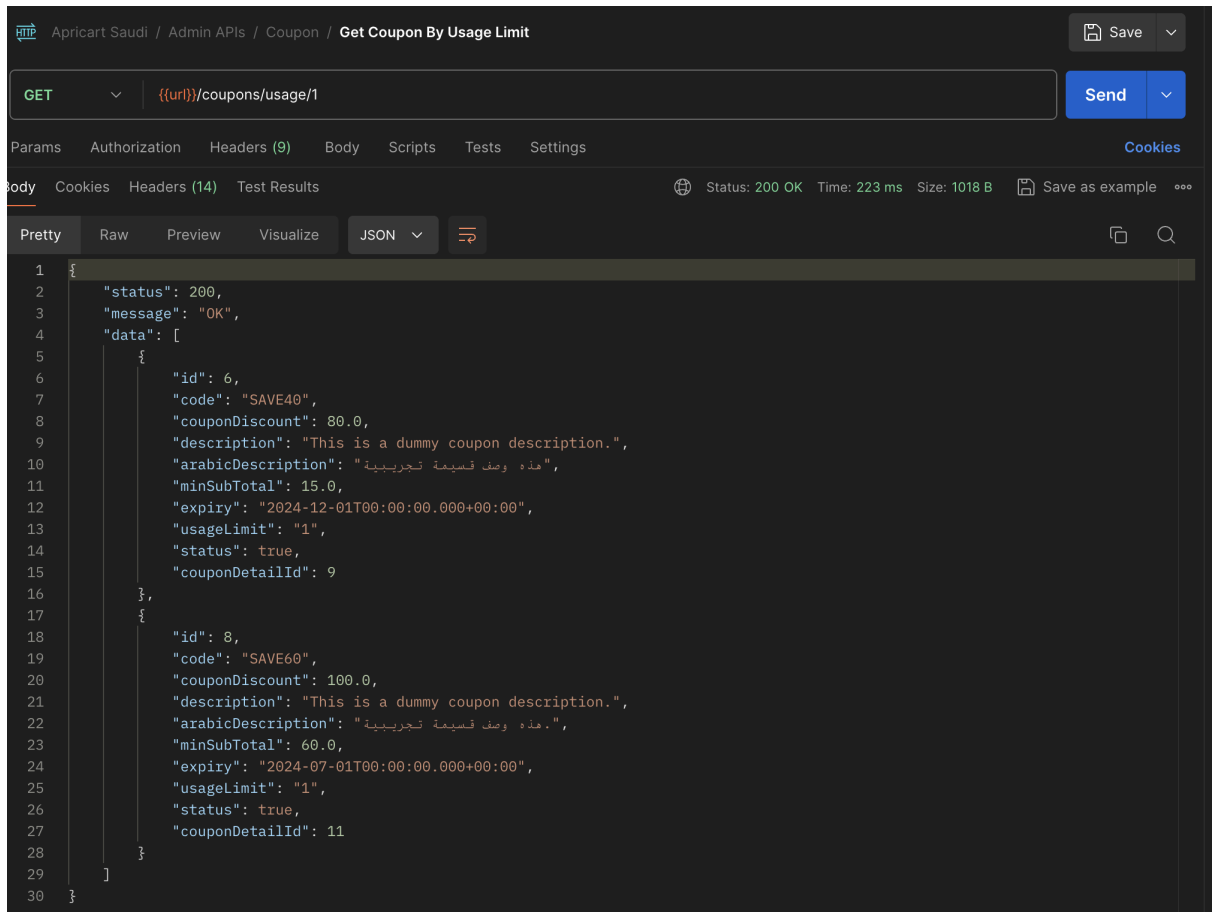

24. Get Coupons By Min SubTotal

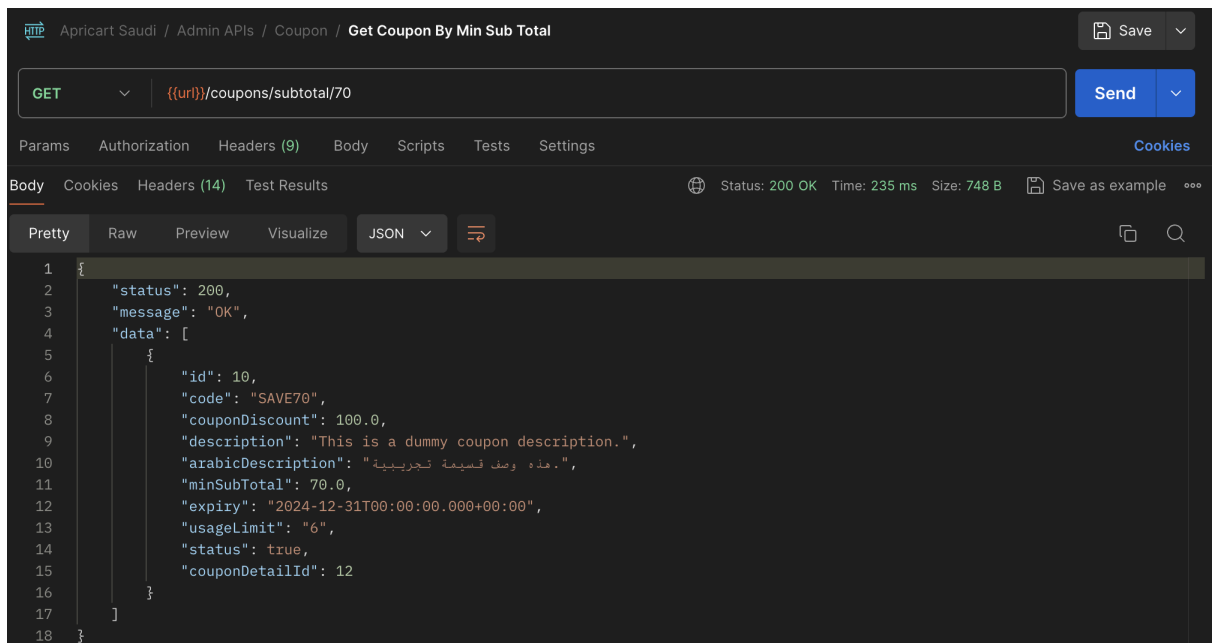

25. Get Coupons By Coupon ID

HTTP Apricart Saudi / Admin APIs / Coupon / **Get Coupon By Id** Save

GET ▼ `{{url}}/coupons/10` Send ▼

Params Authorization Headers (9) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results ⊕ Status: 200 OK Time: 258 ms Size: 746 B Save as example ⋮

Pretty Raw Preview Visualize JSON ▼ ≡

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 10,
6     "code": "SAVE70",
7     "couponDiscount": 100.0,
8     "description": "This is a dummy coupon description.",
9     "arabicDescription": "هذه وصف قسيمة تجريبية.",
10    "minSubTotal": 70.0,
11    "expiry": "2024-12-31T00:00:00.000+00:00",
12    "usageLimit": "6",
13    "status": true,
14    "couponDetailId": 12
15  }
16 }
```

26. Validate Coupon

HTTP Apricart Saudi / Admin APIs / Coupon / **Validate Coupon** Save

GET ▼ `{{url}}/coupons/validate?couponCode=SAVE70&phoneNumber=966550123456&subtotal=800` Send ▼

Params • Authorization Headers (9) Body Scripts Tests Settings Cookies

Query Params

☒	Key	Value	Description	⋮ Bulk Edit
☒	couponCode	SAVE70		
☒	phoneNumber	966550123456		
☒	subtotal	800		
	Key	Value	Description	

Body Cookies Headers (14) Test Results ⊕ Status: 200 OK Time: 341 ms Size: 486 B Save as example ⋮

Pretty Raw Preview Visualize JSON ▼ ≡

```
1 {
2   "status": 200,
3   "message": "Valid Coupon",
4   "data": null
5 }
```