

Customer Address Module: Responses

1. Get Address By Address ID:

GET `{{url}}/address/2` Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Query Params

Key	Value	Description	...	Bulk Edit
Key	Value	Description		

Body Cookies Headers (14) Test Results

Status: 200 OK Time: 257 ms Size: 608 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 2,
6     "addressDetail": "Defence, Karachi",
7     "addressLatitude": "40.7128",
8     "addressType": "SHIPPING",
9     "cityId": 1,
10    "customerId": 1,
11    "active": true
12  }
13 }
```

2. Add Address

HTTP Apricart Saudi / Address / Add Address Save

POST `{{url}}/address/saveOrUpdate` Send

Params Authorization Headers (10) Body Pre-request Script Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON

Beautifuly

```
1 {
2   "active": true,
3   "addressDetail": "Gulistan-e-Jauhar, Karachi",
4   "addressLatitude": "40.7128",
5   "addressLongitude": "-74.0060",
6   "addressType": "BILLING",
7   "cityId": 1
8 }
9
```

Body Cookies Headers (14) Test Results

Status: 201 Created Time: 501 ms Size: 474 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 201,
3   "message": "Created"
4 }
```

3. Get Address By Address Type

HTTP Apricart Saudi / Address / **Get Address By Address Type** Save Send

GET ▼ `{{url}}/address/customer/type/SHIPPING` Send ▼

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Query Params

Key	Value	Description	...	Bulk Edit
Key	Value	Description		

Body Cookies Headers (14) Test Results Status: 200 OK Time: 289 ms Size: 610 B Save as example ...

Pretty Raw Preview Visualize JSON ▼ ↔

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "addressDetail": "Defence, Karachi",
8       "addressLatitude": "40.7128",
9       "addressType": "SHIPPING",
10      "cityId": 1,
11      "customerId": 1,
12      "active": true
13    }
14  ]
15 }
```

4. Enable Address By CustomerID

HTTP Apricart Saudi / Address / **Enable Address By Customer Id** Save Send

PUT ▼ `{{url}}/address/enableCustomer` Send ▼

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Query Params


Key	Value	Description	...	Bulk Edit
Key	Value	Description		

Body Cookies Headers (14) Test Results Status: 200 OK Time: 253 ms Size: 502 B Save as example ...


Pretty Raw Preview Visualize JSON ▼ ↔

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Address enabled successfully"
5 }
```

If the Customer is inactive

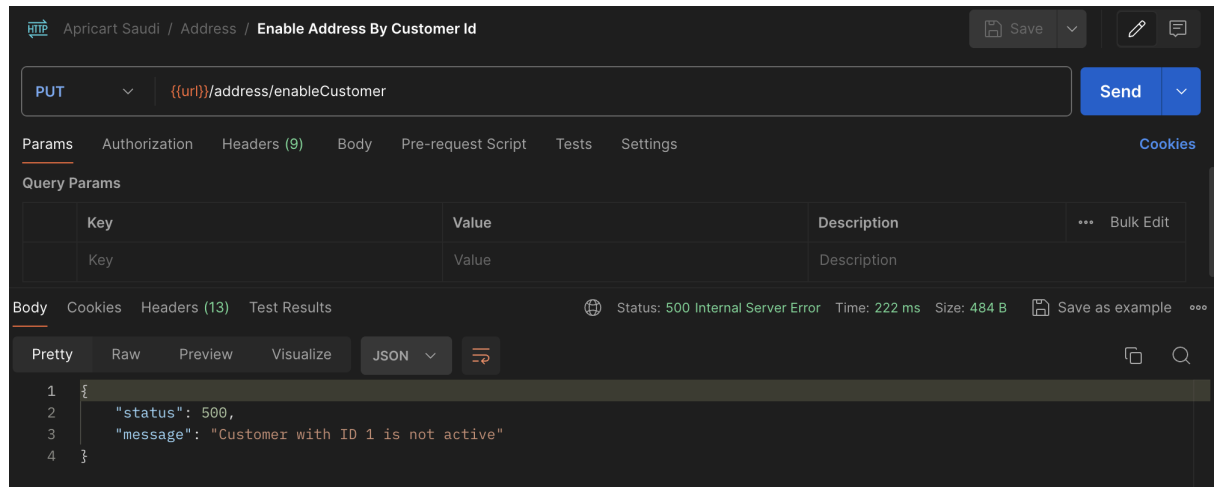

5. Disable Address by Customer ID

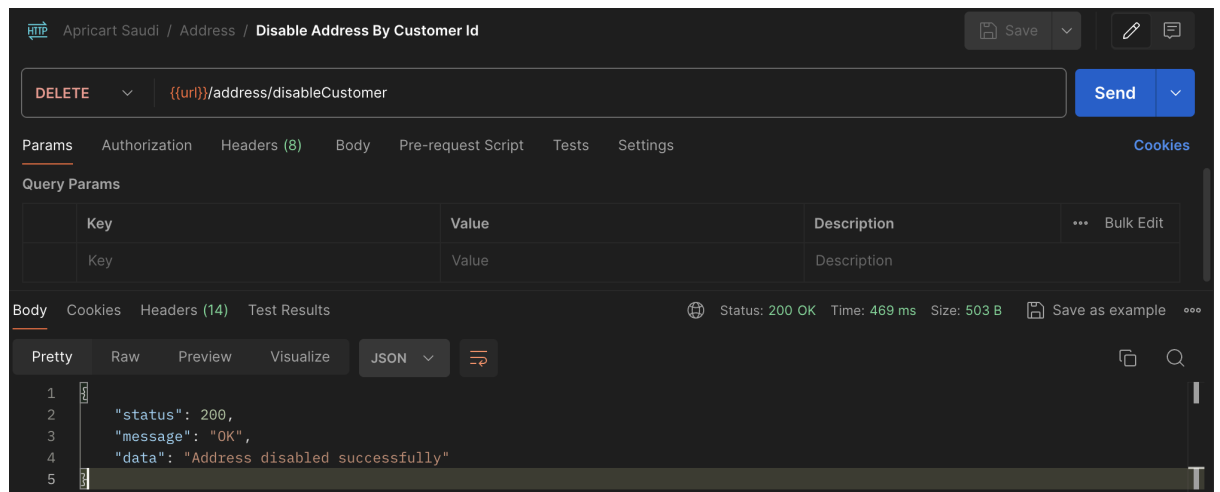

6. Disable Address By Address ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "Address", and the selected endpoint is "Disable Address By Address Id". The HTTP method is set to "DELETE" and the URL is "{{url}}/address/disable/2". The "Send" button is visible. Below the URL bar, the "Params" tab is active, showing a table for "Query Params" with columns "Key", "Value", and "Description". The "Body" tab is also visible, showing a JSON response in "Pretty" format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Address disabled successfully"
5 }
```

The status bar at the bottom indicates "Status: 200 OK", "Time: 277 ms", and "Size: 503 B".

7. Enable Address By Address ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "Address", and the selected endpoint is "Enable Address By Address Id". The HTTP method is set to "PUT" and the URL is "{{url}}/address/enable/2". The "Send" button is visible. Below the URL bar, the "Params" tab is active, showing a table for "Query Params" with columns "Key", "Value", and "Description". The "Body" tab is also visible, showing a JSON response in "Pretty" format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Address enabled successfully"
5 }
```

The status bar at the bottom indicates "Status: 200 OK", "Time: 370 ms", and "Size: 502 B".

8. Disable Address By Address Type & Address ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "Address", and the selected endpoint is "Disable Address By Address Type & Address Id". The HTTP method is set to "DELETE" and the URL is "{{url}}/address/disable/SHIPPING/2". The "Send" button is visible. Below the URL bar, the "Params" tab is active, showing a table for "Query Params" with columns "Key", "Value", and "Description". The "Body" tab is also visible, showing a JSON response in "Pretty" format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Address disabled successfully"
5 }
```

The status bar at the bottom indicates "Status: 200 OK", "Time: 351 ms", and "Size: 503 B".

9. Enable Address By Address Type & Address ID

HTTP Apricart Saudi / Address / **Enable Address By Address Type & Address Id** Save

PUT `{{url}}/address/enable/SHIPPING/2` Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Body Cookies Headers (14) Test Results 🌐 Status: 200 OK Time: 342 ms Size: 502 B Save as example ...

Pretty Raw Preview Visualize **JSON**

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Address enabled successfully"
5 }
```

10. Get Address By Customer

HTTP Apricart Saudi / Address / **Get Address By Customer** Save

GET `{{url}}/address/customer` Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Body Cookies Headers (14) Test Results 🌐 Status: 200 OK Time: 232 ms Size: 757 B Save as example ...

Pretty Raw Preview Visualize **JSON**

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 3,
7       "addressDetail": "Gulistan-e-Jauhar, Karachi",
8       "addressLatitude": "40.7128",
9       "addressType": "BILLING",
10      "cityId": 1,
11      "customerId": 1,
12      "active": false
13    },
14    {
15      "id": 2,
16      "addressDetail": "Defence, Karachi",
17      "addressLatitude": "40.7128",
18      "addressType": "SHIPPING",
19      "cityId": 1,
20      "customerId": 1,
21      "active": true
22    }
23  ]
24 }
```