

Option Module: Responses

1. Add Option:

The screenshot shows the Postman interface for a POST request to `{{url}}/options`. The request body is a JSON object: `{ "key": "Key 2", "value": "Value 2", "status": true }`. The response is a 201 status with a message: `{ "status": 201, "message": "Created" }`.

```
1 {
2   "key": "Key 2",
3   "value": "Value 2",
4   "status": true
5 }
```

Body Cookies Headers (14) Test Results Status: 201 Created Time: 341 ms Size: 474 B Save as example

```
1 {
2   "status": 201,
3   "message": "Created"
4 }
```

2. Update Option

The screenshot shows the Postman interface for a PUT request to `{{url}}/options`. The request body is a JSON object: `{ "id": 1, "key": "Key Dummy", "value": "Value 2", "status": false }`. The response is a 200 status with a message and the updated data: `{ "status": 200, "message": "OK", "data": { "id": 1, "key": "Key Dummy", "value": "Value 2", "status": false } }`.

```
1 {
2   "id": 1,
3   "key": "Key Dummy",
4   "value": "Value 2",
5   "status": false
6 }
```

Body Cookies Headers (14) Test Results Status: 200 OK Time: 1473 ms Size: 531 B Save as example

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 1,
6     "key": "Key Dummy",
7     "value": "Value 2",
8     "status": false
9   }
10 }
```

3. Disable Option

HTTP Apricart Saudi / Option / Disable Option

DELETE {{url}}/options/2

Send

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 609 ms Size: 502 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Option disabled successfully"
5 }
```

4. Get All Options

GET {{url}}/options

Send


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 2.22 s Size: 643 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "key": "Key 1",
8       "value": "Value 1",
9       "status": true
10    },
11    {
12      "id": 3,
13      "key": "Key 2",
14      "value": "Value 2",
15      "status": true
16    },
17    {
18      "id": 1,
19      "key": "Key Dummy",
20      "value": "Value 2",
21      "status": false
22    }
23  ]
24 }
```

5. Get Option by ID

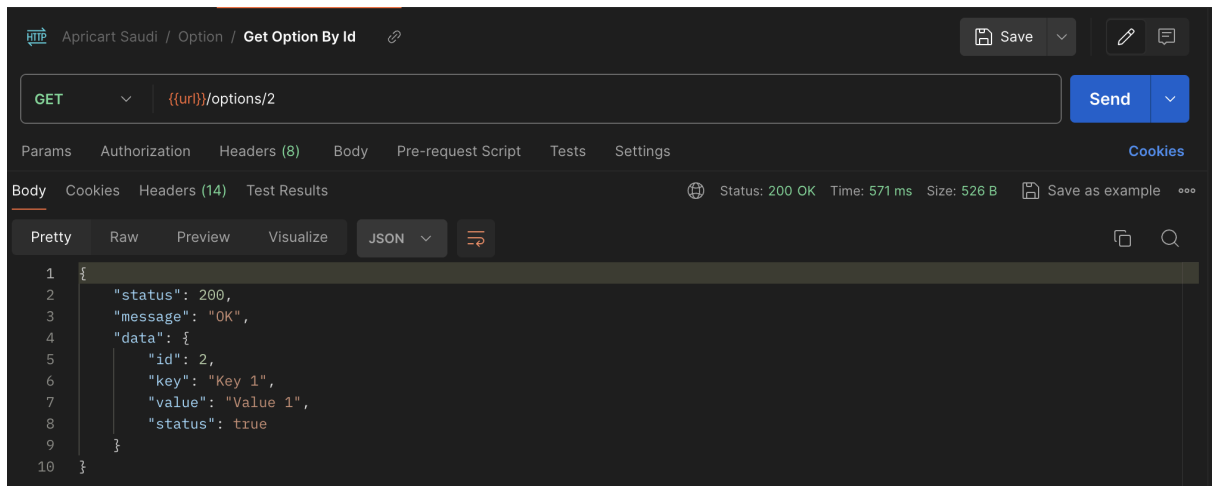

HTTP Apricart Saudi / Option / **Get Option By Id**

GET `{{url}}/options/2` **Send**


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results **Status: 200 OK** Time: 571 ms Size: 526 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 2,
6     "key": "Key 1",
7     "value": "Value 1",
8     "status": true
9   }
10 }
```

6. Get Active Options

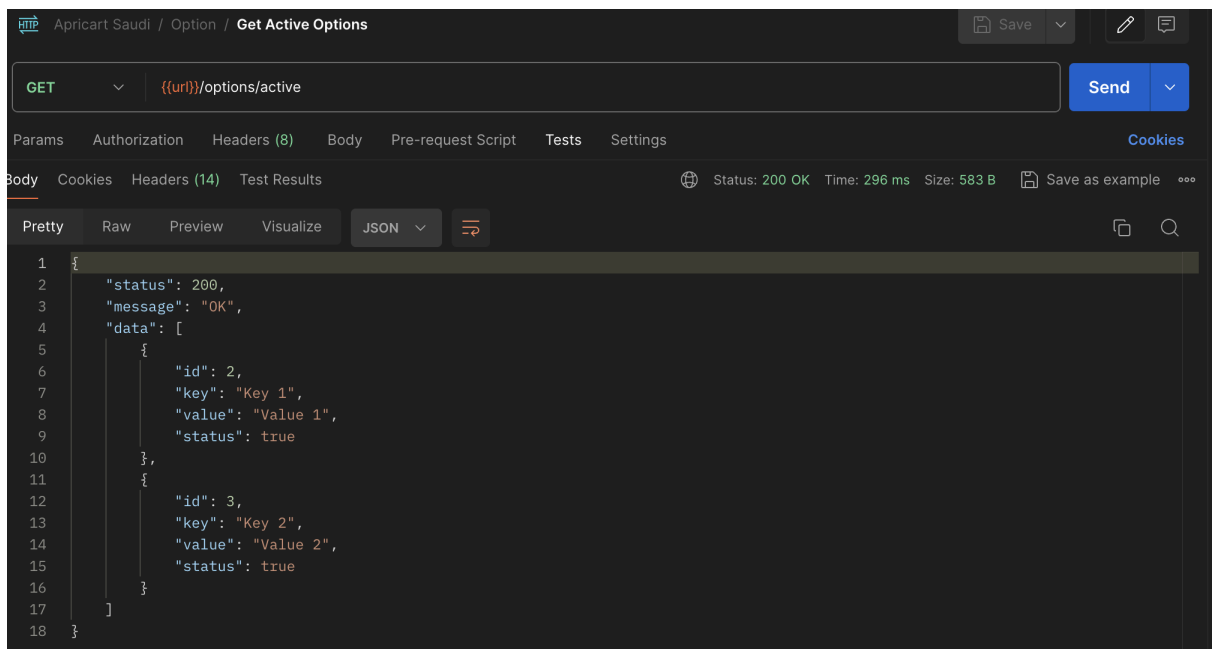

HTTP Apricart Saudi / Option / **Get Active Options**

GET `{{url}}/options/active` **Send**

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results **Status: 200 OK** Time: 296 ms Size: 583 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "key": "Key 1",
8       "value": "Value 1",
9       "status": true
10    },
11    {
12      "id": 3,
13      "key": "Key 2",
14      "value": "Value 2",
15      "status": true
16    }
17  ]
18 }
```

7. Get Option Value by Key

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Option / Get Option Value By Key". The HTTP method is "GET" and the URL is "{{url}}/options/value/Key 1". The response status is "200 OK" with a time of "225 ms" and a size of "481 B". The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Value 1"
5 }
```

8. Get Option By Key

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Option / Get Option By Key". The HTTP method is "GET" and the URL is "{{url}}/options/key/Key 1". The response status is "200 OK" with a time of "248 ms" and a size of "526 B". The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 2,
6     "key": "Key 1",
7     "value": "Value 1",
8     "status": true
9   }
10 }
```

9. Update Option Status by ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "Option / Update Option Status". The HTTP method is "PUT" and the URL is "{{url}}/options/1/true". The response status is "200 OK" with a time of "405 ms" and a size of "530 B". The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 1,
6     "key": "Key Dummy",
7     "value": "Value 2",
8     "status": true
9   }
10 }
```