

Order Item Module: Responses

1. Add Order Item:

The screenshot shows a REST client interface for a POST request to the endpoint `{{url}}/orderItems`. The request body is a JSON object with the following fields: `title` (Product: ABC), `arabicTitle` (منتج أ), `quantity` (10), `taxAmount` (8.25), `totalAmount` (78.50), `orderId` (240509103805431), and `productWarehouseId` (1). The response is a JSON object with `status` (201) and `message` (Created).

```
POST {{url}}/orderItems

{
  "title": "Product: ABC",
  "arabicTitle": "منتج أ",
  "quantity": "10",
  "taxAmount": 8.25,
  "totalAmount": 78.50,
  "orderId": "240509103805431",
  "productWarehouseId": 1
}
```

```
{
  "status": 201,
  "message": "Created"
}
```

2. Update Order Item

The screenshot shows a REST client interface for a PUT request to the endpoint `{{url}}/orderItems`. The request body is a JSON object with `id` (1) and `quantity` (8). The response is a JSON object with `status` (200), `message` (OK), and `data` (an object containing the updated item details).

```
PUT {{url}}/orderItems

{
  "id": 1,
  "quantity": "8"
}
```

```
{
  "status": 200,
  "message": "OK",
  "data": {
    "id": 1,
    "title": "Product ABCDEF",
    "arabicTitle": "منتج أ",
    "quantity": "8",
    "taxAmount": 11.25,
    "totalAmount": 64.5,
    "orderId": "240509103805431",
    "productWarehouseId": 1
  }
}
```


3. Delete Order

The screenshot shows a REST client interface for a DELETE request to the endpoint `{{url}}/orderItems/2`. The response is a JSON object with `status` (200), `message` (OK), and `data` (a message in Arabic: تمت إزالة عنصر الطلب بنجاح).

```
DELETE {{url}}/orderItems/2
```


```
{
  "status": 200,
  "message": "OK",
  "data": "تمت إزالة عنصر الطلب بنجاح"
}
```

4. Get All Order Items

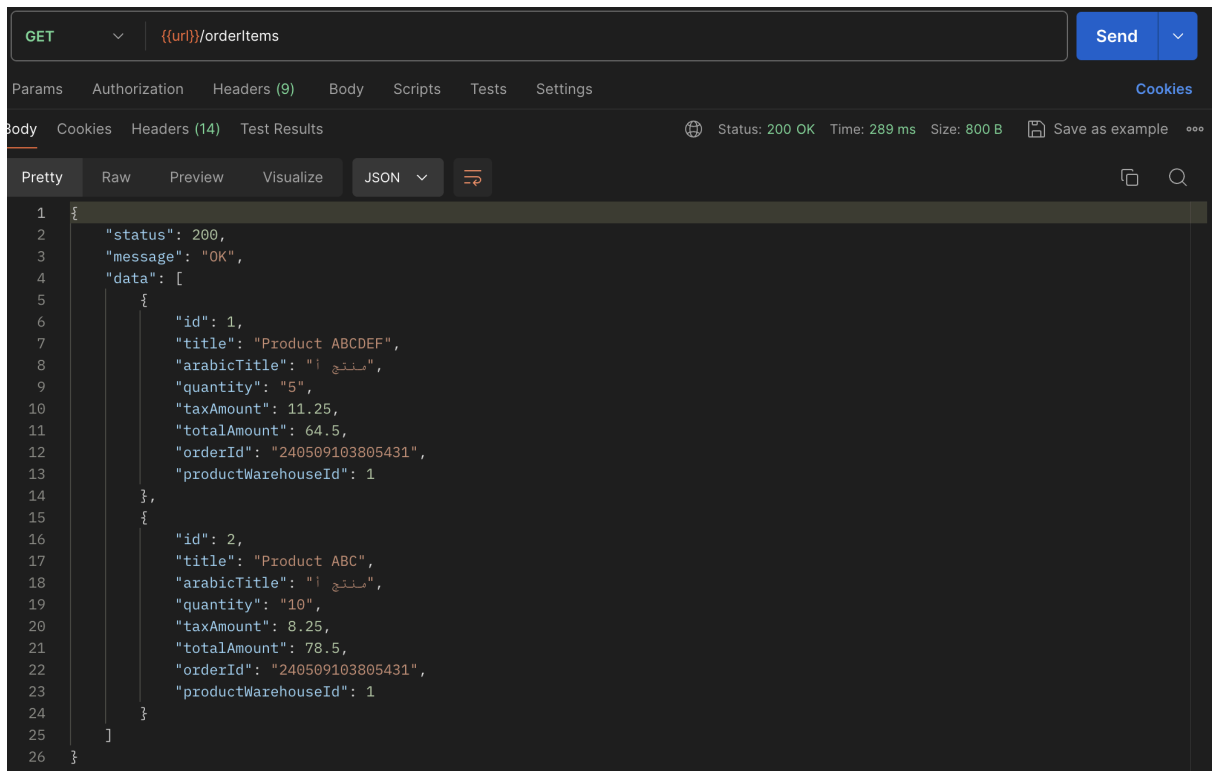


```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1,
7       "title": "Product ABCDEF",
8       "arabicTitle": "منتج",
9       "quantity": "5",
10      "taxAmount": 11.25,
11      "totalAmount": 64.5,
12      "orderId": "240509103805431",
13      "productWarehouseId": 1
14    },
15    {
16      "id": 2,
17      "title": "Product ABC",
18      "arabicTitle": "منتج",
19      "quantity": "10",
20      "taxAmount": 8.25,
21      "totalAmount": 78.5,
22      "orderId": "240509103805431",
23      "productWarehouseId": 1
24    }
25  ]
26 }
```

5. Get Order Item by Order Item ID

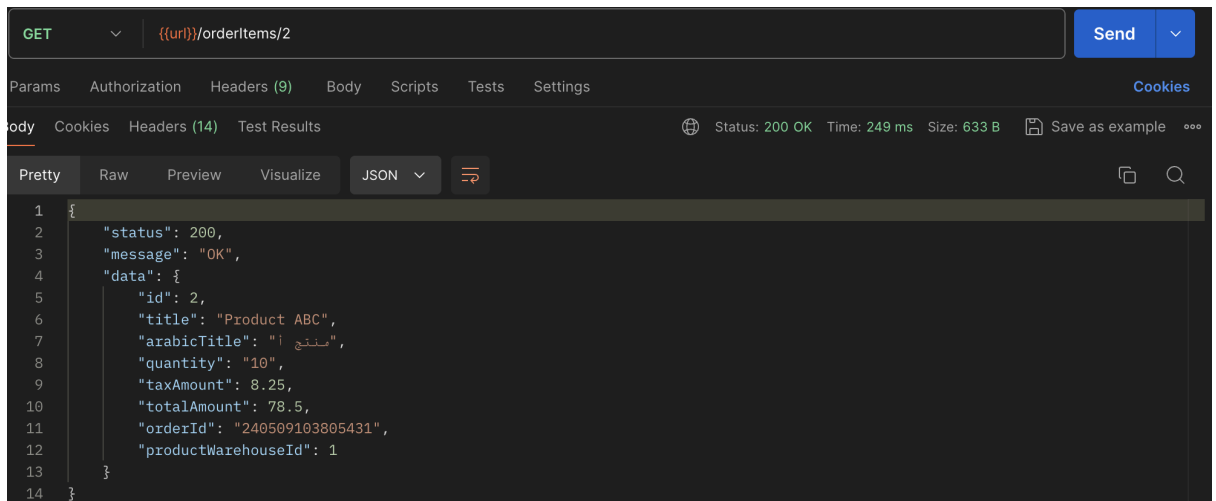


```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 2,
6     "title": "Product ABC",
7     "arabicTitle": "منتج",
8     "quantity": "10",
9     "taxAmount": 8.25,
10    "totalAmount": 78.5,
11    "orderId": "240509103805431",
12    "productWarehouseId": 1
13  }
14 }
```

6. Get Order Items by Product Warehouse ID

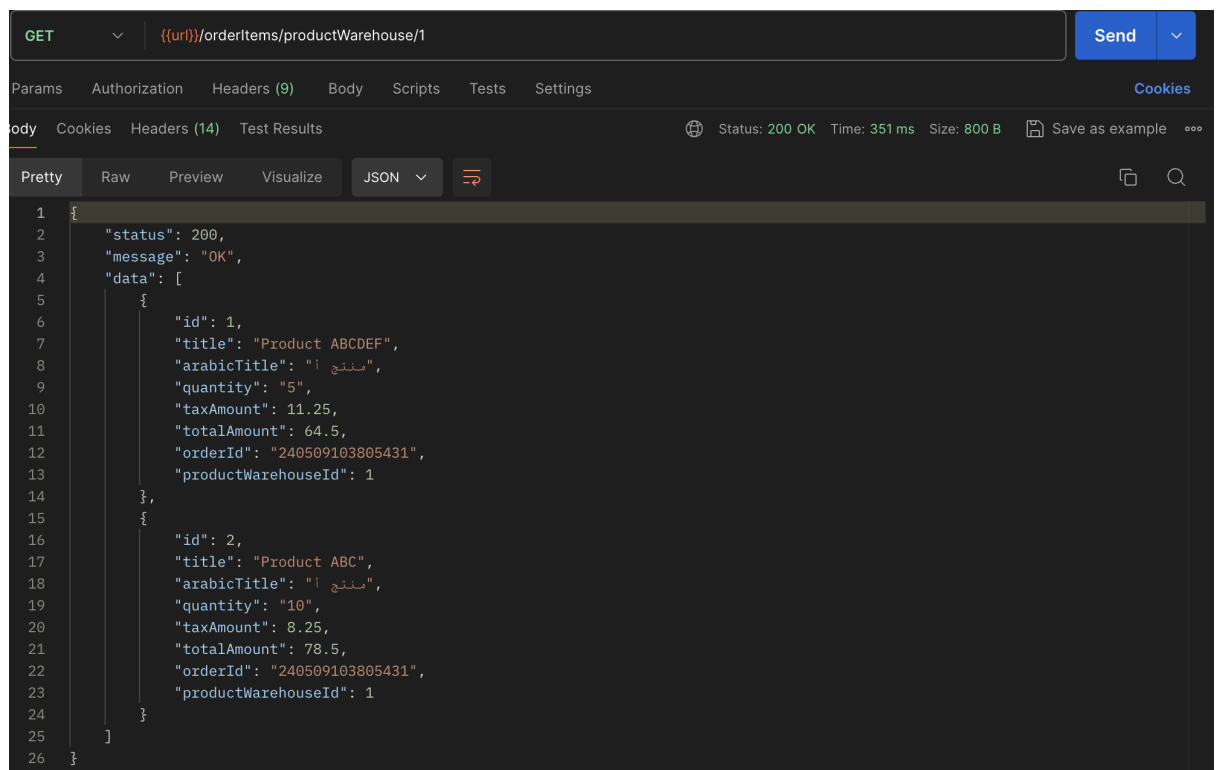

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1,
7       "title": "Product ABCDEF",
8       "arabicTitle": "منتج",
9       "quantity": "5",
10      "taxAmount": 11.25,
11      "totalAmount": 64.5,
12      "orderId": "240509103805431",
13      "productWarehouseId": 1
14    },
15    {
16      "id": 2,
17      "title": "Product ABC",
18      "arabicTitle": "منتج",
19      "quantity": "10",
20      "taxAmount": 8.25,
21      "totalAmount": 78.5,
22      "orderId": "240509103805431",
23      "productWarehouseId": 1
24    }
25  ]
26 }
```

7. Get Order Items by Order ID

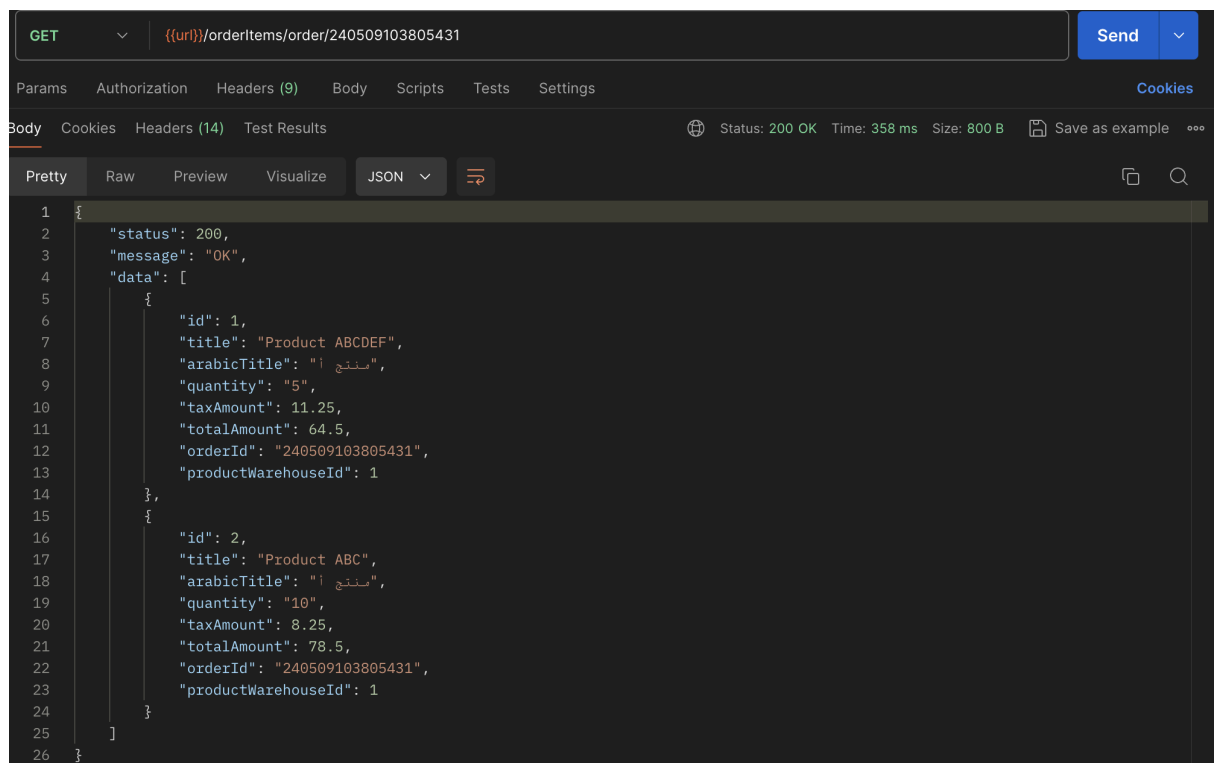

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1,
7       "title": "Product ABCDEF",
8       "arabicTitle": "منتج",
9       "quantity": "5",
10      "taxAmount": 11.25,
11      "totalAmount": 64.5,
12      "orderId": "240509103805431",
13      "productWarehouseId": 1
14    },
15    {
16      "id": 2,
17      "title": "Product ABC",
18      "arabicTitle": "منتج",
19      "quantity": "10",
20      "taxAmount": 8.25,
21      "totalAmount": 78.5,
22      "orderId": "240509103805431",
23      "productWarehouseId": 1
24    }
25  ]
26 }
```

8. Get Total By Order Item ID

The screenshot shows a REST client interface with a GET request to `{{url}}/orderItems/total/1`. The status is 200 OK, with a response time of 308 ms and a size of 476 B. The response body is displayed in JSON format:

```
1 {  
2   "status": 200,  
3   "message": "OK",  
4   "data": 64.5  
5 }
```

9. Get Tax By Order Item ID

The screenshot shows a REST client interface with a GET request to `{{url}}/orderItems/tax/1`. The status is 200 OK, with a response time of 279 ms and a size of 477 B. The response body is displayed in JSON format:

```
1 {  
2   "status": 200,  
3   "message": "OK",  
4   "data": 11.25  
5 }
```