

PriceList Module: Responses

1. Add PriceList:

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "PriceList / Add PriceList". The request method is "POST" and the URL is "{{url}}/pricelists". The request body is a JSON object with the following fields: "name" (Dummy Price List 4), "isIncrease" (true), "description" (Dummy description 2), "priceBookType" (Dummy Price Book Type 2), "roundingType" (Dummy Rounding Type 2), "salesOrPurchaseType" (Dummy Sales or Purchase Type 2), "isActive" (false), and "currencyId" (2). The response status is "201 Created" with a time of 6.71 s and a size of 474 B. The response body is a JSON object with "status": 201 and "message": "Created".

```
POST {{url}}/pricelists

{
  "name": "Dummy Price List 4",
  "isIncrease": true,
  "description": "Dummy description 2",
  "priceBookType": "Dummy Price Book Type 2",
  "roundingType": "Dummy Rounding Type 2",
  "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
  "isActive": false,
  "currencyId": 2
}
```

```
{
  "status": 201,
  "message": "Created"
}
```

2. Update PriceList


The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "PriceList / Update PriceList". The request method is "PUT" and the URL is "{{url}}/pricelists". The request body is a JSON object with "id": 6 and "currencyId": 1. The response status is "200 OK" with a time of 1230 ms and a size of 728 B. The response body is a JSON object with "status": 200, "message": "OK", and "data" containing the updated price list details: "id" (6), "name" (Dummy Price List 4), "isIncrease" (true), "description" (Dummy description 2), "priceBookType" (Dummy Price Book Type 2), "roundingType" (Dummy Rounding Type 2), "salesOrPurchaseType" (Dummy Sales or Purchase Type 2), "currencyId" (1), and "active" (false).

```
PUT {{url}}/pricelists

{
  "id": 6,
  "currencyId": 1
}
```

```
{
  "status": 200,
  "message": "OK",
  "data": {
    "id": 6,
    "name": "Dummy Price List 4",
    "isIncrease": true,
    "description": "Dummy description 2",
    "priceBookType": "Dummy Price Book Type 2",
    "roundingType": "Dummy Rounding Type 2",
    "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
    "currencyId": 1,
    "active": false
  }
}
```

3. Delete PriceList

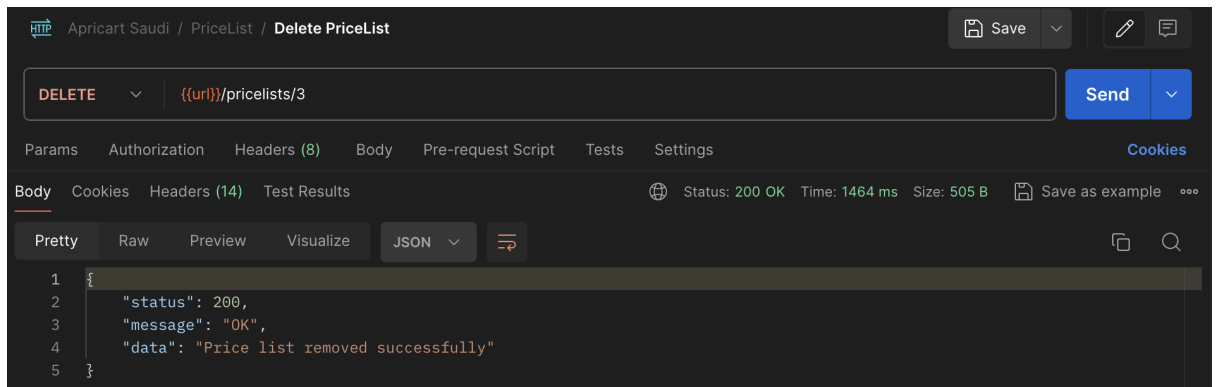

HTTP Apricart Saudi / PriceList / Delete PriceList

DELETE {{url}}/pricelists/3

Send


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 1464 ms Size: 505 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Price list removed successfully"
5 }
```

4. Get All PriceLists

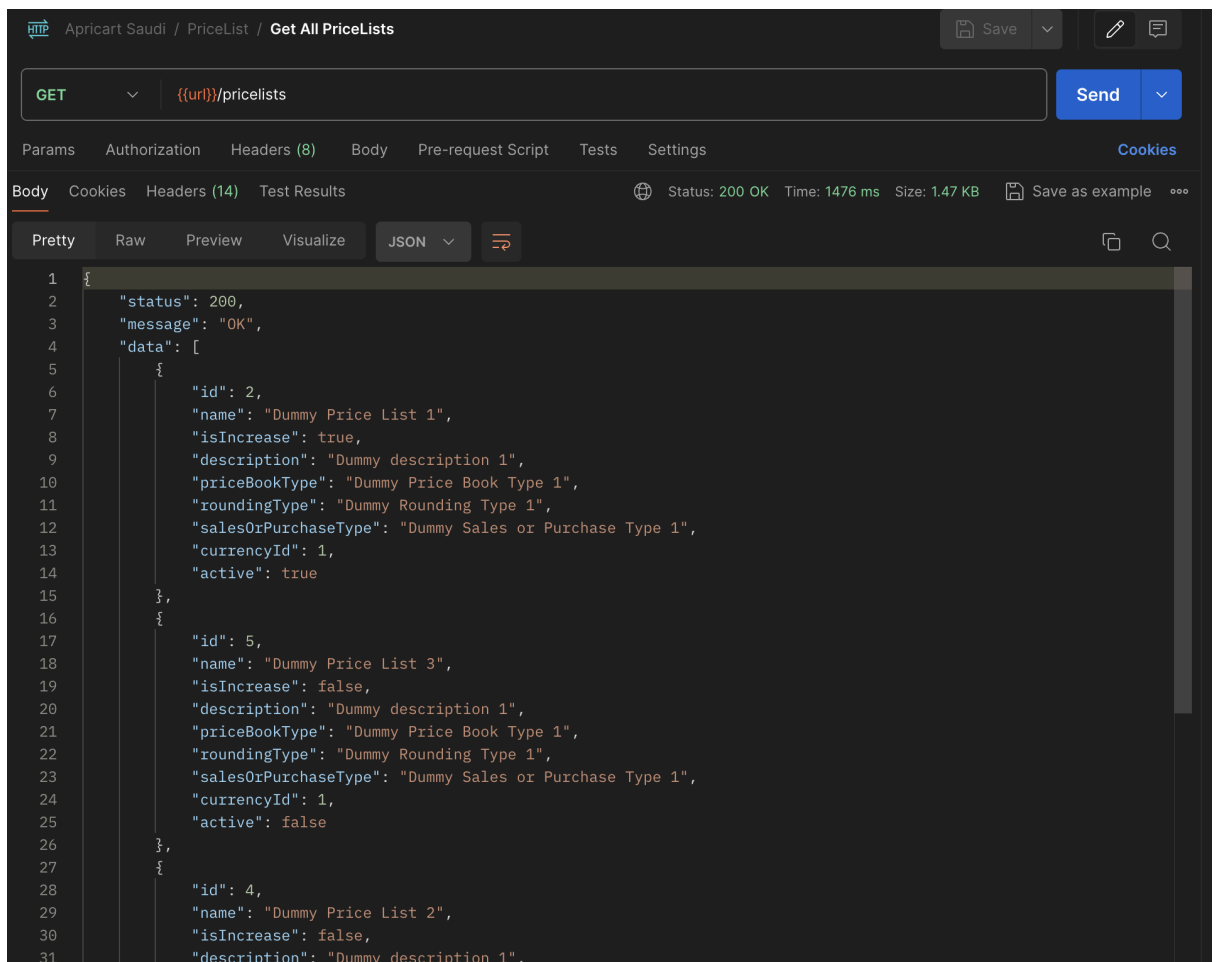

HTTP Apricart Saudi / PriceList / Get All PriceLists

GET {{url}}/pricelists

Send


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 1476 ms Size: 1.47 KB Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "name": "Dummy Price List 1",
8       "isIncrease": true,
9       "description": "Dummy description 1",
10      "priceBookType": "Dummy Price Book Type 1",
11      "roundingType": "Dummy Rounding Type 1",
12      "salesOrPurchaseType": "Dummy Sales or Purchase Type 1",
13      "currencyId": 1,
14      "active": true
15    },
16    {
17      "id": 5,
18      "name": "Dummy Price List 3",
19      "isIncrease": false,
20      "description": "Dummy description 1",
21      "priceBookType": "Dummy Price Book Type 1",
22      "roundingType": "Dummy Rounding Type 1",
23      "salesOrPurchaseType": "Dummy Sales or Purchase Type 1",
24      "currencyId": 1,
25      "active": false
26    },
27    {
28      "id": 4,
29      "name": "Dummy Price List 2",
30      "isIncrease": false,
31      "description": "Dummy description 1",
```

5. Get Active PriceLists

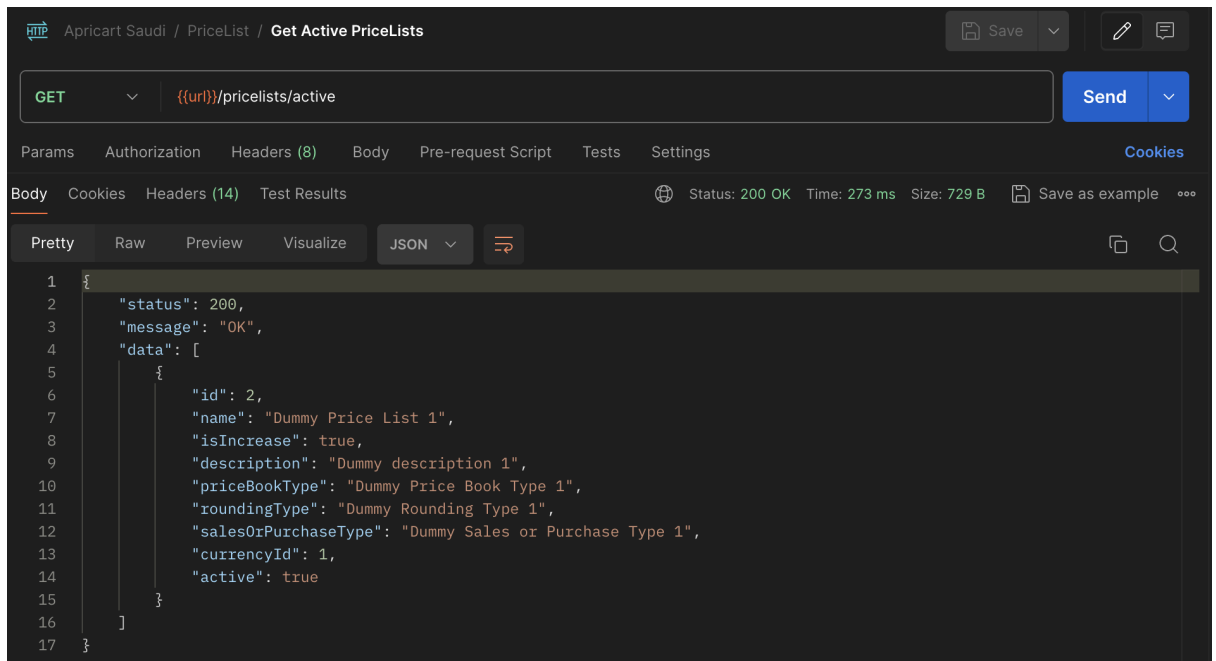

Apricart Saudi / PriceList / **Get Active PriceLists**

GET `{{url}}/pricelists/active` **Send**


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 273 ms Size: 729 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 2,
7       "name": "Dummy Price List 1",
8       "isIncrease": true,
9       "description": "Dummy description 1",
10      "priceBookType": "Dummy Price Book Type 1",
11      "roundingType": "Dummy Rounding Type 1",
12      "salesOrPurchaseType": "Dummy Sales or Purchase Type 1",
13      "currencyId": 1,
14      "active": true
15    }
16  ]
17 }
```

6. Get PriceList by PriceList ID

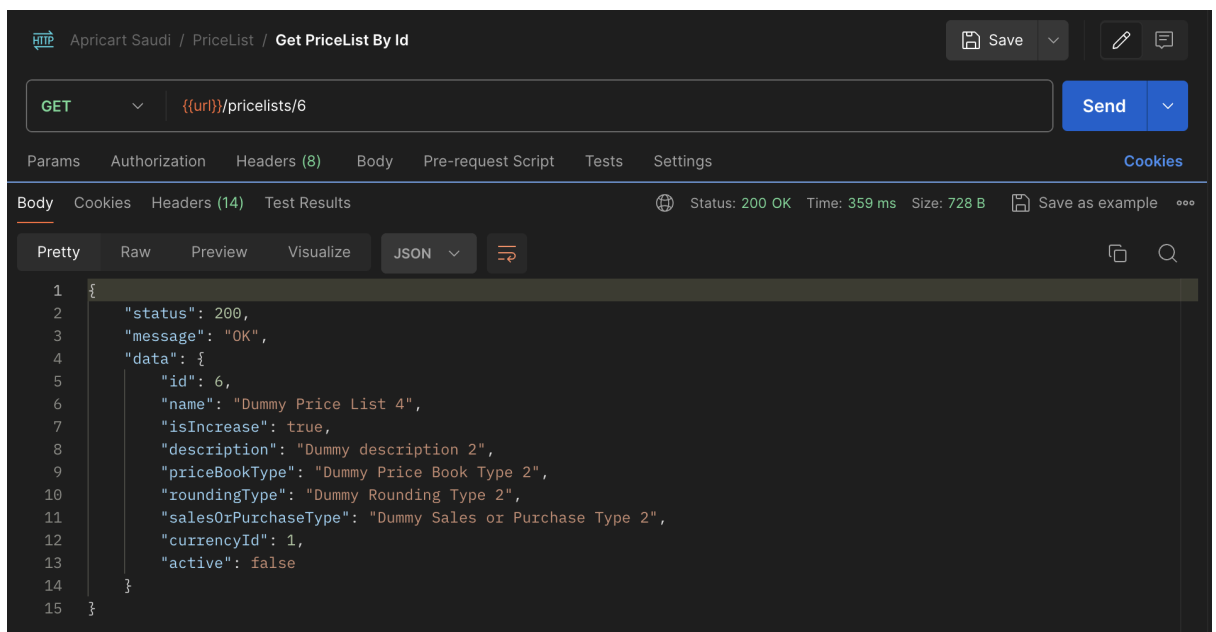

Apricart Saudi / PriceList / **Get PriceList By Id**

GET `{{url}}/pricelists/6` **Send**

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 359 ms Size: 728 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 6,
6     "name": "Dummy Price List 4",
7     "isIncrease": true,
8     "description": "Dummy description 2",
9     "priceBookType": "Dummy Price Book Type 2",
10    "roundingType": "Dummy Rounding Type 2",
11    "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
12    "currencyId": 1,
13    "active": false
14  }
15 }
```

7. Get PriceList by PriceList Name

The screenshot shows a REST client interface for the endpoint `GET {{url}}/pricelists/name/Dummy Price List 4`. The response status is 200 OK, with a time of 237 ms and a size of 728 B. The response body is displayed in JSON format, showing a single price list object.

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 6,
6     "name": "Dummy Price List 4",
7     "isIncrease": true,
8     "description": "Dummy description 2",
9     "priceBookType": "Dummy Price Book Type 2",
10    "roundingType": "Dummy Rounding Type 2",
11    "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
12    "currencyId": 1,
13    "active": false
14  }
15 }
```

8. Get PriceLists by Currency ID

The screenshot shows a REST client interface for the endpoint `GET {{url}}/pricelists/currency/2`. The response status is 200 OK, with a time of 1049 ms and a size of 731 B. The response body is displayed in JSON format, showing an array of price list objects.

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 4,
7       "name": "Dummy Price List 2",
8       "isIncrease": false,
9       "description": "Dummy description 1",
10      "priceBookType": "Dummy Price Book Type 1",
11      "roundingType": "Dummy Rounding Type 1",
12      "salesOrPurchaseType": "Dummy Sales or Purchase Type 1",
13      "currencyId": 2,
14      "active": false
15    }
16  ]
17 }
```

9. Get PriceList by PriceBook

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "PriceList / Get PriceLists By PriceBook". The request method is "GET" and the URL is "{{url}}/pricelists/pricebook/Dummy Price Book Type 2". The response status is "200 OK" with a time of "300 ms" and a size of "730 B". The response body is displayed in JSON format, showing a successful status and a list of price list data.

```
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 6,
      "name": "Dummy Price List 4",
      "isIncrease": true,
      "description": "Dummy description 2",
      "priceBookType": "Dummy Price Book Type 2",
      "roundingType": "Dummy Rounding Type 2",
      "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
      "currencyId": 1,
      "active": false
    }
  ]
}
```

10. Update PriceList Status by PriceList ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The selected endpoint is "PriceList / Update PriceList Status". The request method is "PUT" and the URL is "{{url}}/pricelists/6/true". The response status is "200 OK" with a time of "1818 ms" and a size of "727 B". The response body is displayed in JSON format, showing a successful status and the updated price list data.

```
{
  "status": 200,
  "message": "OK",
  "data": {
    "id": 6,
    "name": "Dummy Price List 4",
    "isIncrease": true,
    "description": "Dummy description 2",
    "priceBookType": "Dummy Price Book Type 2",
    "roundingType": "Dummy Rounding Type 2",
    "salesOrPurchaseType": "Dummy Sales or Purchase Type 2",
    "currencyId": 1,
    "active": true
  }
}
```