

Product Module: Responses

1. Add Products Warehouse:

The screenshot shows a REST client interface with a POST request to `{{url}}/productswarehouse`. The request body is a JSON object with the following fields: `isActive` (false), `inStock` (false), `specialRate` ("9.99"), `currentRate` ("12.99"), `rate` ("15.99"), `quantityInStock` (20), `position` ("top"), `categoryId` (2), `priceListId` (2), `warehouseId` (5), `taxId` (3), and `productId` (2). The response status is 201 Created, with a message "Created".

```
POST {{url}}/productswarehouse

{
  "isActive": false,
  "inStock": false,
  "specialRate": "9.99",
  "currentRate": "12.99",
  "rate": "15.99",
  "quantityInStock": 20,
  "position": "top",
  "categoryId": 2,
  "priceListId": 2,
  "warehouseId": 5,
  "taxId": 3,
  "productId": 2
}
```

Body Cookies Headers (14) Test Results Status: 201 Created Time: 2.35 s Size: 474 B Save as example

```
Pretty Raw Preview Visualize JSON {
  "status": 201,
  "message": "Created"
}
```

2. Update Products Warehouse

The screenshot shows a REST client interface with a PUT request to `{{url}}/productswarehouse`. The request body is a JSON object with `id` (2) and `specialRate` ("5.55"). The response status is 200 OK, with a message "OK" and a data object containing the updated warehouse details. The data object includes `id` (2), `isActive` (true), `inStock` (true), `specialRate` ("5.55"), `currentRate` ("16.99"), `rate` ("18.99"), `quantityInStock` (20), `position` ("top"), `productId` (2), `warehouseId` (5), `priceListId` (2), and `taxId` (3).

```
PUT {{url}}/productswarehouse

{
  "id": 2,
  "specialRate": "5.55"
}
```

Body Cookies Headers (14) Test Results Status: 200 OK Time: 2.66 s Size: 663 B Save as example

```
Pretty Raw Preview Visualize JSON {
  "status": 200,
  "message": "OK",
  "data": {
    "id": 2,
    "isActive": true,
    "inStock": true,
    "specialRate": "5.55",
    "currentRate": "16.99",
    "rate": "18.99",
    "quantityInStock": 20,
    "position": "top",
    "productId": 2,
    "warehouseId": 5,
    "priceListId": 2,
    "taxId": 3
  }
}
```

3. Delete Products Warehouse

The screenshot shows a REST client interface with the following details:

- URL:** `{{url}}/productwarehouse/2`
- Method:** DELETE
- Status:** 200 OK
- Time:** 451 ms
- Size:** 513 B
- Response Body (JSON):**

```
{
  "status": 200,
  "message": "OK",
  "data": "Products Warehouse removed successfully"
}
```

4. Get All Products Warehouse

The screenshot shows a REST client interface with the following details:

- URL:** `{{url}}/productwarehouse`
- Method:** GET
- Status:** 200 OK
- Time:** 335 ms
- Size:** 1.03 KB
- Response Body (JSON):**

```
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 3,
      "isActive": false,
      "inStock": false,
      "specialRate": "9.99",
      "currentRate": "12.99",
      "rate": "15.99",
      "quantityInStock": 20,
      "position": "top",
      "productId": 2,
      "warehouseId": 5,
      "priceListId": 2,
      "taxId": 3
    },
    {
      "id": 1,
      "isActive": true,
      "inStock": true,
      "specialRate": "10.99",
      "currentRate": "15.99",
      "rate": "20.99",
      "quantityInStock": 50,
      "position": "top",
      "productId": 2,
      "warehouseId": 5,
      "priceListId": 2,
      "taxId": 3
    }
  ]
}
```

5. Get Products Warehouse by ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The request is a GET to the endpoint `{{url}}/productswarehouse/1`. The response is a 200 OK with a status of 200, a time of 294 ms, and a size of 664 B. The response body is displayed in JSON format:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 1,
6     "isActive": true,
7     "inStock": true,
8     "specialRate": "10.99",
9     "currentRate": "15.99",
10    "rate": "20.99",
11    "quantityInStock": 50,
12    "position": "top",
13    "productId": 2,
14    "warehouseId": 5,
15    "priceListId": 2,
16    "taxId": 3
17  }
18 }
```

6. Get Products Warehouse by Product ID

The screenshot shows a REST client interface for a project named "Apricart Saudi". The request is a GET to the endpoint `{{url}}/productswarehouse/product/2`. The response is a 200 OK with a status of 200, a time of 320 ms, and a size of 860 B. The response body is displayed in JSON format:


```
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 3,
7       "isActive": false,
8       "inStock": false,
9       "specialRate": "9.99",
10      "currentRate": "12.99",
11      "rate": "15.99",
12      "quantityInStock": 20,
13      "position": "top",
14      "productId": 2,
15      "warehouseId": 5,
16      "priceListId": 2,
17      "taxId": 3
18    },
19    {
20      "id": 1,
21      "isActive": true,
22      "inStock": true,
23      "specialRate": "10.99",
24      "currentRate": "15.99",
25      "rate": "20.99",
26      "quantityInStock": 50,
27      "position": "top",
28      "productId": 2,
29      "warehouseId": 5,
30      "priceListId": 2,
31      "taxId": 3
32    }
33  ]
```

7. Get Products Warehouse by Warehouse ID

The screenshot displays a REST client interface for a project named "Apricart Saudi". The active tab is "Get Product Warehouse By Warehouse Id". The request method is "GET" and the URL is "{url}/productswarehouse/warehouse/5". The response status is "200 OK" with a time of "340 ms" and a size of "1.03 KB". The response body is shown in "JSON" format, displaying a list of two product warehouse entries.

```
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 3,
      "isActive": false,
      "inStock": false,
      "specialRate": "9.99",
      "currentRate": "12.99",
      "rate": "15.99",
      "quantityInStock": 20,
      "position": "top",
      "productId": 2,
      "warehouseId": 5,
      "priceListId": 2,
      "taxId": 3
    },
    {
      "id": 1,
      "isActive": true,
      "inStock": true,
      "specialRate": "10.99",
      "currentRate": "15.99",
      "rate": "20.99",
      "quantityInStock": 50,
      "position": "top",
      "productId": 2,
      "warehouseId": 5,
      "priceListId": 2,
      "taxId": 3
    }
  ]
}
```

8. Get Products Warehouse by Price List ID

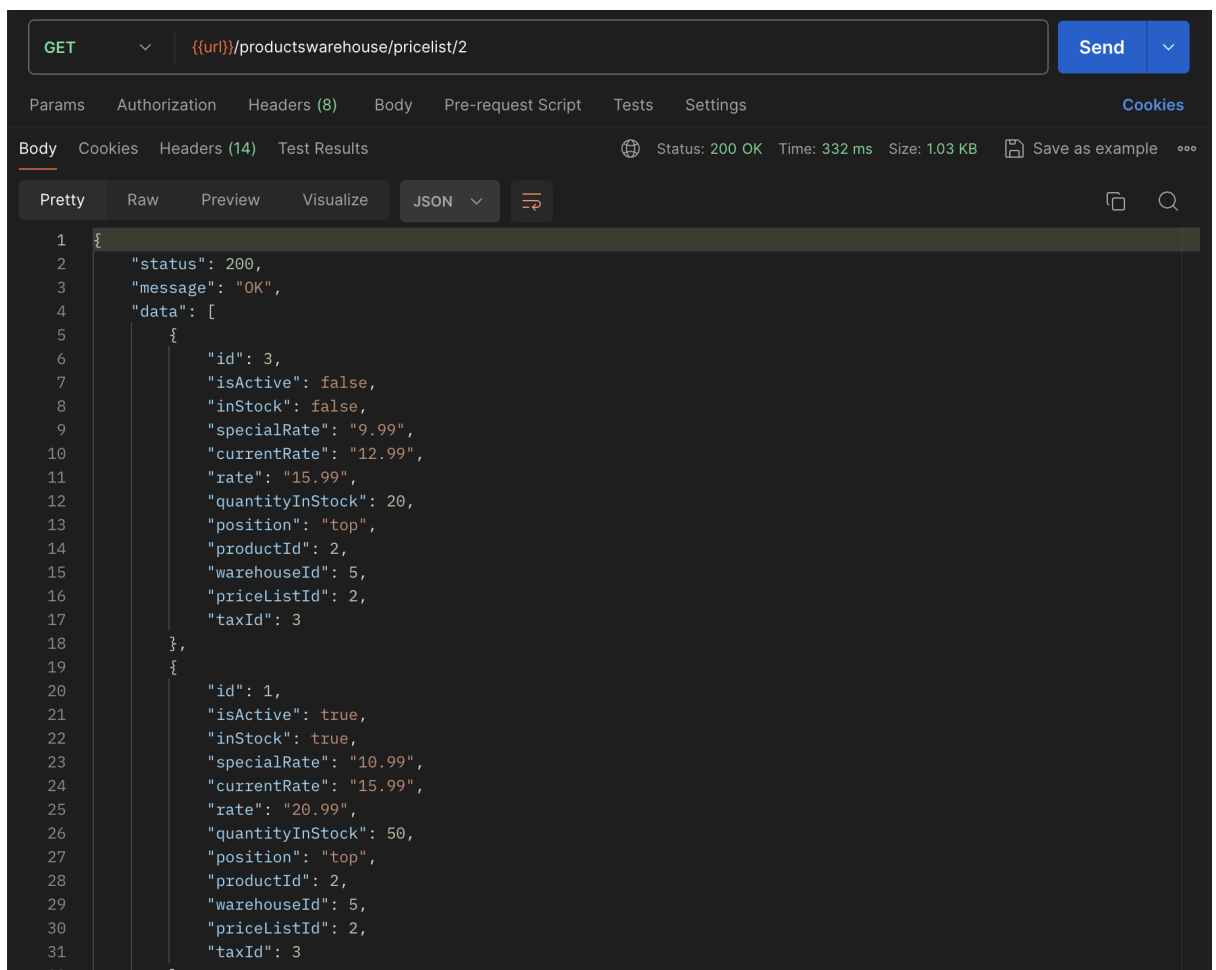

GET `{{url}}/productswarehouse/pricelist/2` Send


Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 332 ms Size: 1.03 KB Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 3,
7       "isActive": false,
8       "inStock": false,
9       "specialRate": "9.99",
10      "currentRate": "12.99",
11      "rate": "15.99",
12      "quantityInStock": 20,
13      "position": "top",
14      "productId": 2,
15      "warehouseId": 5,
16      "priceListId": 2,
17      "taxId": 3
18    },
19    {
20      "id": 1,
21      "isActive": true,
22      "inStock": true,
23      "specialRate": "10.99",
24      "currentRate": "15.99",
25      "rate": "20.99",
26      "quantityInStock": 50,
27      "position": "top",
28      "productId": 2,
29      "warehouseId": 5,
30      "priceListId": 2,
31      "taxId": 3
32    }
33  ]
34 }
```

9. Update Products Warehouse Status by ID

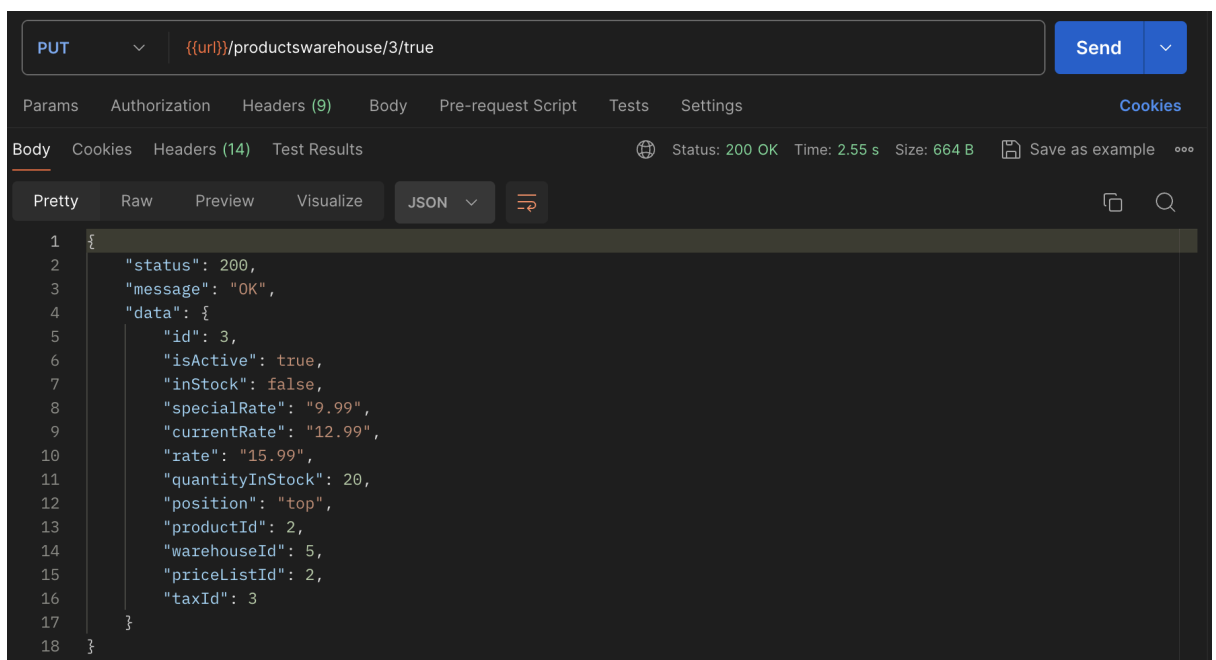

PUT `{{url}}/productswarehouse/3/true` Send

Params Authorization Headers (9) Body Pre-request Script Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 2.55 s Size: 664 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 3,
6     "isActive": true,
7     "inStock": false,
8     "specialRate": "9.99",
9     "currentRate": "12.99",
10    "rate": "15.99",
11    "quantityInStock": 20,
12    "position": "top",
13    "productId": 2,
14    "warehouseId": 5,
15    "priceListId": 2,
16    "taxId": 3
17  }
18 }
```