

SalePerson Module: Responses

1. Add Salesperson:

POST ▼ | {{url}}/auth/open/salesperson Send ▼

Params Authorization Headers (9) **Body** • Scripts Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON ▼ Beautify

```
1 {
2   "id": 3000,
3   "name": "Test Sales Person",
4   "description": "This is a salesperson.",
5   "isActive": true,
6   "cityId": 2
7 }
```

Body Cookies Headers (14) Test Results ⊕ Status: 201 Created Time: 548 ms Size: 474 B 📄 Save as example ⋮

Pretty Raw Preview Visualize JSON ▼ ≡

```
1 {
2   "status": 201,
3   "message": "Created"
4 }
```

2. Update Salesperson

PUT ▼ | {{url}}/auth/open/salesperson Send ▼

Params Authorization Headers (9) **Body** • Scripts Tests Settings Cookies

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL JSON ▼ Beautify

```
1 {
2   "id": 3000,
3   "name": "Sales Person Test",
4   "isActive": false
5 }
```

Body Cookies Headers (14) Test Results ⊕ Status: 200 OK Time: 345 ms Size: 577 B 📄 Save as example ⋮

Pretty Raw Preview Visualize JSON ▼ ≡

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 3000,
6     "name": "Sales Person Test",
7     "description": "This is a salesperson.",
8     "isActive": false,
9     "cityId": 2
10  }
11 }
```

3. Get Salesperson By Id

GET `{{url}}/auth/open/salesperson/1000` Send

Params Authorization Headers (8) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 298 ms Size: 573 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": {
5     "id": 1000,
6     "name": "Sale Person 1",
7     "description": "Sales Person of Riyadh",
8     "isActive": false,
9     "cityId": 1
10  }
11 }
```

4. Get Active Salespersons

GET `{{url}}/auth/open/salesperson/active` Send

Params Authorization Headers (9) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 319 ms Size: 574 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": [
5     {
6       "id": 1000,
7       "name": "Sale Person 1",
8       "description": "Sales Person of Riyadh",
9       "isActive": true,
10      "cityId": 1
11    }
12  ]
13 }
```

5. Delete Salesperson

DELETE `{{url}}/auth/open/salesperson/1000` Send


Params Authorization Headers (7) Body Scripts Tests Settings Cookies

Body Cookies Headers (14) Test Results Status: 200 OK Time: 365 ms Size: 517 B Save as example

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "Sale person marked as inactive successfully"
5 }
```

6. Get All Salespersons

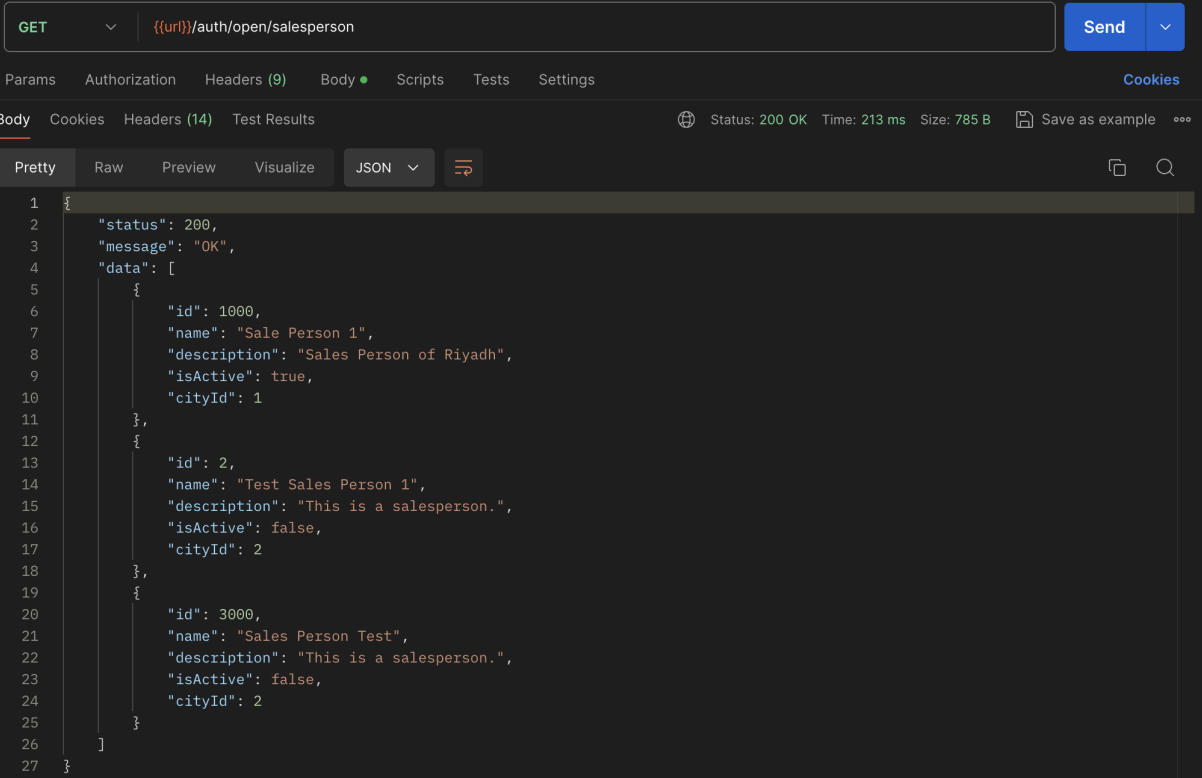

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** {{url}}/auth/open/salesperson
- Status:** 200 OK
- Time:** 213 ms
- Size:** 785 B
- Response Format:** JSON

The response body is a JSON object with the following structure:

```
{
  "status": 200,
  "message": "OK",
  "data": [
    {
      "id": 1000,
      "name": "Sale Person 1",
      "description": "Sales Person of Riyadh",
      "isActive": true,
      "cityId": 1
    },
    {
      "id": 2,
      "name": "Test Sales Person 1",
      "description": "This is a salesperson.",
      "isActive": false,
      "cityId": 2
    },
    {
      "id": 3000,
      "name": "Sales Person Test",
      "description": "This is a salesperson.",
      "isActive": false,
      "cityId": 2
    }
  ]
}
```