

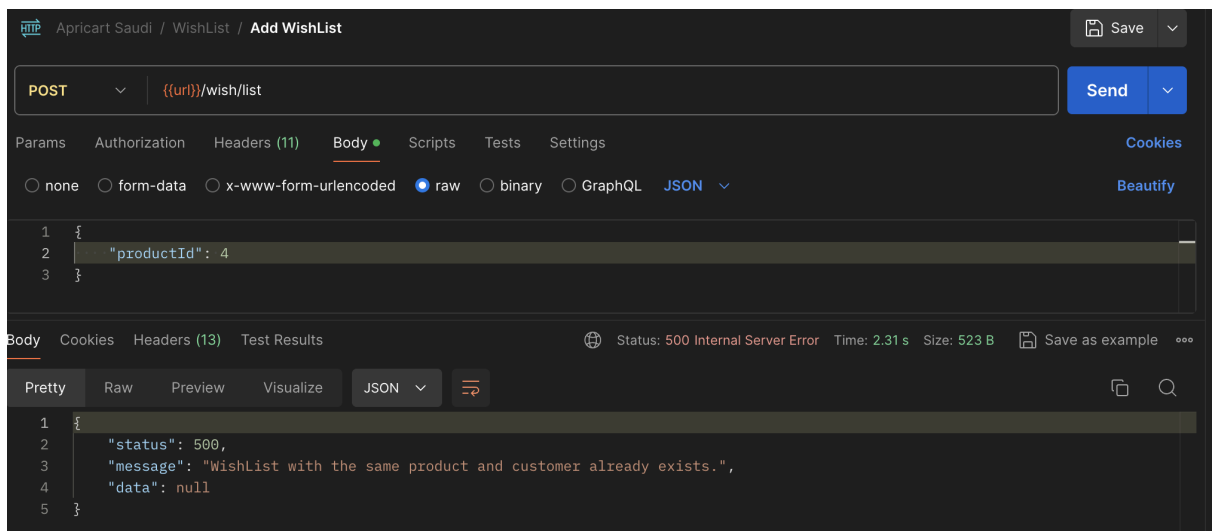


WishList Module: Responses

1. Add Wishlist:

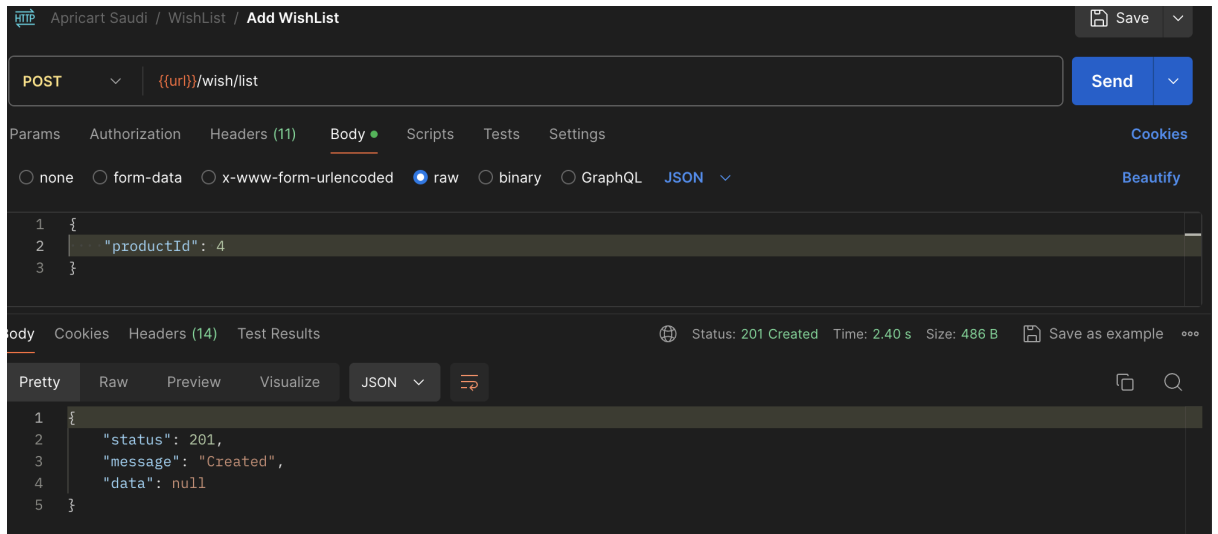

2. Get Wishlist by Id

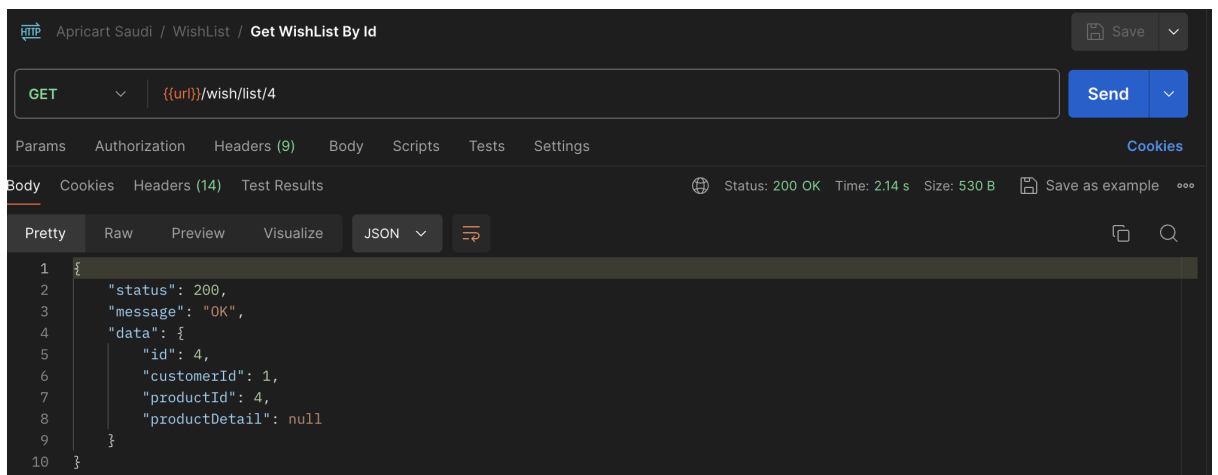

3. Get Wishlist by Customer

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "WishList", and the selected endpoint is "Get WishList By Customer". The HTTP method is "GET", and the URL is "{{url}}/wish/list/customer?warehouseId=1". The "Params" tab is active, showing a single query parameter: "warehouseId" with a value of "1". The "Body" tab is also active, displaying a JSON response in "Pretty" format. The response status is "200 OK", with a time of "8.10 s" and a size of "3.89 KB".

Query Params

Key	Value	Description
warehouseId	1	

Body (JSON)

```
4  "data": [  
5    {  
6      "id": 1,  
7      "customerId": 1,  
8      "productId": 1,  
9      "productDetail": {  
10       "id": 1,  
11       "title": "Tapal Danedar Tea",  
12       "arabicTitle": "شاي تابل دانيدار",  
13       "weight": "430 GM",  
14       "image": "https://staging.apricart.pk/options/stream/product_tea.png",  
15       "description": "Tapal Danedar Tea, Value Pack, Pouch",  
16       "arabicDescription": "شاي تابل دانيدار، حزمة قيمة، كيس",  
17       "sku": "APRA-TEA-01",  
18       "isActive": true,  
19       "isFeatured": false,  
20       "isTrending": true,  
21       "isDiscounted": true,  
22       "isNewArrivals": true,  
23       "isRecommended": true,  
24       "position": 1,  
25       "categoryId": 9,  
26       "subCategoryId": 3,  
27       "brandId": 9,  
28       "brandName": "Tapal",  
29       "brandNameArabic": "تابل",
```

4. Remove WishList by Id

The screenshot shows a REST client interface for the same "Apricart Saudi" project. The active tab is "WishList", and the selected endpoint is "Remove WishList By Id". The HTTP method is "DELETE", and the URL is "{{url}}/wish/list/12". The "Body" tab is active, displaying a JSON response in "Pretty" format. The response status is "200 OK", with a time of "2.47 s" and a size of "503 B".

Body (JSON)

```
1  {  
2    "status": 200,  
3    "message": "OK",  
4    "data": "WishList removed successfully"  
5  }
```

5. Remove WishList By Customer & Product ID

The screenshot shows a REST client interface for the endpoint `DELETE {{url}}/wish/list/customer/4`. The response status is 200 OK, with a time of 3.47 s and a size of 508 B. The response body is a JSON object:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "WishList item removed successfully"
5 }
```

6. Remove WishList By Product ID

The screenshot shows a REST client interface for the endpoint `DELETE {{url}}/wish/list/product/7`. The response status is 200 OK, with a time of 3.03 s and a size of 508 B. The response body is a JSON object:

```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "WishList item removed successfully"
5 }
```



7. Clear WishList

The screenshot shows a REST client interface for the endpoint `DELETE {{url}}/wish/list/clear`. The response status is 200 OK, with a time of 6.55 s and a size of 503 B. The response body is a JSON object:


```
1 {
2   "status": 200,
3   "message": "OK",
4   "data": "WishList cleared successfully"
5 }
```

WishList Module: Arabic Responses

1. Add Wishlist:

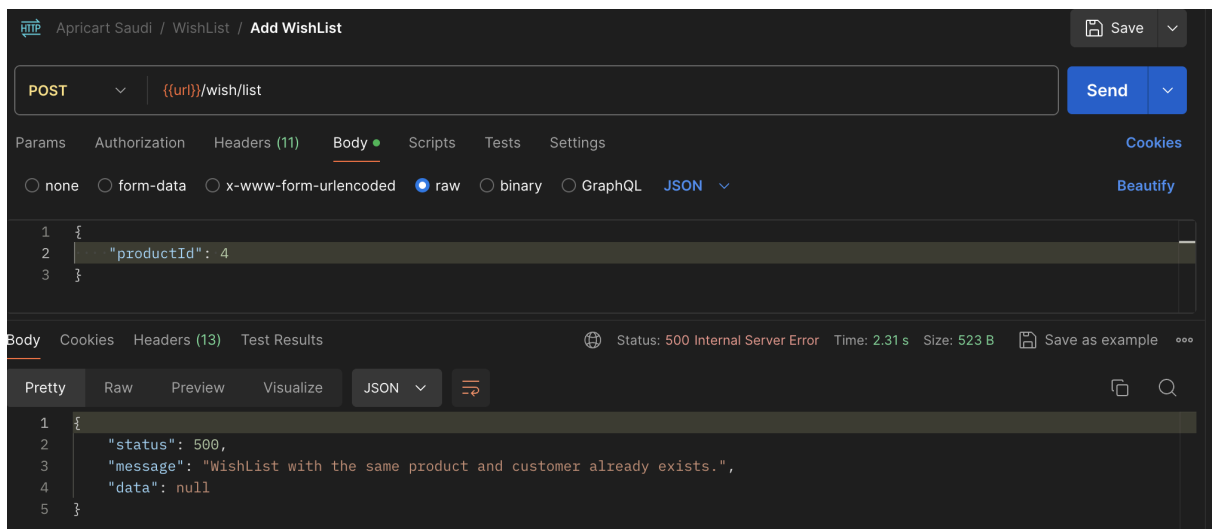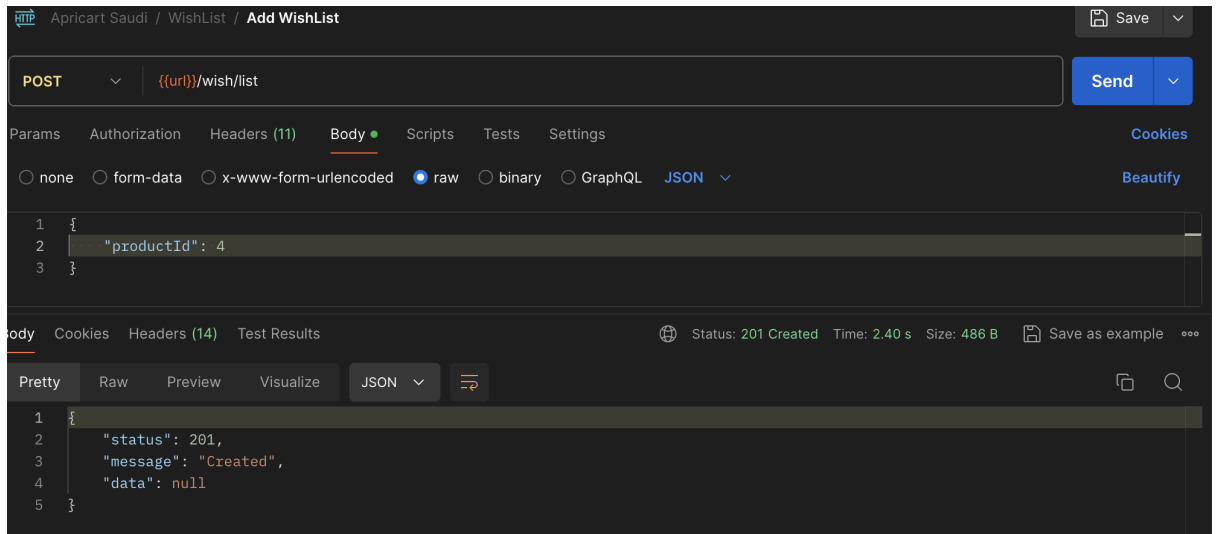

2. Get Wishlist by Id

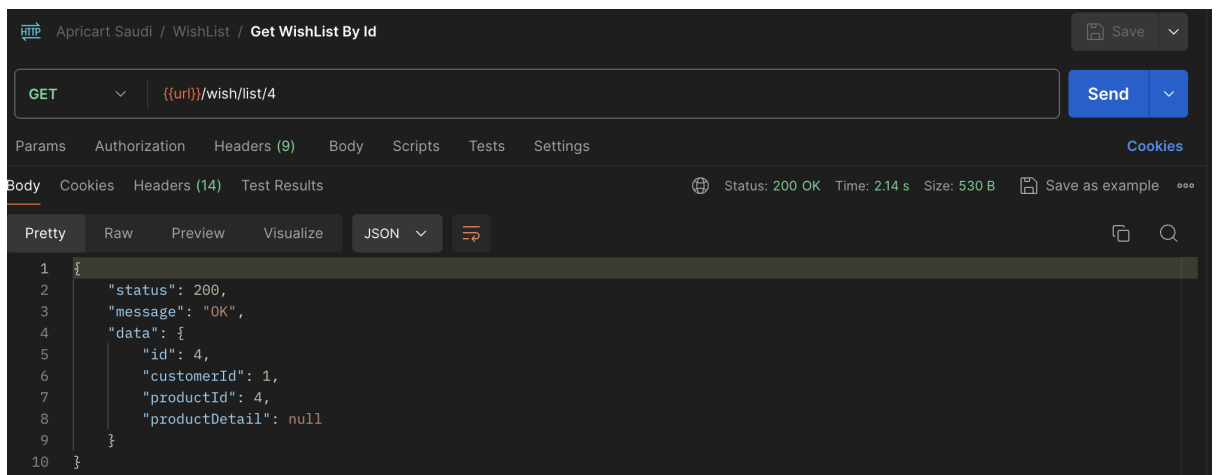

3. Get Wishlist by Customer

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "WishList", and the selected endpoint is "Get WishList By Customer". The HTTP method is set to "GET", and the URL is "{{url}}/wish/list/customer?warehouseId=1". The "Send" button is visible.

Below the URL bar, there are tabs for "Params", "Authorization", "Headers (9)", "Body", "Scripts", "Tests", and "Settings". The "Params" tab is active, showing a table of query parameters:

Key	Value	Description
warehouseId	1	

The "Body" tab is also visible, showing the response in JSON format. The response status is "200 OK", with a time of "8.10 s" and a size of "3.89 KB". The JSON response is as follows:

```
{
  "data": [
    {
      "id": 1,
      "customerId": 1,
      "productId": 1,
      "productDetail": {
        "id": 1,
        "title": "Tapal Danedar Tea",
        "arabicTitle": "شاي تابل دانيدار",
        "weight": "430 GM",
        "image": "https://staging.apricart.pk/options/stream/product_tea.png",
        "description": "Tapal Danedar Tea, Value Pack, Pouch",
        "arabicDescription": "شاي تابل دانيدار، حزمة قيمة، كيس",
        "sku": "APRA-TEA-01",
        "isActive": true,
        "isFeatured": false,
        "isTrending": true,
        "isDiscounted": true,
        "isNewArrivals": true,
        "isRecommended": true,
        "position": 1,
        "categoryId": 9,
        "subCategoryId": 3,
        "brandId": 9,
        "brandName": "Tapal",
        "brandNameArabic": "تابل"
      }
    }
  ]
}
```


4. Remove WishList by Id

The screenshot shows a REST client interface for a project named "Apricart Saudi". The active tab is "WishList", and the selected endpoint is "Remove WishList By Id". The HTTP method is set to "DELETE", and the URL is "{{url}}/wish/list/4". The "Send" button is visible.


Below the URL bar, there are tabs for "Params", "Authorization", "Headers (9)", "Body", "Scripts", "Tests", and "Settings". The "Body" tab is active, showing the response in JSON format. The response status is "200 OK", with a time of "2.23 s" and a size of "530 B". The JSON response is as follows:

```
{
  "status": 200,
  "message": "OK",
  "data": "تمت إزالة قائمة الأمنيات بنجاح"
}
```

5. Remove WishList By Customer & Product ID

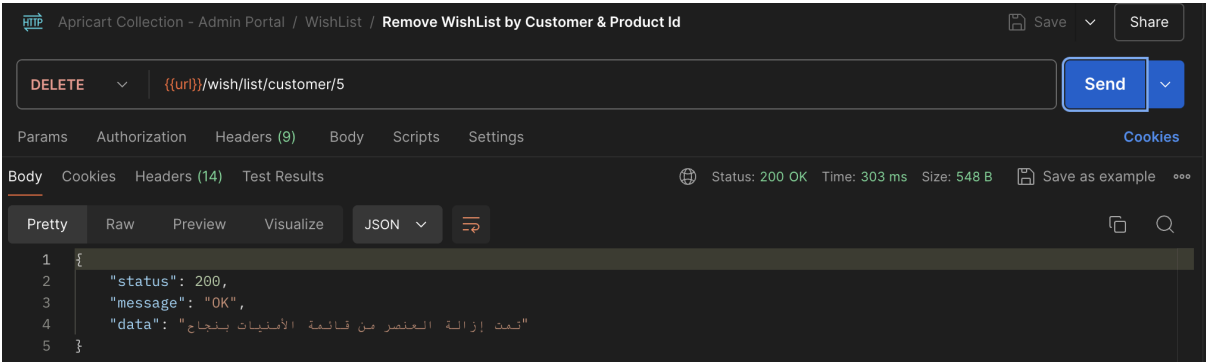

8. Remove WishList By Product ID

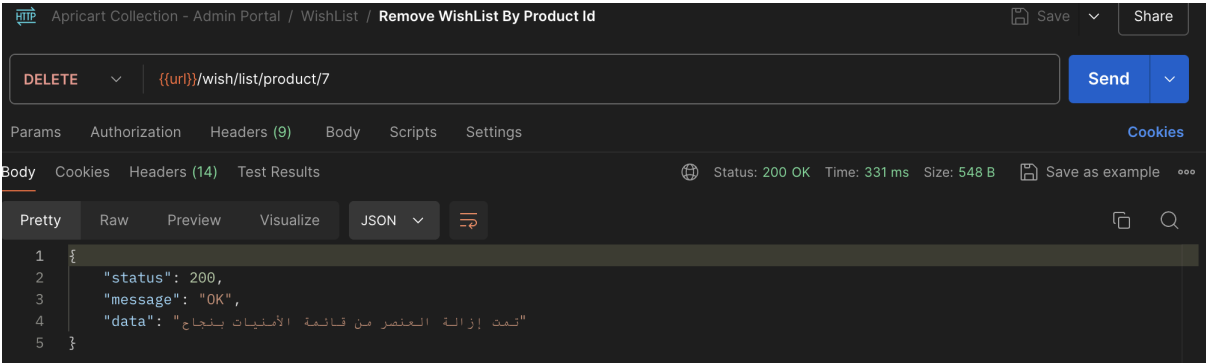

6. Clear WishList

