

# Contact Management System

MSCS542L

Section 816

**Undercover Martyn**



Marist University

School of Computer Science and Mathematics

Submitted To: Dr. Reza Sadeghi

Spring 2025

# Table of Contents

<b>Table of Figures</b>	<b>3</b>
<b>Project Report of Contact Management System</b>	<b>4</b>
<b>Project Objective</b>	<b>5</b>
<b>Review Related Works</b>	<b>6</b>
<b>The Merits of the Project</b>	<b>6</b>
<b>GitHub Repository Address</b>	<b>7</b>
<b>Entity Relationship Model</b>	<b>8</b>
<b>Enhanced Entity Relationship Model</b>	<b>15</b>
<b>Data Types Exploration</b>	<b>17</b>
<b>Database Development</b>	<b>17</b>
<b>Handling Foreign Key Constraints</b>	<b>33</b>
<b>Importing Data</b>	<b>35</b>
<b>Retrieving Data</b>	<b>44</b>
<b>Manipulating Data</b>	<b>50</b>
<b>Database Optimization</b>	<b>51</b>
<b>References</b>	<b>52</b>

## Table of Figures

<b>External Model 1</b>	<b>8</b>
<b>External Model 2</b>	<b>9</b>
<b>ER Diagram</b>	<b>15</b>
<b>EER Diagram</b>	<b>16</b>
<b>SQL Code (Tables)</b>	<b>17</b>
<b>SQL Code (Data)</b>	<b>35</b>

# Project Report of Contact Management System

## Team Name

Undercover Martyn

## Team Members

- |                          |                                       |
|--------------------------|---------------------------------------|
| 1. Reece Schenck         | reece.schenck1@marist.edu (Team Head) |
| 2. Roman Huerta Manrique | Roman.HuertaManrique1@marist.edu      |
| 3. Michelle Macina       | Michelle.Macina1@marist.edu           |

## Description of Team Members

### 1. Reece Schenck

Hello, I am Reece Schenck. I am a computer science and cybersecurity major and I am the manager of the club volleyball team here at Marist. As I started this project as the only member of this group that made me the team head automatically. I chose to add and work with my other team members as they seem very hard working, intelligent, and enthusiastic about this project.

### 2. Roman

I obtained my Bachelor's degree in Informatics Engineering from the Pontifical Catholic University of Peru and began my professional career as a Web Developer Analyst at the same institution, where I worked as a Full-Stack Developer. Subsequently, I transitioned into the field of education, serving as a Mathematics instructor for two years as part of the TeachForPeru program. Most recently, I worked as a Content Creator at Crack The Code, a coding school based in Latin America. I am proficient in PHP, HTML, JavaScript, Python, Java, and SQL. Currently, I am pursuing a Master of Science in Computer Science at Marist University, with a concentration in Artificial Intelligence.

### 3. Michelle

I completed a Bachelor of Arts in International Studies at Elon University and am now looking to obtain a Master of Science in Computer Science at Marist University.

# Project Objective

## PROJECT TITLE: CONTACT MANAGEMENT SYSTEM

**Summary:** THE CONTACT MANAGEMENT SYSTEM (CMS) RECORDS VARIED INFORMATION, SUCH AS CELL NUMBER, FAX NUMBER, HOME NUMBER, EMAIL, AND ADDRESS. THE USERS SHOULD SECURELY ADD RECORDS & UPDATE THEM. THE CMS WILL STORE THE DATA OF DIFFERENT USER TYPES IN DISTINCT SQL TABLES. THIS SYSTEM SHOULD AT LEAST SUPPORT THE FOLLOWING CAPABILITIES:

1. REQUESTING ADMIN USER AND PASSWORD FOR LOG IN (A STRING OF AT LEAST 8 CHARACTERS)
2. CHANGE THE ADMIN USER AND PASSWORD
3. ADMIN USER SHOULD BE ABLE TO ADD A USER TO CMS BY CREATING A NEW USERNAME AND PASSWORD FOR NORMAL USERS, WHO ARE NOT ABLE TO DEFINE OR REMOVE A USER
4. ADMIN USER SHOULD BE ABLE TO REMOVE A USER FROM CMS BY REMOVING HIS/HER USERNAME, PASSWORD, AND HIS/HER OTHER CORRESPONDING DATA
5. EACH USER SHOULD BE ABLE TO:
  - a. ADD MULTIPLE SETS OF CONTACT INFORMATION WITH THE FOLLOWING DETAILS: FIRST NAME, SURNAME, CELL PHONE, WORKPLACE PHONE, FAX NUMBER, EMAIL ADDRESS, GENDER, AND AGE
  - b. REMOVE A CONTACT RECORD
  - c. EDIT THE CONTACT RECORD'S DETAILS
  - d. SEARCH THROUGH CONTACTS BASED ON ONE OR SEVERAL FEATURES AND LIST THE RESULTS ON THE SCREEN. FOR INSTANCE, IT SHOULD BE ABLE TO RETURN THE CELL PHONE NUMBER OF A SPECIFIC NAME.
6. CMS SHOULD BE A USER-FRIENDLY SOFTWARE, SUCH THAT:
  - a. IT SHOWS A WARNING IF A USER TRIES TO INPUT CONTACT INFORMATION WITH A NAME THAT EXISTS IN THE HISTORY.
  - b. CMS SHOULD SHOW A WELCOME PAGE
  - c. CMS SHOULD SHOW A MENU OF ALL FUNCTIONS TO THE USER
  - d. CMS SHOULD PROVIDE THE REPORTS IN A TABULAR FORM
  - e. CMS SHOULD PROVIDE AN EXIT FUNCTION

## Review Related Works

As seen throughout similar Contact Management Systems, they typically are not all encompassing and can be hard to use. In particular, when using HubSpot(2), Pipedrive(5), and Insightly(6), it is clear that they all specialized in some way over the other, each with their own positive and negative aspects.

HubSpot offers many positive features. Some of which include its very user friendly interface offered completely for free. It also offers automation and easy integration with other business solutions. Along with these positives, HubSpot also has some drawbacks. The main issue is that some advanced features are locked behind the paid version. Even so, regardless of the version of HubSpot being used, there is a severe lack of customization to each individual user's unique business models.

Diving into Pipedrive, it offers similar features as HubSpot except with a more tailored financial sales focus. For the positives offered, Pipedrive is very customisable with features like notifications and reminders for activities or follow up appointments. However, similar to HubSpot, Pipedrive also has limited available advanced features on account of it being tailored specifically for financial sales. On top of this, it is difficult to integrate Pipedrive without having to use other tools to work around its lack of compatibility.

Finally examining Insightly, it offers numerous positive features. These include a user friendly interface, easy integration, numerous comprehensive features offered such as automation and other tools. Some negatives include the pricing as it is far more expensive than other available options. Similar to HubSpot, Insightly also has very limited customizations for features such as fields and layouts.

## The Merits of the Project

The Contact Management System(CMS) has several merits that make it an excellent solution for managing contact information. It allows users to store and manage comprehensive details, including cell numbers, email addresses, fax numbers, home numbers, and physical addresses, ensuring all relevant data is centralized and easily accessible. The system enforces security through mandatory admin credentials with a minimum character length of eight and provides robust access control. Admins can manage user accounts by adding or removing users

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

and assigning credentials, while normal users are restricted to contact management tasks, ensuring data security and administrative control.

The CMS offers a range of features for users, such as the ability to add, edit, and remove detailed contact records. Its efficient search filters enable users to quickly locate specific contacts based on fields like name or phone number. The system enhances user-friendliness by providing warnings for duplicate entries, a welcoming interface, menu-driven navigation, and tabular reports for clear and professional data presentation. Additionally, it includes error handling mechanisms and a convenient exit function to streamline operations.

End users benefit from the CMS's centralized and organized data storage, which uses SQL tables for fast and reliable data retrieval. The system prioritizes security and data protection through role-based access and strict login protocols. It is highly adaptable and scalable, catering to both administrators and regular users. The system saves time with its efficient search capabilities and customizable filters while offering professional reporting features for business or personal use.

The CMS is an all-in-one solution, integrating core features that are tailored to user needs. Unlike other tools such as HubSpot, Pipedrive, or Insightly, all of which specialize in certain areas and thus lack full customization or comprehensive functionality, the CMS balances adaptability, and functionality. It is designed with user ease in mind, featuring a welcoming interface and error handling to reduce the learning curve and maximize productivity. Furthermore, it eliminates dependency on external tools, serving as a reliable standalone solution. By addressing common pain points like limited customization and integration challenges found in competing tools, the CMS delivers a secure, user-friendly, and versatile product that effectively meets diverse end-user needs.

## **GitHub Repository Address**

[https://github.com/Reece-Schenck/MSCS542L\\_816\\_CONTACT-MANAGEMENT-SYSTEM\\_Undercover-Martyn](https://github.com/Reece-Schenck/MSCS542L_816_CONTACT-MANAGEMENT-SYSTEM_Undercover-Martyn)

# Entity Relationship Model


## 1. External Models

### External Model 1: User and Activities

This model focuses on the relationship between users, their login credentials, and their relations to meetings and activity logs.

- **Entities:**
  - **User:** Represents the individuals who use the CMS.
  - **Meeting:** Stores details of meetings.
  - **ActivityLog:** Tracks user activities.
  - **ActivityType:** Categorizes logged activities.
- **Relationships:**
  - A **User** can perform many **ActivityLogs** (1:N).
  - A **User** can organize many **Meetings** (1:N).
  - An **ActivityLog** is an **ActivityType** (1:N).

### External Model 1 Diagram:

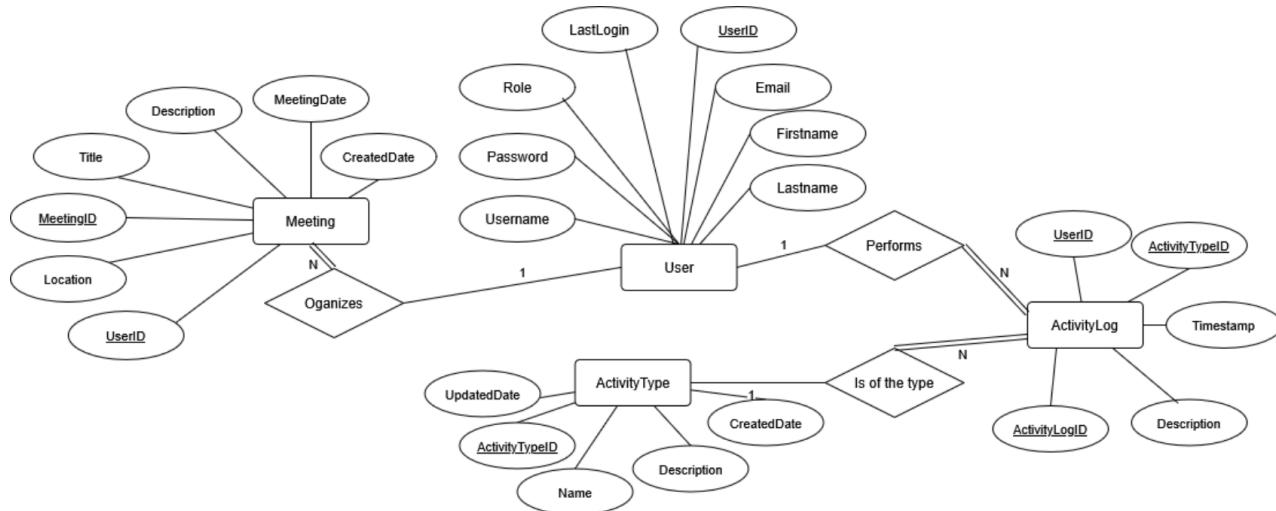


### External Model 2: Contacts and Contact Management

This model focuses on the relationship between contacts and all their elements.

- **Entities:**
  - **Contact:** Stores contact details.
  - **Tag:** Labels assigned to contacts.
  - **Group:** Groups contacts for better organization.
  - **Company:** Companies that contacts are associated with.

- **ContactNote**: Notes related to a contact.
- **Email**: Stores email addresses.
- **Picture**: Stores profile image.
- **Phone**: Stores phone numbers and types.
- **Relationships**:
  - A **Contact** can have many **Phones** (1:N).
  - A **Contact** can have many **Emails** (1:N).
  - A **Contact** has only one profile **Picture** (1:N).
  - A **Contact** can have numerous **ContactNotes** (1:N).
  - Multiple **Contacts** can have a **Company** (1:N)
  - Multiple **Contacts** can belong to multiple **Groups** (M:N)
  - Multiple **Contacts** can have multiple **Tags** (M:N)

### External Model 2 Diagram:

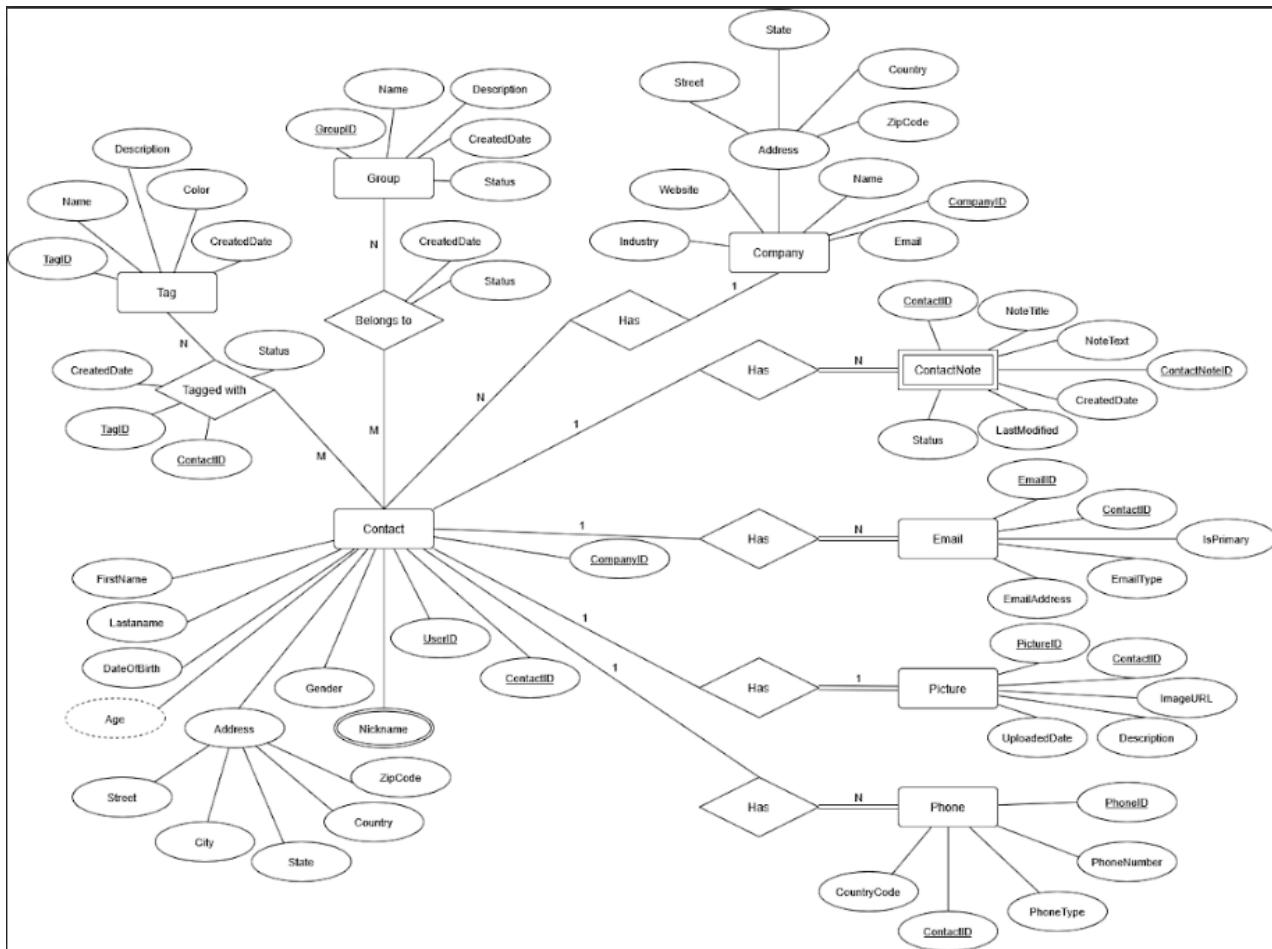

### Selections:

#### Selecting the Entities

Entities represent real-world objects or concepts that are relevant to the CMS. I selected

the entities based on the core operations and features of the system:

- **User**: The individuals who interact with the system, such as admins or normal users.
- **Contact**: Stores contact details, including personal and professional information.
- **Phone**: Stores different phone numbers associated with contacts.
- **Email**: Stores email addresses linked to contacts.
- **Picture**: Stores profile images of contacts.
- **ActivityLog**: Tracks user activities within the system.
- **ActivityType**: Categorizes types of activities logged.
- **ContactNote**: Stores notes related to a contact.
- **Group**: Represents contact groups for better organization.
- **Tag**: Represents keywords or labels assigned to contacts.
- **Meeting**: Stores details of meetings involving contacts.
- **Company**: Represents companies that contacts are associated with.

### Selecting the Attributes

For each entity, I selected relevant attributes that capture all necessary details for effective functionality in the CMS:

- **User**: UserID, Username, Password, Role, Email, FirstName, LastName, LastLogin
- **Contact**: ContactID, UserID, CompanyID, FirstName, LastName, DateOfBirth, Gender, Nickname, Address (Street, City, State, Zip, Country), Age
- **Phone**: PhoneID, ContactID, PhoneNumber, PhoneType, CountryCode
- **Email**: EmailID, ContactID, EmailAddress, EmailType, IsPrimary
- **Picture**: PictureID, ContactID, ImageURL, UploadedDate, Description
- **ActivityLog**: ActivityLogID, UserID, ActivityTypeID, Timestamp, Description
- **ActivityType**: ActivityTypeID, Name, Description, UpdatedDate, CreatedDate
- **ContactNote**: NoteID, ContactID, NoteTitle, NoteText, CreatedDate, LastModified, Status
- **Group**: GroupID, Name, Description, CreatedDate, Status
- **Tag**: TagID, Name, Description, CreatedDate, Color
- **Meeting**: MeetingID, UserID, Title, Description, Location, MeetingDate, CreatedDate
- **Company**: CompanyID, Name, Industry, Address (Street, City, State, Zip, Country), Email, Website

### Selecting the Relationships

The relationships define how entities are connected to one another. I chose relationships based on real-world interactions within the CMS system:

- **User "Owns" Contact (1:N)** → Each user can have multiple contacts, but each contact belongs to only one user.
- **Contact "Has" Phone (1:N)** → Each contact can have multiple phone numbers.

- **Contact "Has" Email (1:N)** → Each contact can have multiple email addresses.
- **Contact "Has" Picture (1:1)** → A contact can have only one profile picture.
- **User "Performs" ActivityLog (1:N)** → Each user can perform multiple activities logged in the system.
- **ActivityLog "Is of type" ActivityType (N:1)** → Each activity log entry must have a defined activity type.
- **Contact "Has" ContactNote (1:N)** → Each contact can have multiple notes (Weak Entity with Total Participation).
- **Contact "Belongs to" Group (M:N)** → Implemented using the **ContactGroupMapping** table.
- **Contact "Tagged with" Tag (M:N)** → Implemented using the **ContactTagMapping** table.
- **Meeting "Invites" Contact (M:N)** → Implemented using the **MeetingContactMapping** table.
- **User "Organizes" Meeting (1:N)** → Each meeting is created by one user.
- **Contact "Has" Company (N:1)** → Multiple contacts can belong to the same company.

## Selecting the Participations

I decided on partial or total participation based on the data requirements for each relationship:

### Total Participation:

- **Contact → Phone**: Every contact must have at least one phone number.
- **Contact → ContactNote**: Every note must belong to a contact.
- **User → ActivityLog**: Every activity log must be associated with a user.

### Partial Participation:

- **Contact → Address**: Not every contact has an address.
- **Contact → Picture**: Some contacts may not have a profile picture.

## Selecting the Cardinalities

Cardinalities define how many instances of one entity can be related to instances of another entity. I selected cardinalities based on how entities interact:

- **1:1 Cardinality**:
  - **Contact → Picture**: A contact can have only one profile picture.
- **1:N Cardinality**:
  - **User → Contact**: A user can have multiple contacts.
  - **Contact → Phone**: A contact can have multiple phone numbers.
- **M:N Cardinality**:
  - **Contact → Group**: A contact can belong to multiple groups.
  - **Contact → Tag**: A contact can have multiple tags.
  - **Meeting → Contact**: Multiple contacts can be invited to meetings.

## Descriptions:

### Entities

1. **User**
  - Represents the individuals interacting with the CMS, either admins or regular users.
2. **Contact**
  - Stores detailed information about each contact.
3. **Phone**
  - Stores multiple phone numbers for contacts.
4. **Email**
  - Stores multiple email addresses for contacts.
5. **Picture**
  - Stores profile images for contacts.
6. **ActivityLog**
  - Records actions performed by users.
7. **ActivityType**
  - Categorizes different types of logged activities.
8. **ContactNote**
  - Stores notes related to contacts.
9. **Group**
  - Represents categories for contacts.
10. **Tag**
  - Represents tags assigned to contacts.
11. **Meeting**
  - Stores meeting details involving contacts.
12. **Company**
  - Stores details about organizations related to contacts.

### Relationships and Cardinalities

1. **User → Contact (1:N)**
  - A user can **have** multiple contacts, but each contact belongs to a single user.
2. **Contact → Phone (1:N)**
  - A contact can **have** multiple phone numbers, but each phone number belongs to only one contact.
3. **Contact → Email (1:N)**
  - A contact can **have** multiple email addresses, categorized by type.
4. **Contact → Picture (1:1)**
  - Each contact can **have** only one profile picture.
5. **User → ActivityLog (1:N)**
  - A user can **perform** multiple logged activities, such as updating a contact's information.
6. **ActivityLog → ActivityType (1:N)**

- Each logged activity **is assigned** a predefined activity type.
- 7. **Contact → ContactNote (1:N)**
  - A contact can **have** multiple notes.
- 8. **Contact → Group (M:N)**
  - Multiple contacts can **belong to** multiple groups.
- 9. **Contact → Tag (M:N)**
  - A contact can **have** multiple tags.
- 10. **Meeting → Contact (M:N)**
  - Multiple contacts can **attend** a meeting, and a contact can be **invited** to multiple meetings.
- 11. **User → Meeting (1:N)**
  - Each meeting is **created** by a single user, but a user can **organize** multiple meetings.
- 12. **Company → Contact (1:N)**
  - Multiple contacts can be associated with the same company.

## Participations

1. **Partial Participation:**
  - **Contact → Address:** Not all contacts may have an address.
  - **Contact → Picture:** Some contacts may not have a profile picture.
  - **Contact → Company:** Some contacts may not have an associated company.
  - **Company → Contact:** Some companies may not have an associated contact.
2. **Total Participation:**
  - **Contact → Phone:** Every contact must have at least one phone number.
  - **Picture → Contact:** Every profile picture must have a contact.
  - **Contact → ContactNote:** Every contact note must be associated with a contact.
  - **User → ActivityLog:** Every activity log entry must be linked to a user.

## Advanced Features:

- **Composite Attribute:** **Street, City, State, ZipCode, and Country** combine into a composite attribute for **Address**.
- **Multivalued Attribute:** **Nickname** in **Contact** allows multiple alternative names for a contact.
- **Derived Attribute:** **Age** in **Contact** is calculated based on **DateOfBirth**.

## 2. Conceptual Model

### Entities and Attributes

#### 1. User

- Attributes: UserID, Username, Password, Email, Role, FirstName, LastName, LastLogin

**2. Contact**

- Attributes: ContactID, UserID, CompanyID, FirstName, LastName, DateOfBirth, Gender, Nickname, Address, Age

**3. Phone**

- Attributes: PhoneID, ContactID, PhoneNumber, PhoneType, CountryCode

**4. Email**

- Attributes: EmailID, ContactID, EmailAddress, EmailType, IsPrimary

**5. Picture**

- Attributes: PictureID, ContactID, ImageURL, UploadedDate, Description

**6. ActivityLog**

- Attributes: ActivityLogID, UserID, ActivityTypeID, Timestamp, Description

**7. ActivityType**

- Attributes: ActivityTypeID, Name, Description, UpdatedDate, CreatedDate

**8. ContactNote**

- Attributes: NoteID, ContactID, NoteTitle, NoteText, CreatedDate, LastModified, Status

**9. Group**

- Attributes: GroupID, Name, Description, CreatedDate, Status

**10. Tag**

- Attributes: TagID, Name, Description, CreatedDate, Color


**11. Meeting**

- Attributes: MeetingID, Title, Description, Location, Time, CreatedDate

**12. Company**

- Attributes: CompanyID, Name, Industry, Address, Email, Website

## ER Diagram:

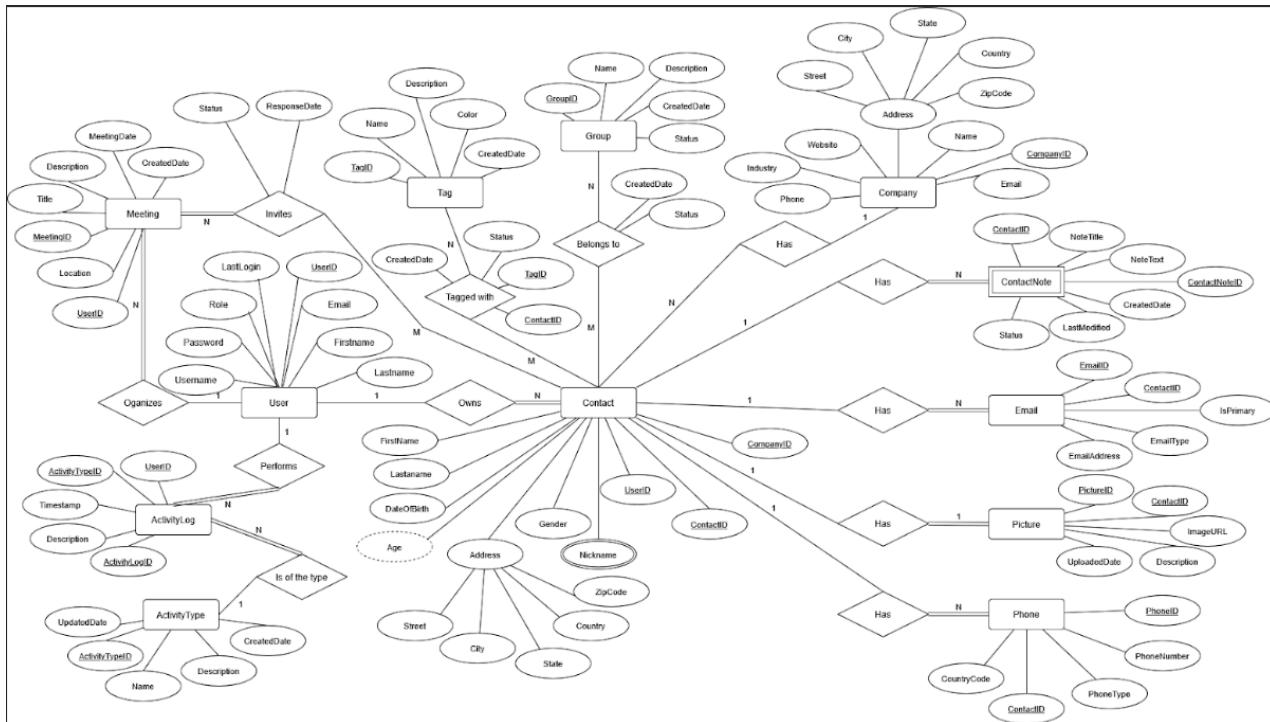

## Enhanced Entity Relationship Model


Each entity, such as **User**, **Contact**, and **Phone**, was designed with at least five attributes, including a primary key(PK) to ensure unique identification of records. For example, the **UserID** in the **User** entity and **ContactID** in the **Contact** entity serve as primary keys. Foreign keys (FK) were introduced to establish relationships between entities, such as the **UserID** in the **Contact** entity, which references the **UserID** in the **User** entity.

The relationships in the EER model were defined using 1:1, 1:N, and M:N cardinalities. A 1:1 relationship, such as between **Contact** and **Picture**, ensures that each contact may have only one picture. A 1:N relationship, such as between **User** and **Contact**, allows each user to have multiple contacts. Meanwhile, an M:N relationship, such as between **Contact** and **Tag**, enables many-to-many interactions where a contact may have zero or many tags, and a tag may be related to one or more contacts. Total participation was

applied where every instance of an entity must participate in a relationship, such as every **Contact** requiring at least one **Phone**. Partial participation was used where relationships are optional, such as not all **Contacts** having a **Company**.

The model also incorporates advanced features, including multivalued, composite, and derived attributes. For example, the **Nickname** attribute in the **Contact** entity supports multiple values. The **Address** entity was designed as a composite attribute, breaking down into **Street**, **City**, **State**, **ZipCode**, and **Country**. Additionally, a derived attribute, such as **Age** in the **Contact** entity, was calculated based on the **DateOfBirth** attribute.

## EER Diagram:

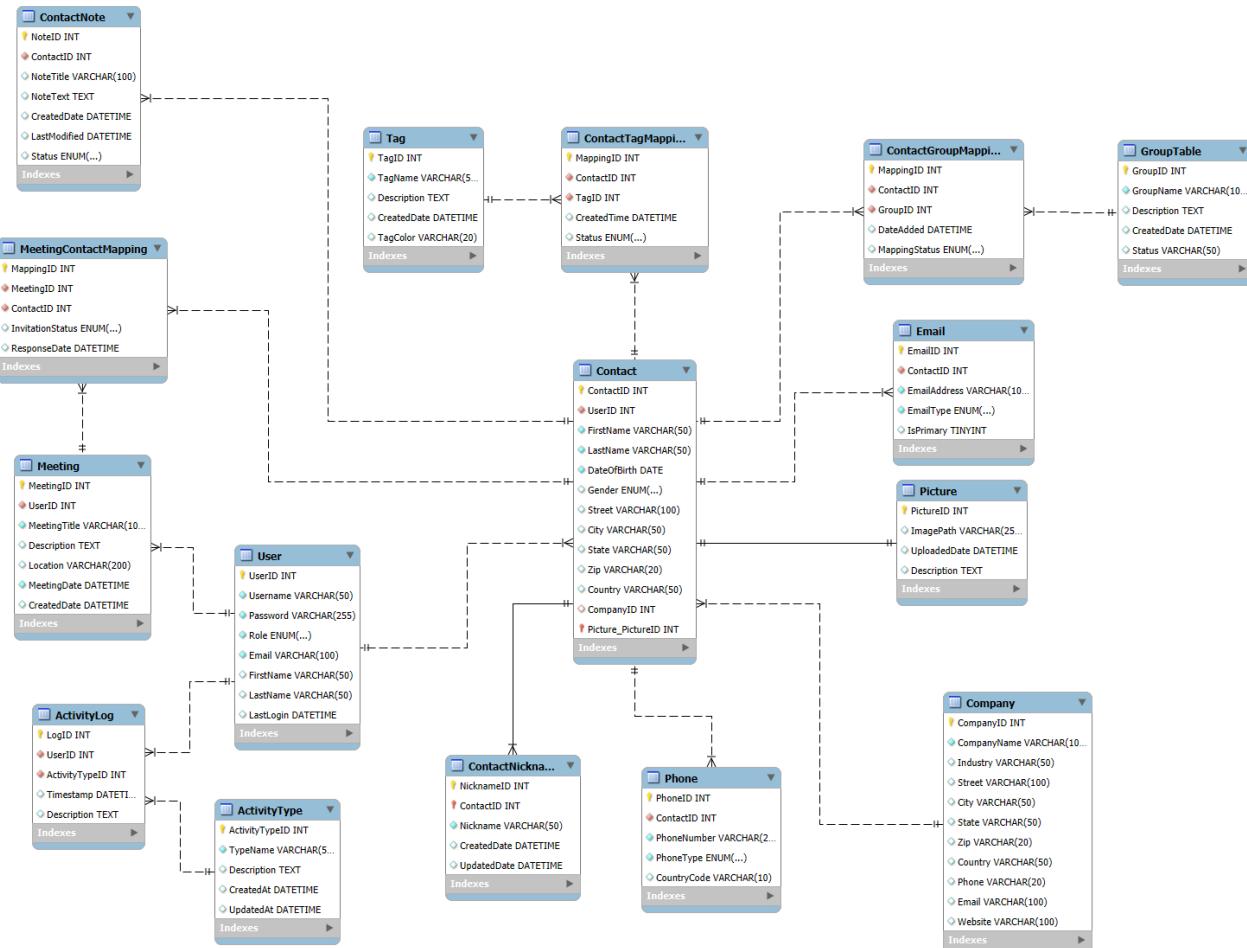

## Data Types Exploration

The DATE and TIME and Spatial data types serve different purposes. DATE and TIME data type is used to store temporal information such as dates, times, or both. These types ensure accurate recording and manipulation of time-related data, supporting operations like date comparisons, intervals, and calculations. We use date and time data types to manage events, track deadlines, and perform time-based queries in applications like scheduling, birthdays, holidays, transaction timestamps, and shift timings.

Spatial data type is used to store and manage geometric or geographic data, such as points, lines, and polygons. It enables efficient handling of spatial relationships, allowing for operations like distance calculations, intersections, and spatial indexing. We use spatial data types to accurately represent real-world locations, and integrate geographic information into applications like mapping, navigation, and urban planning.

## Database Development

In the next section we will describe the SQL code to implement the database. We will explain some parts that will repeat.

Create schema(database):

```
CREATE SCHEMA IF NOT EXISTS `MyCMS` DEFAULT CHARACTER SET utf8 ;
USE `MyCMS` ;
```

This piece of code creates the schema where all the tables will be created in, the character set says what set of characters will be used, in this case the UTF8 character encoding will be used, this has more support for non english characters.

Table creation:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Contact` (
  `ContactID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `UserID` INT NOT NULL,
  `FirstName` VARCHAR(50) NOT NULL,
  `LastName` VARCHAR(50) NOT NULL,
  `DateOfBirth` DATE NOT NULL,
  `Gender` ENUM('M', 'F', 'Other') NULL DEFAULT NULL,
  `Street` VARCHAR(100) NULL DEFAULT NULL,
```

```
`City` VARCHAR(50) NULL DEFAULT NULL,  
`State` VARCHAR(50) NULL DEFAULT NULL,  
`Zip` VARCHAR(20) NULL DEFAULT NULL,  
`Country` VARCHAR(50) NULL DEFAULT NULL,  
`CompanyID` INT NULL DEFAULT NULL,  
PRIMARY KEY (`ContactID`),  
INDEX (`UserID` ASC) VISIBLE,  
INDEX (`CompanyID` ASC) VISIBLE,  
CONSTRAINT ``  
    FOREIGN KEY (`UserID`)  
        REFERENCES `MyCMS`.`User`(`UserID`)  
        ON DELETE CASCADE,  
CONSTRAINT ``  
    FOREIGN KEY (`CompanyID`)  
        REFERENCES `MyCMS`.`Company`(`CompanyID`)  
        ON DELETE SET NULL;
```

This code will create a table with the name “Contact” and it specifies that it is in the “MyCMS” schema. Later it defines the attributes with the type of data and if they are or not NULL and the default value for it.

The primary keys are defined with the PRIMARY KEY command and the relations between the tables are defined by using CONSTRAINT and FOREIGN KEY where it specifies to what table and attribute the tables attribute is related, and also the actions that will be taken when updating and deleting are specified.

And the indexes are also defined using the INDEX command, it specifies what attribute the index is taking and if they are visible or not.

### **Tables description:**

#### **1. User Table**

##### **Description:**

The User table stores information about system users, including their login credentials, personal details, and role within the system.

##### **Relations:**

- Referenced by the Contact table to associate a user with contacts.
- Referenced by the ActivityLog table to log user activities.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

Attribute	Data Type	Key	Description
UserID	INT AUTO_INCREMENT	PK	Unique identifier for each user.
Username	VARCHAR(50) NOT NULL UNIQUE		Stores the user's login username, which must be unique.
Password	VARCHAR(255) NOT NULL		Securely stores hashed user passwords using a robust encryption mechanism.
Role	ENUM('ADMIN', 'NORMAL') NOT NULL		Defines user roles and their access levels.
Email	VARCHAR(100) NOT NULL UNIQUE		Stores user email, ensuring uniqueness.
FirstName	VARCHAR(50) NULL		First name of the user.
LastName	VARCHAR(50) NULL		Last name of the user.
LastLogin	DATETIME NULL		Stores the last login timestamp of the user to track activity.

## Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`User` (
  `UserID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `Username` VARCHAR(50) NOT NULL,
  `Password` VARCHAR(255) NOT NULL,
  `Role` ENUM('ADMIN', 'NORMAL') NOT NULL,
  `Email` VARCHAR(100) NOT NULL,
  `FirstName` VARCHAR(50) NULL DEFAULT NULL,
  `LastName` VARCHAR(50) NULL DEFAULT NULL,
  `LastLogin` DATETIME NULL DEFAULT NULL,
  PRIMARY KEY (`UserID`),
  UNIQUE INDEX (`Username` ASC) VISIBLE,
  UNIQUE INDEX (`Email` ASC) VISIBLE);
```

## 2. Company Table

### Description:

The Company table holds details about organizations that interact with the system. It is referenced by the Contact table to associate a contact with a company.

### Relations:

- Referenced by the Contact table to associate contacts with companies.

Attribute	Data Type	Key	Description
-----------	-----------	-----	-------------

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

CompanyID	INT AUTO_INCREMENT	PK	Unique identifier for each company.
CompanyName	VARCHAR(100) NOT NULL UNIQUE		Stores the company name, ensuring uniqueness.
Industry	VARCHAR(50) NULL		Represents the industry in which the company operates.
Street	VARCHAR(100) NULL		The street address of the company.
City	VARCHAR(50) NULL		The city where the company is located.
State	VARCHAR(50) NULL		The state where the company is located.
Zip	VARCHAR(20) NULL		Zip code of the company's address.
Country	VARCHAR(50) NULL		Country where the company operates.
Phone	VARCHAR(20) NULL		Contact phone number of the company.
Email	VARCHAR(100) NULL		The company's official email.
Website	VARCHAR(100) NULL		The company's website URL.

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Company` (
  `CompanyID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `CompanyName` VARCHAR(100) NOT NULL,
  `Industry` VARCHAR(50) NULL DEFAULT NULL,
  `Street` VARCHAR(100) NULL DEFAULT NULL,
  `City` VARCHAR(50) NULL DEFAULT NULL,
  `State` VARCHAR(50) NULL DEFAULT NULL,
  `Zip` VARCHAR(20) NULL DEFAULT NULL,
  `Country` VARCHAR(50) NULL DEFAULT NULL,
  `Phone` VARCHAR(20) NULL DEFAULT NULL,
  `Email` VARCHAR(100) NULL DEFAULT NULL,
  `Website` VARCHAR(100) NULL DEFAULT NULL,
  PRIMARY KEY (`CompanyID`),
  UNIQUE INDEX (`CompanyName` ASC) VISIBLE);
```

## 3. Picture Table

### Description:

The Picture table is used to store metadata about images uploaded to the system. The Contact table references it to associate a contact with a profile picture.

### Relations:

- Referenced by the Contact table to assign profile pictures to contacts.

Attribute	Data Type	Key	Description
PictureID	INT AUTO_INCREMENT	PK	Unique identifier for each picture.
ContactID	INT	FK	Foreign key referencing Contact(ContactID).
ImagePath	VARCHAR(255) NULL		Stores the file path of the image.
UploadedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Records the timestamp of when the image was uploaded.
Description	TEXT NULL		Provides additional details about the image.

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Picture` (
  `PictureID` INT AUTO_INCREMENT,
  `ContactID` INT NOT NULL UNIQUE,
  `ImagePath` VARCHAR(255) NULL DEFAULT NULL,
  `UploadedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
  `Description` TEXT NULL DEFAULT NULL,
  PRIMARY KEY (`PictureID`));
```

## 4. Contact Table

### Description:

The Contact table stores personal and professional details about individuals who are associated with companies or users.

### Relations:

- References the User table to associate contacts with users.
- References the Company table to link contacts to companies.
- References the Picture table to assign a profile picture to contacts.

Attribute	Data Type	Key	Description
ContactID	INT AUTO_INCREMENT	PK	Unique identifier for each contact.
UserID	INT NOT NULL	FK	Foreign key referencing User(UserID).
FirstName	VARCHAR(50) NOT NULL		Contact's first name.
LastName	VARCHAR(50) NOT NULL		Contact's last name.
DateOfBirth	DATE NOT NULL		Contact's date of birth.

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

Gender	ENUM('M', 'F', 'Other') NULL		Contact's gender.
Street	VARCHAR(100) NULL		Contact's street address.
City	VARCHAR(50) NULL		Contact's city.
State	VARCHAR(50) NULL		Contact's state.
Zip	VARCHAR(20) NULL		Contact's zip code.
Country	VARCHAR(50) NULL		Contact's country.
CompanyID	INT NULL	FK	Foreign key referencing Company(CompanyID).

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Contact` (
  `ContactID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `UserID` INT NOT NULL,
  `FirstName` VARCHAR(50) NOT NULL,
  `LastName` VARCHAR(50) NOT NULL,
  `DateOfBirth` DATE NOT NULL,
  `Gender` ENUM('M', 'F', 'Other') NULL DEFAULT NULL,
  `Street` VARCHAR(100) NULL DEFAULT NULL,
  `City` VARCHAR(50) NULL DEFAULT NULL,
  `State` VARCHAR(50) NULL DEFAULT NULL,
  `Zip` VARCHAR(20) NULL DEFAULT NULL,
  `Country` VARCHAR(50) NULL DEFAULT NULL,
  `CompanyID` INT NULL DEFAULT NULL,
  PRIMARY KEY (`ContactID`),
  INDEX (`UserID` ASC) VISIBLE,
  INDEX (`CompanyID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`UserID`)
    REFERENCES `MyCMS`.`User` (`UserID`)
    ON DELETE CASCADE,
  CONSTRAINT ``
    FOREIGN KEY (`CompanyID`)
    REFERENCES `MyCMS`.`Company` (`CompanyID`)
    ON DELETE SET NULL;
```

## 5. ContactNickname Table

### Description:

The ContactNickname table stores alternative names used for contacts. This allows

flexibility in managing different names a contact might be known by.

### **Relations:**

- References the Contact table to associate nicknames with a contact.
- A contact can have multiple nicknames.

Attribute	Data Type	Key	Description
ContactID	INT NOT NULL	PK	Primary key referencing Contact(ContactID).
Nickname	VARCHAR(50) NOT NULL	PK	The alternative name for the contact.

### **Code:**

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`ContactNickname` (
  `ContactID` INT NOT NULL,
  `Nickname` VARCHAR(50) NOT NULL,
  PRIMARY KEY (`Nickname`, `ContactID`),
  INDEX (`ContactID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE);
```

## **6. Phone Table**

### **Description:**

The Phone table stores phone numbers associated with contacts, allowing multiple phone numbers for each contact.

### **Relations:**

- References the Contact table to associate phone numbers with a contact.
- Each contact can have multiple phone numbers (work, home, mobile, fax, etc.).

Attribute	Data Type	Key	Description
PhoneID	INT AUTO_INCREMENT	PK	Unique identifier for each phone number.
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
PhoneNumber	VARCHAR(20) NOT NULL		The actual phone number.

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

PhoneType	ENUM('Cell', 'Home', 'Work', 'Fax') NOT NULL		Specifies the type of phone number.
CountryCode	VARCHAR(10) NULL		Stores the country code of the phone number.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`Phone` (
  `PhoneID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `ContactID` INT NOT NULL,
  `PhoneNumber` VARCHAR(20) NOT NULL,
  `PhoneType` ENUM('Cell', 'Home', 'Work', 'Fax') NOT NULL,
  `CountryCode` VARCHAR(10) NULL DEFAULT NULL,
  PRIMARY KEY (`PhoneID`),
  INDEX (`ContactID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE);

```

## 7. Email Table

### Description:

The Email table stores email addresses associated with contacts, allowing multiple email addresses per contact.

### Relations:

- References the Contact table to associate email addresses with a contact.
- Each contact can have multiple email addresses (personal, work, etc.).

Attribute	Data Type	Key	Description
EmailID	INT AUTO_INCREMENT	PK	Unique identifier for each email address.
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
EmailAddress	VARCHAR(100) NOT NULL		The email address of the contact.
EmailType	ENUM('Personal', 'Work', 'Other') NOT NULL		Specifies the type of email address.
IsPrimary	TINYINT NULL DEFAULT FALSE		Indicates if this is the primary email for the contact.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`Email` (
  `EmailID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `ContactID` INT NOT NULL,
  `EmailAddress` VARCHAR(100) NOT NULL,
  `EmailType` ENUM('Personal', 'Work', 'Other') NOT NULL,
  `IsPrimary` TINYINT NULL DEFAULT FALSE,
  PRIMARY KEY (`EmailID`),
  INDEX (`ContactID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE);

```

## 8. ActivityType Table

### Description:

The ActivityType table defines different types of activities that can be logged in the system, such as login attempts, updates, deletions, and other user actions.

### Relations:

- Referenced by the ActivityLog table to classify logged activities.
- Used to maintain consistent activity tracking across the system.

Attribute	Data Type	Key	Description
ActivityTypeID	INT AUTO_INCREMENT	PK	Unique identifier for each activity type.
TypeName	VARCHAR(50) NOT NULL		The name of the activity type.
Description	TEXT NULL		A more detailed description of the activity type.
CreatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the activity type was added.
UpdatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP		Timestamp when the activity type was last updated.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`ActivityType` (
  `ActivityTypeID` INT NULL DEFAULT NULL AUTO_INCREMENT,

```

```

`TypeName` VARCHAR(50) NOT NULL,
`Description` TEXT NULL DEFAULT NULL,
`CreatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
`UpdatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE
CURRENT_TIMESTAMP,
PRIMARY KEY (`ActivityTypeID`),
UNIQUE INDEX (`TypeName` ASC) VISIBLE);

```

## 9. ActivityLog Table

### Description:

The ActivityLog table records system activities performed by users, such as logins, updates, and data modifications. It helps in tracking user interactions with the system for auditing purposes.

### Relations:

- References the User table to associate an activity with the user who performed it.
- References the ActivityType table to classify the type of activity being logged.

Attribute	Data Type	Key	Description
LogID	INT AUTO_INCREMENT	PK	Unique identifier for each log entry.
UserID	INT NOT NULL	FK	Foreign key referencing User(UserID).
ActivityTypeID	INT NOT NULL	FK	Foreign key referencing ActivityType(ActivityTypeID).
Timestamp	DATETIME DEFAULT CURRENT_TIMESTAMP		The time when the activity was logged.
Description	TEXT NULL		Additional details about the logged activity.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`ActivityLog` (
`LogID` INT NULL DEFAULT NULL AUTO_INCREMENT,
`UserID` INT NOT NULL,
`ActivityTypeID` INT NOT NULL,
`Timestamp` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
`Description` TEXT NULL DEFAULT NULL,
PRIMARY KEY (`LogID`),
INDEX (`UserID` ASC) VISIBLE,
INDEX (`ActivityTypeID` ASC) VISIBLE,

```

```

CONSTRAINT ``
    FOREIGN KEY (`UserID`)
    REFERENCES `MyCMS`.`User` (`UserID`)
    ON DELETE CASCADE,
CONSTRAINT ``
    FOREIGN KEY (`ActivityTypeID`)
    REFERENCES `MyCMS`.`ActivityType` (`ActivityTypeID`)
    ON DELETE CASCADE);

```

## 10. ContactNote Table

### Description:

The ContactNote table stores notes associated with contacts, allowing users to maintain additional details or remarks about a contact.

### Relations:

- References the Contact table to associate notes with a specific contact.

Attribute	Data Type	Key	Description
NoteID	INT AUTO_INCREMENT	PK	Unique identifier for each note.
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
NoteTitle	VARCHAR(100) NULL		A title or short description for the note.
NoteText	TEXT NULL		The actual content of the note.
CreatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the note was created.
LastModified	DATETIME DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP		Timestamp of the last modification to the note.
Status	ENUM('ACTIVE', 'REMOVED') DEFAULT 'ACTIVE'		The status of the note.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`ContactNote` (
`NoteID` INT NULL DEFAULT NULL AUTO_INCREMENT,
`ContactID` INT NOT NULL,
`NoteTitle` VARCHAR(100) NULL DEFAULT NULL,
`NoteText` TEXT NULL DEFAULT NULL,

```

```

`CreatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
`LastModified` DATETIME NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE
CURRENT_TIMESTAMP,
`Status` ENUM('ACTIVE', 'REMOVED') NULL DEFAULT 'ACTIVE',
PRIMARY KEY (`NoteID`),
INDEX (`ContactID` ASC) VISIBLE,
CONSTRAINT ``
FOREIGN KEY (`ContactID`)
REFERENCES `MyCMS`.`Contact` (`ContactID`)
ON DELETE CASCADE);

```

## 11. Group Table

### Description:

The Group table stores groups that contacts can belong to. These groups help in organizing and categorizing contacts efficiently.

### Relations:

- Referenced by the ContactGroupMapping table to associate contacts with groups.

Attribute	Data Type	Key	Description
GroupID	INT AUTO_INCREMENT	PK	Unique identifier for each group.
GroupName	VARCHAR(100) NOT NULL UNIQUE		The name of the group.
Description	TEXT NULL		Additional information about the group.
CreatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the group was created.
Status	VARCHAR(50) NULL		Status of the group (e.g., active, archived).

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`Group` (
`GroupID` INT NULL DEFAULT NULL AUTO_INCREMENT,
`GroupName` VARCHAR(100) NOT NULL,
`Description` TEXT NULL DEFAULT NULL,
`CreatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
`Status` VARCHAR(50) NULL DEFAULT NULL,
PRIMARY KEY (`GroupID`),
UNIQUE INDEX (`GroupName` ASC) VISIBLE);

```

## 12. ContactGroupMapping Table

### Description:

The ContactGroupMapping table manages the many-to-many relationship between contacts and groups, allowing a contact to belong to multiple groups and a group to contain multiple contacts.

### Relations:

- References the Contact table to associate contacts with groups.
- References the Group table to establish the group the contact belongs to.

Attribute	Data Type	Key	Description
MappingID	INT AUTO_INCREMENT	PK	Unique identifier for each mapping entry.
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
GroupID	INT NOT NULL	FK	Foreign key referencing Group(GroupID).
DateAdded	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the contact was added to the group.
MappingStatus	ENUM('ACTIVE', 'INACTIVE') DEFAULT 'ACTIVE'		Status of the mapping.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`ContactGroupMapping` (
  `MappingID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `ContactID` INT NOT NULL,
  `GroupID` INT NOT NULL,
  `DateAdded` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
  `MappingStatus` ENUM('ACTIVE', 'INACTIVE') NULL DEFAULT 'ACTIVE',
  PRIMARY KEY (`MappingID`),
  INDEX (`ContactID` ASC) VISIBLE,
  INDEX (`GroupID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE,
  CONSTRAINT ``
    FOREIGN KEY (`GroupID`)
    REFERENCES `MyCMS`.`Group` (`GroupID`)
    ON DELETE CASCADE);

```

## 13. Tag Table

### Description:

The Tag table stores different tags that can be assigned to contacts. Tags help in categorizing contacts for easy filtering and identification.

### Relations:

- Referenced by the ContactTagMapping table to associate contacts with tags.

Attribute	Data Type	Key	Description
TagID	INT AUTO_INCREMENT	PK	Unique identifier for each tag.
TagName	VARCHAR(50) NOT NULL UNIQUE		The name of the tag.
Description	TEXT NULL		Additional details about the tag.
CreatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the tag was created.
TagColor	VARCHAR(20) NULL		Optional color assigned to the tag.

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Tag` (
  `TagID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `TagName` VARCHAR(50) NOT NULL,
  `Description` TEXT NULL DEFAULT NULL,
  `CreatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
  `TagColor` VARCHAR(20) NULL DEFAULT NULL,
  PRIMARY KEY (`TagID`),
  UNIQUE INDEX (`TagName` ASC) VISIBLE);
```

## 14. ContactTagMapping Table

### Description:

The ContactTagMapping table manages the many-to-many relationship between contacts and tags, allowing a contact to have multiple tags and a tag to be associated with multiple contacts.

### Relations:

- References the Contact table to associate contacts with tags.
- References the Tag table to define the tag assigned to the contact.

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

Attribute	Data Type	Key	Description
MappingID	INT AUTO_INCREMENT	PK	Unique identifier for each mapping entry.
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
TagID	INT NOT NULL	FK	Foreign key referencing Tag(TagID).
CreatedTime	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the tag was assigned to the contact.
Status	ENUM('ACTIVE', 'REMOVED') DEFAULT 'ACTIVE'		Status of the tag assignment.

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`ContactTagMapping` (
  `MappingID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `ContactID` INT NOT NULL,
  `TagID` INT NOT NULL,
  `CreatedTime` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
  `Status` ENUM('ACTIVE', 'REMOVED') NULL DEFAULT 'ACTIVE',
  PRIMARY KEY (`MappingID`),
  INDEX (`ContactID` ASC) VISIBLE,
  INDEX (`TagID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE,
  CONSTRAINT ``
    FOREIGN KEY (`TagID`)
    REFERENCES `MyCMS`.`Tag` (`TagID`)
    ON DELETE CASCADE);
```

## 15. Meeting Table

### Description:

The Meeting table stores details about meetings involving users and contacts. It helps in managing scheduled events, discussions, and appointments.

### Relations:

- References the User table to associate a meeting with a user who organized it.
- Referenced by the MeetingContactMapping table to link contacts with meetings.

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

Attribute	Data Type	Key	Description
MeetingID	INT AUTO_INCREMENT	PK	Unique identifier for each meeting.
UserID	INT NOT NULL	FK	Foreign key referencing User(UserID).
MeetingTitle	VARCHAR(100) NOT NULL		Title of the meeting.
Description	TEXT NULL		Additional details about the meeting.
Location	VARCHAR(200) NULL		The location where the meeting is held.
MeetingDate	DATETIME NOT NULL		Scheduled date and time for the meeting.
CreatedDate	DATETIME DEFAULT CURRENT_TIMESTAMP		Timestamp when the meeting was created.

### Code:

```
CREATE TABLE IF NOT EXISTS `MyCMS`.`Meeting` (
  `MeetingID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `UserID` INT NOT NULL,
  `MeetingTitle` VARCHAR(100) NOT NULL,
  `Description` TEXT NULL DEFAULT NULL,
  `Location` VARCHAR(200) NULL DEFAULT NULL,
  `MeetingDate` DATETIME NOT NULL,
  `CreatedDate` DATETIME NULL DEFAULT CURRENT_TIMESTAMP,
  PRIMARY KEY (`MeetingID`),
  INDEX (`UserID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`UserID`)
    REFERENCES `MyCMS`.`User` (`UserID`)
    ON DELETE CASCADE);
```

## 16. MeetingContactMapping Table

### Description:

The MeetingContactMapping table manages the many-to-many relationship between meetings and contacts, allowing multiple contacts to participate in a single meeting.

### Relations:

- References the Meeting table to associate a contact with a meeting.
- References the Contact table to specify the contact participating in a meeting.

Attribute	Data Type	Key	Description
MappingID	INT AUTO_INCREMENT	PK	Unique identifier for each mapping entry.
MeetingID	INT NOT NULL	FK	Foreign key referencing Meeting(MeetingID).
ContactID	INT NOT NULL	FK	Foreign key referencing Contact(ContactID).
InvitationStatus	ENUM('Accepted', 'Declined', 'Pending') DEFAULT 'Pending'		The status of the meeting invitation for the contact.
ResponseDate	DATETIME NULL		The date the contact responded to the invitation.

### Code:

```

CREATE TABLE IF NOT EXISTS `MyCMS`.`MeetingContactMapping` (
  `MappingID` INT NULL DEFAULT NULL AUTO_INCREMENT,
  `MeetingID` INT NOT NULL,
  `ContactID` INT NOT NULL,
  `InvitationStatus` ENUM('Accepted', 'Declined', 'Pending') NULL DEFAULT
'Pending',
  `ResponseDate` DATETIME NULL DEFAULT NULL,
  PRIMARY KEY (`MappingID`),
  INDEX (`MeetingID` ASC) VISIBLE,
  INDEX (`ContactID` ASC) VISIBLE,
  CONSTRAINT ``
    FOREIGN KEY (`MeetingID`)
    REFERENCES `MyCMS`.`Meeting` (`MeetingID`)
    ON DELETE CASCADE,
  CONSTRAINT ``
    FOREIGN KEY (`ContactID`)
    REFERENCES `MyCMS`.`Contact` (`ContactID`)
    ON DELETE CASCADE);

```

## Handling Foreign Key Constraints

To import data we created a SQL Script file that will have all the INSERTS that will be needed. This file inserts the data in order so that we don't have problems with the Foreign Key violations. But as part of the process we recreated a violation by trying to insert data to a dependent table before inserting data to the parent table.

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

For example, trying to execute the next script will give us an error:

```
INSERT INTO `MyCMS`.`Contact`
    (`UserID`, `FirstName`, `LastName`, `DateOfBirth`, `Gender`, `Street`,
`City`, `State`, `Zip`, `Country`, `CompanyID`)
VALUES
    (1, 'Alice', 'Doe', '1980-02-01', 'F', '111 Main St', 'New York', 'NY',
'10001', 'USA', 1),
    (2, 'Bob', 'Smith', '1975-07-10', 'M', '222 Oak St', 'Los Angeles',
'CA', '90001', 'USA', 2);

INSERT INTO `MyCMS`.`User`
    (`Username`, `Password`, `Role`, `Email`, `FirstName`, `LastName`,
`LastLogin`)
VALUES
    ('admin',
'ef92b778bafe771e89245b89ecbc70ec1e5e14bba5b7b43eaf5f6a2e5d0b62d1', 'ADMIN',
'admin@mycms.com', 'Admin', 'User', '2025-02-22 09:00:00'),
    ('jsmith',
'a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5c6d7e8f90123456789abcdef0', 'NORMAL',
'jsmith@mycms.com', 'John', 'Smith', '2025-02-21 16:45:00');

INSERT INTO `MyCMS`.`Company`
    (`CompanyName`, `Industry`, `Street`, `City`, `State`, `Zip`,
`Country`, `Phone`, `Email`, `Website`)
VALUES
    ('Tech Innovators Inc', 'Technology', '123 Tech Ave', 'San Francisco',
'CA', '94107', 'USA', '415-555-0100', 'info@techinnovators.com',
'www.techinnovators.com');
```

Because the Contact table has some fields that depend on the other tables, so as it doesn't find the records needed it will throw an FK violation. The error is shown in the next image:

```
mysql> INSERT INTO `MyCMS`.`Contact`
    -> (`UserID`, `FirstName`, `LastName`, `DateOfBirth`, `Gender`, `Street`,
`City`, `State`, `Zip`, `Country`, `CompanyID`)
    -> VALUES
    -> (1, 'Alice', 'Doe', '1980-02-01', 'F', '111 Main St', 'New York', 'NY',
'10001', 'USA', 1),
    -> (2, 'Bob', 'Smith', '1975-07-10', 'M', '222 Oak St', 'Los Angeles', 'CA',
'90001', 'USA', 2);
ERROR 1452 (23000): Cannot add or update a child row: a foreign key constraint fails (`mycms`.`contact`,
CONSTRAINT `FK>Contact_UserID` FOREIGN KEY (`UserID`) REFERENCES `user` (`UserID`) ON DELETE CASCADE)
```

To avoid this error we decided to use the SET FOREIGN\_KEY\_CHECKS statement to change the value of the variable to disable the foreign key check while the data was being inserted.

```
SET FOREIGN_KEY_CHECKS = 0;

-- Insert queries

SET FOREIGN_KEY_CHECKS = 1;
```

## Importing data

Here is the complete SQL script for inserting the data:

```
SET FOREIGN_KEY_CHECKS = 0; -- Disable foreign key checks

INSERT INTO `MyCMS`.`User`
(`Username`, `Password`, `Role`, `Email`, `FirstName`, `LastName`,
`LastLogin`)
VALUES
    ('admin',
'ef92b778bafe771e89245b89ecbc70ec1e5e14bba5b7b43eaf5f6a2e5d0b62d1', 'ADMIN',
'admin@mycms.com', 'Admin', 'User', '2025-02-22 09:00:00'),
    ('jsmith',
'a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5c6d7e8f90123456789abcdef0', 'NORMAL',
'jsmith@mycms.com', 'John', 'Smith', '2025-02-21 16:45:00'),
    ('amiller',
'b1c2d3e4f5061728394a5b6c7d8e9f00112233445566778899aabccddeff00', 'NORMAL',
'amiller@mycms.com', 'Alice', 'Miller', '2025-02-20 11:30:00'),
    ('bjohnson',
'0123456789abcdef0123456789abcdef0123456789abcdef0123456789abcdef', 'NORMAL',
'bjohnson@mycms.com', 'Bob', 'Johnson', '2025-02-19 14:20:00'),
    ('cwalker',
'fedcba9876543210fedcba9876543210fedcba9876543210fedcba9876543210', 'NORMAL',
'cwalker@mycms.com', 'Carol', 'Walker', '2025-02-18 08:15:00'),
    ('dlee',
'aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa', 'NORMAL',
'dlee@mycms.com', 'David', 'Lee', '2025-02-17 12:00:00'),
    ('eroberts',
'bbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbb', 'NORMAL',
'eroberts@mycms.com', 'Emma', 'Roberts', '2025-02-16 17:30:00'),
```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
( 'fclark',
'cccccccccccccccccccccccccccccccccccccccccccccccccccccccccc', 'NORMAL',
'fclark@mycms.com', 'Frank', 'Clark', '2025-02-15 09:45:00'),
( 'gmartin',
'aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa', 'NORMAL',
'gmartin@mycms.com', 'Grace', 'Martin', '2025-02-14 11:15:00'),
( 'hscott',
'eeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeeee', 'NORMAL',
'hscott@mycms.com', 'Henry', 'Scott', '2025-02-13 10:30:00');

INSERT INTO `MyCMS`.`Company`
(`CompanyName`, `Industry`, `Street`, `City`, `State`, `Zip`,
`Country`, `Phone`, `Email`, `Website`)
VALUES
    ('Tech Innovators Inc', 'Technology', '123 Tech Ave', 'San Francisco',
'CA', '94107', 'USA', '415-555-0100', 'info@techinnovators.com',
'www.techinnovators.com'),
    ('HealthPlus Corp', 'Healthcare', '456 Wellness Blvd', 'Los Angeles',
'CA', '90017', 'USA', '323-555-0200', 'contact@healthplus.com',
'www.healthplus.com'),
    ('Green Energy Solutions', 'Energy', '789 Green Way', 'Austin', 'TX',
'73301', 'USA', '512-555-0300', 'support@greenenergy.com',
'www.greenenergy.com'),
    ('EduLearn Inc', 'Education', '101 Learning St', 'Boston', 'MA',
'02108', 'USA', '617-555-0400', 'hello@edulearn.com', 'www.edulearn.com'),
    ('FinSecure LLC', 'Finance', '202 Money Rd', 'New York', 'NY', '10005',
'USA', '212-555-0500', 'services@finsecure.com', 'www.finsecure.com'),
    ('AutoDrive Motors', 'Automotive', '303 Car Ln', 'Detroit', 'MI',
'48226', 'USA', '313-555-0600', 'sales@autodrive.com', 'www.autodrive.com'),
    ('Fashion Forward', 'Retail', '404 Style Blvd', 'New York', 'NY',
'10001', 'USA', '212-555-0700', 'info@fashionforward.com',
'www.fashionforward.com'),
    ('Foodies Delight', 'Food & Beverage', '505 Gourmet Ave', 'Chicago',
'IL', '60616', 'USA', '312-555-0800', 'order@foodiesdelight.com',
'www.foodiesdelight.com'),
    ('BuildRight Construction', 'Construction', '606 Builder St',
'Seattle', 'WA', '98101', 'USA', '206-555-0900', 'contact@buildright.com',
'www.buildright.com'),
    ('TravelQuest', 'Travel', '707 Adventure Rd', 'Orlando', 'FL', '32801',
'USA', '407-555-1000', 'support@travelquest.com', 'www.travelquest.com');

INSERT INTO `MyCMS`.`Contact`
```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
        (`UserID`, `FirstName`, `LastName`, `DateOfBirth`, `Gender`, `Street`,
`City`, `State`, `Zip`, `Country`, `CompanyID`)
VALUES
        (1, 'Alice', 'Doe', '1980-02-01', 'F', '111 Main St', 'New York', 'NY',
'10001', 'USA', 1),
        (2, 'Bob', 'Smith', '1975-07-10', 'M', '222 Oak St', 'Los Angeles',
'CA', '90001', 'USA', 2),
        (3, 'Charlie', 'Brown', '1990-03-15', 'M', '333 Pine St', 'Chicago',
'IL', '60601', 'USA', 3),
        (4, 'Diana', 'Prince', '1988-04-20', 'F', '444 Cedar St', 'Boston',
'MA', '02108', 'USA', 4),
        (5, 'Edward', 'Norton', '1982-12-05', 'M', '555 Maple Ave', 'Detroit',
'MI', '48226', 'USA', 5),
        (6, 'Fiona', 'Apple', '1995-09-09', 'F', '666 Birch Rd', 'Austin',
'TX', '73301', 'USA', 6),
        (7, 'George', 'Clooney', '1961-05-06', 'M', '777 Walnut St', 'San
Francisco', 'CA', '94107', 'USA', 7),
        (8, 'Helen', 'Mirren', '1945-07-26', 'F', '888 Spruce St', 'Seattle',
'WA', '98101', 'USA', 8),
        (9, 'Ian', 'McKellen', '1939-05-25', 'M', '999 Elm St', 'Chicago',
'IL', '60616', 'USA', 9),
        (10, 'Jane', 'Doe', '1985-11-30', 'Other', '1010 Ash Ave', 'Orlando',
'FL', '32801', 'USA', 10);

INSERT INTO `MyCMS`.`ContactNickname`
(`ContactID`, `Nickname`)

VALUES
        (1, 'Ally'),
        (1, 'Ali'),
        (2, 'Bobby'),
        (3, 'Chuck'),
        (4, 'Di'),
        (4, 'D'),
        (5, 'Eddie'),
        (5, 'Ed'),
        (6, 'Fi'),
        (7, 'Geo'),
        (8, 'Leni'),
        (9, 'Mack'),
        (10, 'Janie');

INSERT INTO `MyCMS`.`Phone`
(`ContactID`, `PhoneNumber`, `PhoneType`, `CountryCode`)
```

```

VALUES
(1, '603-751-2124', 'Cell', '+1'),
(1, '603-750-0027', 'Home', '+1'),
(2, '651-751-2125', 'Home', '+1'),
(3, '521-751-2126', 'Work', '+1'),
(4, '501-751-2127', 'Fax', '+1'),
(5, '401-751-2128', 'Cell', '+1'),
(6, '307-751-2129', 'Home', '+1'),
(7, '701-751-2130', 'Work', '+1'),
(8, '201-751-2131', 'Fax', '+1'),
(9, '410-751-2132', 'Cell', '+1'),
(10, '710-751-2133', 'Home', '+1');

INSERT INTO `MyCMS`.`Email`
(`ContactID`, `EmailAddress`, `EmailType`, `IsPrimary`)
VALUES
(1, 'contact1@example.com', 'Personal', 1),
(2, 'contact2@example.com', 'Work', 1),
(3, 'contact3@example.com', 'Other', 1),
(4, 'contact4@example.com', 'Personal', 1),
(5, 'contact5@example.com', 'Work', 1),
(6, 'contact6@example.com', 'Other', 1),
(7, 'contact7@example.com', 'Personal', 1),
(8, 'contact8@example.com', 'Work', 1),
(9, 'contact9@example.com', 'Other', 1),
(10, 'contact10@example.com', 'Personal', 1);

INSERT INTO `MyCMS`.`Picture`
(`ImagePath`, `UploadedDate`, `Description`, `Contact_ContactID`)
VALUES
('images/contact1_pic1.jpg', '2025-02-21 10:00:00', 'Profile picture',
1),
('images/contact2_pic1.jpg', '2025-02-20 09:30:00', 'Office event', 2),
('images/contact3_pic1.jpg', '2025-02-19 12:00:00', 'Profile picture',
3),
('images/contact4_pic1.jpg', '2025-02-18 14:00:00', 'Profile picture',
4),
('images/contact5_pic1.jpg', '2025-02-17 10:30:00', 'Profile picture',
5),
('images/contact6_pic1.jpg', '2025-02-16 16:00:00', 'Profile picture',
6),
('images/contact7_pic1.jpg', '2025-02-15 09:15:00', 'Profile picture',
7),

```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
( 'images/contact8_pic1.jpg', '2025-02-14 11:30:00', 'Profile picture',  
8),  
    ('images/contact9_pic1.jpg', '2025-02-13 08:45:00', 'Profile picture',  
9),  
    ('images/contact10_pic1.jpg', '2025-02-12 13:30:00', 'Profile picture',  
10);  
  
INSERT INTO `MyCMS`.`ActivityType`  
(`TypeName`, `Description`, `CreatedAt`, `UpdatedAt`)  
VALUES  
    ('Login',      'User logged in',           '2025-02-22 08:00:00', '2025-02-22  
08:00:00'),  
    ('Logout',     'User logged out',          '2025-02-22 08:05:00',  
'2025-02-22 08:05:00'),  
    ('Create',     'Created a record',         '2025-02-22 09:00:00',  
'2025-02-22 09:00:00'),  
    ('Update',     'Updated a record',         '2025-02-22 10:00:00',  
'2025-02-22 10:00:00'),  
    ('Delete',     'Deleted a record',         '2025-02-22 11:00:00',  
'2025-02-22 11:00:00'),  
    ('View',       'Viewed a record',          '2025-02-22 12:00:00', '2025-02-22  
12:00:00'),  
    ('Upload',     'Uploaded a file',          '2025-02-22 14:00:00',  
'2025-02-22 14:00:00');  
  
INSERT INTO `MyCMS`.`ActivityLog`  
(`UserID`, `ActivityTypeID`, `Timestamp`, `Description`)  
VALUES  
    (1, 1, '2025-02-22 08:10:00', 'User logged in'),  
    (1, 3, '2025-02-22 08:15:00', 'Created a new contact'),  
    (2, 1, '2025-02-22 09:00:00', 'User logged in'),  
    (2, 6, '2025-02-22 09:10:00', 'Viewed a company profile'),  
    (3, 2, '2025-02-22 10:30:00', 'User logged out'),  
    (4, 4, '2025-02-22 11:00:00', 'Updated user settings'),  
    (5, 5, '2025-02-12 12:00:00', 'Deleted a contact record'),  
    (7, 7, '2025-02-22 13:45:00', 'Uploaded a document'),  
    (8, 7, '2025-02-25 13:45:00', 'Uploaded a document'),  
    (10, 1, '2025-02-22 16:30:00', 'User logged in');  
  
INSERT INTO `MyCMS`.`ContactNote`  
(`ContactID`, `NoteTitle`, `NoteText`, `CreatedDate`, `LastModified`,  
`Status`)  
VALUES
```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
(1, 'Follow-up Meeting', 'Schedule a follow-up meeting with Alice.',  
'2025-02-20 08:00:00', '2025-02-21 09:00:00', 'ACTIVE'),  
    (1, 'Urgent Request', 'Alice requested additional documentation.',  
'2025-02-21 10:15:00', '2025-02-21 11:00:00', 'ACTIVE'),  
    (2, 'Project Update', 'Bob needs an update on project status.',  
'2025-02-19 12:30:00', '2025-02-19 13:45:00', 'ACTIVE'),  
    (3, 'Client Inquiry', 'Charlie asked about new service offerings.',  
'2025-02-18 09:45:00', '2025-02-18 10:20:00', 'ACTIVE'),  
    (4, 'Invoice Issue', 'Diana reported an issue with an invoice.',  
'2025-02-17 11:10:00', '2025-02-17 12:00:00', 'ACTIVE'),  
    (5, 'Training Session', 'Edward signed up for the training program.',  
'2025-02-16 14:00:00', '2025-02-16 14:30:00', 'ACTIVE'),  
    (6, 'Follow-up Email', 'Fiona needs a follow-up email.', '2025-02-15  
08:15:00', '2025-02-15 08:45:00', 'ACTIVE'),  
    (7, 'Meeting Notes', 'George attended a company meeting.', '2025-02-14  
10:30:00', '2025-02-14 11:00:00', 'ACTIVE'),  
    (8, 'Documentation Request', 'Helen requested access to documents.',  
'2025-02-13 09:20:00', '2025-02-13 10:00:00', 'ACTIVE'),  
    (9, 'Feedback Received', 'Ian provided feedback on the new policy.',  
'2025-02-12 16:45:00', '2025-02-12 17:30:00', 'ACTIVE'),  
    (10, 'Contract Review', 'Jane is reviewing the new contract terms.',  
'2025-02-11 15:30:00', '2025-02-11 16:00:00', 'ACTIVE'),  
    (10, 'Updated Contact Info', 'Jane updated her phone number.',  
'2025-02-10 14:20:00', '2025-02-10 15:00:00', 'ACTIVE');  
  
INSERT INTO `MyCMS`.`GroupTable`  
(`GroupName`, `Description`, `CreatedDate`, `Status`)  
VALUES  
    ('Business Partners', 'Contacts related to business partnerships.',  
'2025-02-01 08:00:00', 'ACTIVE'),  
    ('Clients', 'Clients of the company.', '2025-02-02 09:00:00',  
'ACTIVE'),  
    ('VIP Clients', 'High-value clients with special privileges.',  
'2025-02-03 10:00:00', 'ACTIVE'),  
    ('Suppliers', 'Suppliers and vendors for the company.', '2025-02-04  
11:00:00', 'ACTIVE'),  
    ('Employees', 'Internal employees and staff.', '2025-02-05 12:00:00',  
'ACTIVE'),  
    ('Investors', 'People who have invested in the company.', '2025-02-06  
13:00:00', 'ACTIVE'),  
    ('Consultants', 'External consultants and advisors.', '2025-02-07  
14:00:00', 'ACTIVE'),  
    ('Marketing Team', 'Marketing team members.', '2025-02-08 15:00:00',
```

```

'ACTIVE'),
    ('Developers', 'Software development team.', '2025-02-09 16:00:00',
'ACTIVE'),
    ('Board Members', 'Board of directors and executives.', '2025-02-10
17:00:00', 'ACTIVE');

INSERT INTO `MyCMS`.`ContactGroupMapping`
(`ContactID`, `GroupID`, `DateAdded`, `MappingStatus`)
VALUES
(1, 1, '2025-02-11 08:00:00', 'ACTIVE'),
(1, 3, '2025-02-12 08:30:00', 'ACTIVE'),
(2, 2, '2025-02-13 09:00:00', 'ACTIVE'),
(3, 5, '2025-02-14 09:30:00', 'ACTIVE'),
(4, 4, '2025-02-15 10:00:00', 'ACTIVE'),
(5, 6, '2025-02-16 10:30:00', 'ACTIVE'),
(6, 7, '2025-02-17 11:00:00', 'ACTIVE'),
(7, 8, '2025-02-18 11:30:00', 'ACTIVE'),
(8, 9, '2025-02-19 12:00:00', 'ACTIVE'),
(9, 10, '2025-02-20 12:30:00', 'ACTIVE'),
(10, 2, '2025-02-21 13:00:00', 'ACTIVE'),
(10, 6, '2025-02-22 13:30:00', 'ACTIVE'),
(2, 4, '2025-02-23 14:00:00', 'ACTIVE'),
(3, 6, '2025-02-24 14:30:00', 'ACTIVE'),
(5, 8, '2025-02-25 15:00:00', 'ACTIVE');

INSERT INTO `MyCMS`.`Tag`
(`TagName`, `Description`, `CreatedDate`, `TagColor`)
VALUES
('VIP', 'High-value contact.', '2025-02-01 08:00:00', 'Gold'),
('Lead', 'Potential customer or client.', '2025-02-02 09:00:00',
'Blue'),
('Supplier', 'Supplier contact.', '2025-02-03 10:00:00', 'Green'),
('Investor', 'Investors in the company.', '2025-02-04 11:00:00',
'Silver'),
('Employee', 'Internal employee.', '2025-02-05 12:00:00', 'Red'),
('Consultant', 'External consultant or advisor.', '2025-02-06
13:00:00', 'Orange'),
('Marketing', 'Marketing-related contact.', '2025-02-07 14:00:00',
'Purple'),
('Developer', 'Software developer contact.', '2025-02-08 15:00:00',
'Teal'),
('Board Member', 'Part of the board of directors.', '2025-02-09
16:00:00', 'Brown'),

```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
( 'Customer', 'Current paying customer.', '2025-02-10 17:00:00',
'Yellow');

INSERT INTO `MyCMS`.`ContactTagMapping`
(`ContactID`, `TagID`, `CreatedTime`, `Status`)
VALUES
(1, 1, '2025-02-11 08:00:00', 'ACTIVE'),
(1, 2, '2025-02-12 08:30:00', 'ACTIVE'),
(2, 3, '2025-02-13 09:00:00', 'ACTIVE'),
(3, 5, '2025-02-14 09:30:00', 'ACTIVE'),
(4, 4, '2025-02-15 10:00:00', 'ACTIVE'),
(5, 6, '2025-02-16 10:30:00', 'ACTIVE'),
(6, 7, '2025-02-17 11:00:00', 'ACTIVE'),
(7, 8, '2025-02-18 11:30:00', 'ACTIVE'),
(8, 9, '2025-02-19 12:00:00', 'ACTIVE'),
(9, 10, '2025-02-20 12:30:00', 'ACTIVE'),
(10, 2, '2025-02-21 13:00:00', 'ACTIVE'),
(10, 4, '2025-02-22 13:30:00', 'ACTIVE'),
(2, 5, '2025-02-23 14:00:00', 'ACTIVE'),
(3, 6, '2025-02-24 14:30:00', 'ACTIVE'),
(5, 7, '2025-02-25 15:00:00', 'ACTIVE');

INSERT INTO `MyCMS`.`Meeting`
(`UserID`, `MeetingTitle`, `Description`, `Location`, `MeetingDate`,
`CreatedDate`)
VALUES
(1, 'Project Kickoff', 'Initial meeting to discuss project details.',
'Conference Room A', '2025-03-01 10:00:00', '2025-02-20 08:00:00'),
(2, 'Marketing Strategy', 'Discussing marketing plans for Q2.', 'Online - Zoom',
'2025-03-02 14:00:00', '2025-02-21 09:00:00'),
(3, 'Investor Update', 'Quarterly investor update meeting.', 'Boardroom',
'2025-03-03 16:00:00', '2025-02-22 10:00:00'),
(4, 'Tech Team Sync', 'Weekly development team stand-up.', 'Engineering Lab',
'2025-03-04 09:30:00', '2025-02-23 11:00:00'),
(5, 'Customer Feedback', 'Meeting with customers to collect feedback.', 'Client Office',
'2025-03-05 13:00:00', '2025-02-24 12:00:00'),
(6, 'Partnership Discussion', 'Discussing potential business partnerships.', 'Main Office',
'2025-03-06 11:00:00', '2025-02-25 13:00:00'),
(7, 'Annual General Meeting', 'Company-wide annual update.', 'Main Auditorium',
'2025-03-07 10:00:00', '2025-02-26 14:00:00'),
(8, 'Training Session', 'Employee training on new software.', 'Training Room 2',
'2025-03-08 15:00:00', '2025-02-27 15:00:00'),
(9, 'Supplier Negotiation', 'Negotiation with key suppliers.',
```

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

```
'Supplier HQ', '2025-03-09 12:30:00', '2025-02-28 16:00:00'),  
    (10, 'Board Meeting', 'Strategic planning meeting for executives.',  
'Boardroom', '2025-03-10 17:00:00', '2025-03-29 17:00:00');  
  
INSERT INTO `MyCMS`.`MeetingContactMapping`  
(`MeetingID`, `ContactID`, `InvitationStatus`, `ResponseDate`)  
VALUES  
    (1, 1, 'Accepted', '2025-02-25 08:30:00'),  
    (1, 2, 'Pending', NULL),  
    (2, 3, 'Accepted', '2025-02-26 09:15:00'),  
    (2, 4, 'Declined', '2025-02-26 10:00:00'),  
    (3, 5, 'Accepted', '2025-02-27 11:20:00'),  
    (3, 6, 'Pending', NULL),  
    (4, 7, 'Accepted', '2025-02-28 12:45:00'),  
    (5, 8, 'Pending', NULL),  
    (5, 9, 'Accepted', '2025-03-01 14:10:00'),  
    (6, 10, 'Accepted', '2025-03-02 15:30:00'),  
    (6, 1, 'Pending', NULL),  
    (7, 2, 'Accepted', '2025-03-03 16:00:00'),  
    (8, 3, 'Accepted', '2025-03-04 09:30:00'),  
    (8, 4, 'Declined', '2025-03-04 10:20:00'),  
    (9, 5, 'Accepted', '2025-03-05 11:45:00'),  
    (9, 6, 'Pending', NULL),  
    (10, 7, 'Accepted', '2025-03-06 13:10:00'),  
    (10, 8, 'Accepted', '2025-03-06 14:30:00');  
  
SET FOREIGN_KEY_CHECKS = 1; -- Re-enable foreign key checks
```

Another way to import data is to use the LOAD DATA INLINE command, for this we need to use CSVs files with the data, and we have to use one file per table. To import data this way we should do it in the console using commands like the next:

```
SET FOREIGN_KEY_CHECKS=0;  
  
LOAD DATA INFILE './user.csv'  
INTO TABLE `MyCMS`.`User`  
FIELDS TERMINATED BY ','  
LINES TERMINATED BY '\n';  
  
SET FOREIGN_KEY_CHECKS=1;
```

And like this for all every table. We'll attach all the CSVs files in a compressed file.

## Retrieving data

The screenshot shows the MySQL Workbench interface. At the top, there's a toolbar with various icons. Below it is a text editor window containing SQL code. The code includes `use MyCMS;` followed by several `INSERT INTO` statements for the `User` and `Contact` tables. Some of these insertions violate constraints (Primary Key, Foreign Key, Unique, Data Type), resulting in error messages. At the bottom, there's a table titled 'Action Output' showing the execution details of each query.

```

1 • use MyCMS;
2 -- Primary key
3 • INSERT INTO User (UserID, Username, `Password`, `Role`, Email, FirstName, LastName, LastLogin)
4 VALUES
5 (1,'johndoe', 'hashed_password_here', 'NORMAL', 'johndoe@example.com', 'John', 'Doe', '2025-02-24 14:30:00');
6
7 -- foreign key
8 • INSERT INTO Contact (UserID, FirstName, LastName, DateOfBirth, Gender, Street, City, State, Zip, Country, CompanyID)
9 VALUES
10 (12, 'James', 'Anderson', '1985-09-22', 'M', '456 Maple Ave', 'Chicago', 'IL', '60601', 'USA', 3);
11
12 -- unique key
13 • INSERT INTO User (Username, `Password`, `Role`, Email, FirstName, LastName, LastLogin)
14 VALUES
15 ('admin', 'hashed_password_here', 'NORMAL', 'johndoe@example.com', 'John', 'Doe', '2025-02-24 14:30:00');
16
17 -- data types
18 • INSERT INTO Contact (UserID, FirstName, LastName, DateOfBirth, Gender, Street, City, State, Zip, Country, CompanyID)
19 VALUES
20 (1, 'Emma', 'Williams', 'bagel', 'F', '789 Oak Street', 'Los Angeles', 'CA', '90001', 'USA', 2);
21

```

Action	Output	Time	Action	Response	Duration / Fetch Time
✗ 1	16:46:57	INSERT INTO User (UserID, Username, `Password`, `Role`, Email, FirstName, LastName, LastLogin)	Error Code: 1062. Duplicate entry '1' for key 'user.PRIMARY'	0.00041 sec	
✗ 2	16:47:01	INSERT INTO Contact (UserID, FirstName, LastName, DateOfBirth, Gender, Street, City, State, Zip, Country, CompanyID)	Error Code: 1452. Cannot add or update a child row: a foreign key constraint fails	0.0058 sec	
✗ 3	16:47:04	INSERT INTO User (Username, `Password`, `Role`, Email, FirstName, LastName, LastLogin)	Error Code: 1062. Duplicate entry 'admin' for key 'user.Username'	0.0062 sec	
✗ 4	16:47:10	INSERT INTO Contact (UserID, FirstName, LastName, DateOfBirth, Gender, Street, City, State, Zip, Country, CompanyID)	Error Code: 1292. Incorrect date value: 'bagel' for column 'DateOfBirth' at...	0.00039 sec	

Above shows:

The error of a Primary Key by trying to add a UserID that is already being used.

The error of a Foreign Key by trying to add information into the Contact table with a UserID that is not established in the User table.

The error of a Unique Key by trying to a Username that is already taken.

The error of Data Types by trying to add a DateOfBirth that is not a number value.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

The screenshot shows the MySQL Workbench interface with a query editor at the top containing the following SQL code:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4   -- Select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6 • Select `Timestamp` From ActivityLog;
7   -- Select PhoneNumber From Phone;
8   -- Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10  -- Select `Status` From GroupTable;
11  -- Select * From `User`;
12
13

```

The results grid below displays the 'Timestamp' column from the 'ActivityLog' table. The data shows various timestamp values from February 2022.

Timestamp
2025-02-22 08:10:00
2025-02-22 08:15:00
2025-02-22 09:00:00
2025-02-22 09:10:00
2025-02-22 10:30:00
2025-02-22 11:00:00
2025-02-12 12:00:00
2025-02-22 13:45:00
2025-02-25 13:45:00
2025-02-22 16:30:00

Action Output table:

Time	Action	Response	Duration / Fetch Time
19 20:19:30	Select DateAdded From ContactGroupMapping LIMIT 0, 1000	10 row(s) returned	0.00000 sec / 0.000...
20 20:20:36	use MyCMS	0 row(s) affected	0.00035 sec
21 20:20:36	Select PhoneNumber From Phone LIMIT 0, 1000	11 row(s) returned	0.00059 sec / 0.000...
22 20:21:48	use MyCMS	0 row(s) affected	0.00048 sec
23 20:21:48	Select `Timestamp` From ActivityLog LIMIT 0, 1000	10 row(s) returned	0.00066 sec / 0.000...

Above shows the selection of Timestamp information from the ActivityLog table.

The screenshot shows the MySQL Workbench interface with a query editor at the top containing the same SQL code as the previous screenshot.

The results grid below displays the 'Nickname' column from the 'ContactNickname' table. The data shows various nickname values.

Nickname
Ally
Ali
B...
C...
Di
D
E...
Ed
Fl
Geo
Leni
M...
J...

Action Output table:

Time	Action	Response	Duration / Fetch Time
21 20:20:30	Select PhoneNumber From Phone LIMIT 0, 1000	11 row(s) returned	0.00000 sec / 0.000...
22 20:21:48	use MyCMS	0 row(s) affected	0.00048 sec
23 20:21:48	Select `Timestamp` From ActivityLog LIMIT 0, 1000	10 row(s) returned	0.00066 sec / 0.000...
24 20:23:08	use MyCMS	0 row(s) affected	0.00045 sec
25 20:23:08	Select Nickname From ContactNickname LIMIT 0, 1000	13 row(s) returned	0.00046 sec / 0.000...

Above shows the selection of Nickname from the ContactNickname table.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

The screenshot shows the MySQL Workbench interface with the following details:

- SQL Editor:** Contains the following SQL query:
 

```
1 • use MyCMS;
2 •   SELECT CompanyName From Company;
3 --   SELECT City From Contact;
4 --   Select EmailAddress From Email;
5 --   Select Nickname From ContactNickname;
6 --   Select `Timestamp` From ActivityLog;
7 --   Select PhoneNumber From Phone;
8 --   Select DateAdded From ContactGroupMapping;
9 --   Select Location From Meeting;
10 --  Select `Status` From GroupTable;
11 --  Select * From `User`;
12
13
```
- Result Grid:** Shows the results of the query, displaying a list of company names:
 

CompanyName
AutoDrive Motors
BuildRight Construction
EduLearn Inc
Fashion Forward
FinSecure LLC
Foodies Delight
Green Energy Solutions
HealthPlus Corp
NextGen Solutions
Tech Innovators Inc
TravelQuest
- Action Output:** Displays the execution log with the following entries:
 

Time	Action	Response	Duration / Fetch Time
20-24-30	Select EmailAddress From Email LIMIT 0, 1000	10 row(s) returned	0.000045 sec / 0.000...
33 20-26-29	use MyCMS	0 row(s) affected	0.00033 sec
34 20-26-29	SELECT City From Contact LIMIT 0, 1000	10 row(s) returned	0.000046 sec / 0.000...
35 20-27-05	use MyCMS	0 row(s) affected	0.000044 sec
36 20-27-05	SELECT CompanyName From Company LIMIT 0, 1000	11 row(s) returned	0.000045 sec / 0.000...

Above shows the selection of CompanyName from the Company Table.

The screenshot shows the MySQL Workbench interface with the following details:

- SQL Editor:** Contains the following SQL query:
 

```
1 • use MyCMS;
2 --   SELECT CompanyName From Company;
3 •   SELECT City From Contact;
4 --   Select EmailAddress From Email;
5 --   Select Nickname From ContactNickname;
6 --   Select `Timestamp` From ActivityLog;
7 --   Select PhoneNumber From Phone;
8 --   Select DateAdded From ContactGroupMapping;
9 --   Select Location From Meeting;
10 --  Select `Status` From GroupTable;
11 --  Select * From `User`;
12
13
```
- Result Grid:** Shows the results of the query, displaying a list of cities:
 

City
New Y...
Los A...
Chicago
Boston
Detroit
Austin
San F...
Seattle
Chicago
Orlando
- Action Output:** Displays the execution log with the following entries:
 

Time	Action	Response	Duration / Fetch Time
30 20-24-10	EXPLAIN SELECT PhoneNumber From Phone	UN	0.000 sec
31 20-24-36	use MyCMS	0 row(s) affected	0.000042 sec
32 20-24-36	Select EmailAddress From Email LIMIT 0, 1000	10 row(s) returned	0.000045 sec / 0.000...
33 20-26-29	use MyCMS	0 row(s) affected	0.00033 sec
34 20-26-29	SELECT City From Contact LIMIT 0, 1000	10 row(s) returned	0.000046 sec / 0.000...

Above shows the selection of City from the Contact Table.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

The screenshot shows the MySQL Workbench interface with a query editor and a results grid. The query is:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4 • select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6   -- Select `Timestamp` From ActivityLog;
7   -- Select PhoneNumber From Phone;
8   -- Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10  -- Select `Status` From GroupTable;
11  -- Select * From `User`;
12
13

```

The results grid displays the following data:

EmailAddress
contact1@example.com
contact2@example.com
contact3@example.com
contact4@example.com
contacts@example.com
contact5@example.com
contact6@example.com
contact7@example.com
contact8@example.com
contact9@example.com
contact10@example.com

Action Output:

Time	Action	Response	Duration / Fetch Time
2024-01-29 20:24:01	Select `Timestamp` From ActivityLog LIMIT 0, 1000	10 row(s) returned	0.000054 sec / 0.0000...
2024-01-29 20:24:01	Select PhoneNumber From Phone LIMIT 0, 1000	11 row(s) returned	0.000054 sec / 0.0000...
2024-01-29 20:24:15	EXPLAIN Select PhoneNumber From Phone	OK	0.000 sec
2024-01-31 20:24:36	use MyCMS	0 row(s) affected	0.000042 sec
2024-01-32 20:24:36	Select EmailAddress From Email LIMIT 0, 1000	10 row(s) returned	0.000045 sec / 0.000...

Above shows the selection of EmailAddress from the Email table.

The screenshot shows the MySQL Workbench interface with a query editor and a results grid. The query is:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4   -- Select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6   -- Select `Timestamp` From ActivityLog;
7 • Select PhoneNumber From Phone;
8   -- Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10  -- Select `Status` From GroupTable;
11  -- Select * From `User`;
12
13

```

The results grid displays the following data:

Phone...
603-7...
603-7...
651-7...
521-7...
401-7...
307-7...
701-7...
201-7...
410-7...
710-7...

Action Output:

Time	Action	Response	Duration / Fetch Time
2024-01-17 20:18:40	Select Location From Meeting LIMIT 0, 1000	10 row(s) returned	0.000046 sec / 0.0000...
2024-01-18 20:19:35	use MyCMS	0 row(s) affected	0.000044 sec
2024-01-19 20:19:35	Select DateAdded From ContactGroupMapping LIMIT 0, 1000	15 row(s) returned	0.000050 sec / 0.0000...
2024-01-20 20:20:36	use MyCMS	0 row(s) affected	0.000035 sec
2024-01-21 20:20:36	Select PhoneNumber From Phone LIMIT 0, 1000	11 row(s) returned	0.000059 sec / 0.000...

Above shows the selection of PhoneNumber from the Phone table.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

The screenshot shows the MySQL Workbench interface with the following details:

- SQL Editor:** Contains the following SQL code:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4   -- Select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6   -- Select 'Timestamp' From ActivityLog;
7   -- Select PhoneNumber From Phone;
8 • Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10  -- Select 'Status' From GroupTable;
11  -- Select * From 'User';
12
13
    
```
- Result Grid:** Shows the results of the query, displaying a single column "DateAdded" with values ranging from 2025-02-11 08:00:00 to 2025-02-21 13:00:00.
- Action Output:** Displays the execution log with the following entries:

Time	Action	Response	Duration / Fetch Time
2025-02-17 14:00:00	Select 'Status' From GroupTable LIMIT 0, 1000	10 row(s) returned	0.00000 sec / 0.000...
2025-02-17 14:00:00	use MyCMS	0 row(s) affected	0.00001 sec
2025-02-17 14:00:00	Select Location From Meeting LIMIT 0, 1000	10 row(s) returned	0.00006 sec / 0.000...
2025-02-17 14:00:00	use MyCMS	0 row(s) affected	0.00001 sec
2025-02-17 14:00:00	Select DateAdded From ContactGroupMapping LIMIT 0, 1000	15 row(s) returned	0.00005 sec / 0.000...

Above shows the selection of DateAdded from the ContactGroupMapping table.

The screenshot shows the MySQL Workbench interface with the following details:

- SQL Editor:** Contains the following SQL code:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4   -- Select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6   -- Select 'Timestamp' From ActivityLog;
7   -- Select PhoneNumber From Phone;
8   -- Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10  -- Select 'Status' From GroupTable;
11  -- Select * From 'User';
12
13
    
```
- Result Grid:** Shows the results of the query, displaying a single column "Location" with values such as Conference Room A, Online - Zoom, Boardroom, Engineering Lab, Client Office, Main Office, Main Auditorium, Training Room 2, Supplier HQ, and Boardroom.
- Action Output:** Displays the execution log with the following entries:

Time	Action	Response	Duration / Fetch Time
2025-02-17 14:05:50	Select * From 'User' LIMIT 0, 1000	10 row(s) returned	0.00015 sec / 0.0003...
2025-02-17 14:05:50	use MyCMS	0 row(s) affected	0.00005 sec
2025-02-17 14:05:50	Select 'Status' From GroupTable LIMIT 0, 1000	10 row(s) returned	0.00006 sec / 0.000...
2025-02-17 14:05:50	use MyCMS	0 row(s) affected	0.00001 sec
2025-02-17 14:05:50	Select Location From Meeting LIMIT 0, 1000	10 row(s) returned	0.000046 sec / 0.000...

Above shows the selection of the Location from the Meeting table.

# MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

The screenshot shows the MySQL Workbench interface. The SQL editor window contains the following code:

```

1 • use MyCMS;
2   -- SELECT CompanyName From Company;
3   -- SELECT City From Contact;
4   -- Select EmailAddress From Email;
5   -- Select Nickname From ContactNickname;
6   -- Select 'Timestamp' From ActivityLog;
7   -- Select PhoneNumber From Phone;
8   -- Select DateAdded From ContactGroupMapping;
9   -- Select Location From Meeting;
10 • Select `Status` From GroupTable;
11   -- Select * From `User`;
12
13

```

The Result Grid pane displays the results of the last query, which is an empty table named "GroupTable 14". The Action Output pane shows the execution history with the following details:

Time	Action	Response	Duration / Fetch Time
20:12:40	Select Location From Meeting LIMIT 0, 1000	10 row(s) returned	0.0009 sec / 0.0000...
20:14:01	Select `Status` From GroupTable LIMIT 0, 1000	10 row(s) returned	0.0024 sec / 0.00006...
20:14:53	Select * From `User` LIMIT 0, 1000	10 row(s) returned	0.0013 sec / 0.00003...
20:17:14	use MyCMS	0 row(s) affected	0.00050 sec
20:17:14	Select `Status` From GroupTable LIMIT 0, 1000	10 row(s) returned	0.00056 sec / 0.000...

Above shows the selection of Status from the GroupTable table.

The screenshot shows the MySQL Workbench interface. The SQL editor window contains the following code:

```

11 • Select * From `User`;
12
13
14
15
16
17
18
19
20
21
22
23

```

The Result Grid pane displays the results of the last query, which is an empty table named "User 13". The Action Output pane shows the execution history with the following details:

Time	Action	Response	Duration / Fetch Time
20:09:40	Select PhoneNumber From Phone LIMIT 0, 1000	11 row(s) returned	0.00029 sec / 0.0000...
20:10:56	Select DateAdded From ContactGroupMapping LIMIT 0, 1000	15 row(s) returned	0.00039 sec / 0.000...
20:12:40	Select Location From Meeting LIMIT 0, 1000	10 row(s) returned	0.00097 sec / 0.0000...
20:14:01	Select `Status` From GroupTable LIMIT 0, 1000	10 row(s) returned	0.0024 sec / 0.00006...
20:14:53	Select * From `User` LIMIT 0, 1000	10 row(s) returned	0.0013 sec / 0.00003...

Above shows the selection of all information from the User table.

## Manipulating data

**UPDATE User**

```
SET Email = 'newemail2025@example.com'
WHERE UserID = 1;
```

```
select * from User;
```

Using the update statement shown above to update a value in User Table, we change this output:

UserID	Username	Password	Role	Email	FirstName	LastName	LastLogin
1	johndoe	hashedpassword	NORMAL	newemail@example.com	John	Doe	2025-02-21 16:45:00
2	admin	ef92b778bafe771e89245b89ecbc70ec1e5e14b...	ADMIN	admin@mycms.com	Admin	User	2025-02-22 09:00:00
3	jsmith	a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5...	NORMAL	jsmith@mycms.com	John	Smith	2025-02-21 16:45:00
4	amiller	b1c2d3e4f5061728394a5b6c7d8e9f001122334...	NORMAL	amiller@mycms.com	Alice	Miller	2025-02-20 11:30:00
5	bjohnson	0123456789abcdef0123456789abcdef0123456...	NORMAL	bjohnson@mycms.com	Bob	Johnson	2025-02-19 14:20:00
6	cwalker	fedcba9876543210fedcba9876543210fedcba9...	NORMAL	cwalker@mycms.com	Carol	Walker	2025-02-18 08:15:00
7	dlee	aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa...	NORMAL	dlee@mycms.com	David	Lee	2025-02-17 12:00:00
8	eroberts	bbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbbb...	NORMAL	eroberts@mycms.com	Emma	Roberts	2025-02-16 17:30:00
9	fdark	cccccccccccccccccccccccccccccccccccc...	NORMAL	fdark@mycms.com	Frank	Clark	2025-02-15 09:45:00
10	gmartin	dddddddddddddcccccccccccccccccccccccc...	NORMAL	gmartin@mycms.com	Grace	Martin	2025-02-14 11:15:00
11	hscott	eeeeeeeeeeeeeeeeeeeeeeeeeeeeeeee...	NORMAL	hscott@mycms.com	Henry	Scott	2025-02-13 10:30:00

Into this output:

UserID	Username	Password	Role	Email	FirstName	LastName	LastLogin
1	johndoe	hashedpassword	NORMAL	newemail2025@example.com	John	Doe	2025-02-21 16:45:00
2	admin	ef92b778bafe771e89245b89ecbc70ec1e5e14b...	ADMIN	admin@mycms.com	Admin	User	2025-02-22 09:00:00
3	jsmith	a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5...	NORMAL	jsmith@mycms.com	John	Smith	2025-02-21 16:45:00
4	amiller	b1c2d3e4f5061728394a5b6c7d8e9f001122334...	NORMAL	amiller@mycms.com	Alice	Miller	2025-02-20 11:30:00
5	bjohnson	0123456789abcdef0123456789abcdef0123456...	NORMAL	bjohnson@mycms.com	Bob	Johnson	2025-02-19 14:20:00
6	cwalker	fedcba9876543210fedcba9876543210fedcba9...	NORMAL	cwalker@mycms.com	Carol	Walker	2025-02-18 08:15:00
7	dlee	aaaaaaaaaaaaaaaaaaaaaaaaaaaa...	NORMAL	dlee@mycms.com	David	Lee	2025-02-17 12:00:00
8	eroberts	bbbbbbbbbbbbbbbbbbbbbbbbbb...	NORMAL	eroberts@mycms.com	Emma	Roberts	2025-02-16 17:30:00
9	fdark	cccccccccccccccccccccccccccc...	NORMAL	fdark@mycms.com	Frank	Clark	2025-02-15 09:45:00
10	gmartin	dddddddddddddcccccccccccc...	NORMAL	gmartin@mycms.com	Grace	Martin	2025-02-14 11:15:00
11	hscott	eeeeeeeeeeeeeeeeeeeeeeee...	NORMAL	hscott@mycms.com	Henry	Scott	2025-02-13 10:30:00

Using an Insert into statements with 'On Duplicate Key' as shown below:

```
INSERT INTO User (`UserID`, `Username`, `Password`, `Role`, `Email`, `FirstName`, `LastName`, `LastLogin`)
VALUES (1, 'johndoe', 'hashedpassword', 'NORMAL', 'newemail@example.com', 'John', 'Doe', '2025-02-21 16:45:00')
ON DUPLICATE KEY UPDATE
`Username` = concat(`Username`, '_ ', `LastActivity`);

select * from User;
```

We further change the results as seen here:

## MSCS542L\_816\_Project Progress Report\_Phase #3\_Undercover Martyn

UserID	Username	Password	Role	Email	FirstName	LastName	LastLogin
1	johndoe_2025-02-24 16:02:41	hashedpassword	NORMAL	newemail2025@example.com	John	Doe	2025-02-21 16:45:00
2	admin	ef92b778bafe771e89245b89ecbc70ec1e5e14b...	ADMIN	admin@mycms.com	Admin	User	2025-02-22 09:00:00
3	jsmith	a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5...	NORMAL	jsmith@mycms.com	John	Smith	2025-02-21 16:45:00
4	amiller	b1c2d3e4f5061728394a5b6c7d8e9f001122334...	NORMAL	amiller@mycms.com	Alice	Miller	2025-02-20 11:30:00
5	bjohnson	0123456789abccdef0123456789abccdef0123456...	NORMAL	bjohnson@mycms.com	Bob	Johnson	2025-02-19 14:20:00
6	cwalker	fedcba9876543210fedcba9876543210fedcba9...	NORMAL	cwalker@mycms.com	Carol	Walker	2025-02-18 08:15:00
7	dlee	aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa...	NORMAL	dlee@mycms.com	David	Lee	2025-02-17 12:00:00
8	eroberts	bbbbbbbbbbbbbbaaaaaaaaaaaaaaaaaaaaa...	NORMAL	eroberts@mycms.com	Emma	Roberts	2025-02-16 17:30:00
9	fdark	cccccccccccccccccccccccccccccccccccc...	NORMAL	fdark@mycms.com	Frank	Clark	2025-02-15 09:45:00
10	gmartin	ddddddddddeeeeeeeeeeeeeeeeeeeeeeeee...	NORMAL	gmartin@mycms.com	Grace	Martin	2025-02-14 11:15:00
11	hscott	eeeeeeeeeeeeeeeeeeeeeeeeeeeeeeee...	NORMAL	hscott@mycms.com	Henry	Scott	2025-02-13 10:30:00

Using an Alter Table statement to add LastActivity attribute of type TIMESTAMP as shown below:

```
ALTER TABLE User
ADD COLUMN LastActivity TIMESTAMP DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP;

select * from User;
```

We get these results:

UserID	Username	Password	Role	Email	FirstName	LastName	LastLogin	LastActivity
1	johndoe_2025-02-24 16:02:41	hashedpassword	NORMAL	newemail2025@example.com	John	Doe	2025-02-21 16:45:00	2025-02-24 16:05:43
2	admin	ef92b778bafe771e89245b89ecbc70ec1e5e14b...	ADMIN	admin@mycms.com	Admin	User	2025-02-22 09:00:00	2025-02-24 14:47:49
3	jsmith	a3f5b1d6e7c8f9b0a1b2c3d4e5f60718293a4b5...	NORMAL	jsmith@mycms.com	John	Smith	2025-02-21 16:45:00	2025-02-24 14:47:49
4	amiller	b1c2d3e4f5061728394a5b6c7d8e9f001122334...	NORMAL	amiller@mycms.com	Alice	Miller	2025-02-20 11:30:00	2025-02-24 14:47:49
5	bjohnson	0123456789abccdef0123456789abccdef0123456...	NORMAL	bjohnson@mycms.com	Bob	Johnson	2025-02-19 14:20:00	2025-02-24 14:47:49
6	cwalker	fedcba9876543210fedcba9876543210fedcba9...	NORMAL	cwalker@mycms.com	Carol	Walker	2025-02-18 08:15:00	2025-02-24 14:47:49
7	dlee	aaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa...	NORMAL	dlee@mycms.com	David	Lee	2025-02-17 12:00:00	2025-02-24 14:47:49
8	eroberts	bbbbbbbbbbbbbbaaaaaaaaaaaaaaaaa...	NORMAL	eroberts@mycms.com	Emma	Roberts	2025-02-16 17:30:00	2025-02-24 14:47:49
9	fdark	cccccccccccccccccccccccccccccccc...	NORMAL	fdark@mycms.com	Frank	Clark	2025-02-15 09:45:00	2025-02-24 14:47:49
10	gmartin	ddddddddddeeeeeeeeeeeeeeeee...	NORMAL	gmartin@mycms.com	Grace	Martin	2025-02-14 11:15:00	2025-02-24 14:47:49
11	hscott	eeeeeeeeeeeeeeeeeeeeeeee...	NORMAL	hscott@mycms.com	Henry	Scott	2025-02-13 10:30:00	2025-02-24 14:47:49

## Database optimization

Inserting Instances one at a time results in a completion time of:

execution_time_seconds
0.2979

Inserting Instances all at once results in a completion time of:

execution_time_seconds
0.0702

### Time difference:

Inserting all data at once is 0.2277 seconds faster than inserting data online at a time. That makes bulk inserts 76.42% faster than single line inserts.

## References

- (1) HubSpot. "Top Contact Management Software for 2023." *Blog HubSpot*, 2023,  
<https://blog.hubspot.com/sales/contact-management-software>.
- (2) HubSpot. "Contact Management CRM | Free Tool for Tracking Customer Information." *HubSpot*, 2023, <https://www.hubspot.com/products/crm/contact-management>.
- (3) Capterra. "Best Contact Management Software 2023." *Capterra.com*, 2023,  
<https://www.capterra.com/contact-management-software/>.
- (4) TechRadar. "Best Contact Management Software in 2023." *TechRadar*, 2023,  
<https://www.techradar.com/best/best-contact-management-software>.
- (5) Pipedrive. "Contact Management Software for Sales Teams." *Pipedrive.com*, 2023,  
<https://www.pipedrive.com/en/roles/crm-for-contact-managers>.
- (6) Insightly. "CRM Pricing Plans." *Insightly.com*, 2023,  
<https://www.insightly.com/pricing-plans/>.