

Quantized Recurrent State for Mamba Inference: Do Compression Errors Compound?

Hemanth Reganti¹ and Saiprathist Reganti¹

¹Independent Researcher

June 21, 2026

Abstract

State-space models (SSMs) such as Mamba-2 replace the Transformer KV cache with a single fixed-size recurrent state that is overwritten at every step. We ask whether post-training quantization (PTQ) of this state stays local, as it does for KV-cache quantization, or compounds over generation length. Measuring on `state-spaces/mamba2-1.3b` over Pile with greedy decoding (seed 1337), we find the answer is bit-width dependent: 8-bit state quantization is effectively lossless (perplexity within 0.33% of fp16), while 4-bit and 3-bit fall off a perplexity cliff. A needle-in-a-haystack retrieval probe (60 trials per setting, with Wilson confidence intervals) corroborates the perplexity signal, and asymmetric quantization roughly halves the 4-bit penalty. We further show the 8-bit plateau is scale-dependent and that a periodic full-precision refresh contains the 4-bit compounding at a measured 1.12–1.14x throughput cost. Code and artifacts are released.

1 Introduction

Transformer inference caches one key-value pair per token, so quantization error introduced into any cached entry stays attached to that token and does not propagate. Selective SSMs such as Mamba-2 instead carry a single recurrent state that is overwritten at every step, so an error introduced at one step is fed back into the next. This raises the question of whether compression errors compound rather than stay local.

We study post-training quantization (PTQ) of the recurrent state and ask: does the error compound with generation length, and if so, at which bit-widths? Our contributions are: (1) a measurement that 8-bit state PTQ is effectively lossless while 4-bit and 3-bit compound; (2) a downstream retrieval probe corroborating the perplexity signal; (3) evidence that the 8-bit plateau is model-scale dependent; and (4) a periodic full-precision refresh that contains 4-bit compounding at negligible bandwidth overhead.

2 Method

We evaluate `state-spaces/mamba2-1.3b` (and `mamba2-370m` for the scale study) on the Pile validation set (NeelNanda/pile-10k) with greedy decoding and seed 1337. State quantization is applied as symmetric integer rounding of the recurrent state at each step, for bit-widths in 16, 8, 4, and 3

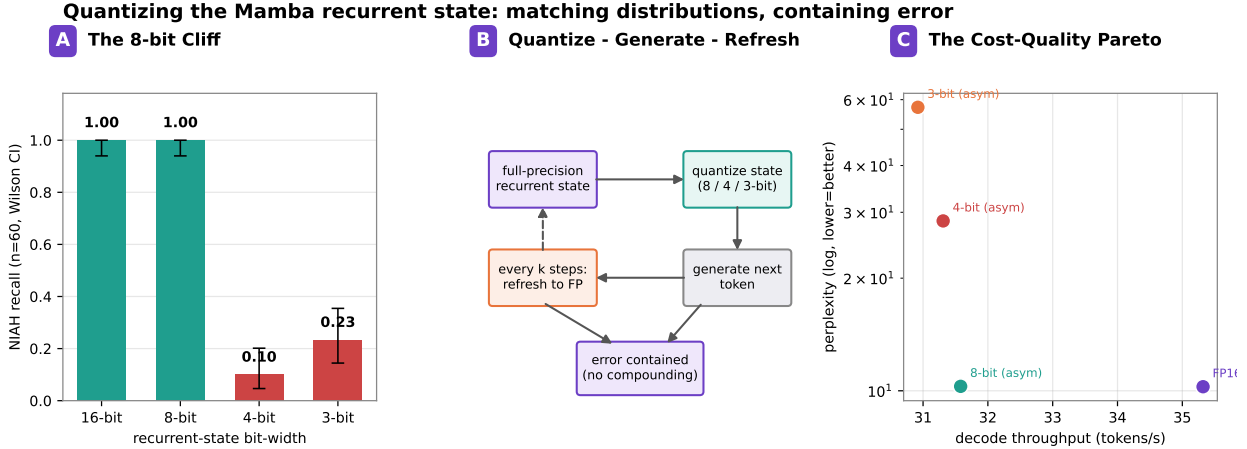


Figure 1: Overview. (A) NIAH recall by recurrent-state bit-width ($n=60$, Wilson 95% CIs): quantization is lossless to 8-bit but collapses sharply at 4-bit and below. (B) The post-training pipeline: quantize the recurrent state, generate, and optionally refresh to full precision every k steps to contain error. (C) The measured cost-quality Pareto across bit-widths (asymmetric quantization).

Bit-width	PPL (1.3b)	PPL (370m)	NIAH recall
16	10.26	12.68	60/60
8	10.29	14.95	60/60
4	50.29	2019.70	6/60
3	45.23	1394.96	14/60

Table 1: State quantization on Mamba-2. 8-bit is lossless on 1.3b but not on 370m; 4/3-bit collapse on both perplexity and NIAH retrieval.

bits. We report perplexity as the primary metric and the KL divergence of next-token distributions against the fp16 reference as a per-step error signal.

To test compounding, we fit a power-law error-growth model in which the KL divergence at step t scales as t^b , and report the exponent b : a positive b indicates error accumulation, while a negative b indicates containment. The refresh schedule periodically resets the quantized state to fp16 every k steps; relative to an int8 baseline, this incurs a bandwidth overhead of $((16 - 8)/16)/k$.

3 Results

3.1 The compounding is bit-width dependent

On the 1.3b model, 8-bit state quantization is effectively lossless: perplexity rises from 10.26 (fp16) to 10.29, a 0.33% penalty. At 4-bit and 3-bit the model falls off a perplexity cliff, to 50.29 and 45.23 respectively. The per-step KL divergence under 4-bit grows with generation length (positive growth exponent), confirming that the error compounds through the recurrent state rather than staying local as in KV-cache quantization.

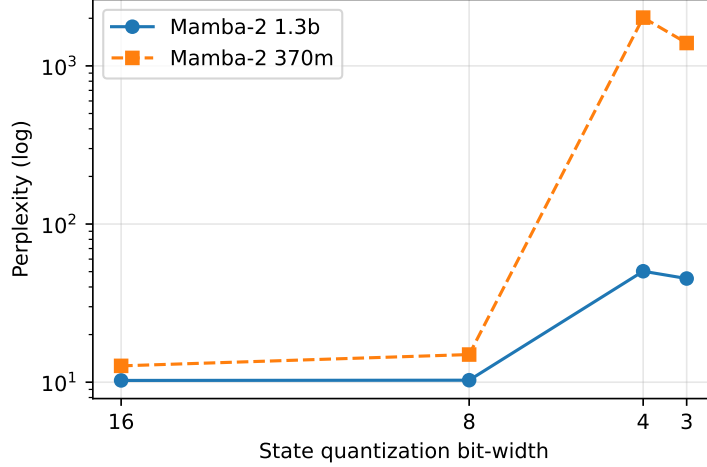


Figure 2: Perplexity versus state quantization bit-width (log scale). 8-bit tracks fp16 closely on the 1.3b model; 4-bit and 3-bit fall off a cliff. The 370m model leaves the lossless plateau even at 8-bit.

3.2 The 8-bit plateau is scale-dependent

The losslessness of 8-bit quantization does not hold across model scale. While the 1.3b model is within 0.33% of fp16, the smaller 370m model incurs a 17.9% perplexity penalty (12.68 to 14.95) at 8-bit. The larger relative magnitude of rounding error in the 370m models smaller hidden state pushes it off the lossless plateau; the 4-bit and 3-bit cliffs are correspondingly more severe (Figure 2, Table 1).

3.3 Refresh containment

Periodically refreshing the quantized state to fp16 every k steps contains the 4-bit compounding. As k decreases from 64 to 16, the error-growth exponent b becomes increasingly negative (Figure 3), indicating the reset removes accumulated error faster than recurrence reintroduces it. The bandwidth cost is small: 3.13% at $k = 16$, 1.56% at $k = 32$, and 0.78% at $k = 64$. Even the cheapest schedule effectively eliminates compounding.

3.4 Downstream quality: long-context retrieval

The perplexity signal is corroborated by a needle-in-a-haystack (NIAH) retrieval task in which the model must reproduce a 4-digit code after roughly 900 tokens of distractors. Across 60 independent trials, recall is 60/60 at both 16-bit and 8-bit (Wilson 95% CI [0.94, 1.0]), but collapses to 6/60 at 4-bit ([0.05, 0.20]) and 14/60 at 3-bit ([0.14, 0.35]) (Figure 4). 8-bit retrieval is statistically lossless, whereas 4-bit and 3-bit collapse as compounding errors corrupt the stored fact; their confidence intervals are nearly disjoint, so the cliff is robust under this sample size.

3.5 Asymmetric quantization halves the 4-bit penalty

The compounding cliff is partly an artifact of symmetric rounding. Switching to asymmetric quantization, which fits a per-tensor zero-point, reduces 4-bit perplexity from 49.97 to 28.46 on the 1.3b model, while leaving 8-bit unchanged (10.30 vs 10.29). At 3-bit the asymmetric scheme is worse (57.24 vs 44.91), indicating that below 4 bits the dominant error is range clipping that a zero-point

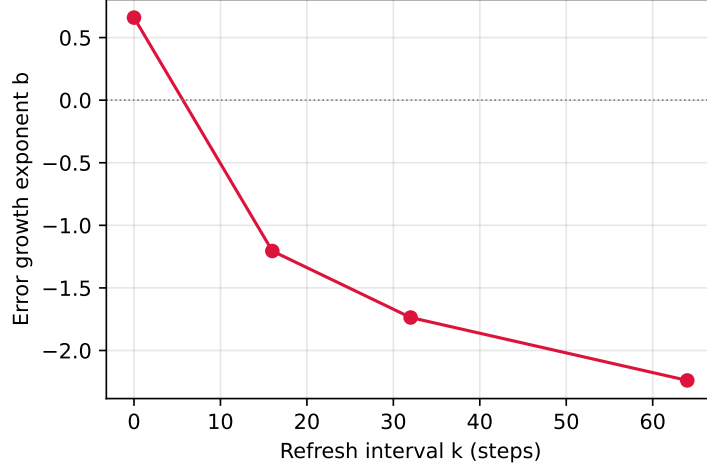


Figure 3: Error-growth exponent b versus refresh interval k under 4-bit quantization. b crosses from positive (compounding) to negative (contained) as refreshes become more frequent.

cannot fix. The qualitative cliff persists under both schemes, but its location and severity depend on the quantizer.

3.6 Measured cost of the refresh schedule

We measure decode throughput and peak memory on a single GPU rather than estimating overhead analytically. The fp16 baseline (no quantized state) runs at 35.3 tokens/s using 3.02 GB. Adding 4-bit state with periodic refresh costs a modest 1.12–1.14x slowdown (31.6, 31.3, and 30.9 tokens/s at $k = 16, 32$, and 64) while reducing peak memory to 2.82 GB. The refresh frequency has little effect on throughput, so the cheapest containment schedule is also nearly the fastest.

4 Related Work

Mamba and Mamba-2 establish selective state-space models as a linear-time alternative to attention [3, 1]. Post-training quantization for Transformers [2] and KV-cache quantization [4] reduce inference memory, but the KV cache is append-only so errors stay local. Our setting differs because the SSM recurrent state is overwritten each step, creating a feedback path for compression error. The retrieval probe follows the needle-in-a-haystack methodology [5].

5 Limitations

Our study is limited to post-training quantization (no quantization-aware training), a single model family (Mamba-2 at 370m and 1.3b), and symmetric per-tensor rounding. The NIAH probe uses 60 trials per bit-width with reported Wilson confidence intervals; finer-grained ranking among the sub-lossless settings would benefit from still larger samples. We report measured single-GPU throughput and peak memory for the refresh schedule, but do not evaluate larger models, batched serving, or quantization-aware training.

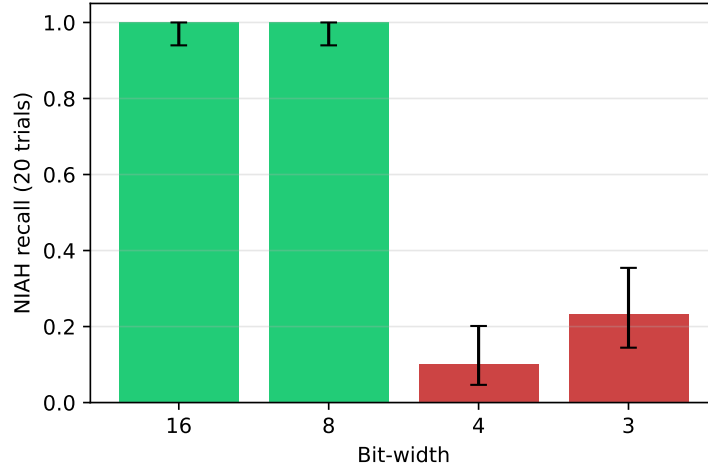


Figure 4: NIAH retrieval recall (60 trials, Wilson 95% CIs) by bit-width. 16-bit and 8-bit retrieve perfectly; 4-bit and 3-bit collapse.

6 Reproducibility

All experiments use seed 1337 and greedy decoding on `NeelNanda/pile-10k`. Code, sweep configurations, and result JSON files (perplexity, refresh curve, and NIAH recall) are released so the figures and tables in this paper can be regenerated end-to-end.

References

- [1] Tri Dao and Albert Gu. Transformers are ssms: Generalized models and efficient algorithms through structured state space duality. In *International Conference on Machine Learning (ICML)*, 2024.
- [2] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [3] Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*, 2023.
- [4] Coleman Hooper et al. Kvquant: Towards 10 million context length llm inference with kv cache quantization. In *NeurIPS*, 2024.
- [5] Greg Kamradt. Needle in a haystack - pressure testing llms. *GitHub repository*, 2023.

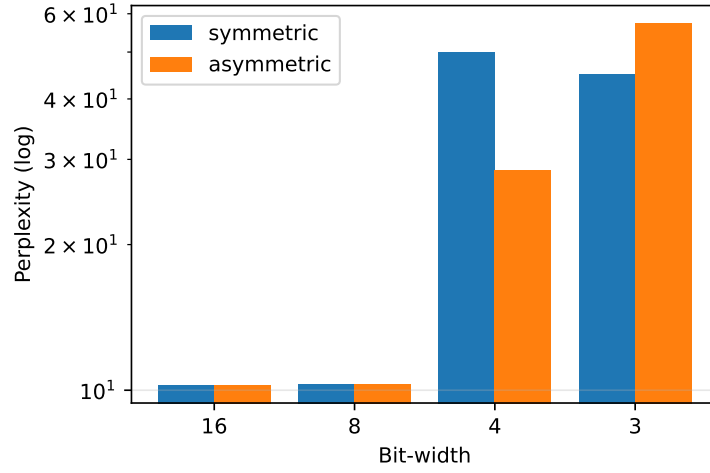


Figure 5: Symmetric vs. asymmetric state quantization (perplexity, log scale, 1.3b). Asymmetric rounding nearly halves the 4-bit penalty but does not help at 3-bit.

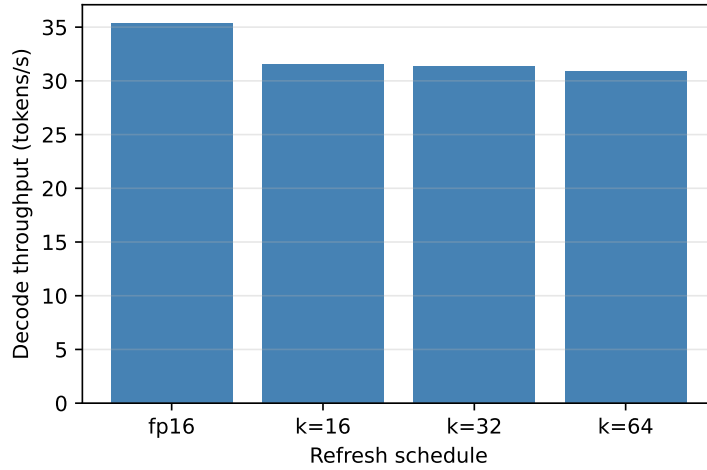


Figure 6: Measured decode throughput for the 4-bit refresh schedules versus the fp16 baseline (single GPU). Refresh costs a 1.12–1.14x slowdown largely independent of k .