

Programming Project 03

Francèl Lamprecht, Christine Robinson, Regina Wehler

Winter Semester 2018/19

Contents

1	Introduction	2
2	Methodology	2
2.1	Segmentation	2
2.2	Object Recognition	3
2.3	Object Analysis	3
2.4	Explorative Data Analysis	3
3	Results	3
4	Discussion & Outlook	3
5	References	3

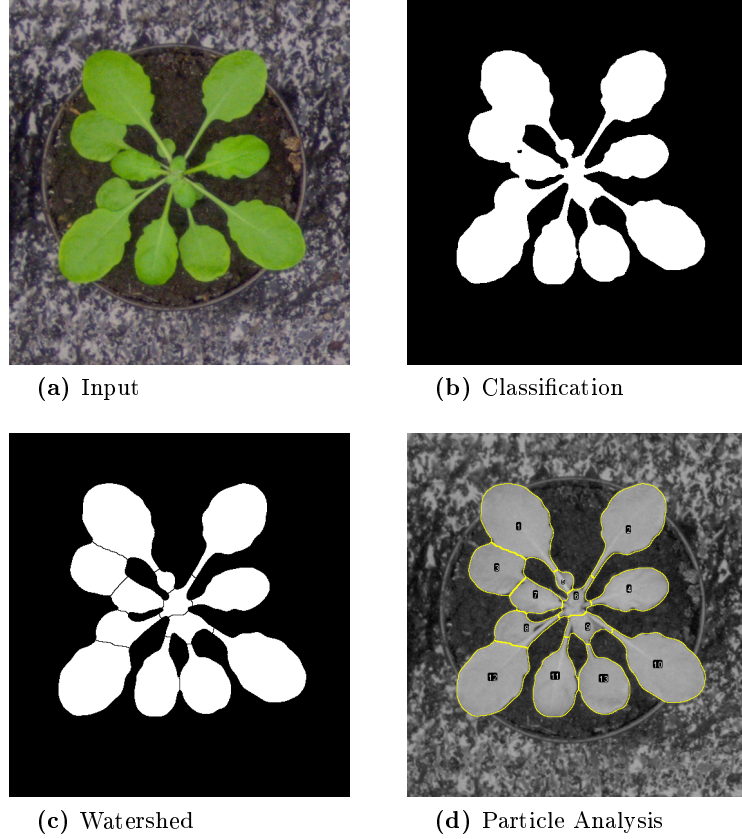


Figure 1 – The analysis of plant leaves is conducted in three steps. The RGB input image (a) is classified into plant and background by a trainable Weka segmentation classifier (b). Single leaf objects are identified by watershed segmentation (c). The binary mask is used to analyze properties in the split red, green and blue channel (d).

1 Introduction

This is a dummy sentence that shows how citations work (Adams et al., 2018).

2 Methodology

The image analysis approach consists of three main steps (figure 1). First, the input RGB input image is segmented into two class, plant and background by a trainable Weka segmentation classifier. Second, the binary class output is used to identify single leaf objects by watershed segmentation. The resulting binary mask is utilized to analyze properties of the leaf objects in the single red, green and blue channel, respectively.

2.1 Segmentation

The plant is separated from the background with the help of a trainable Weka segmentation classifier, which is available as a plugin for Fiji. The trainable Weka segmentation provides a GUI to train machine learning algorithms to produce pixel-based segmentations. The user can add traces to classes and after classifier training, traces/regions of interest can be adjusted to improve classification. Six representative pictures are selected from the 2017 data set to train the classifier (plant029, plant145 and plant159 from A1; plant032,

plant034 and plant037 from A2). Pictures are chosen to cover the whole range of plant green shades and the range of background characteristics. The Weka Experimenter was used to assess the performance of different machine learning algorithms. Based on these results (table 1), FastRandomForest was used as a classifier.

Table 1 – Comparison of classifier performance by Weka Experimenter. The default algorithm parameters were kept.

Algorithm	Percent correct	Precision	Recall	F score	Matthews correlation	AUC
FastRandomForest	99.93	1.00	1.00	1.00	1.00	1.00
SMO	92.52	0.89	0.93	0.91	0.85	0.93
k -nearest Neighbors	95.38	0.95	0.93	0.94	0.90	0.95
RandomSubSpace	99.85	1.00	1.00	1.00	1.00	1.00
Bagging	99.77	1.00	1.00	1.00	1.00	1.00
DesicisonTable	99.05	0.99	0.9	0.99	0.98	1.00

2.2 Object Recognition

Watershed

2.3 Object Analysis

Particle Analyzer and additional stuff until csv export

2.4 Explorative Data Analysis

Everything in Python

3 Results

4 Discussion & Outlook

5 References

Adams, T., Dörpinghaus, J., Jacobs, M., and Steinhage, V. (2018). Automated lung tumor detection and diagnosis in CT Scans using texture feature analysis and SVM. In *Communication Papers of the 2018 Federated Conference on Computer Science and Information Systems*, Annals of Computer Science and Information Systems, pages 13–20. PTI.