
MERCHANT CHECKOUT + PAID APIS

Sell in MUSD. Know what was paid.

Merchant payments and x402 API access on Mezo, with inspectable settlement and protocol-aware treasury policy.

Built by Praise

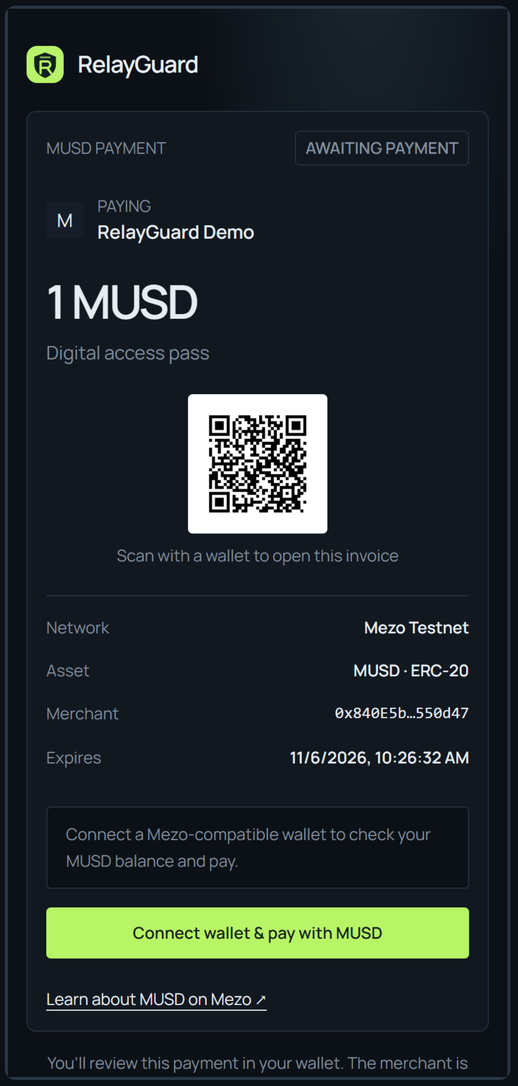

01 / THE MERCHANT'S MISSING LAYER

A token transfer does not identify an order.

Digital merchants need a payment workflow: a price, a customer, an expiry and a reliable decision about what to fulfil.

01

Request

Create an exact, expiring payment request.

02

Reconcile

Tie the transfer to the buyer and merchant.


03

Fulfil


Release an order or API response after verification.

02 / PRODUCT

Create a link. Let the customer pay.

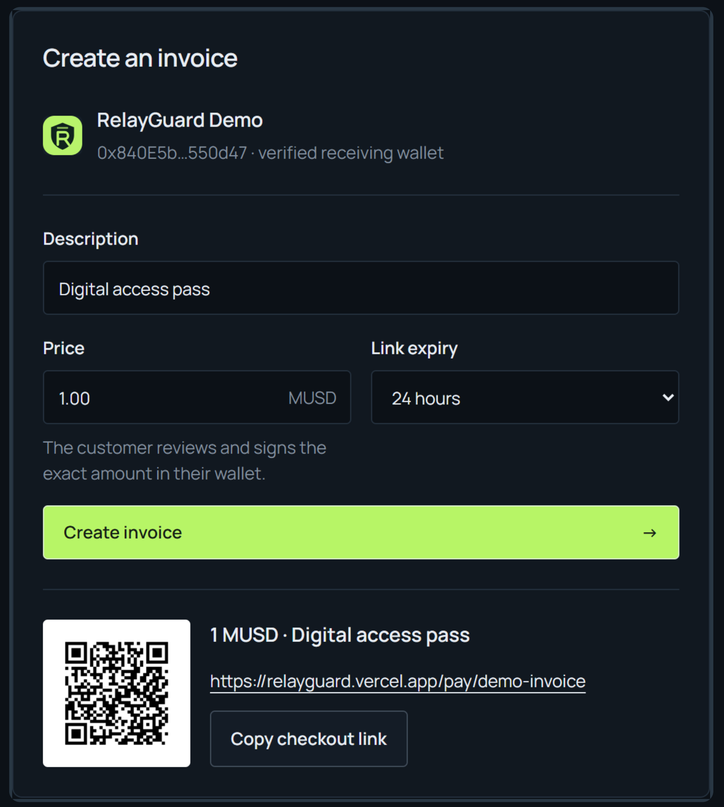

Demo account

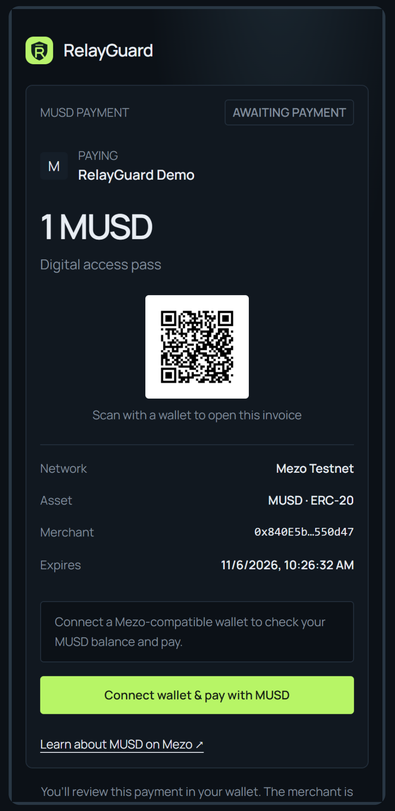

01 Merchant sets the terms

Product, exact MUSD price and expiry.

02 Customer reviews and signs


The checkout makes the destination and amount visible.

03 Funds arrive directly

The merchant remains the receiving wallet.

03 / DEVELOPER EXPERIENCE

The same payment discipline, per request.

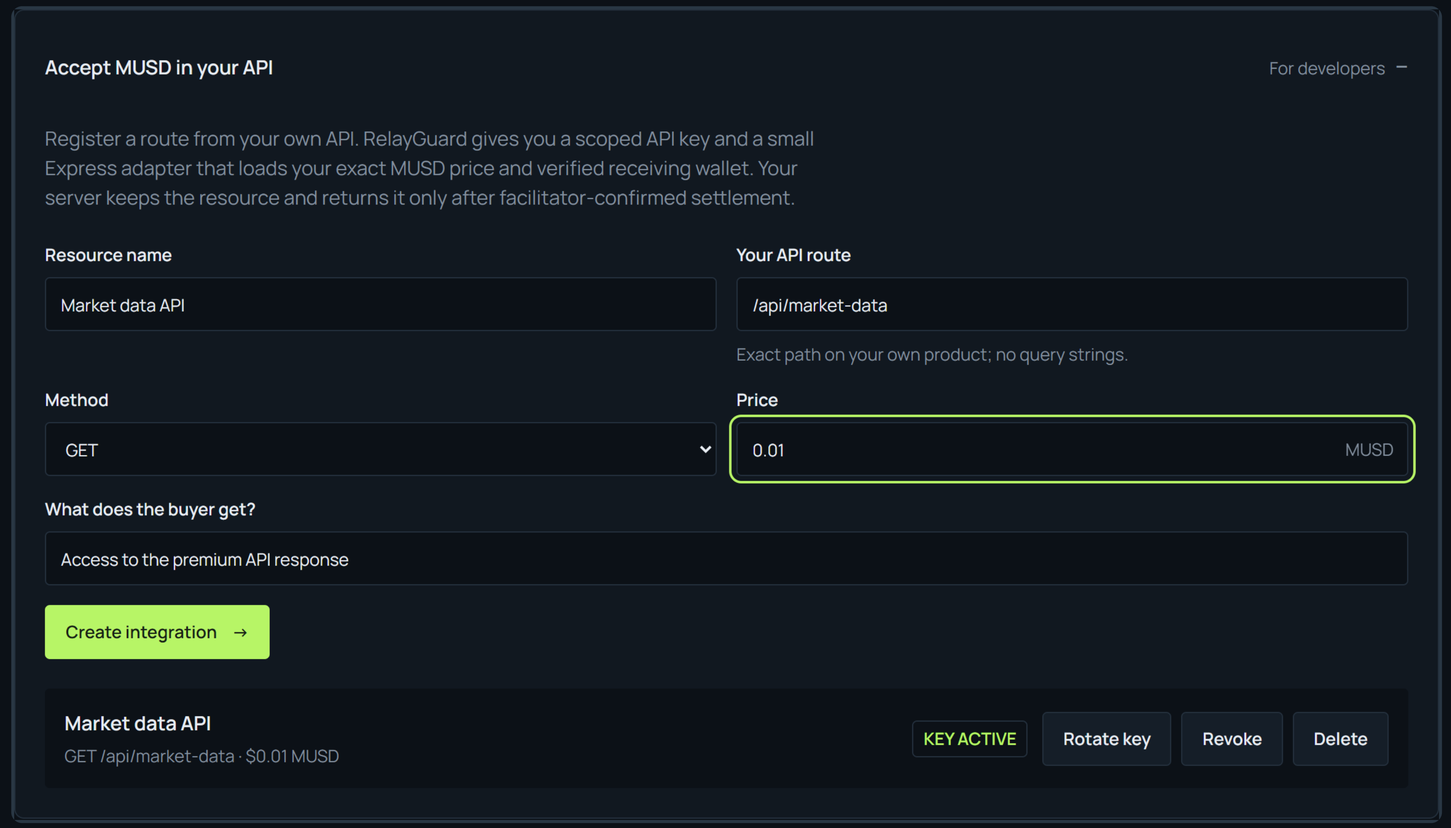

01 **Register**

Define a paid route and MUSD price.

02 **Challenge**

HTTP 402 returns payment requirements.

03 **Settle**

Signed authorization is settled before a response is released.

04 / WHY MEZO

MUSD is the payment asset. Mezo informs risk.

Settlement	**Canonical MUSD on Mezo Testnet** ERC-20 transfers for invoices; x402 signed authorization for APIs.
Protocol reads	**Trove state + price feed** BTC collateral, debt and collateral ratio inform policy.
Treasury policy	**Evaluate before authorization** Human review, spending blocks and unavailable-read handling.

Chain 31611 / BTC gas / MUSD payments

05 / INTEGRATION EVIDENCE

Historical Testnet payments. Public verification.

Customer invoice

NOT VERIFIED NOW

1.00 MUSD

From	0x2D6d690d…18480828
To	0x840E5bBF…30550d47
Token	Canonical Mezo Testnet MUSD
Block	Refresh to verify

Inspect transaction on Mezo ↗

Agent API access

RPC VERIFIED

0.001 MUSD

From	0x2D6d690d…18480828
To	0x840E5bBF…30550d47
Token	Canonical Mezo Testnet MUSD
Block	16372674


Inspect transaction on Mezo ↗

▶ Inspect machine-readable verification

Receipt status remains visible when an RPC read is unavailable.

06 / RISK BOUNDARIES

A clear boundary between permission and risk.

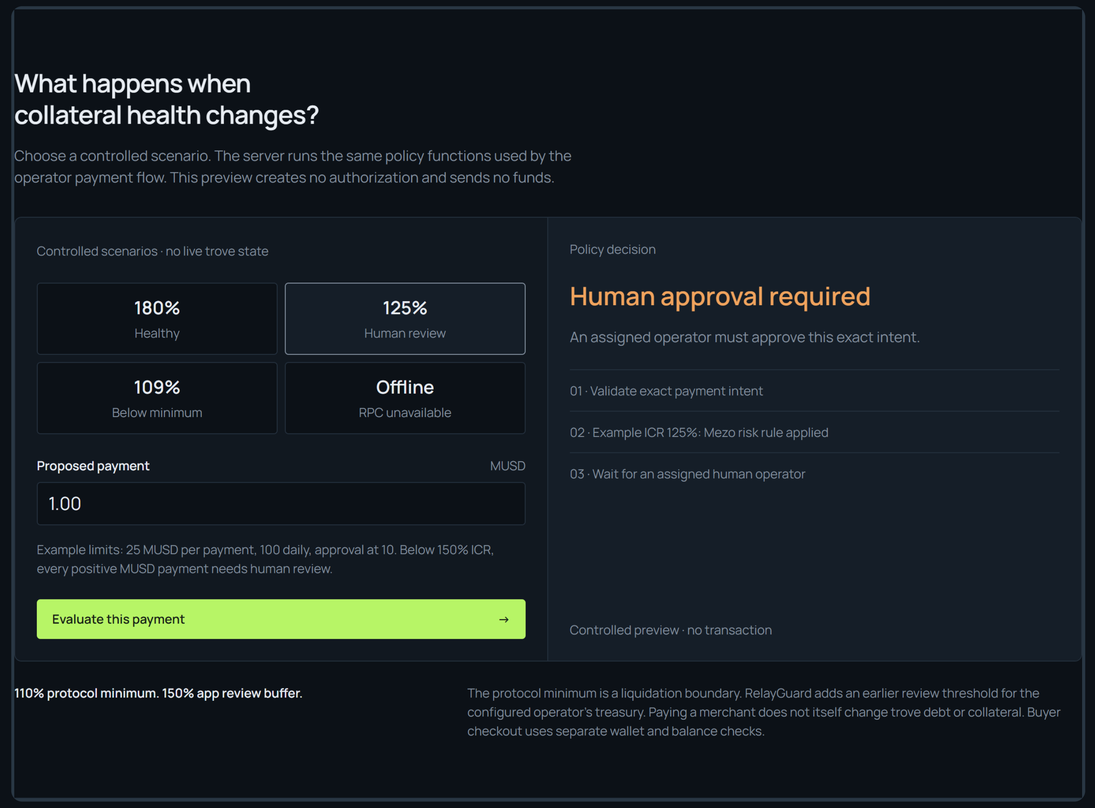

Controlled scenarios / real policy functions / no transaction broadcast

150% app threshold

125% collateral requires human approval.

110% protocol minimum

109% collateral blocks spending.

Unavailable reads

Pause MUSD authorization when context is missing.

07 / ENGINEERING

Verification belongs on the server.

Exact settlement checks

Receipt success, canonical token, payer, recipient and atomic amount.

Authenticated merchant operations

Session validation, wallet ownership signatures and merchant-scoped invoices.

Replay and expiry handling

Payment attempts are bounded by invoice state and authorization validity.

Tested policy boundaries

63 automated tests cover settlement, authentication and policy behavior.

08 / FIRST MARKET

Start with sellers who already want MUSD.

API sellers and digital merchants need payment links, clear reconciliation and a small integration surface.

NEXT MILESTONE

3 design partners

Measure time to first payment, checkout completion and repeat payment activity.

$19/month merchant workspace: a pricing hypothesis to validate in the pilot.

Pilot objective / first payment to repeat usage

RELAYGUARD / MEZO WAVE 2

From a payment request to a verifiable result.

MUSD checkout. Paid APIs. Protocol-aware policy.

Explore the product

relayguard.vercel.app

Inspect the implementation

github.com/Reinasboo/relayguard

Praise / Builder