


0.4 <https://fullstack-exampleapp.herokuapp.com/notes>

Upon clicking the button a method call is activated that sends a POST request to the server along with the data in the form (notes). The 302 reply from the server prompts the page to reload which ensues get request for all it's content. Including the now updated list of notes.

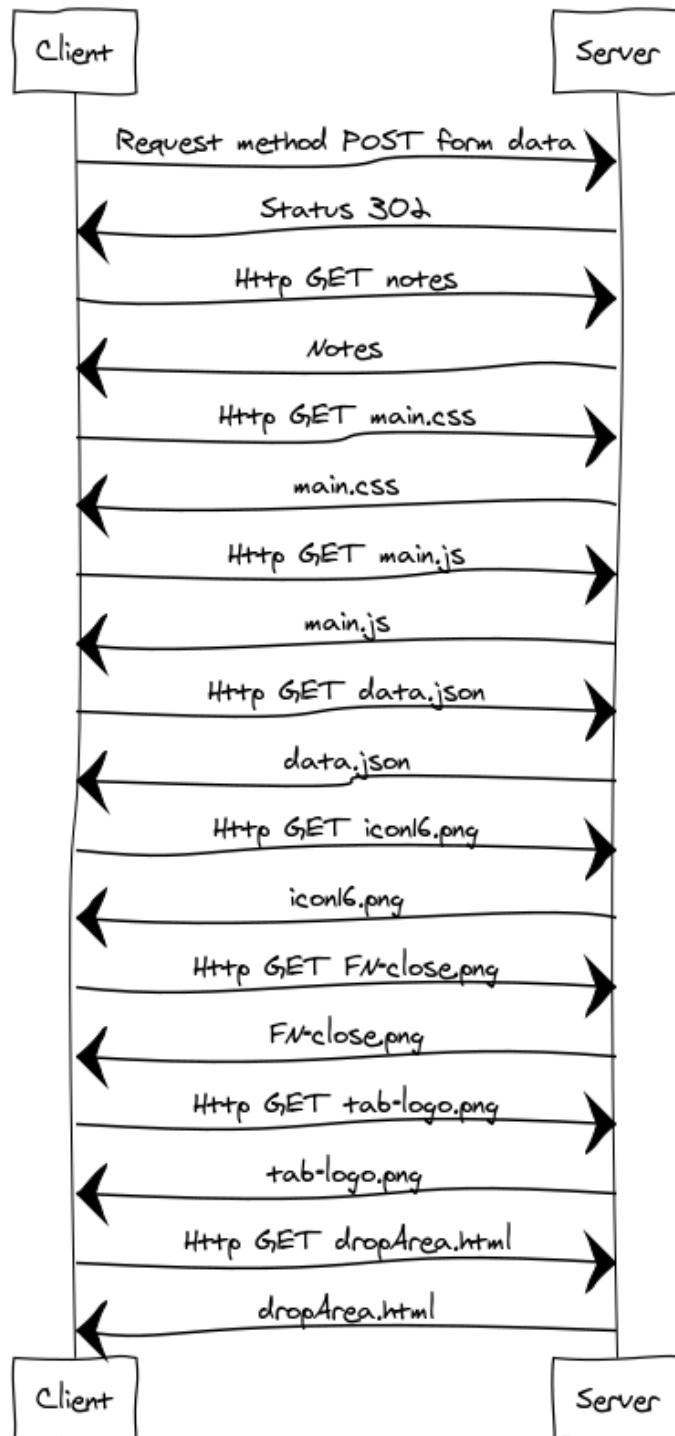

0.6 <https://fullstack-exampleapp.herokuapp.com/spa> (loading the page)

Essentially same as with the previous page, since we are loading the page for the “first” time. Only difference is part of the content, such as `spa.js`, which is not in the `/notes` version

0.6 <https://fullstack-exampleapp.herokuapp.com/spa> (new note)

After pressing send the page prevents form from immediately sending and reloading the page. Instead the note is taken via “`document.getElementById(notes_form)`” and immediately appended to the list held by the site. After this it is sent as a POST json request to the server.

