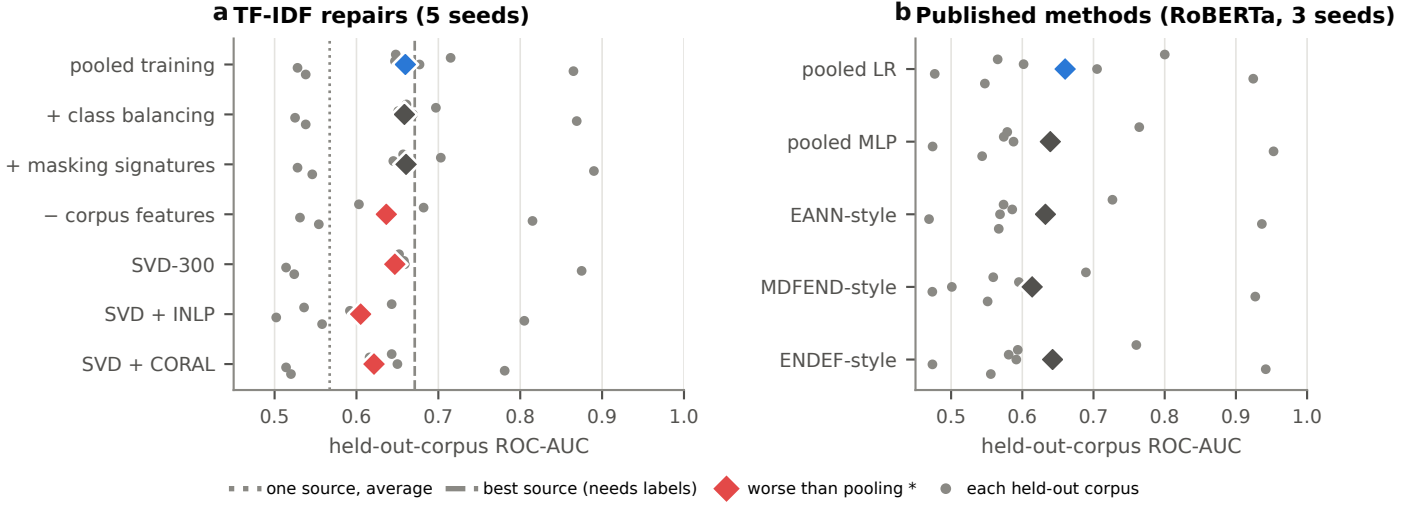
a TF-IDF repairs (5 seeds)
pooled training
+ class balancing
+ masking signatures
− corpus features
SVD-300
SVD + INLP
SVD + CORAL
0.5
0.6
0.7
0.8
0.9
1.0
held-out-corpus ROC-AUC
b Published methods (RoBERTa, 3 seeds)
pooled LR
pooled MLP
EANN-style
MDFEND-style
ENDEF-style
0.5
0.6
0.7
0.8
0.9
1.0
held-out-corpus ROC-AUC
one source, average
best source (needs labels)
worse than pooling *
each held-out corpus