
Duration: 1 m 14.634 s Start: Feb 24, 11:29:16.335 AM End: Feb 24, 11:30:30.969 AM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 8 10 40 50 60 40 50 60 40 50 60 Pass % 70 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Graph page	1 m 14.634 s	2	0	2	0	10	0	2	8


Tag	Scenario				Fea	ture		
Name	T	P	F	S	T	P	F	S
@graph	2	0	2	0	1	0	1	0

FEATURES SUMMARY -- 4

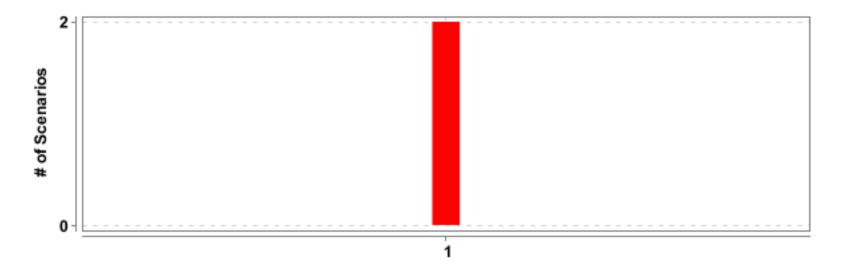

#	Feature Name	T	P	F	S	Duration
1	Graph page	2	0	2	0	1 m 14.634 s

SCENARIOS SUMMARY -- 5

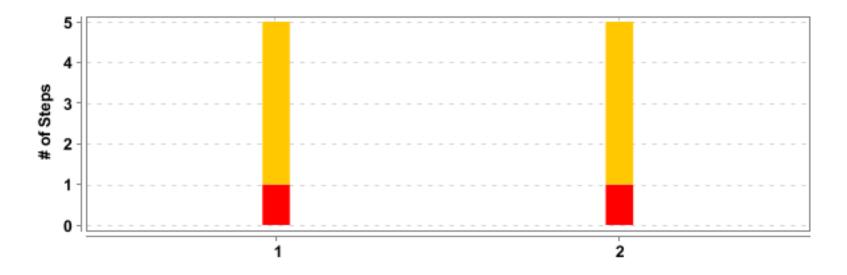


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Graph page	user navigate to Graph page and works on Graph	5	0	1	4	1 m 5.571 s
2	Graph page	user does Graph Representations	5	0	1	4	8.566 s

DETAILED SECTION -- 6 --

Graph page

FAILED	DURATION - 1 m 14.634 s	Scenarios		Steps	
		Total - 2		Total - 10	
/ 11:29:16.335 AM //	/ 11:30:30.969 AM /	Pass - 0	2	Pass - 0	10
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 8	

user navigate to Graph page and works on Graph

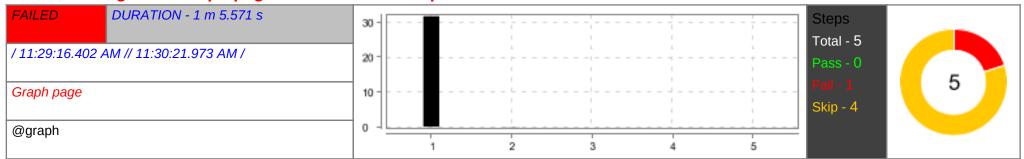

#	Step / Hook Details	Status	Duration
1	Given user login with username "USERNAME" and password "PASSWORD" given through config	FAILED	31.676 s
	org.openqa.selenium.TimeoutException: timeout: Timed out receiving message from renderer: 30.000 (Session info: chrome=110.0.5481.104) Build info: version: '4.8.0', revision: '267030adea' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_351' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0d954e1041cb75c178d71b4fe88a7c06, get {url=https://dsportalapp.herokuapp.com/login}] Capabilities {acceptInsecureCerts: true, browserName: chrome, browserVersion: 110.0.5481.104, chrome: {chromedriverVersion: 110.0.5481.77 (65ed616c6e8e, userDataDir: C:WINDOWS\text{TEMP\scoped_dir2}}, goog:chromeOptions: {debuggerAddress: localhost:55732}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55732/devtoo, se:cdpVersion: 110.0.5481.104, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 20000, pageLoad: 30000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 0d954e1041cb75c178d71b4fe88a7c06 at sun.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(Unknown Source) at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(Unknown Source) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:297) at pages.CollectionsPage.LoginPage(CollectionsPage.java:158) at StepDefinition.Collections_step.user_login_with_username_and_password_given_through_config(Collections_step.java:303) at ?.user login with username "USERNAME" and password "PASSWORD" given through config(file:///C:/Users/Reka/git/DS-ALGO-94NN/src/test/resources/features/10_graph.feature:5) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - hooks.Hooks.afterstep(io.cucumber.java.Scenario)	FAILED	33.499 s
	org.openqa.selenium.remote.UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.8.0', revision: '267030adea' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_351' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0d954e104tcb75c178d71D4fe88a7c06, screenshot {}] Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 110.0.5481.104, chrome: (chromedriverVersion: 110.0.5481.177 (65ed616c6e8e, userDataDir: C:\WINDOWS\TEMP\scoped_dir2), goog:chromeOptions: {debuggerAddress: localhost:55732}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy,'), se:cctp. versi/focalhost:55732/networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy,'), se:cctp. versi/focalhost:55732/devtoo, se:cctpVersion: 110.0.5481.104, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 20000, pag/Load: 30000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: 0d954e1041cb75c178d71bdfe88a7c06 at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:589) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:59) at hooks.dterstep(Hooks.java:57) Caused by: java.io.UncheckedIOException: java.io.IOException: An existing connection was forcibly closed by the remote host at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:73) at org.openqa.selenium.remote.http.HathadsandFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at or	PAILED	55.499 5
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at hooks.Hooks.afterstep(Hooks.java:57) at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		


#	Step / Hook Details	Status	Duration
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	$at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda \$run Test Case \$5 (Cucumber Execution Context. java: 130)$		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	Caused by: java.io.IOException: An existing connection was forcibly closed by the remote host		
	at sun.nio.ch.SocketDispatcher.read0(Native Method)		
	at sun.nio.ch.SocketDispatcher.read(Unknown Source)		
	at sun.nio.ch.IOUtil.readIntoNativeBuffer(Unknown Source)		
	at sun.nio.ch.IOUtil.read(Unknown Source)		
	at sun.nio.ch.SocketChannelImpl.read(Unknown Source)		
	at io.netty.buffer.PooledByteBuf.setBytes(PooledByteBuf.java:259)		
	at io.netty.buffer.AbstractByteBuf.writeBytes(AbstractByteBuf.java:1132)		
	at io.netty.channel.socket.nio.NioSocketChannel.doReadBytes(NioSocketChannel.java:357)		
	at io.netty.channel.nio.AbstractNioByteChannel\$NioByteUnsafe.read(AbstractNioByteChannel.java:151)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:788)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.lang.Thread.run(Unknown Source)		
2	Given user clicks "Get started" in Graph field	SKIPPED	0.027 s
3	When user click "Graph" first link in the Graph	SKIPPED	0.002 s
4	Then user clicks "Try here"	SKIPPED	0.002 s
5	Then user enters code in tryEditor from "pythonCode" and 0 then click run , output is printed	SKIPPED	0.003 s

user does Graph Representations

DETAILED SECTION -- 10 --

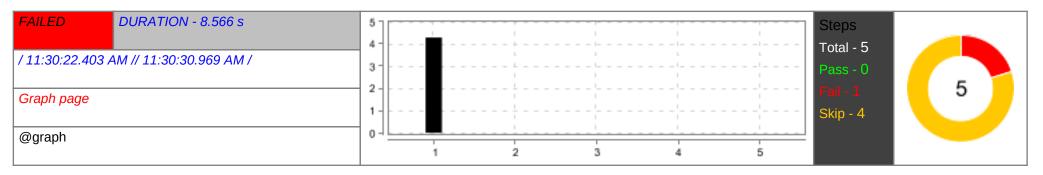

#	Step / Hook Details	Status	Duration
1	Given user is in Graph homepage	FAILED	4.278 s
\vdash			
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:297)		
	at pages.CollectionsPage.clickGraphPage(CollectionsPage.java:364)		
	at StepDefinition.Collections_step.user_is_in_graph_homepage(Collections_step.java:318)		

#	Step / Hook Details	Status	Duration
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(Unknown Source)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(Unknown Source)		
	at java.lang.reflect.Method.invoke(Unknown Source)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:130)		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		

	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	aused by: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:1:4295		
	at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)		
	at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)		
	at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)		
	at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)		
	at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)		
	at io.netty.util.concurrent.DefaultPromise.setFailureO(DefaultPromise.java:629)		
	at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)		
- 1	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
- 1	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.lang.Thread.run(Unknown Source)		
	aused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/		
	0:0:0:0:0:1:4295 Caused by: java.net.ConnectException: Connection refused: no further information		
	at sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)		
	at sun.nio.ch.SocketChannelImpl.finishConnect(Unknown Source)		
	at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		

#	Step / Hook Details	Status	Duration
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.lang.Thread.run(Unknown Source) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - hooks.Hooks.afterstep(io.cucumber.java.Scenario)	FAILED	4.195 s
	Org.openqa.selenium.remote. UnreachableBrowserException: Error communicating with the remote browser. It may have died. Build info: version: '4.8.0', revision: '267030adea' System info: os.name: Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0, 351' Driver info: org.openqa.selenium.chrome.ChromeDriver Command. (0954e1041cb75c178d71b4fe88a7c06, screenshot (1) Capabilities (acceptinsecureCerts: true, browserName: chrome, browserVersion: 110.0.5481.104, chrome: (chromedriverVersion: 110.0.5481.17 (65ed616c6e8e, userDataDir: C:WINDOWS\true\true\true\true\true\true\true\true	HAILED	4.195 S
	at java.lang.reflect.Method.invoke(Unknown Source)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)		
	at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)		
	at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:56)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:130)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)		
	Caused by: java.net.ConnectException: Connection refused: no further information: localhost/0:0:0:0:0:0:0:0:0:1:4295		
	at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179)		
	at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28)		
	at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20)		
	at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:590)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:583)		
	at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:559)		
	at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:492)		
	at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:636)		
	at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:629)		
	at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:118)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.lang.Thread.run(Unknown Source)		
	Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/		
	0:0:0:0:0:0:0:1:4295 Caused by: java.net.ConnectException: Connection refused: no further information		
	at sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)		
	at sun.nio.ch.SocketChannelImpl.finishConnect(Unknown Source)		
	at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)		
	at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)		
	at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)		
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)		
	at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)		
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)		
	at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)		
	at java.lang.Thread.run(Unknown Source)		

DETAILED SECTION -- 16 --

#	Step / Hook Details	Status	Duration
2	When user click "Graph Representations" second link in the Graph	SKIPPED	0.001 s
3	Then user clicks "Try here"	SKIPPED	0.002 s
4	Then user enters code in tryEditor from "pythonCode" and 0 then click run, output is printed	SKIPPED	0.003 s
5	And user navigate to homepage	SKIPPED	0.001 s