


examples/mercenne-prime
/lockfree_queue.h

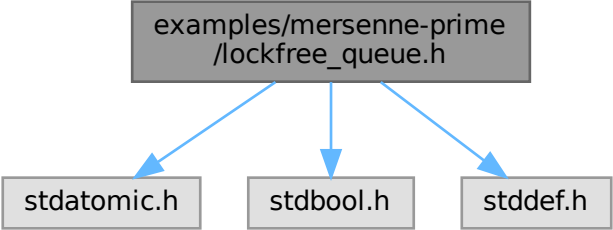

```
graph TD; A["examples/mercenne-prime<br/>/lockfree_queue.h"] --> B["stdatomic.h"]; A --> C["stdbool.h"]; A --> D["stddef.h"];
```

The diagram illustrates the dependencies of the file `examples/mercenne-prime/lockfree_queue.h`. It is represented as a root node in a gray box at the top. Three blue arrows point downwards from this root node to three child nodes, each in a light gray box: `stdatomic.h` on the left, `stdbool.h` in the center, and `stddef.h` on the right.

stdatomic.h

stdbool.h

stddef.h