


Selecting an existing program on 64 disjoint cases

Prespecified rule selected generation 2 · this panel supports selection, not final assessment


- Original seed
- Generation 1
- Generation 2

- Generation 1 – seed
- Generation 2 – seed
- Generation 2 – generation 1

A Program means

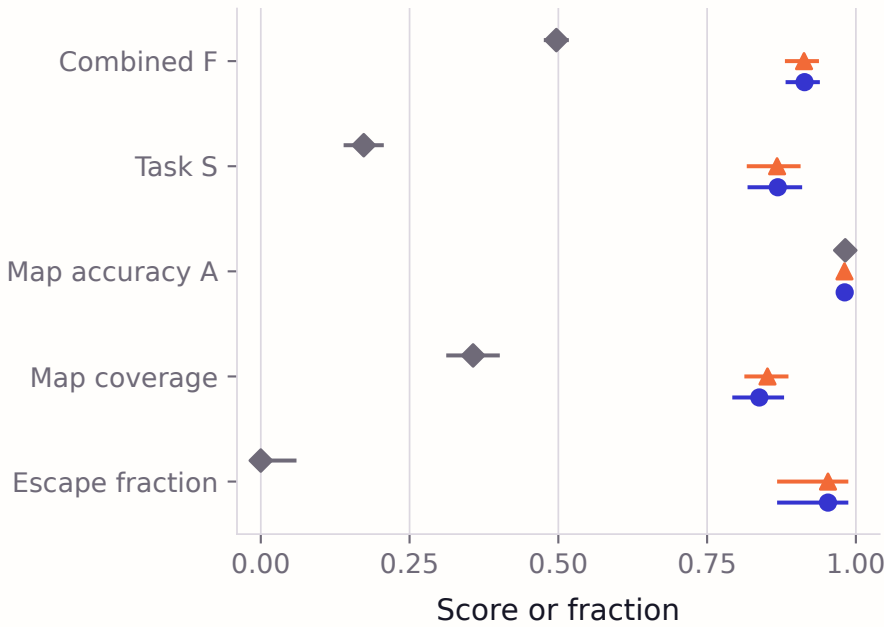

B Paired differences

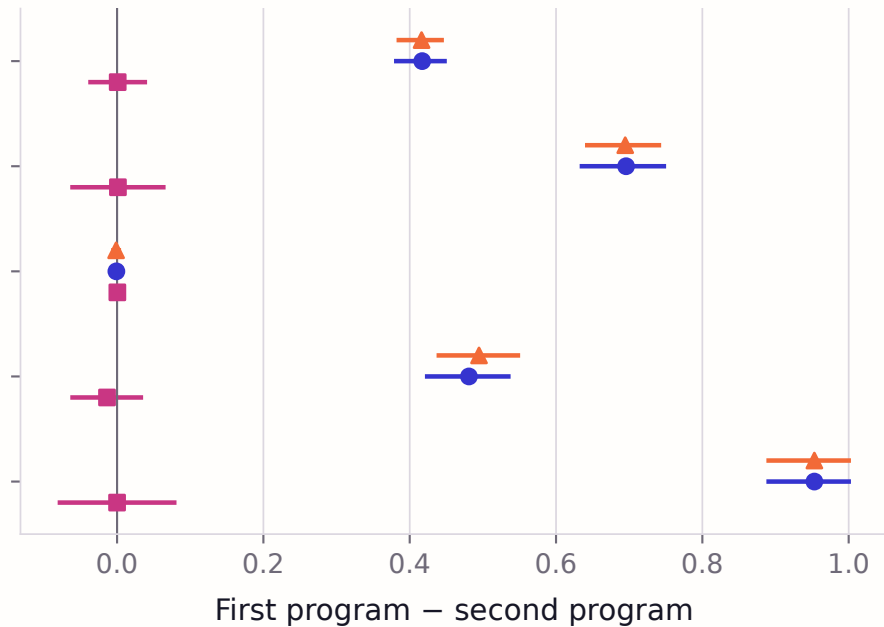

95% intervals: paired whole-case bootstrap; panel A escape uses prospectively specified separate-arm Wilson intervals.

The combined objective is 0.6 task + 0.4 reconstruction accuracy. All outcomes, including invalid executions, retain their denominator.

Accuracy measures the current map on different trajectories. These results do not identify prediction learning or its causal benefit.