




Day 41

“CLOUD SECURITY”


Preventing Deletion of Backups Using an Amazon Backup Vault Resource-based Access Policy:

Steps:


First, we will create a user which will have access to AWS backups:

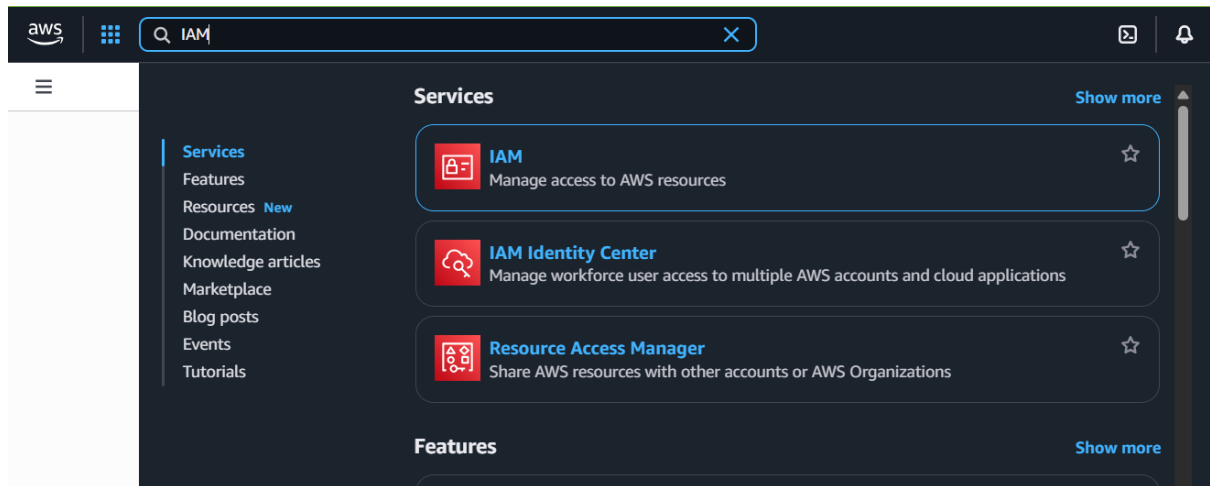


Following screen will appear:

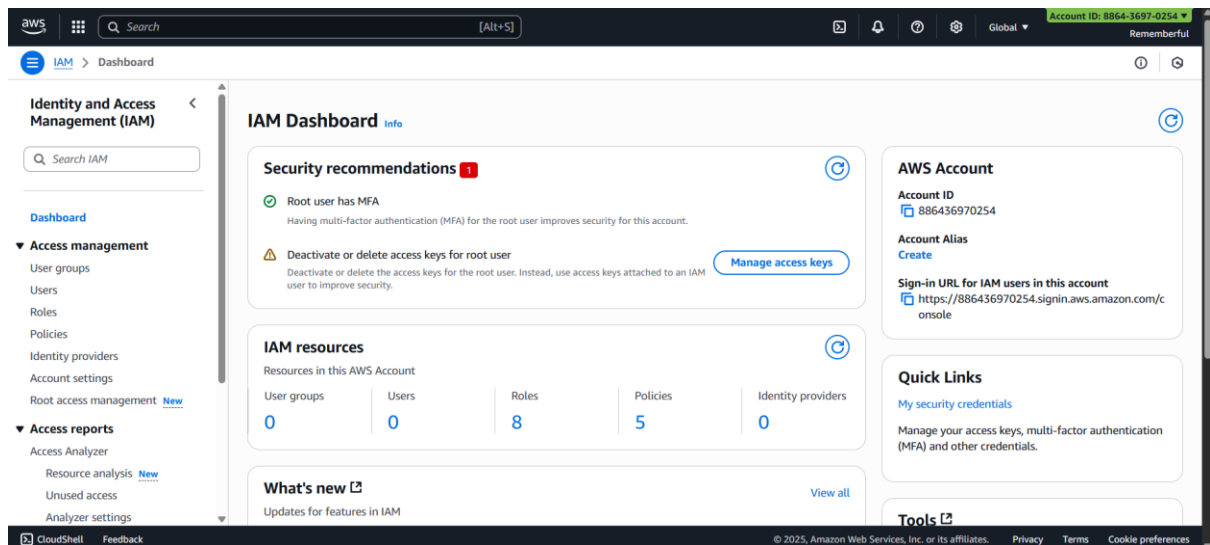


Open “users” section:

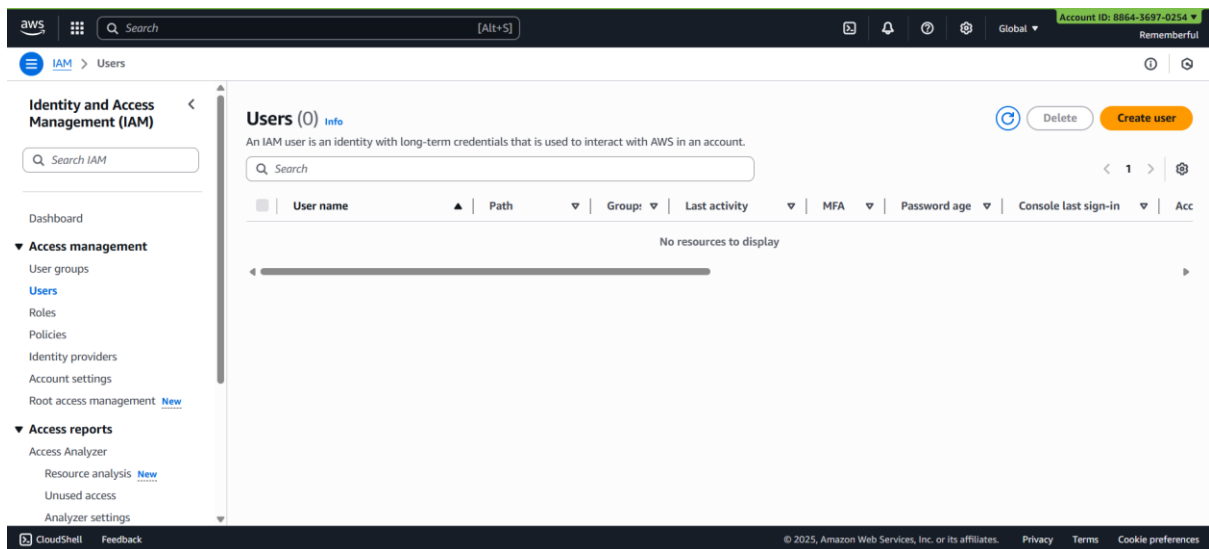

Click on “Create User”, following screen will appear:

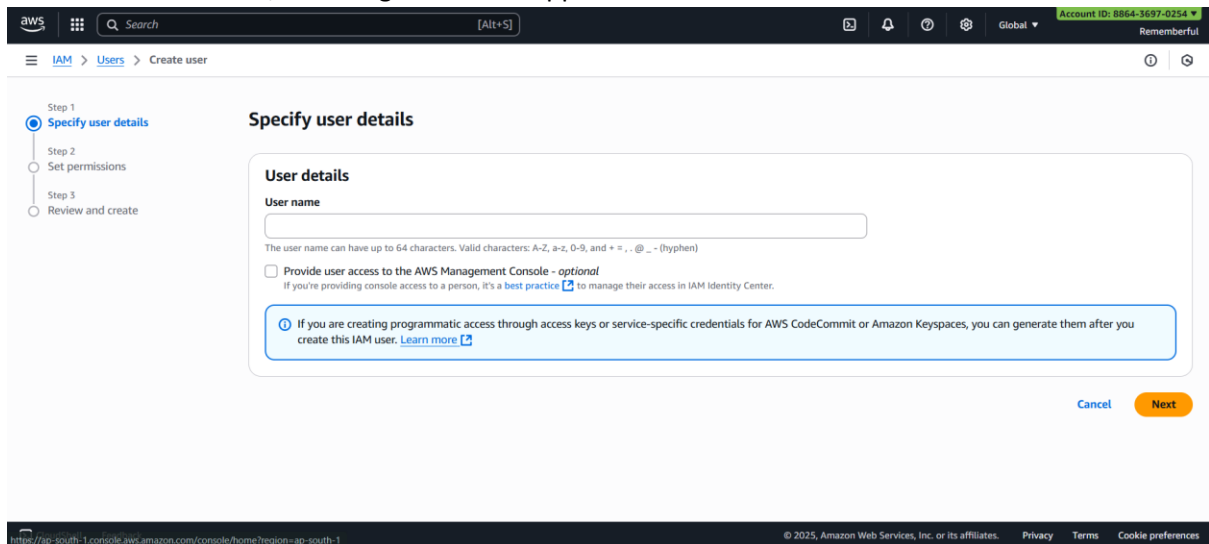

Assign password:

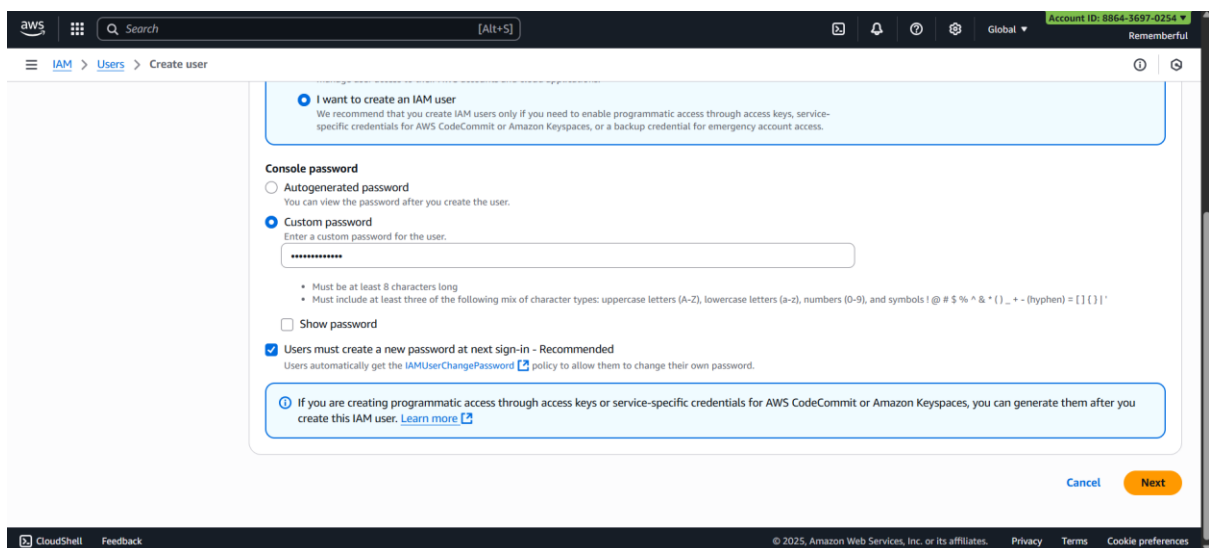

Click on “Next” following screen will appear:

The screenshot shows the 'Set permissions' step of the AWS IAM 'Create user' wizard. The left sidebar indicates the current step is 'Set permissions'. The main content area has a heading 'Set permissions' and a subheading 'Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)'. Below this, there are three 'Permissions options' boxes: 'Add user to group', 'Copy permissions', and 'Attach policies directly' (which is selected). Under 'Attach policies directly', it says 'Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.' Below the options is a section 'Permissions policies (1394)' with a search bar and a 'Filter by Type' dropdown. The search bar contains 'awsbackupfullaccess'. The table below shows one result: 'AWSBackupFullAccess' (AWS managed) with 0 attached entities. At the bottom right, there are 'Cancel', 'Previous', and 'Next' buttons.

Step 1: Specify user details
Step 2: **Set permissions**
Step 3: Review and create
Step 4: Retrieve password

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

- ☐ Add user to group
Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ☐ Copy permissions
Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ☒ **Attach policies directly**
Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

Permissions policies (1394)
Choose one or more policies to attach to your new user.

Search: Filter by Type: All types

Policy name	Type	Attached entities
☐ AccessAnalyzerServiceRolePolicy	AWS managed	0
☐ AdministratorAccess	AWS managed - job function	0

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Look for “awsbackupfullaccess”:

This screenshot is similar to the previous one, but the search bar in the 'Permissions policies' section now contains 'awsbackupfullaccess'. The table below the search bar shows one result: 'AWSBackupFullAccess' (AWS managed) with 0 attached entities. The 'Next' button is now highlighted in orange.

Step 2: **Set permissions**
Step 3: Review and create
Step 4: Retrieve password

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

- ☐ Add user to group
Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.
- ☐ Copy permissions
Copy all group memberships, attached managed policies, and inline policies from an existing user.
- ☒ **Attach policies directly**
Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

Permissions policies (1394)
Choose one or more policies to attach to your new user.

Search: Filter by Type: All types 1 match

Policy name	Type	Attached entities
☐ AWSBackupFullAccess	AWS managed	0

► Set permissions boundary - optional

Cancel Previous **Next**

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Click on “Next” following screen will appear:

The screenshot shows the 'Review and create' step of the AWS IAM 'Create user' wizard. The left sidebar indicates the current step is 'Review and create'. The main content area has a heading 'Review and create' and a subheading 'Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.' Below this, there are two sections: 'User details' and 'Permissions summary'. The 'User details' section shows 'User name' as 'john', 'Console password type' as 'Custom password', and 'Require password reset' as 'Yes'. The 'Permissions summary' section shows a table with two policies: 'AWSBackupFullAccess' (AWS managed) and 'IAMUserChangePassword' (AWS managed), both used as 'Permissions policy'. At the bottom, there is a 'Tags - optional' section with a note 'No tags associated with the resource.' and a 'Add tags' button. At the bottom right, there are 'Cancel', 'Previous', and 'Next' buttons.

Step 1: Specify user details
Step 2: Set permissions
Step 3: **Review and create**
Step 4: Retrieve password

Review and create

Review your choices. After you create the user, you can view and download the autogenerated password, if enabled.

User details

User name	Console password type	Require password reset
john	Custom password	Yes


Permissions summary

Name	Type	Used as
AWSBackupFullAccess	AWS managed	Permissions policy
IAMUserChangePassword	AWS managed	Permissions policy


Tags - optional
Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.
No tags associated with the resource.

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


Following confirmation will occur:

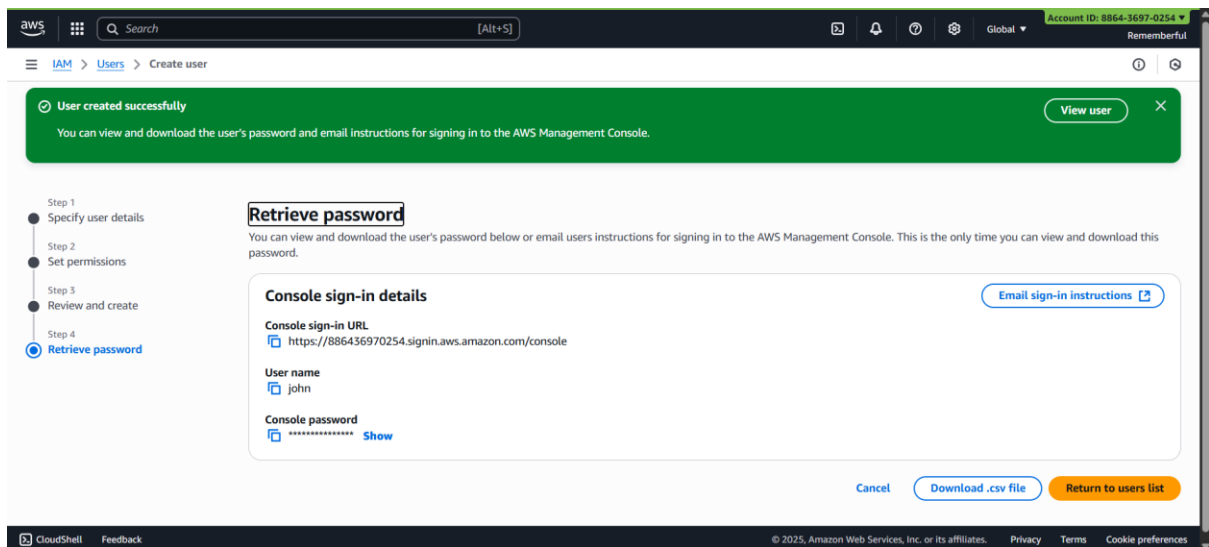


Click on "Return to users list":

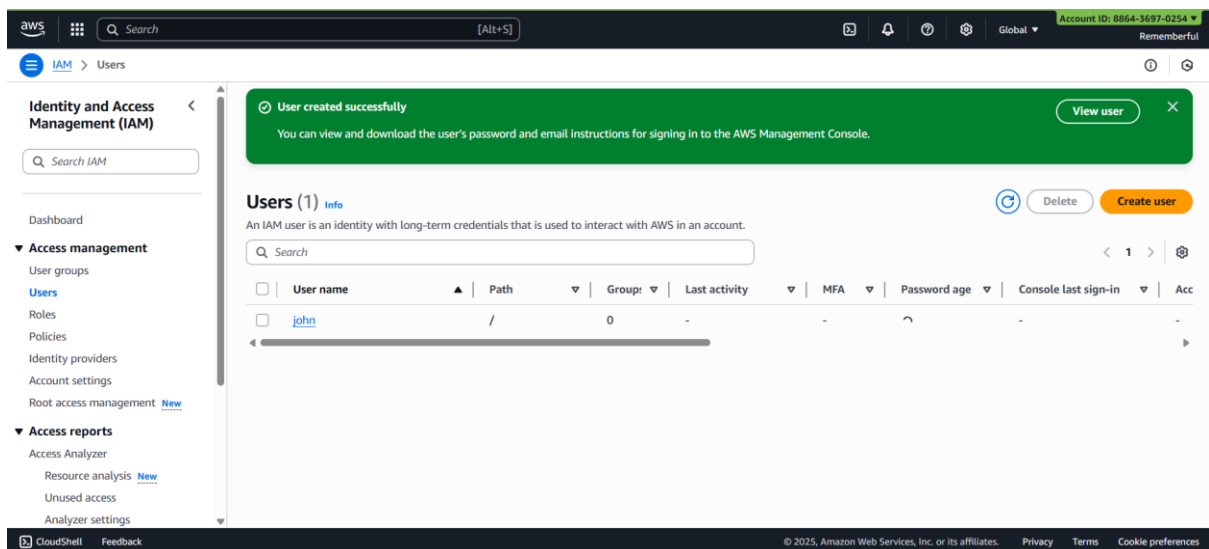


Click on the User name: copy ARN.

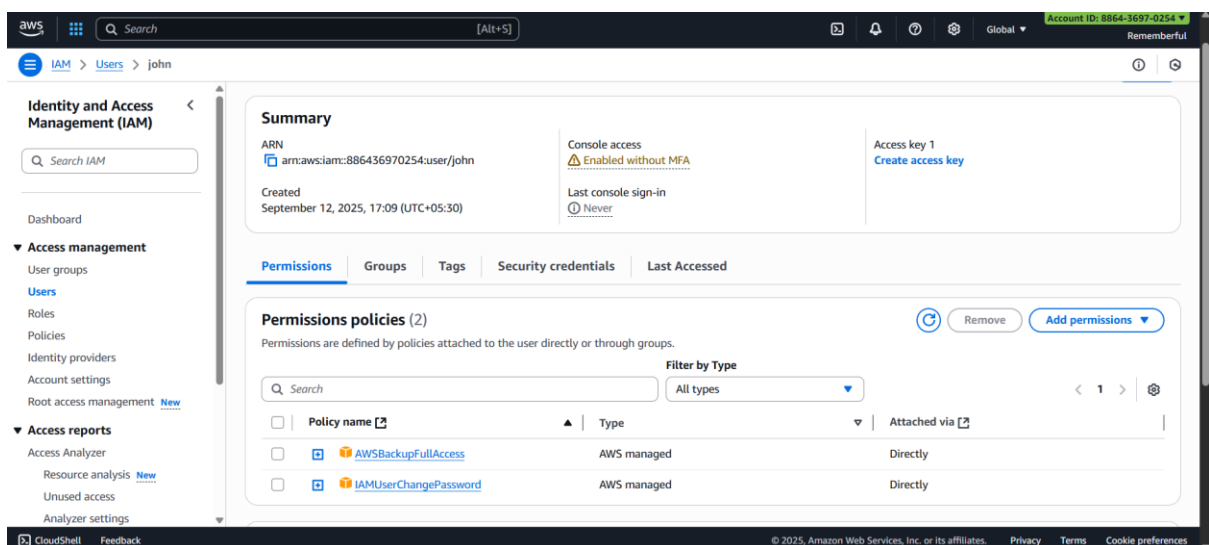


Now, look for AWS Backup:

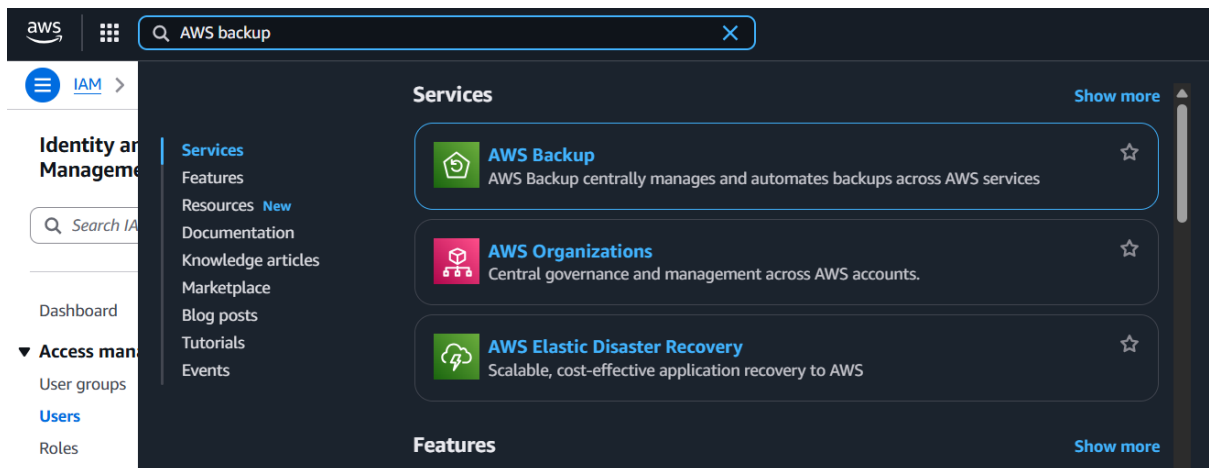

Following screen will appear:

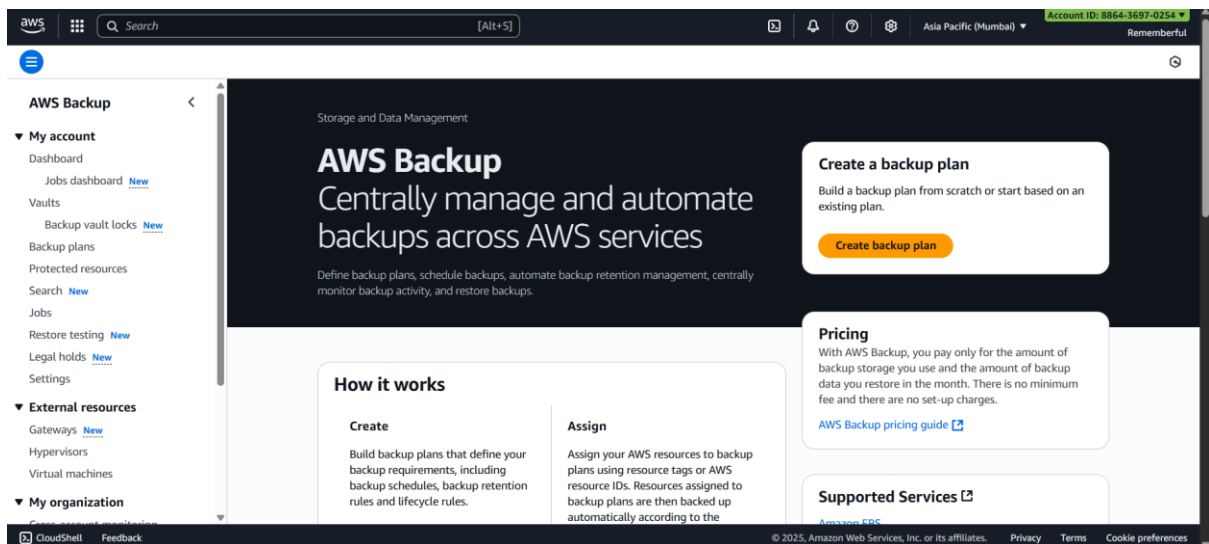

Click on “vault” option:

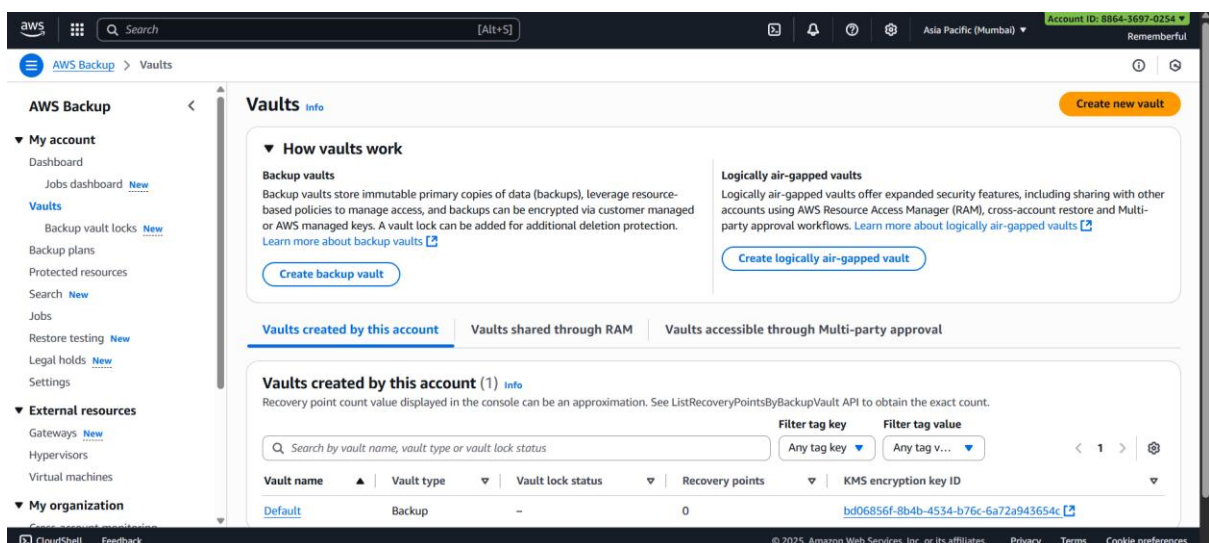

Click on “Create new vault” button: following screen will appear

Create vault [Info](#)

General

Vault name

Vault name is case sensitive. Must contain from 2 to 50 alphanumeric or "-_" characters.

Vault type

☒ **Backup vault**
Backup vaults store immutable backups that are separate from source instances.

- Encryption key is managed by customer or AWS
- Vault lock is optional

☐ **Logically air-gapped vault**
Logically air-gapped vaults store copies of backups.

- Encryption key is owned by AWS and cannot be deleted
- Cross-account and cross-organization sharing which supports direct restore
- Vault lock is mandatory

Encryption key [Info](#)

Choose KMS key

Vault tags - optional

Tags specified here help organize and track your vault.

Assign name and select the encryption key:

Create vault [Info](#)

General

Vault name

awsbackupvault1

Vault name is case sensitive. Must contain from 2 to 50 alphanumeric or "-_" characters.

Vault type

☒ **Backup vault**
Backup vaults store immutable backups that are separate from source instances.

- Encryption key is managed by customer or AWS
- Vault lock is optional

☐ **Logically air-gapped vault**
Logically air-gapped vaults store copies of backups.

- Encryption key is owned by AWS and cannot be deleted
- Cross-account and cross-organization sharing which supports direct restore
- Vault lock is mandatory

Encryption key [Info](#)

(default) aws/backup

Description	Account	Key ID	Status
Default key that protects my Backup data when no other key is defined	This account (886436970254)	bd06856f-8b4b-4534-b76c-6a72a943654c	Enabled

Following confirmation will occur:

AWS Backup

My account

- Dashboard
- Jobs dashboard [New](#)
- Vaults**
- Backup vault locks [New](#)
- Backup plans
- Protected resources
- Search [New](#)
- Jobs
- Restore testing [New](#)
- Legal holds [New](#)
- Settings

External resources

- Gateways [New](#)
- Hypervisors
- Virtual machines

My organization

awsbackupvault1 [Info](#)

[Create vault lock](#) [Delete vault](#) [Edit access policy](#)

Summary

Vault name awsbackupvault1	KMS encryption key ID bd06856f-8b4b-4534-b76c-6a72a943654c	Vault lock -
Vault type Backup vault	Creation date September 12, 2025, 17:25:24 (UTC+05:30)	Retention period for vault lock Minimum retention period: - Maximum retention period: -
Vault ARN arn:aws:backup:ap-south-1:886436970254:backup-vault:awsbackupvault1		


Recovery points (0) [Info](#)

Recovery point count value displayed in the console can be an approximation. See ListRecoveryPointsByBackupVault API to obtain the exact count.


[Filter by resource type, recovery point ARN, status, resource ARN or source account ID](#)

[Deselect all](#) [Actions](#)


Similarly create one more backup vault: awsbackupvault1 and awsbackupvault2 done

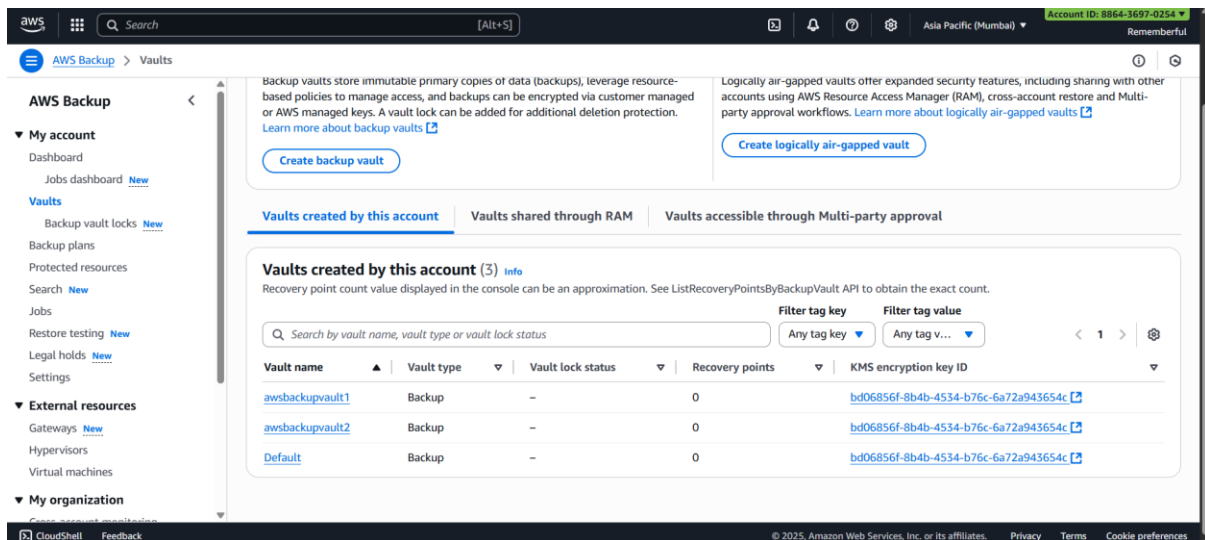


Now, to deny deletion access of John to awsbackupvault2, we will create a resource based policy, open the 2nd :

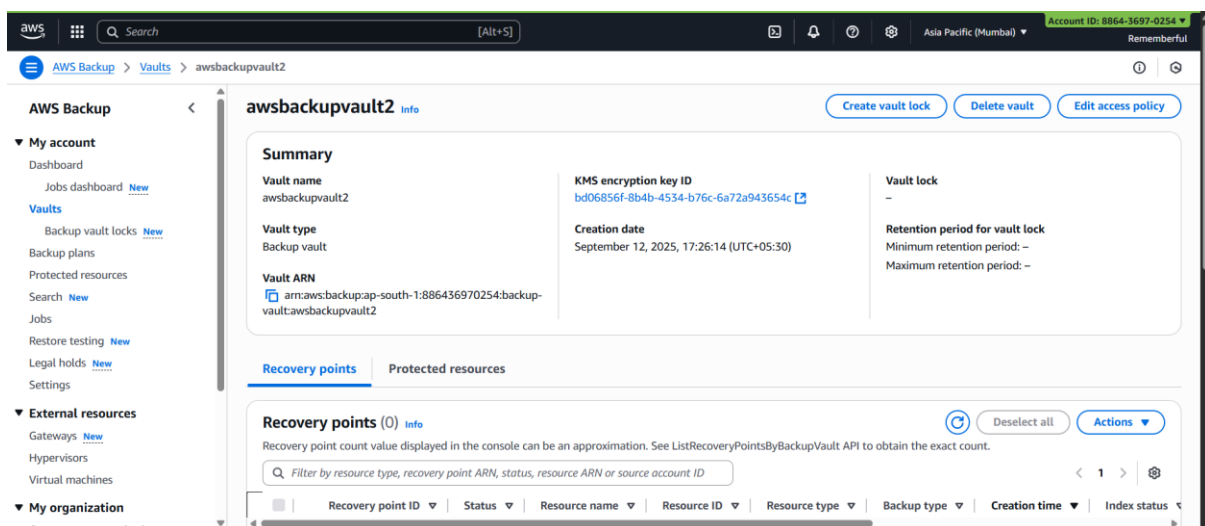

Copy the ARN, and scroll down to the section of Access policy and click on “edit”:

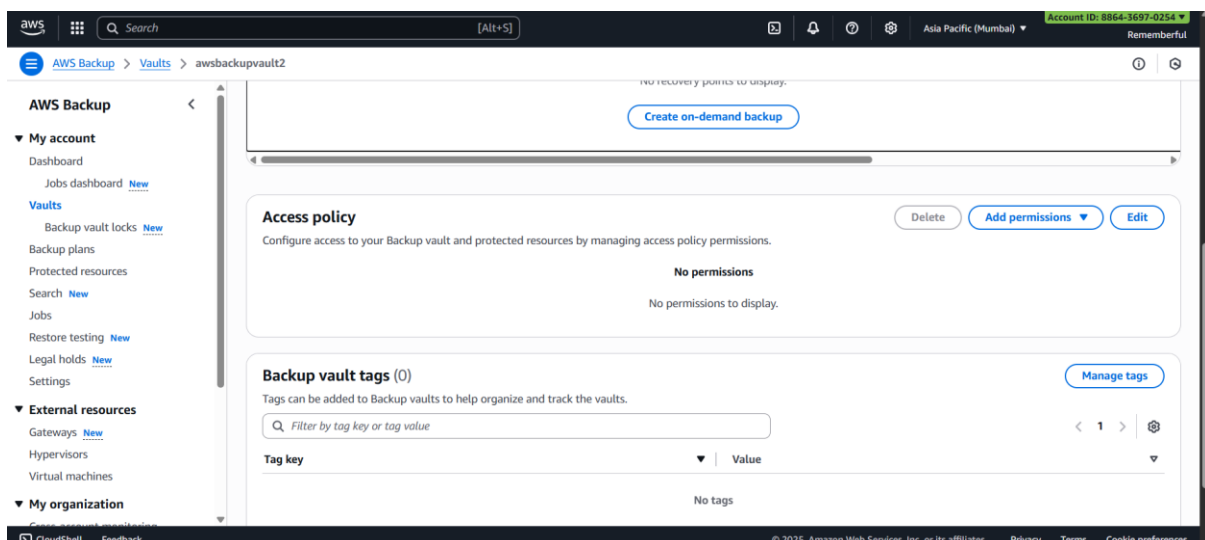


Paste the JSON policy:

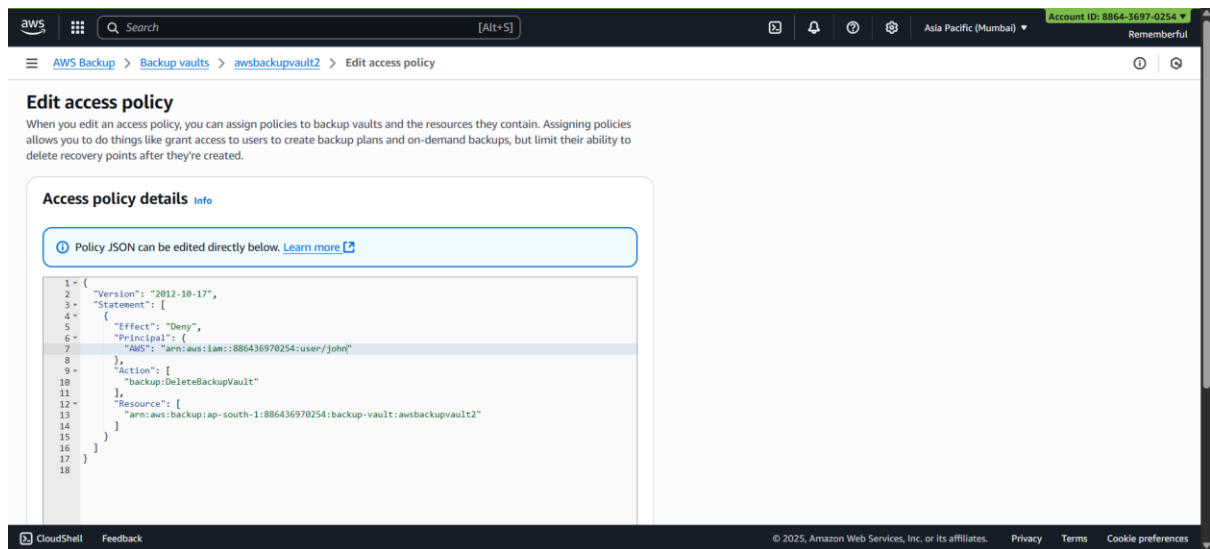


```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Deny",
      "Principal": {
        "AWS": "arn:aws:iam::886436970254:user/john"
      },
      "Action": [
        "backup:DeleteBackupVault"
      ],
      "Resource": [
        "arn:aws:backup:ap-south-1:886436970254:backup-vault:awsbackupvault2"
      ]
    }
  ]
}
```



Confirmation will occur:

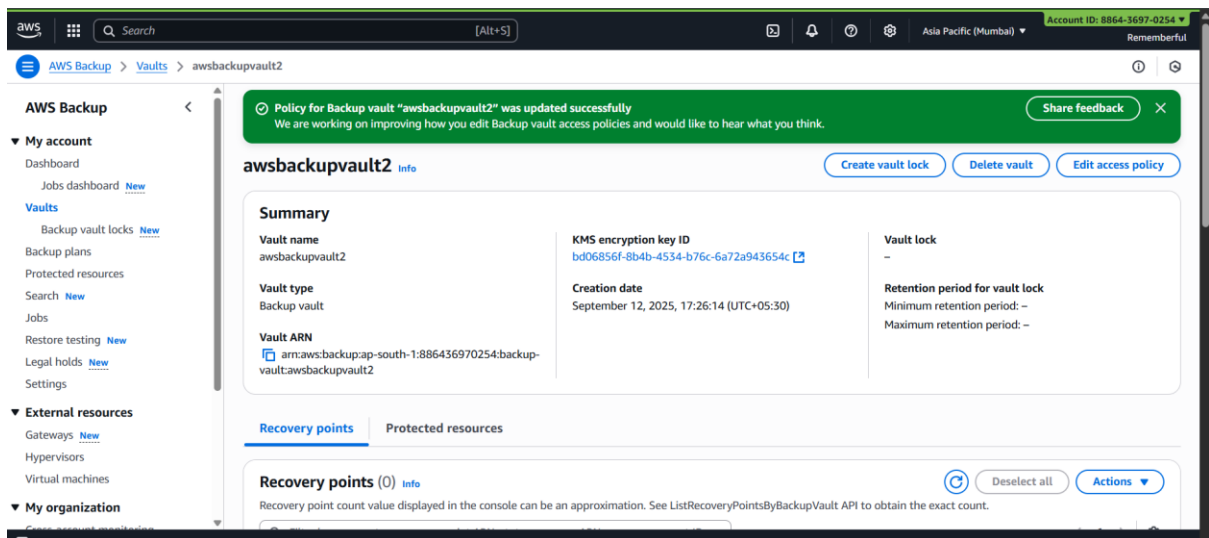

Now, sign in with the john as user:

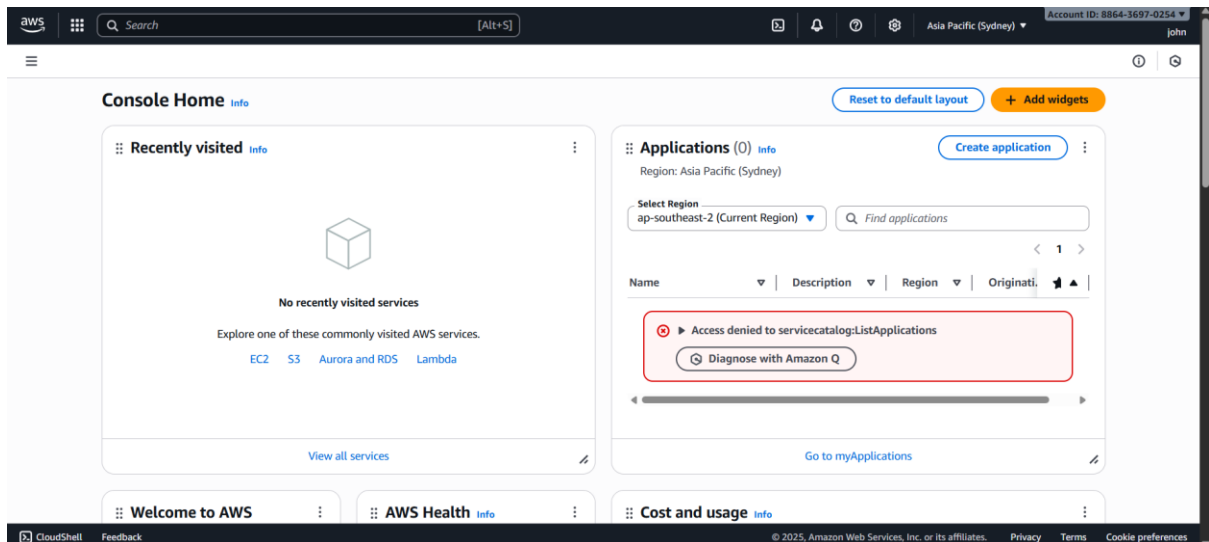

Look for AWS backup:

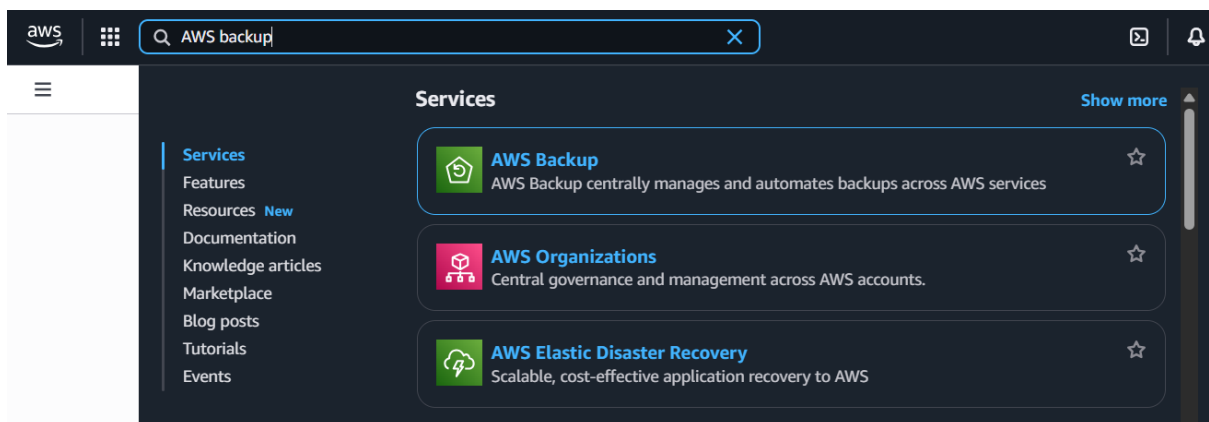

You will see that you can't delete the awsbackupvault2.

--The End--