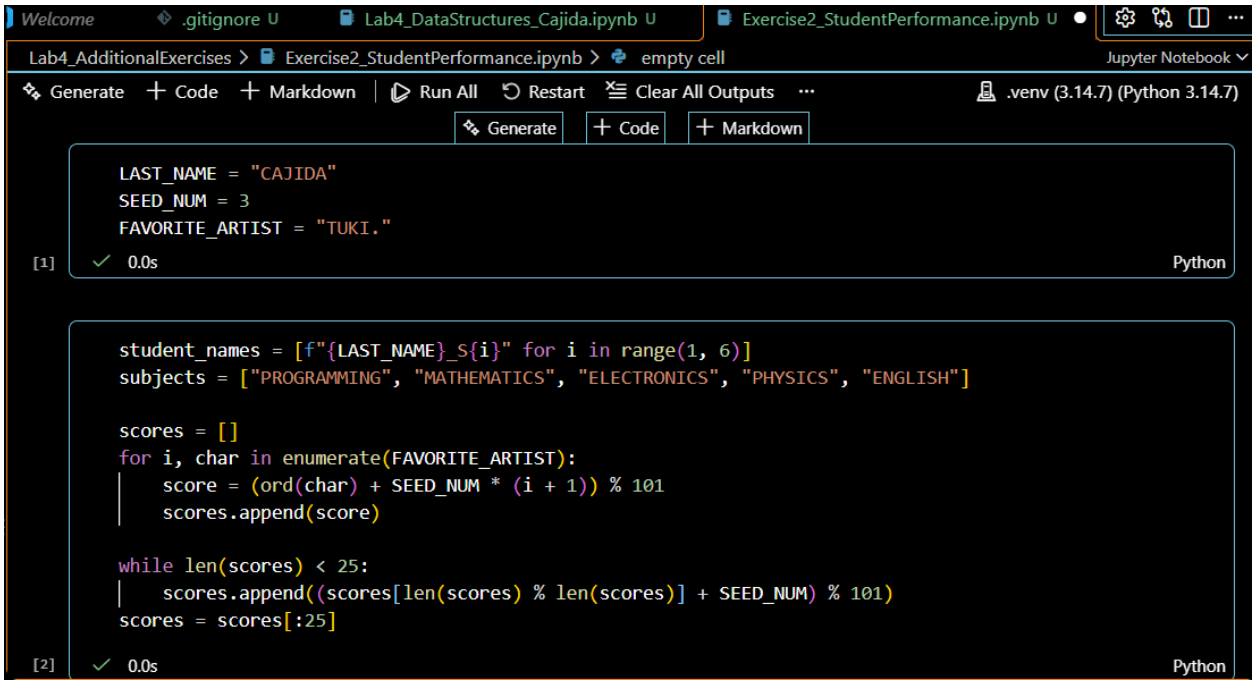
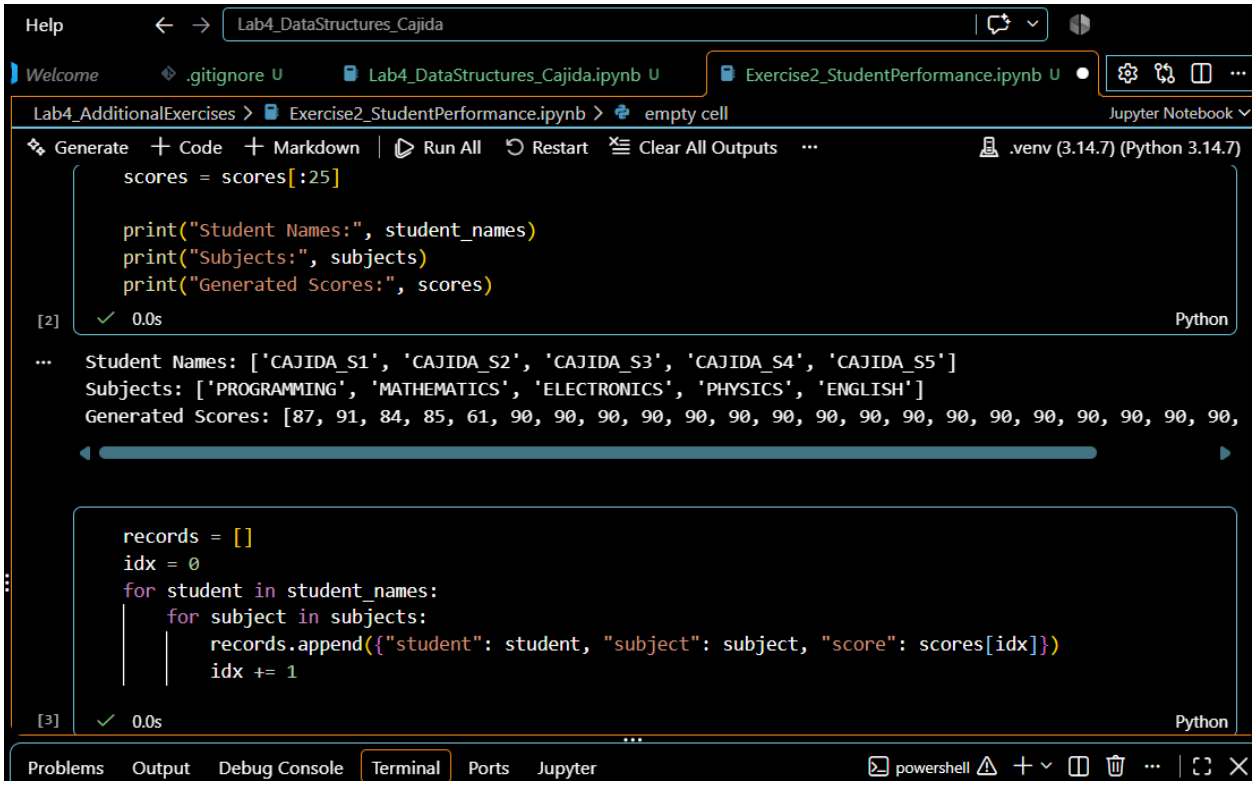
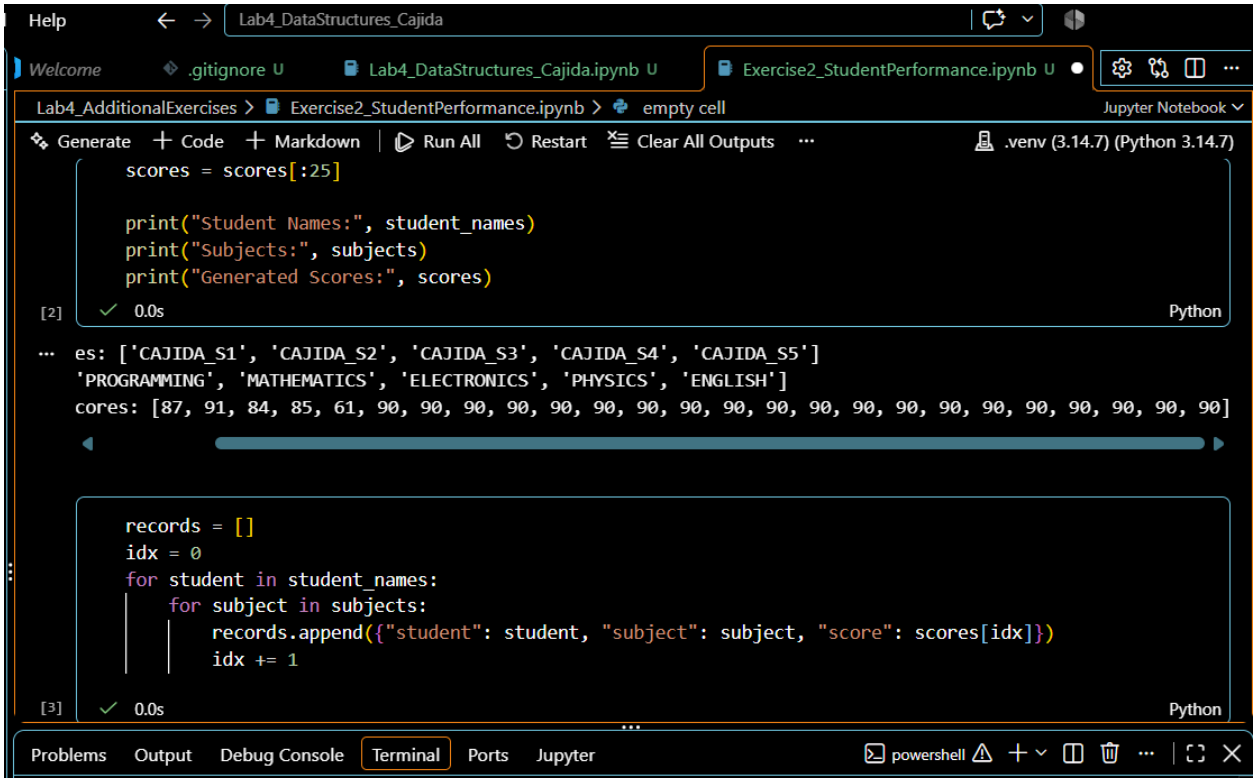
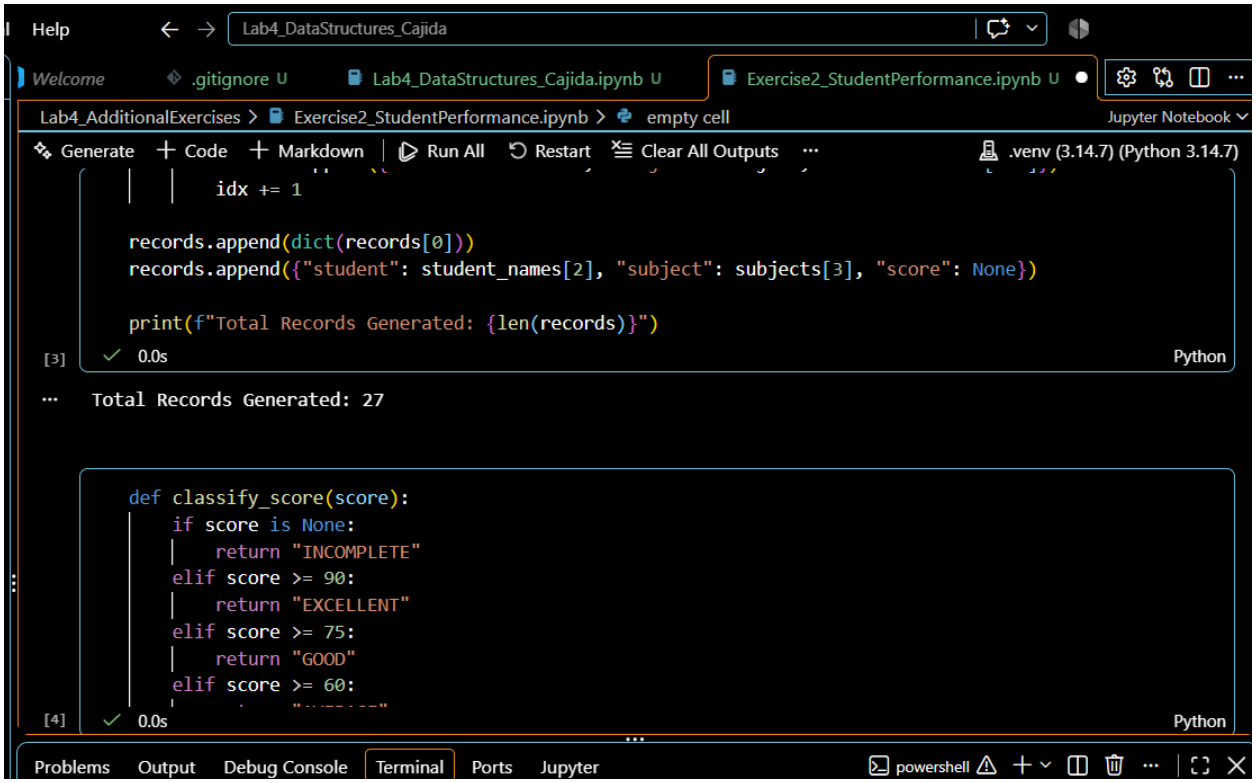
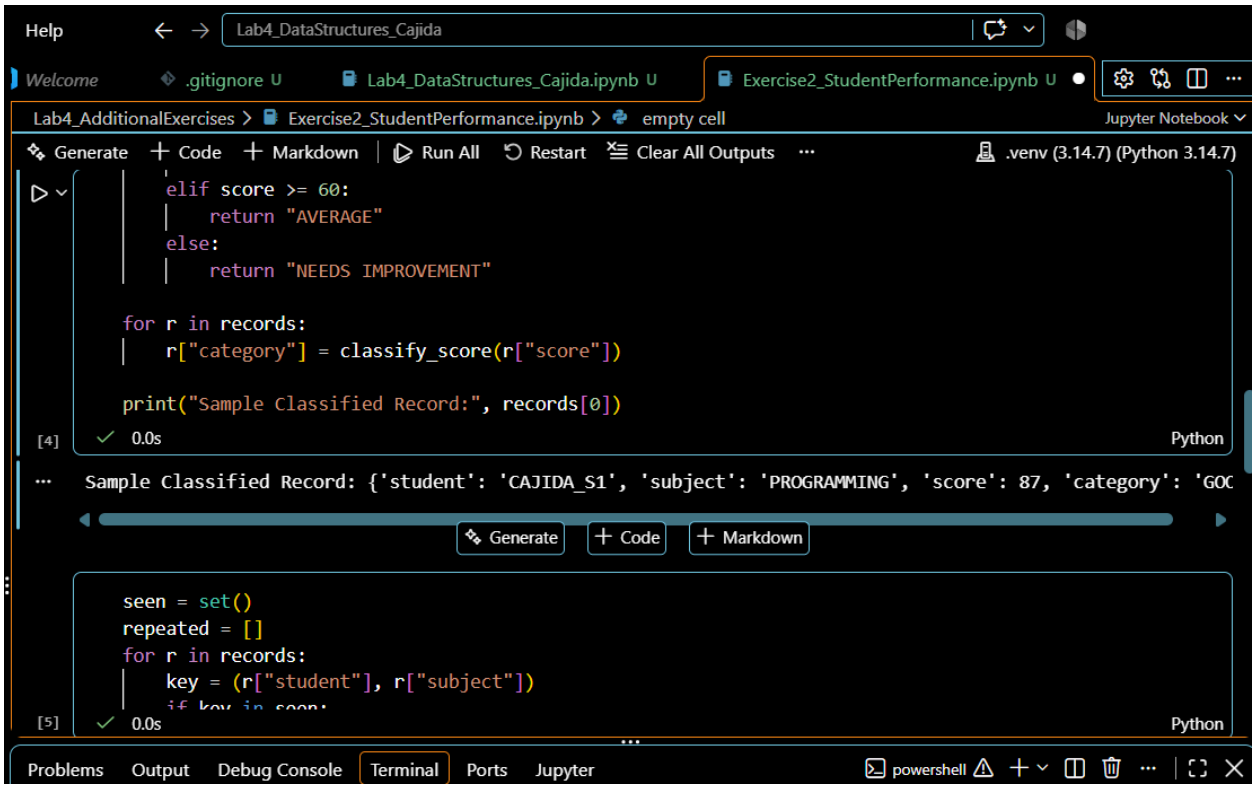
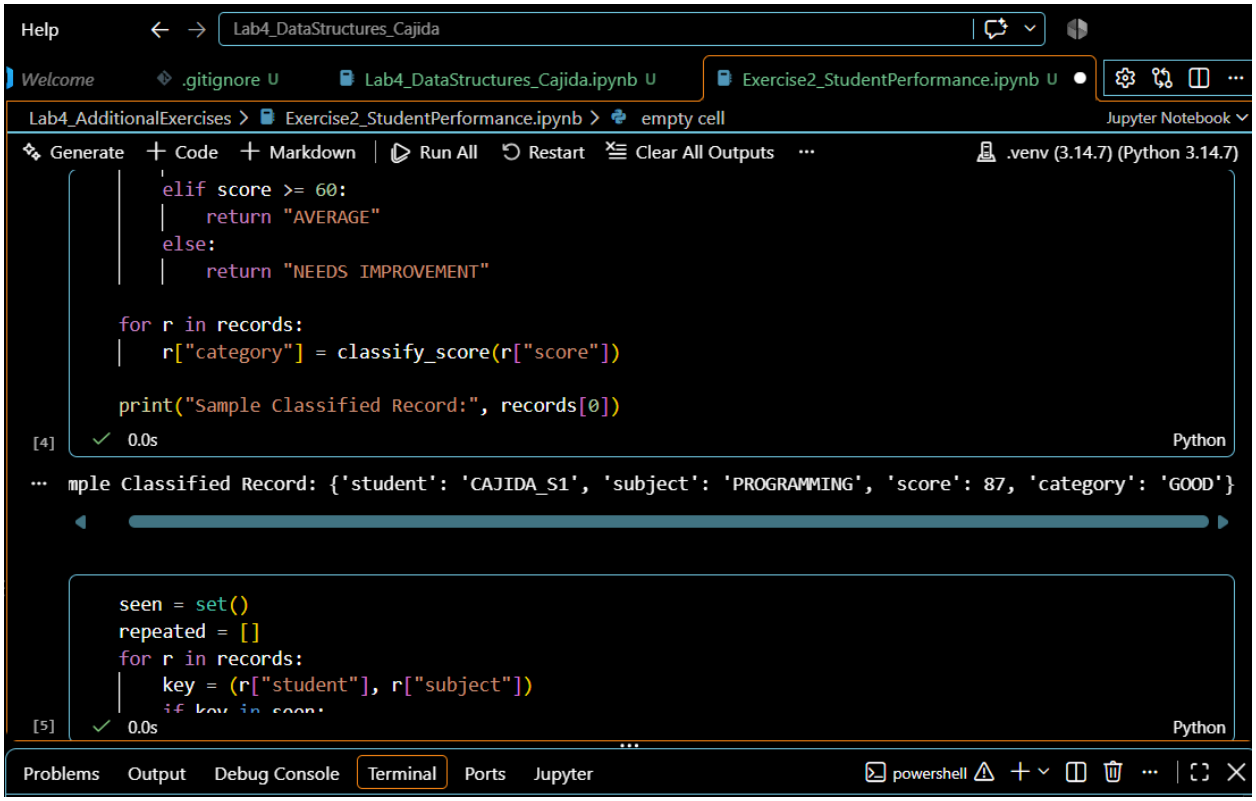

Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
LAST_NAME = "CAJIDA"
SEED_NUM = 3
FAVORITE_ARTIST = "TUKI."
[1]
0.0s
Python
student_names = [f"{LAST_NAME}_S{i}" for i in range(1, 6)]
subjects = ["PROGRAMMING", "MATHEMATICS", "ELECTRONICS", "PHYSICS", "ENGLISH"]
scores = []
for i, char in enumerate(FAVORITE_ARTIST):
score = (ord(char) + SEED_NUM * (i + 1)) % 101
scores.append(score)
while len(scores) < 25:
scores.append((scores[len(scores) % len(scores)] + SEED_NUM) % 101)
scores = scores[:25]
[2]
0.0s
Python

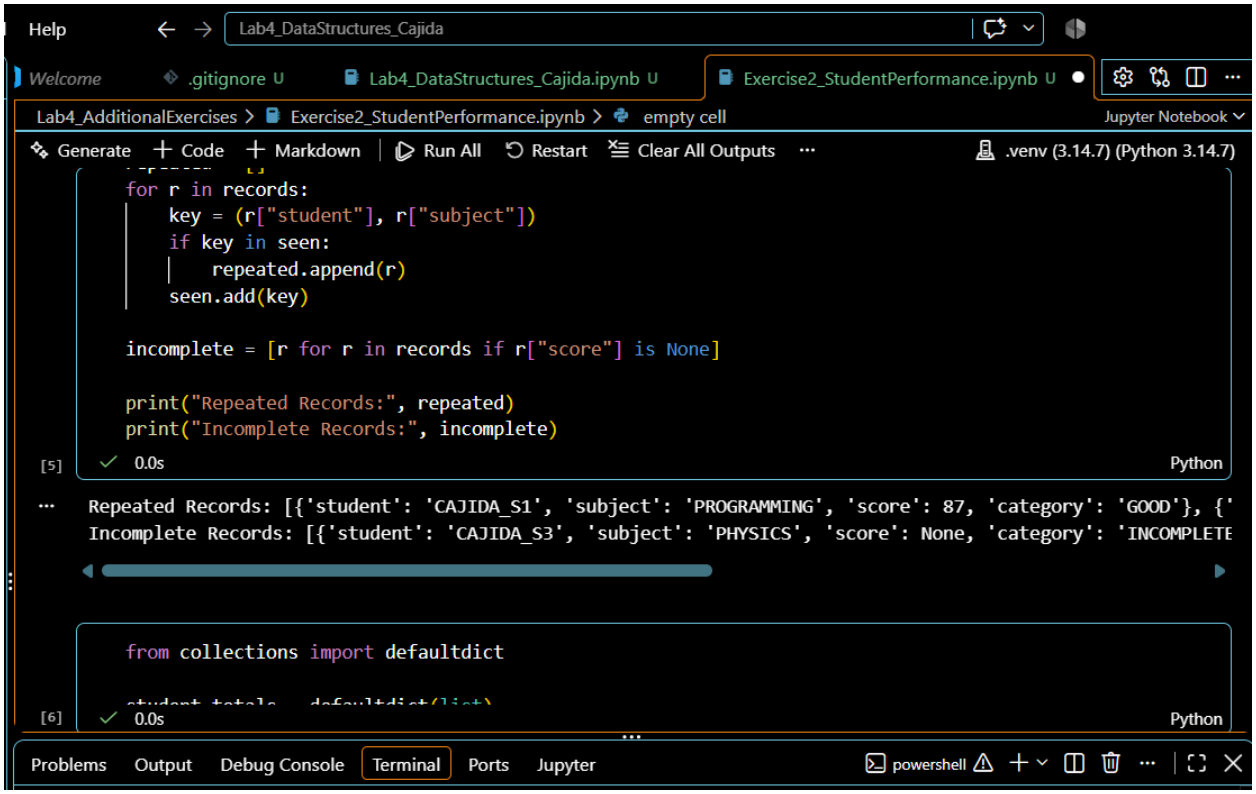

Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
scores = scores[:25]
print("Student Names:", student_names)
print("Subjects:", subjects)
print("Generated Scores:", scores)
[2]
0.0s
Python
Student Names: ['CAJIDA_S1', 'CAJIDA_S2', 'CAJIDA_S3', 'CAJIDA_S4', 'CAJIDA_S5']
Subjects: ['PROGRAMMING', 'MATHEMATICS', 'ELECTRONICS', 'PHYSICS', 'ENGLISH']
Generated Scores: [87, 91, 84, 85, 61, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90,
records = []
idx = 0
for student in student_names:
for subject in subjects:
records.append({"student": student, "subject": subject, "score": scores[idx]})
idx += 1
[3]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

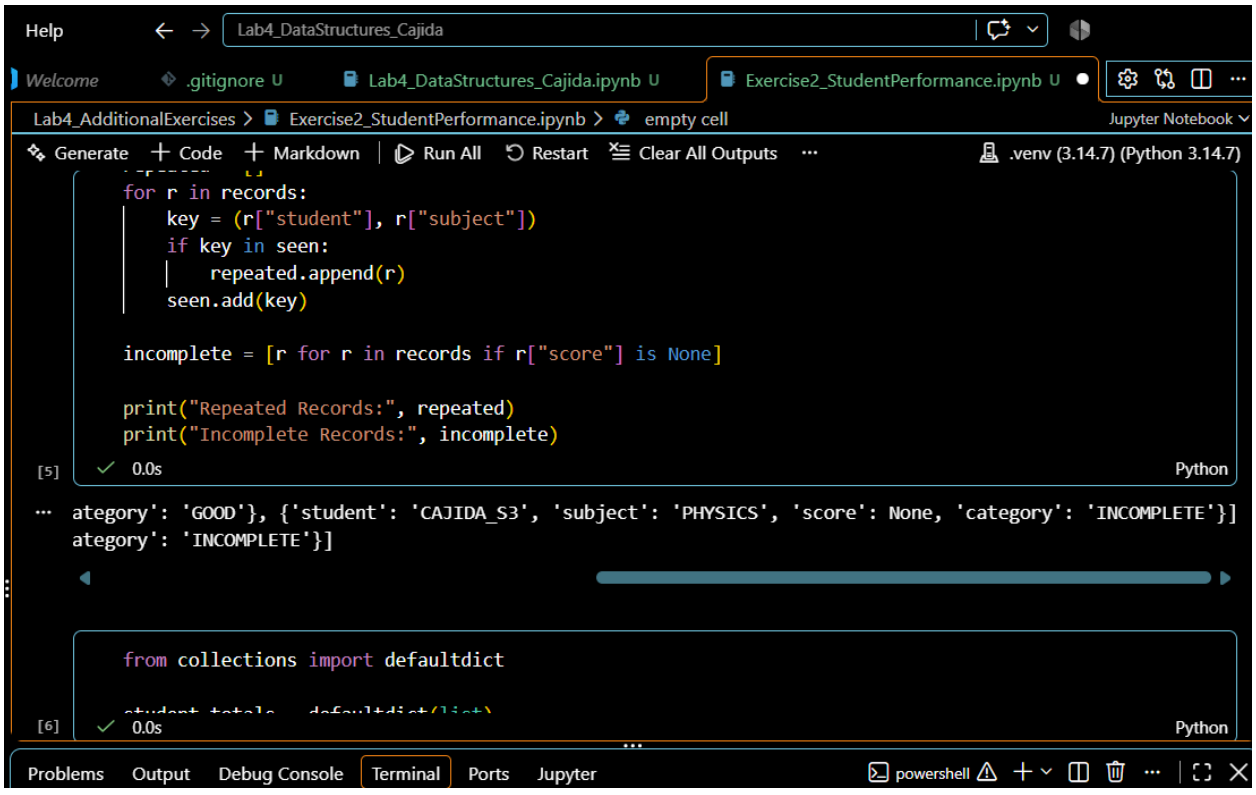

Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
scores = scores[:25]
print("Student Names:", student_names)
print("Subjects:", subjects)
print("Generated Scores:", scores)
[2]
0.0s
Python
es: ['CAJIDA_S1', 'CAJIDA_S2', 'CAJIDA_S3', 'CAJIDA_S4', 'CAJIDA_S5']
'PROGRAMMING', 'MATHEMATICS', 'ELECTRONICS', 'PHYSICS', 'ENGLISH']
cores: [87, 91, 84, 85, 61, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90, 90]
records = []
idx = 0
for student in student_names:
for subject in subjects:
records.append({"student": student, "subject": subject, "score": scores[idx]})
idx += 1
[3]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

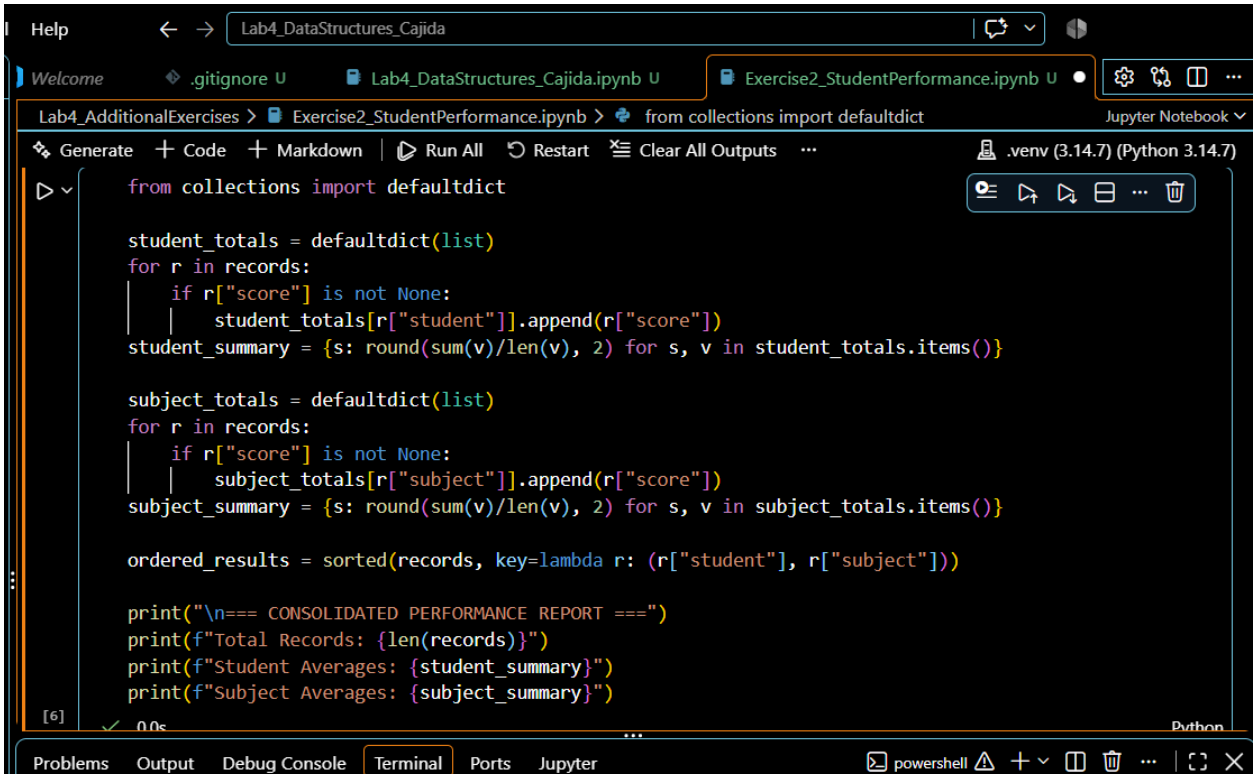

Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
idx += 1
records.append(dict(records[0]))
records.append({"student": student_names[2], "subject": subjects[3], "score": None})
print(f"Total Records Generated: {len(records)}")
[3]
0.0s
Python
Total Records Generated: 27
def classify_score(score):
if score is None:
return "INCOMPLETE"
elif score >= 90:
return "EXCELLENT"
elif score >= 75:
return "GOOD"
elif score >= 60:
[4]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

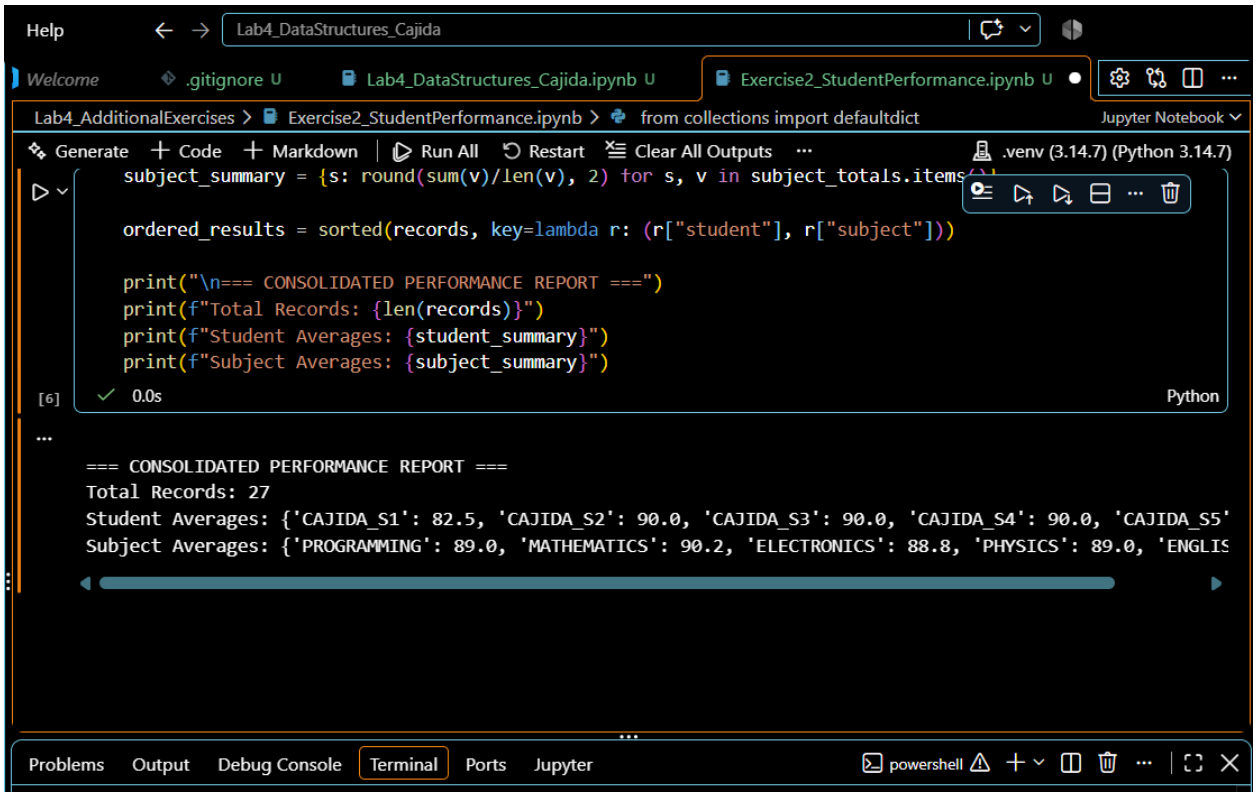

Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
elif score >= 60:
return "AVERAGE"
else:
return "NEEDS IMPROVEMENT"
for r in records:
r["category"] = classify_score(r["score"])
print("Sample Classified Record:", records[0])
[4]
0.0s
Python
Sample Classified Record: {'student': 'CAJIDA_S1', 'subject': 'PROGRAMMING', 'score': 87, 'category': 'GOC
Generate
Code
Markdown
seen = set()
repeated = []
for r in records:
key = (r["student"], r["subject"])
[5]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

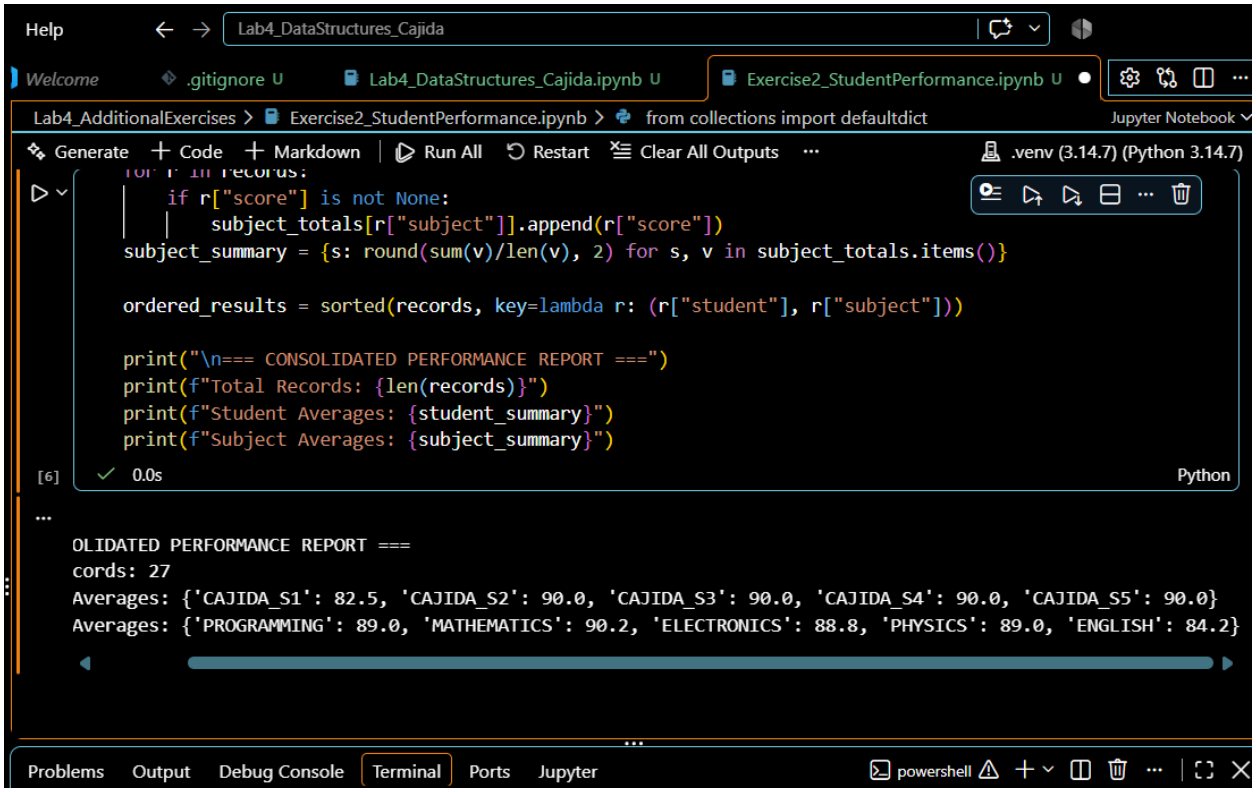

Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
elif score >= 60:
return "AVERAGE"
else:
return "NEEDS IMPROVEMENT"
for r in records:
r["category"] = classify_score(r["score"])
print("Sample Classified Record:", records[0])
[4]
0.0s
Python
mple Classified Record: {'student': 'CAJIDA_S1', 'subject': 'PROGRAMMING', 'score': 87, 'category': 'GOOD'}
seen = set()
repeated = []
for r in records:
key = (r["student"], r["subject"])
[5]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
for r in records:
key = (r["student"], r["subject"])
if key in seen:
repeated.append(r)
seen.add(key)
incomplete = [r for r in records if r["score"] is None]
print("Repeated Records:", repeated)
print("Incomplete Records:", incomplete)
[5]
0.0s
Python
Repeated Records: [{'student': 'CAJIDA_S1', 'subject': 'PROGRAMMING', 'score': 87, 'category': 'GOOD'}, {'
Incomplete Records: [{'student': 'CAJIDA_S3', 'subject': 'PHYSICS', 'score': None, 'category': 'INCOMPLETE
from collections import defaultdict
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
for r in records:
key = (r["student"], r["subject"])
if key in seen:
repeated.append(r)
seen.add(key)
incomplete = [r for r in records if r["score"] is None]
print("Repeated Records:", repeated)
print("Incomplete Records:", incomplete)
[5]
0.0s
Python
ategory': 'GOOD'}, {'student': 'CAJIDA_S3', 'subject': 'PHYSICS', 'score': None, 'category': 'INCOMPLETE'}]
ategory': 'INCOMPLETE'}]
from collections import defaultdict
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > from collections import defaultdict
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
from collections import defaultdict
student_totals = defaultdict(list)
for r in records:
if r["score"] is not None:
student_totals[r["student"]].append(r["score"])
student_summary = {s: round(sum(v)/len(v), 2) for s, v in student_totals.items()}
subject_totals = defaultdict(list)
for r in records:
if r["score"] is not None:
subject_totals[r["subject"]].append(r["score"])
subject_summary = {s: round(sum(v)/len(v), 2) for s, v in subject_totals.items()}
ordered_results = sorted(records, key=lambda r: (r["student"], r["subject"]))
print("\n=== CONSOLIDATED PERFORMANCE REPORT ===")
print(f"Total Records: {len(records)}")
print(f"Student Averages: {student_summary}")
print(f"Subject Averages: {subject_summary}")
[6]
0.0s
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > from collections import defaultdict
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
subject_summary = {s: round(sum(v)/len(v), 2) for s, v in subject_totals.items()}
ordered_results = sorted(records, key=lambda r: (r["student"], r["subject"]))
print("\n=== CONSOLIDATED PERFORMANCE REPORT ===")
print(f"Total Records: {len(records)}")
print(f"Student Averages: {student_summary}")
print(f"Subject Averages: {subject_summary}")
[6]
0.0s
Python
=== CONSOLIDATED PERFORMANCE REPORT ===
Total Records: 27
Student Averages: {'CAJIDA_S1': 82.5, 'CAJIDA_S2': 90.0, 'CAJIDA_S3': 90.0, 'CAJIDA_S4': 90.0, 'CAJIDA_S5'
Subject Averages: {'PROGRAMMING': 89.0, 'MATHEMATICS': 90.2, 'ELECTRONICS': 88.8, 'PHYSICS': 89.0, 'ENGLIS
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
Welcome
.gitignore U
Lab4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Lab4_AdditionalExercises > Exercise2_StudentPerformance.ipynb > from collections import defaultdict
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
for r in records:
if r["score"] is not None:
subject_totals[r["subject"]].append(r["score"])
subject_summary = {s: round(sum(v)/len(v), 2) for s, v in subject_totals.items()}
ordered_results = sorted(records, key=lambda r: (r["student"], r["subject"]))
print("\n=== CONSOLIDATED PERFORMANCE REPORT ===")
print(f"Total Records: {len(records)}")
print(f"Student Averages: {student_summary}")
print(f"Subject Averages: {subject_summary}")
[6]
0.0s
Python
OLIDATED PERFORMANCE REPORT ===
cords: 27
Averages: {'CAJIDA_S1': 82.5, 'CAJIDA_S2': 90.0, 'CAJIDA_S3': 90.0, 'CAJIDA_S4': 90.0, 'CAJIDA_S5': 90.0}
Averages: {'PROGRAMMING': 89.0, 'MATHEMATICS': 90.2, 'ELECTRONICS': 88.8, 'PHYSICS': 89.0, 'ENGLISH': 84.2}
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell