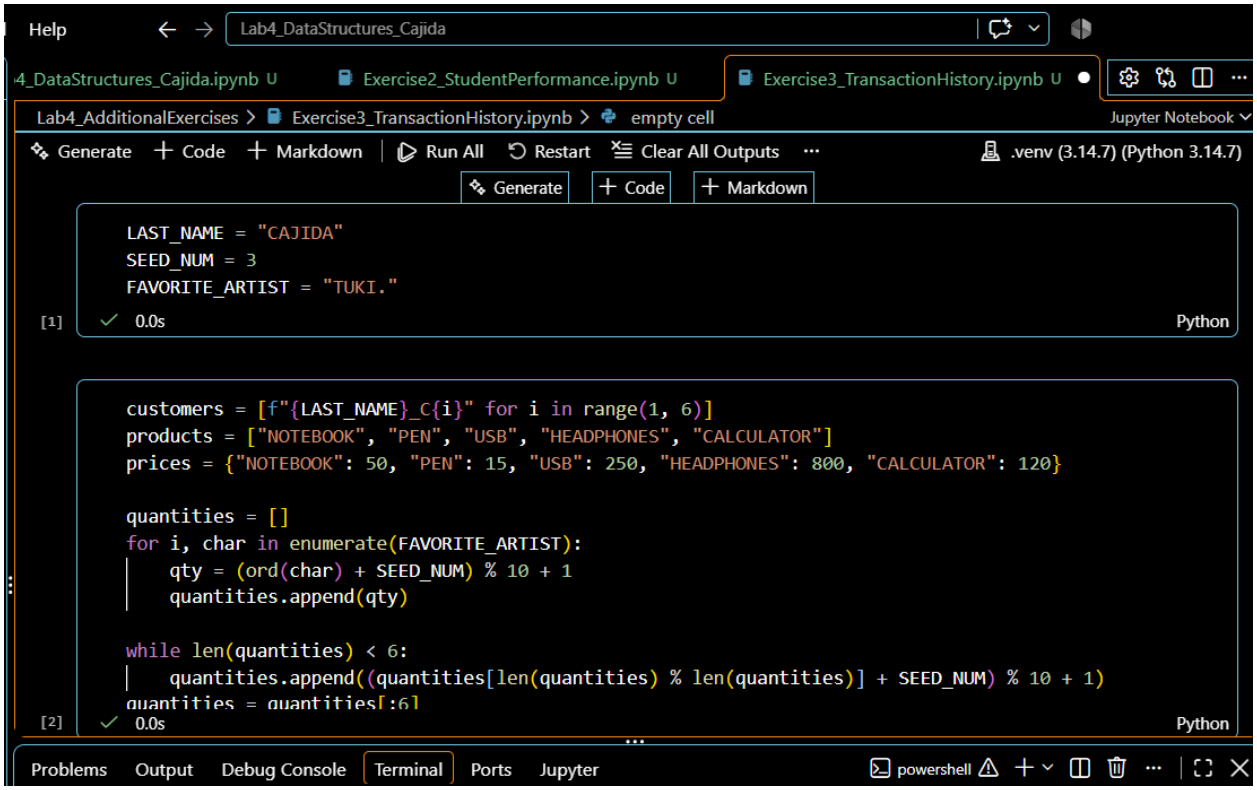
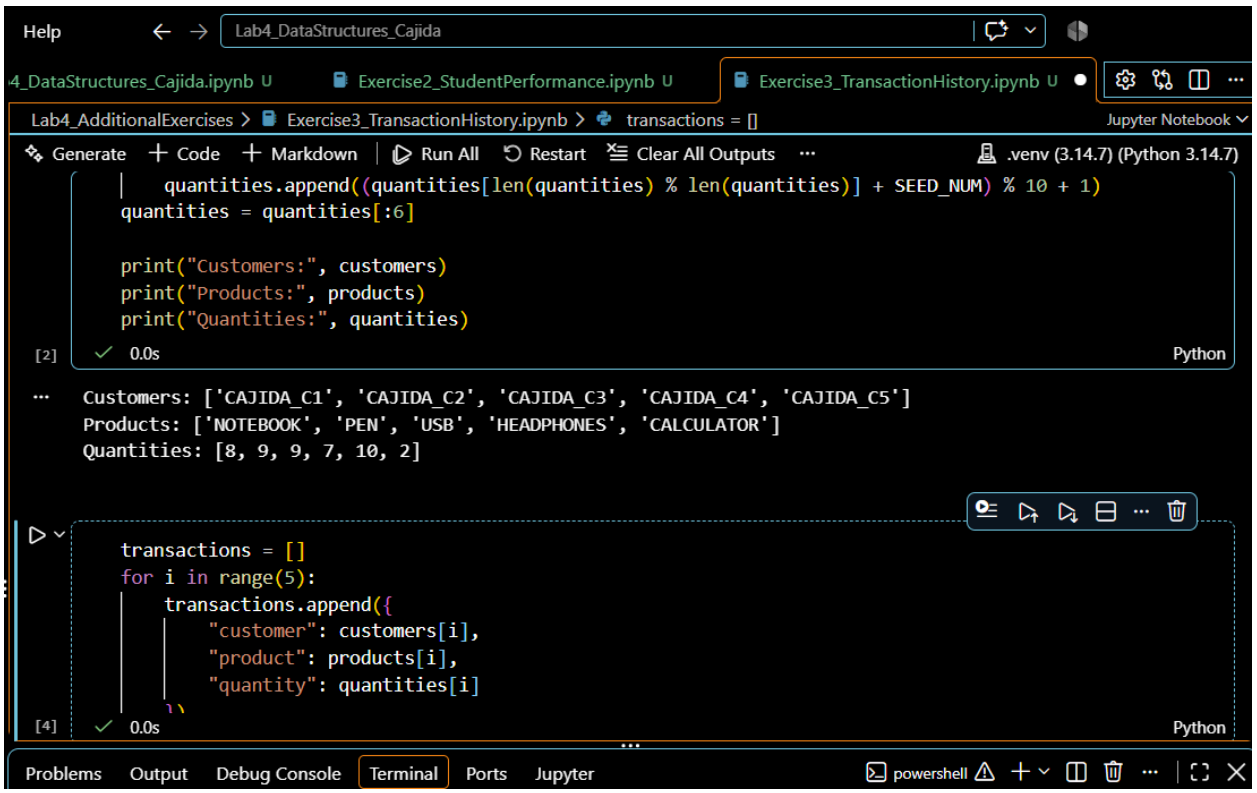
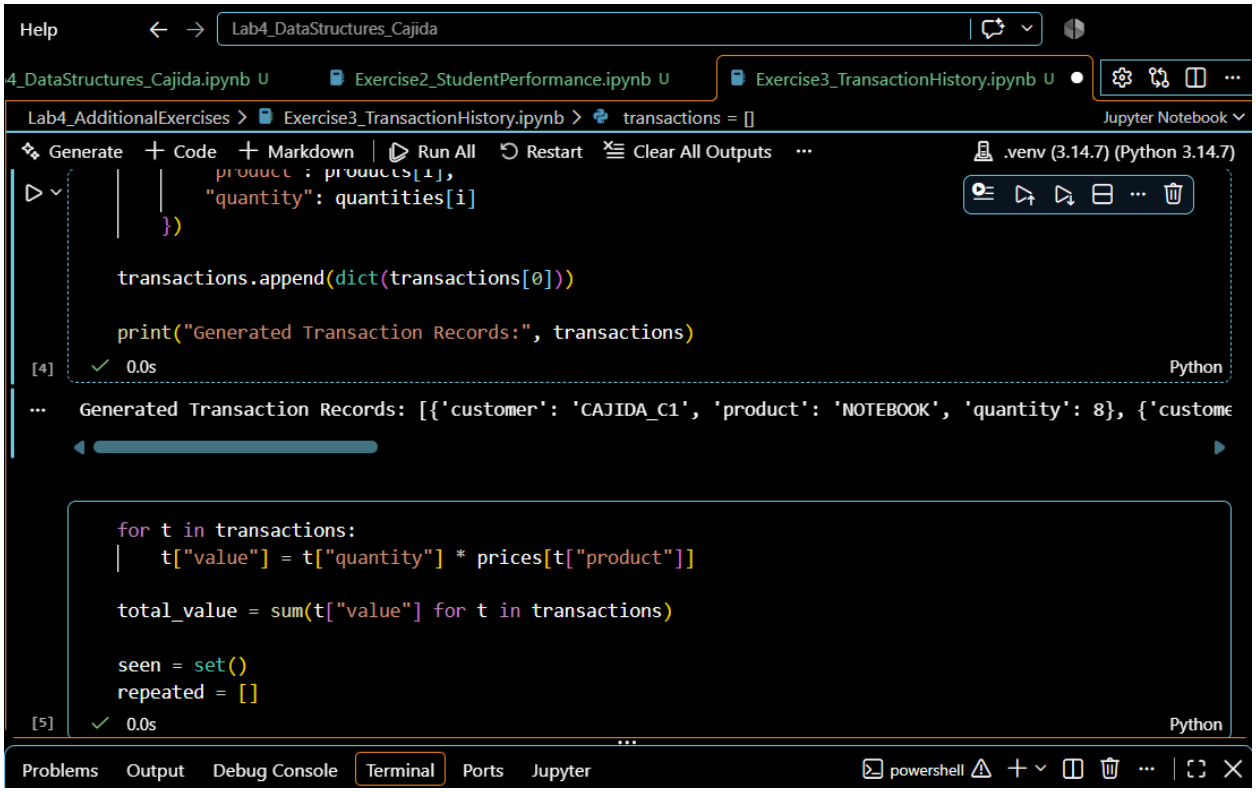
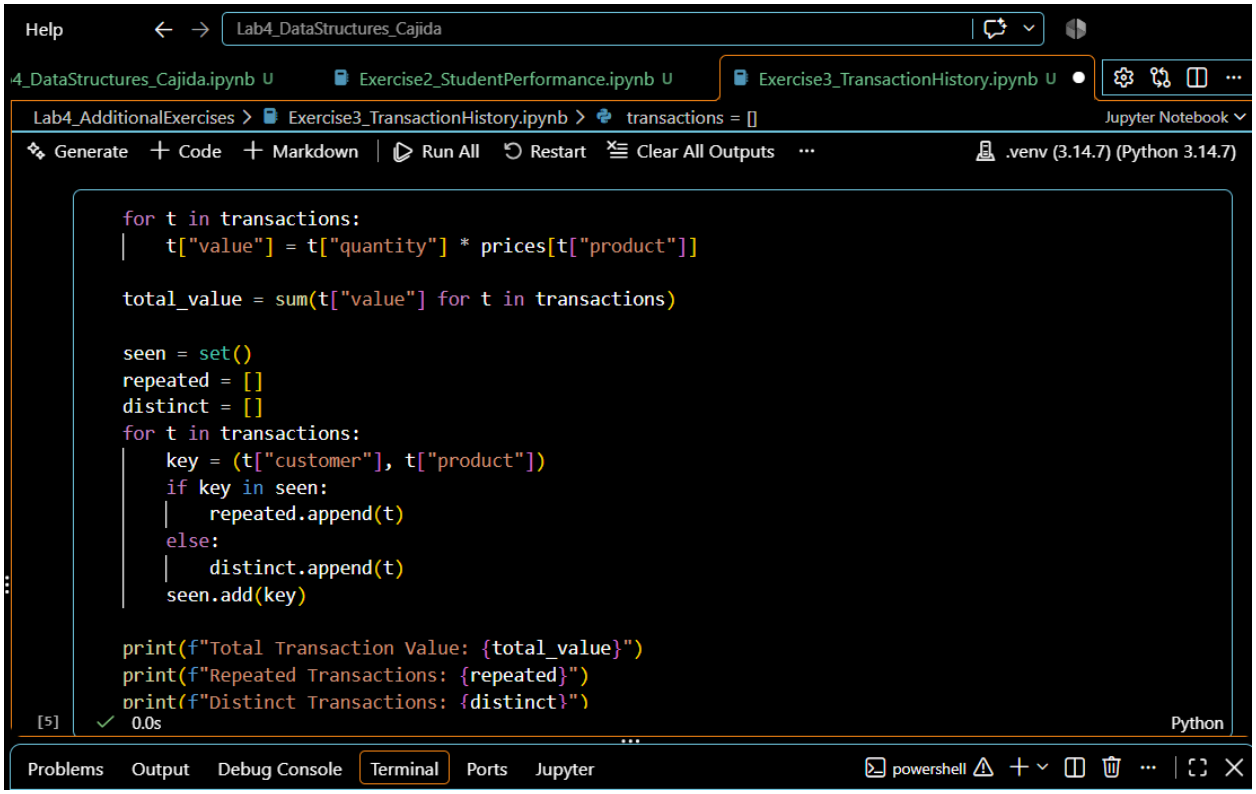
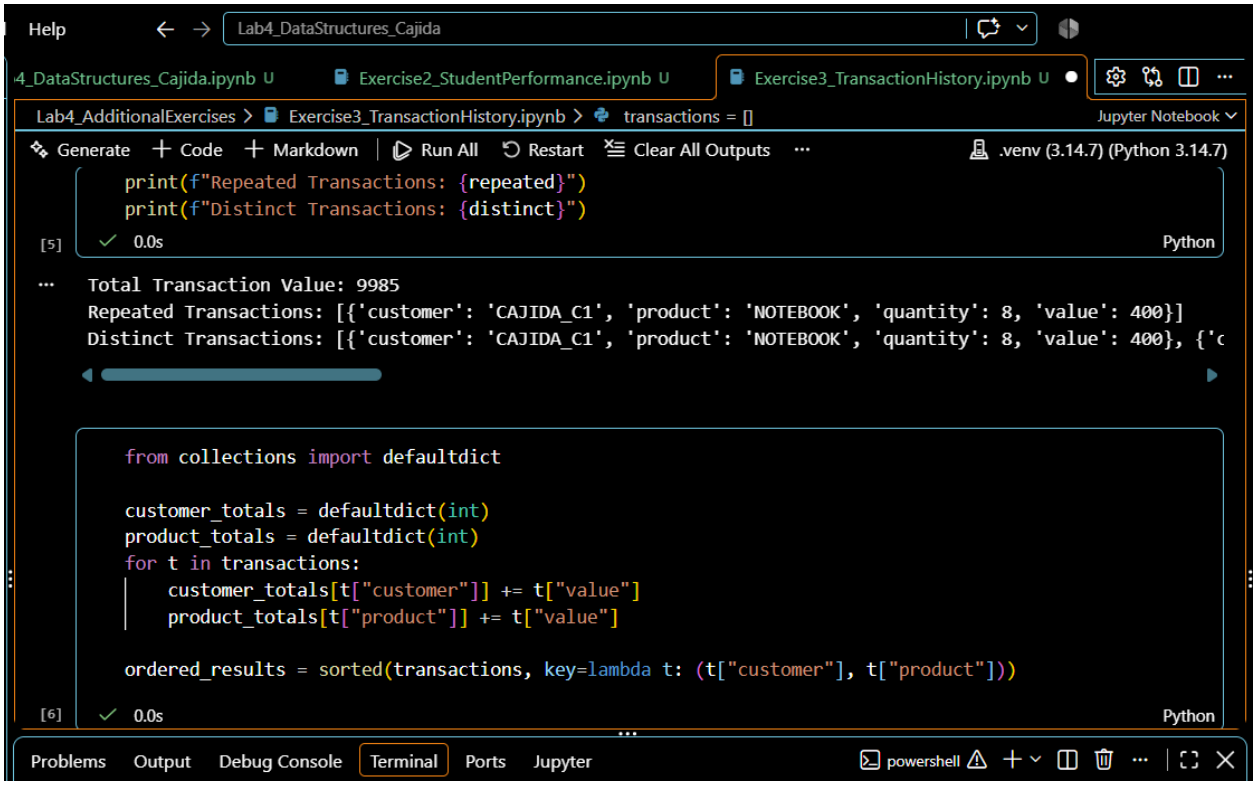

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > empty cell
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
LAST_NAME = "CAJIDA"
SEED_NUM = 3
FAVORITE_ARTIST = "TUKI."
[1]
0.0s
Python
customers = [f"{LAST_NAME}_C{i}" for i in range(1, 6)]
products = ["NOTEBOOK", "PEN", "USB", "HEADPHONES", "CALCULATOR"]
prices = {"NOTEBOOK": 50, "PEN": 15, "USB": 250, "HEADPHONES": 800, "CALCULATOR": 120}
quantities = []
for i, char in enumerate(FAVORITE_ARTIST):
qty = (ord(char) + SEED_NUM) % 10 + 1
quantities.append(qty)
while len(quantities) < 6:
quantities.append((quantities[len(quantities) % len(quantities)] + SEED_NUM) % 10 + 1)
quantities = quantities[:6]
[2]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

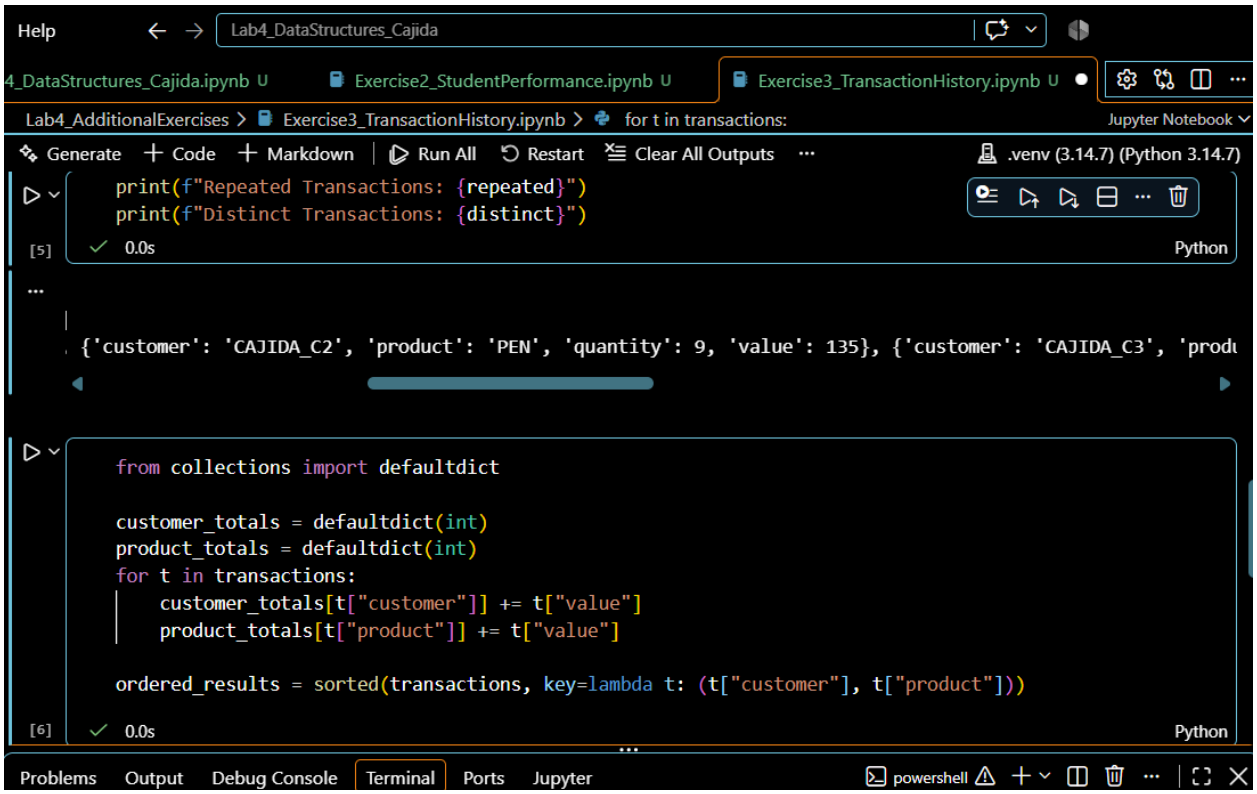

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > transactions = []
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
quantities.append((quantities[len(quantities) % len(quantities)] + SEED_NUM) % 10 + 1)
quantities = quantities[:6]
print("Customers:", customers)
print("Products:", products)
print("Quantities:", quantities)
[2]
0.0s
Python
Customers: ['CAJIDA_C1', 'CAJIDA_C2', 'CAJIDA_C3', 'CAJIDA_C4', 'CAJIDA_C5']
Products: ['NOTEBOOK', 'PEN', 'USB', 'HEADPHONES', 'CALCULATOR']
Quantities: [8, 9, 9, 7, 10, 2]
transactions = []
for i in range(5):
transactions.append({
"customer": customers[i],
"product": products[i],
"quantity": quantities[i]
})
[4]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

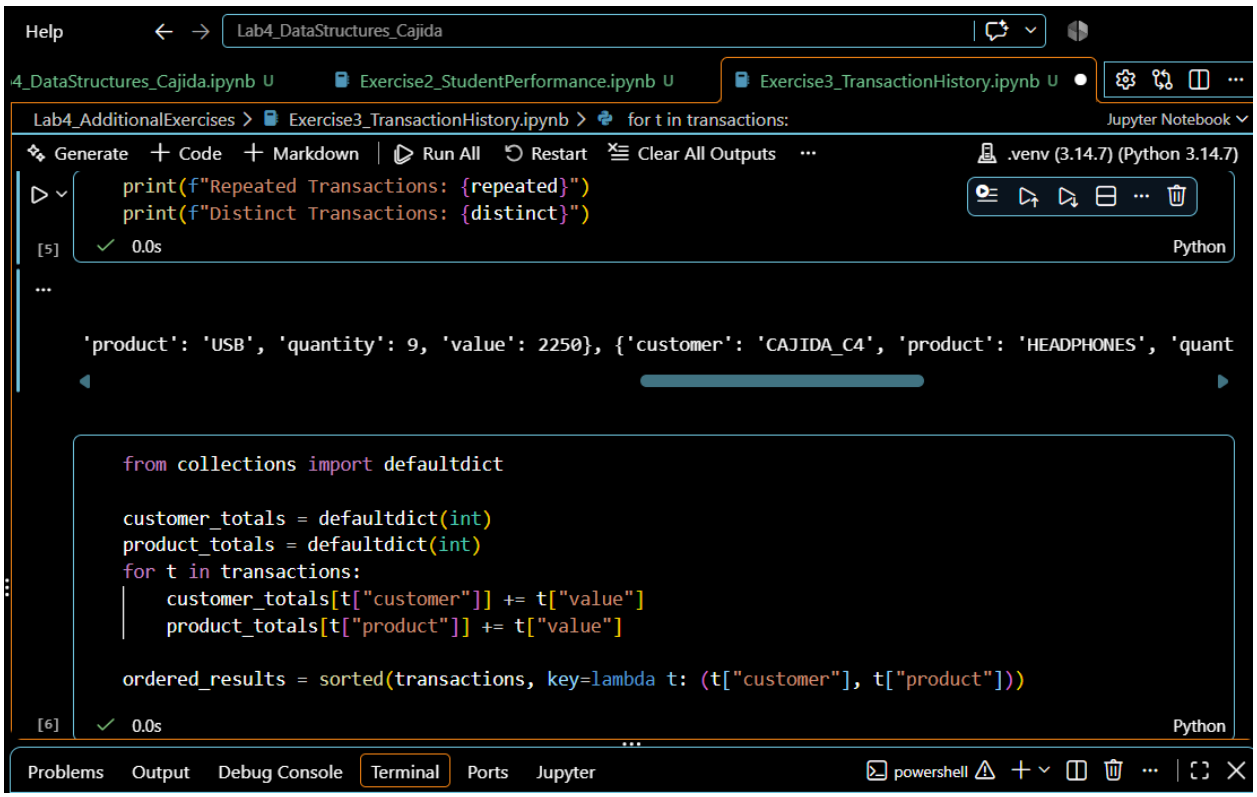


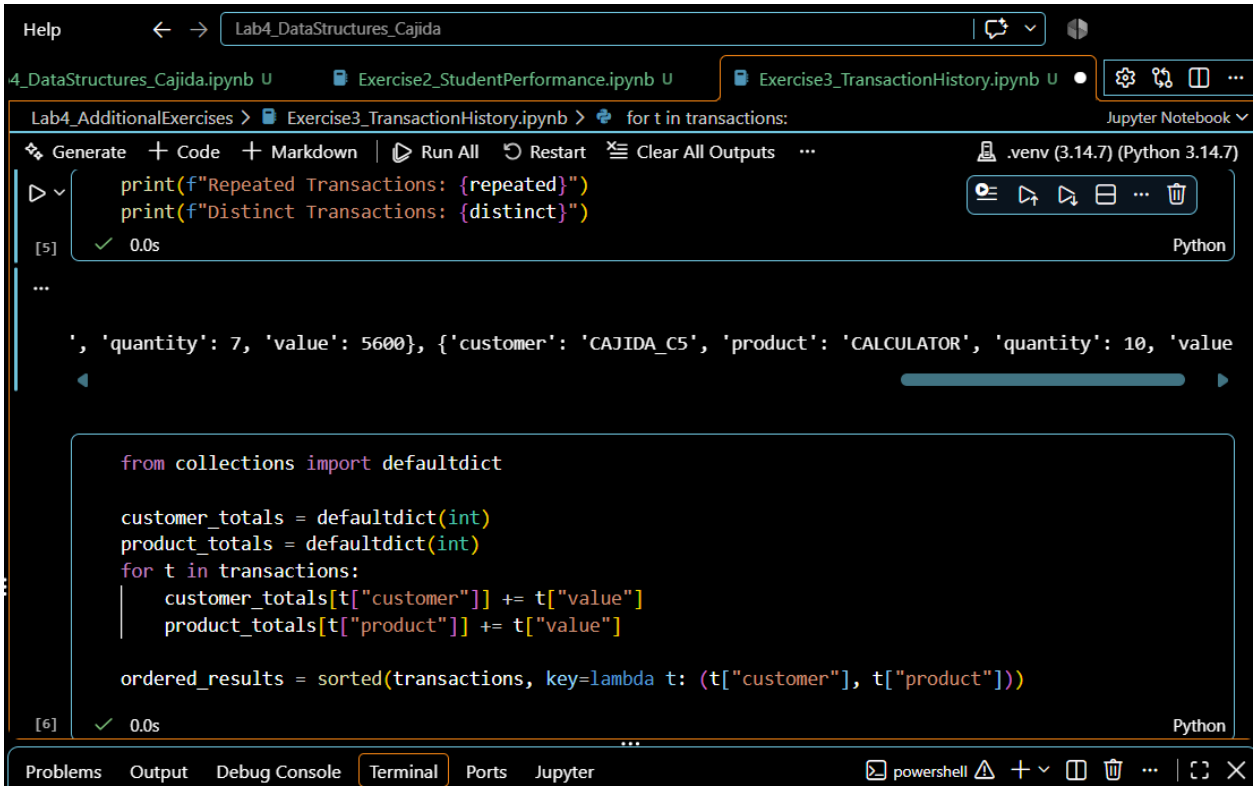
Output: Generated Transaction Records: [{'customer': 'CAJIDA_C1', 'product': 'NOTEBOOK', 'quantity': 8}, {'customer': 'CAJIDA_c2', 'product': 'PEN', 'quantity': 9}, {'customer': 'CAJIDA_C3', 'product': 'USB', 'quantity': 9}, {'customer': 'CAJIDA_C4', 'product': 'HEADPHONES', 'quantity': 7}, {'customer': 'CAJIDA_C5', 'product': 'CALCULATOR', 'quantity': 10}, {'customer': 'CAJIDA_C1', 'product': 'NOTEBOOK', 'quantity': 8)

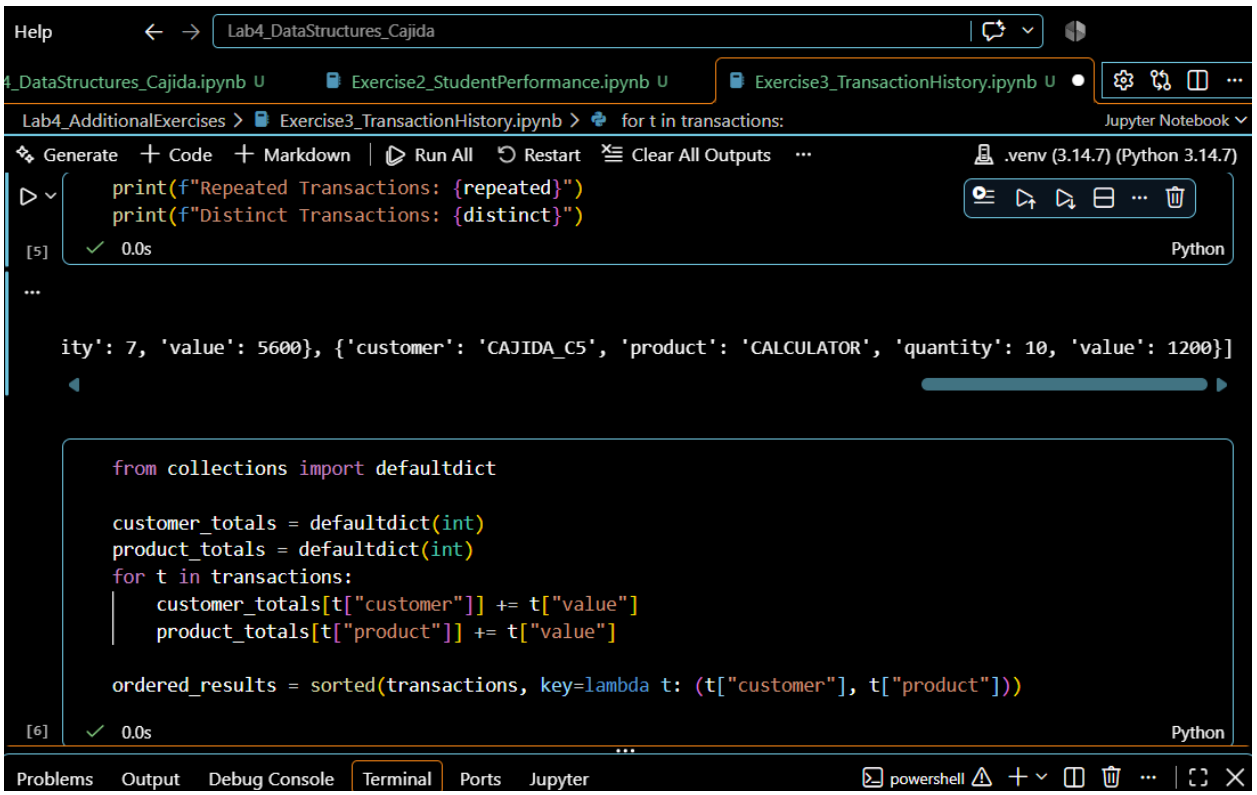

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > transactions = []
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
for t in transactions:
t["value"] = t["quantity"] * prices[t["product"]]
total_value = sum(t["value"] for t in transactions)
seen = set()
repeated = []
distinct = []
for t in transactions:
key = (t["customer"], t["product"])
if key in seen:
repeated.append(t)
else:
distinct.append(t)
seen.add(key)
print(f"Total Transaction Value: {total_value}")
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

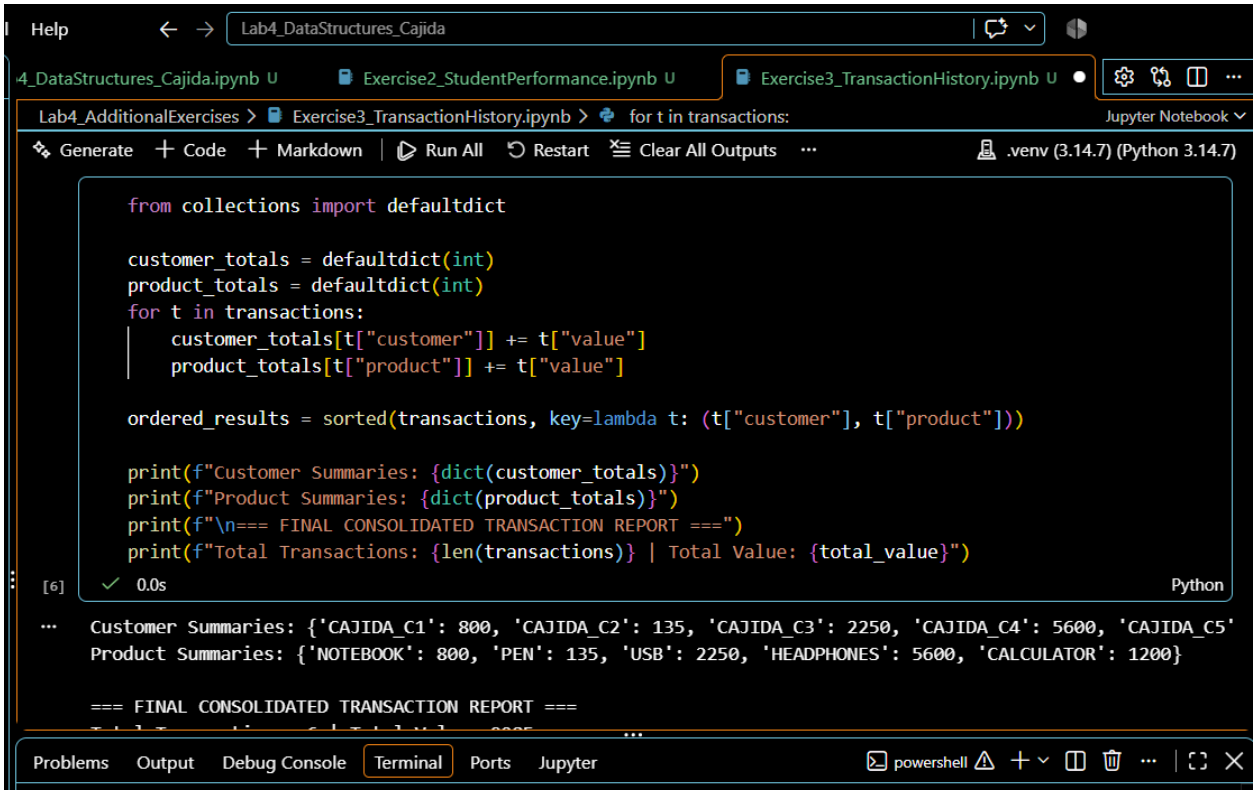

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > transactions = []
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
Total Transaction Value: 9985
Repeated Transactions: [{'customer': 'CAJIDA_C1', 'product': 'NOTEBOOK', 'quantity': 8, 'value': 400}]
Distinct Transactions: [{'customer': 'CAJIDA_C1', 'product': 'NOTEBOOK', 'quantity': 8, 'value': 400}, {'c
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

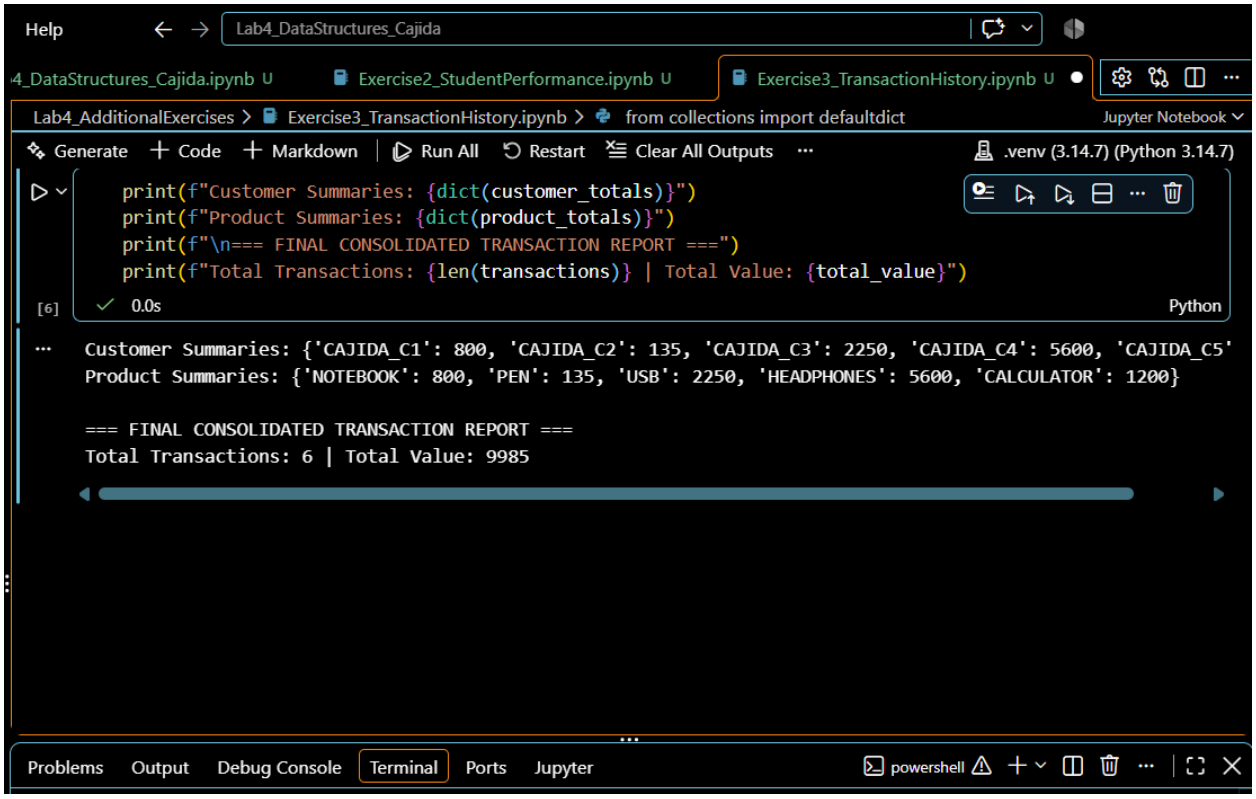

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > for t in transactions:
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
{'customer': 'CAJIDA_C2', 'product': 'PEN', 'quantity': 9, 'value': 135}, {'customer': 'CAJIDA_C3', 'produ
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell

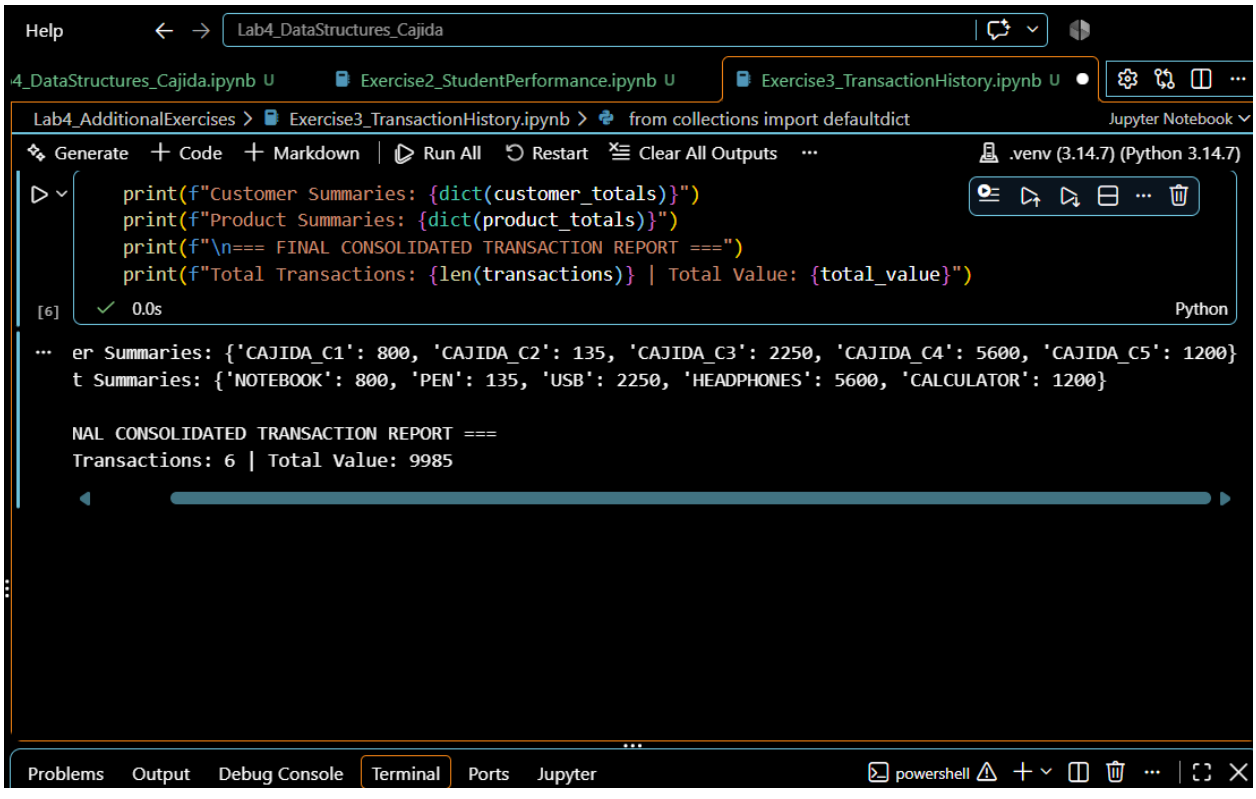

Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > for t in transactions:
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
'product': 'USB', 'quantity': 9, 'value': 2250}, {'customer': 'CAJIDA_C4', 'product': 'HEADPHONES', 'quant
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > for t in transactions:
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
', 'quantity': 7, 'value': 5600}, {'customer': 'CAJIDA_C5', 'product': 'CALCULATOR', 'quantity': 10, 'value
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > for t in transactions:
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Repeated Transactions: {repeated}")
print(f"Distinct Transactions: {distinct}")
[5]
0.0s
Python
ity': 7, 'value': 5600}, {'customer': 'CAJIDA_C5', 'product': 'CALCULATOR', 'quantity': 10, 'value': 1200}]
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
[6]
0.0s
Python
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > for t in transactions:
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
from collections import defaultdict
customer_totals = defaultdict(int)
product_totals = defaultdict(int)
for t in transactions:
customer_totals[t["customer"]] += t["value"]
product_totals[t["product"]] += t["value"]
ordered_results = sorted(transactions, key=lambda t: (t["customer"], t["product"]))
print(f"Customer Summaries: {dict(customer_totals)}")
print(f"Product Summaries: {dict(product_totals)}")
print(f"\n=== FINAL CONSOLIDATED TRANSACTION REPORT ===")
print(f"Total Transactions: {len(transactions)} | Total Value: {total_value}")
[6]
0.0s
Python
Customer Summaries: {'CAJIDA_C1': 800, 'CAJIDA_C2': 135, 'CAJIDA_C3': 2250, 'CAJIDA_C4': 5600, 'CAJIDA_C5'
Product Summaries: {'NOTEBOOK': 800, 'PEN': 135, 'USB': 2250, 'HEADPHONES': 5600, 'CALCULATOR': 1200}
=== FINAL CONSOLIDATED TRANSACTION REPORT ===
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > from collections import defaultdict
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Customer Summaries: {dict(customer_totals)}")
print(f"Product Summaries: {dict(product_totals)}")
print(f"\n=== FINAL CONSOLIDATED TRANSACTION REPORT ===")
print(f"Total Transactions: {len(transactions)} | Total Value: {total_value}")
[6]
0.0s
Python
Customer Summaries: {'CAJIDA_C1': 800, 'CAJIDA_C2': 135, 'CAJIDA_C3': 2250, 'CAJIDA_C4': 5600, 'CAJIDA_C5'
Product Summaries: {'NOTEBOOK': 800, 'PEN': 135, 'USB': 2250, 'HEADPHONES': 5600, 'CALCULATOR': 1200}
=== FINAL CONSOLIDATED TRANSACTION REPORT ===
Total Transactions: 6 | Total Value: 9985
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell


Help
Lab4_DataStructures_Cajida
4_DataStructures_Cajida.ipynb U
Exercise2_StudentPerformance.ipynb U
Exercise3_TransactionHistory.ipynb U
Lab4_AdditionalExercises > Exercise3_TransactionHistory.ipynb > from collections import defaultdict
Jupyter Notebook
Generate
Code
Markdown
Run All
Restart
Clear All Outputs
.venv (3.14.7) (Python 3.14.7)
print(f"Customer Summaries: {dict(customer_totals)}")
print(f"Product Summaries: {dict(product_totals)}")
print(f"\n=== FINAL CONSOLIDATED TRANSACTION REPORT ===")
print(f"Total Transactions: {len(transactions)} | Total Value: {total_value}")
[6]
0.0s
Python
er Summaries: {'CAJIDA_C1': 800, 'CAJIDA_C2': 135, 'CAJIDA_C3': 2250, 'CAJIDA_C4': 5600, 'CAJIDA_C5': 1200}
t Summaries: {'NOTEBOOK': 800, 'PEN': 135, 'USB': 2250, 'HEADPHONES': 5600, 'CALCULATOR': 1200}
NAL CONSOLIDATED TRANSACTION REPORT ===
Transactions: 6 | Total Value: 9985
Problems
Output
Debug Console
Terminal
Ports
Jupyter
powershell