valid http beginning and ending in recv_buf


char* recv_buf_scanner

index instead of pointer better for index calculations

int recv_buf_size

char* terminator
(for us always \r\n\r\n\r\n)

int terminator_len

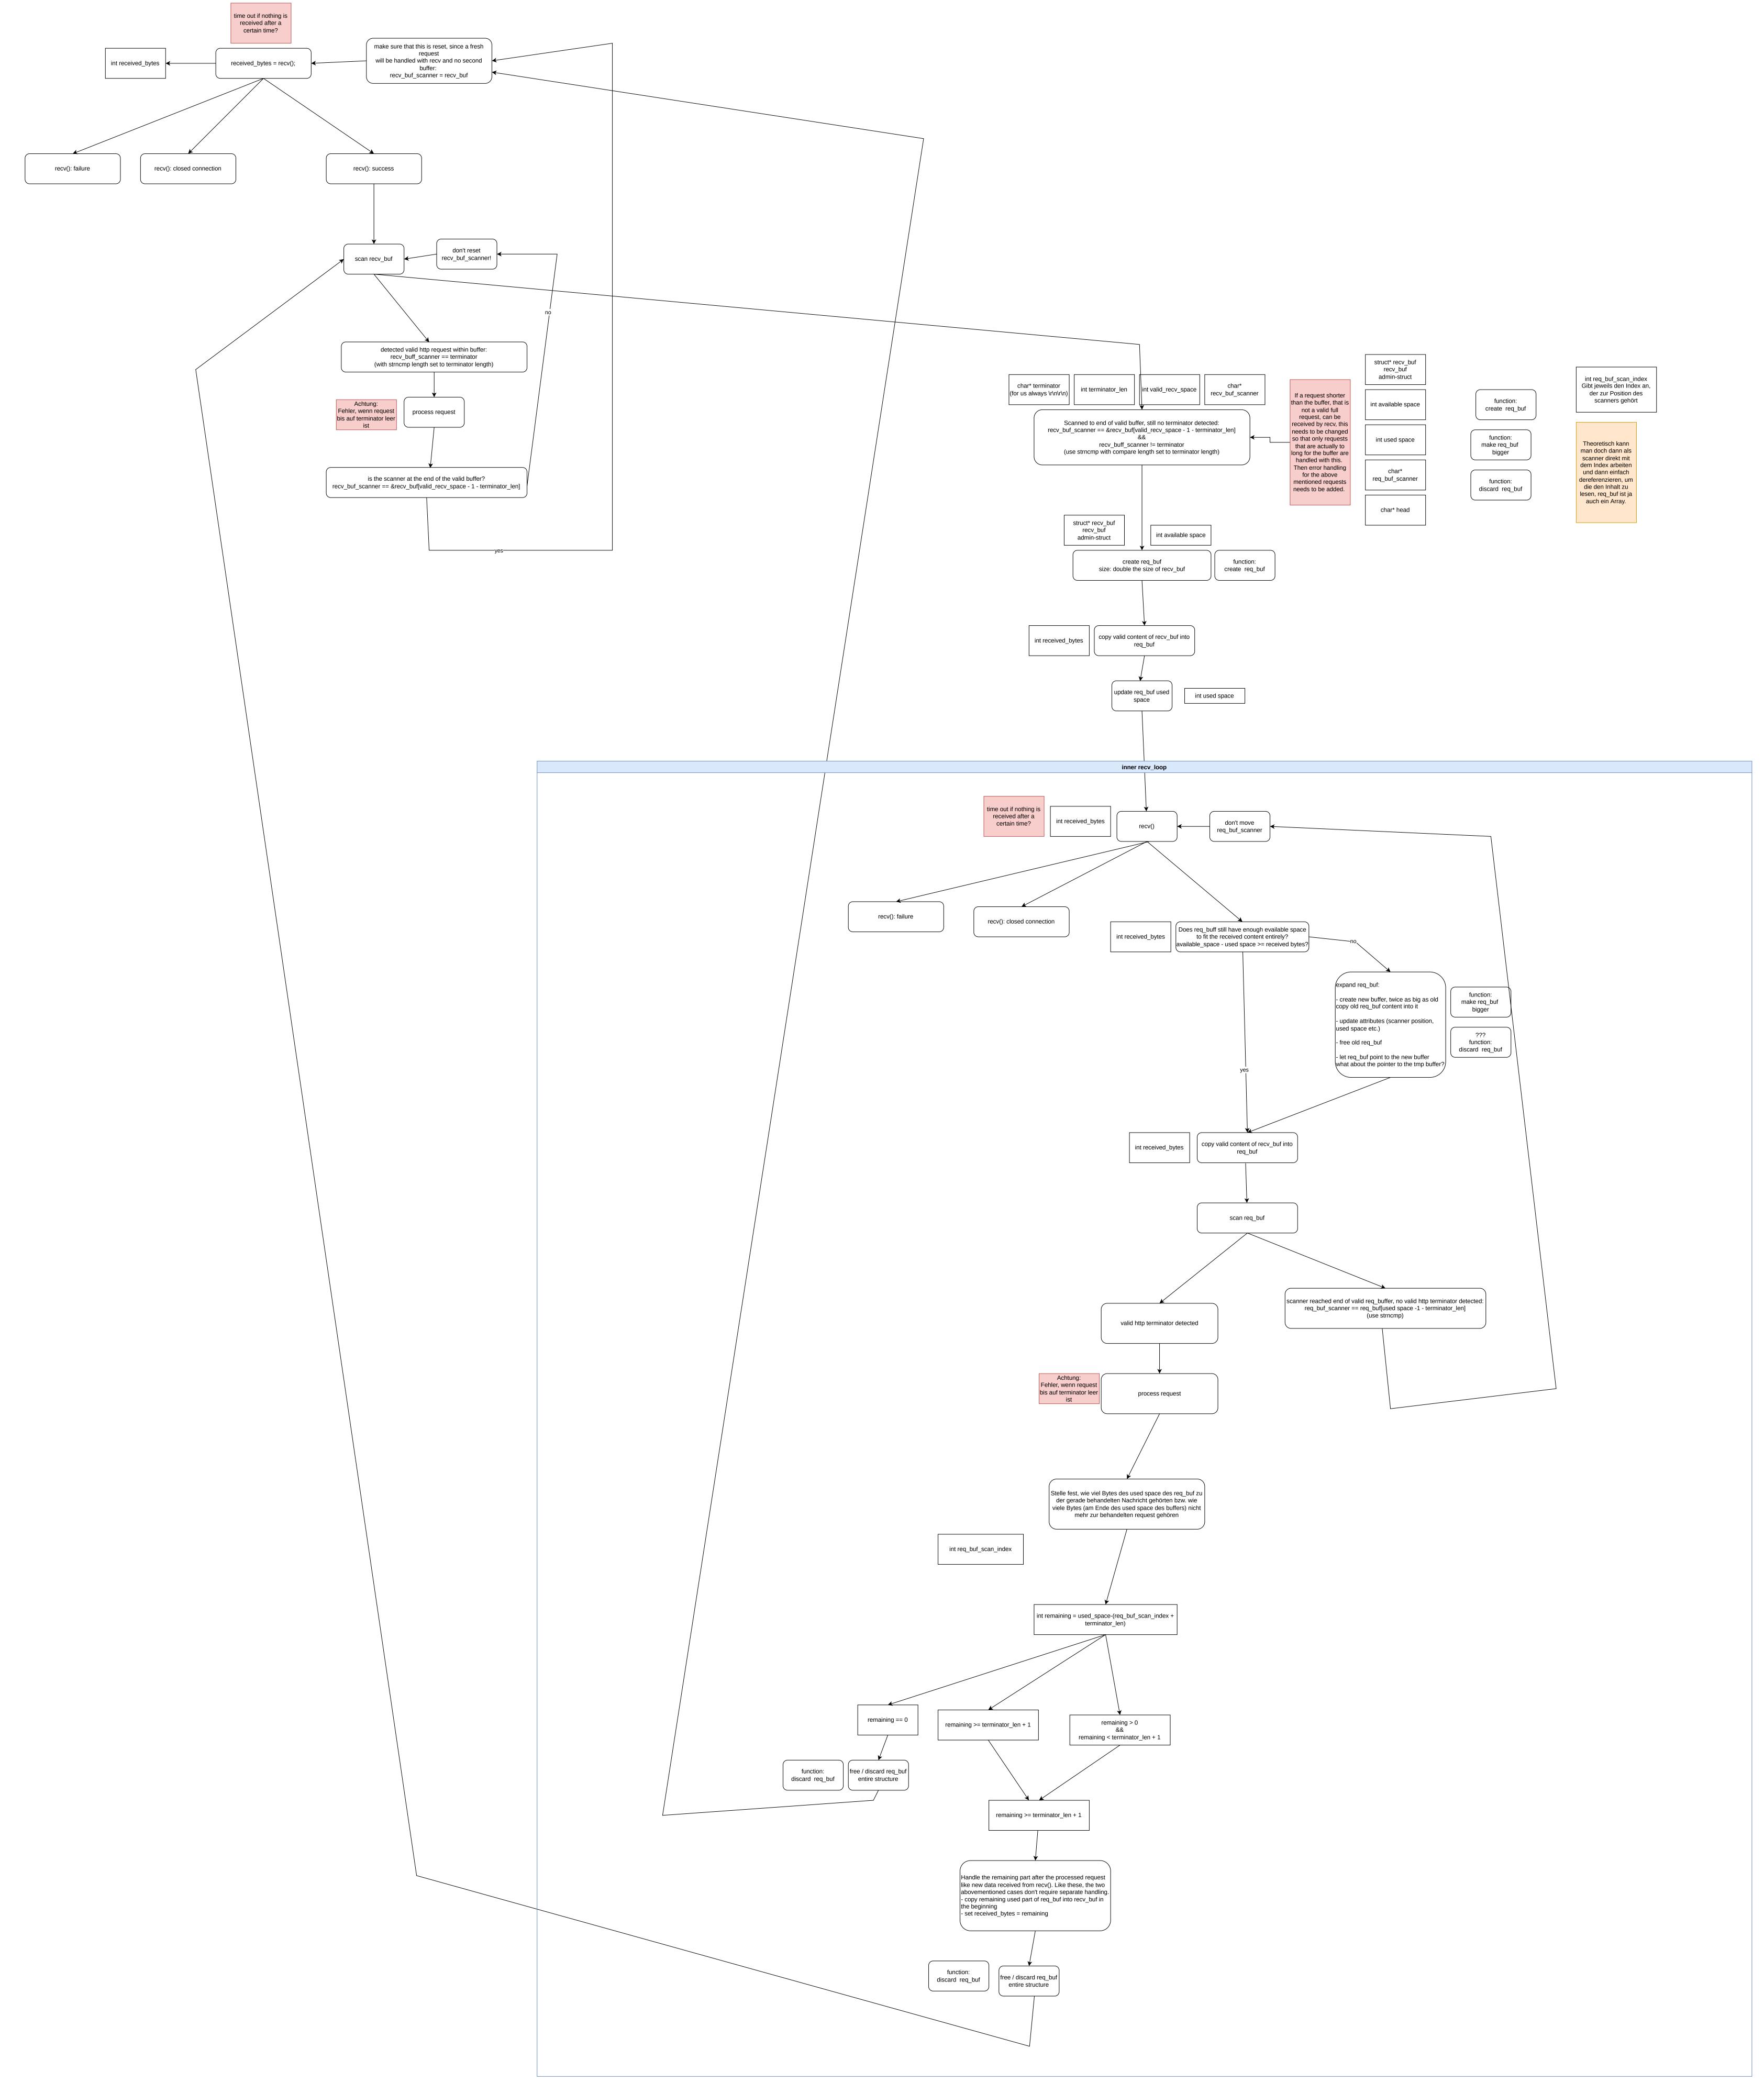

Outer recv()-loop