rshaheen

(https://profile.intra.42.fr)

# SCALE FOR PROJECT MINISHELL (/PROJECTS/42CURSUS-MINISHELL)

You should evaluate 2 students in this team



#### Git repository

git@vogsphere-v2.codam.nl:vogsphere/intra-uuid-66b73901-3e87-49f0-be

Ĉ

# Introduction

Please comply with the following rules:

- Remain polite, courteous, respectful and constructive throughout the evaluation process. The well-being of the community depends on it.
- Identify with the student or group whose work is evaluated the possible dysfunctions in their project. Take the time to discuss and debate the problems that may have been identified.
- You must consider that there might be some differences in how your peers might have understood the project's instructions and the scope of its functionalities. Always keep an open mind and grade them as honestly as possible. The pedagogy is useful only and only if the peer-evaluation is done seriously.

# Guidelines

- Only grade the work that was turned in the Git repository of the evaluated student or group.
- Double-check that the Git repository belongs to the student(s). Ensure that the project is the one expected. Also, check that 'git clone' is used in an empty folder.
- Check carefully that no malicious aliases was used to fool you and make you evaluate something that is not the content of the official repository.
- To avoid any surprises and if applicable, review together any scripts used to facilitate the grading (scripts for testing or automation).
- If you have not completed the assignment you are going to evaluate, you have to read the entire subject prior to starting the evaluation process.
- Use the available flags to report an empty repository, a non-functioning program, a Norm error, cheating, and so forth.

  In these cases, the evaluation process ends and the final grade is 0, or -42 in case of cheating. However, except for cheating, student are strongly encouraged to review together the work that was turned in, in order to identify any mistakes that shouldn't be repeated in the future.
- Remember that for the duration of the defense, no segfault, no other unexpected, premature, uncontrolled or unexpected termination of the program, else the final grade is 0. Use the appropriate flag.

You should never have to edit any file except the configuration file if it exists. If you want to edit a file, take the time to explicit the reasons with the evaluated student and make sure both of you are okay with this.

- You must also verify the absence of memory leaks. Any memory allocated on the heap must be properly freed before the end of execution.

You are allowed to use any of the different tools available on the computer, such as leaks, valgrind, or e\_fence. In case of memory leaks, tick the appropriate flag.

# **Attachments**

subject.pdf (https://cdn.intra.42.fr/pdf/pdf/117739/en.subject.pdf)

# **Mandatory Part**

#### Compile

• Use "make -n" to see if compilation use "-Wall -Wextra -Werror". If not, select the "invalid compilation" flag.

X No

- · minishell compiles without any errors. If not, select the flag.
- The Makefile must not re-link. If not, select the flag.

⊗ Yes

#### Simple Command & global variables

- · Execute a simple command with an absolute path like /bin/ls, or any other command without any options.
- How many global variables are used? Why? Ask the evaluated student to give you a concrete example of why it feels mandatory or logical.
- Check the global variable. This global variable cannot provide any other information or data access than the number of a received signal.
- · Test an empty command.
- · Test only spaces or tabs.
- · If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

#### Arguments

- Execute a simple command with an absolute path like /bin/ls, or any other command with arguments but without any quotes or double quotes.
- · Repeat multiple times with different commands and arguments.
- · If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

 ${\it ext{ iny Yes}}$ 

#### echo

- Execute the echo command with or without arguments, or the -n option.
- Repeat multiple times with different arguments.
- If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

#### exit

- Execute exit command with or without arguments.
- Repeat multiple times with different arguments.
- Don't forget to relaunch the minishell
- If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

⊗ Yes × No

# Return value of a process

- Execute a simple command with an absolute path like /bin/ls, or any other command with arguments but without any quotes and double quotes. Then execute echo \$?
- Check the printed value. You can do the same in bash in order to compare the results.
- Repeat multiple times with different commands and arguments. Try some wrong commands like '/bin/ls filethatdoesntexist'
- Try anything like expr \$? + \$?
- If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

⊗ Yes × No

### Signals

- ctrl-C in an empty prompt should display a new line with a new prompt.
- ctrl-\ in an empty prompt should not do anything.
- ctrl-D in an empty prompt should quit minishell --> RELAUNCH!
- ctrl-C in a prompt after you wrote some stuff should display a new line with a new prompt.

#### Intra Projects minishell Edit

- The buffer should be clean too. Press "Enter" to make sure nothing from the previous line is executed.
- ctrl-D in a prompt after you wrote some stuff should not do anything.
- ctrl-\ in a prompt after you wrote some stuff should not do anything.
- Try ctrl-C after running a blocking command like cat without arguments or grep "something".
- $\bullet \ \ \text{Try ctrl-} \land \text{after running a blocking command like cat without arguments or grep "something"}.$
- Try ctrl-D after running a blocking command like cat without arguments or grep "something".
- Repeat multiple times using different commands.
- If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

× No

#### **Double Quotes**

- Execute a simple command with arguments and, this time, use also double quotes (you should try to includ whitespaces too).
- Try a command like : echo "cat lol.c | cat > lol.c"
- · Try anything except \$.
- · If something crashes, select the "crash" flag.
- If something doesn't work, select the "incomplete work" flag.

×No

# Single Quotes

- · Execute commands with single quotes as arguments.
- · Try empty arguments.
- Try environment variables, whitespaces, pipes, redirection in the single quotes.
- · echo '\$USER' must print "\$USER".
- · Nothing should be interpreted.

∧ No

#### env

· Check if env shows you the current environment variables.



# export

- Export environment variables, create new ones and replace old ones.
- · Check the result with env.

⊗ Y	⁄es	× No

#### unset

- Export environment variables, create new ones and replace old ones.
- Use unset to remove some of them.
- · Check the result with env.



# cd

- Use the command cd to move the working directory and check if you are in the right directory with /bin/ls
- · Repeat multiple times with working and not working cd
- Also, try '.' and '..' as arguments

⊗ Yes	× <sub>No</sub>

# pwd

- · Use the command pwd.
- · Repeat multiple times in different directories.


×No

# Relative Path

- Execute commands but this time use a relative path.
- Repeat multiple times in different directories with a complex relative path (lots of ..).

	⊗ Yes	XNo
Envir	ronment path	
•	Execute commands but this time without any path (ls, wc, awk a Unset the \$PATH and ensure commands are not working anymous Set the \$PATH to a multiple directory value (directory1:directory2 order from left to right.	ore.
	⊘ Yes	×No
Redi	rection	
•	Execute commands with redirections < and/or > Repeat multiple times with different commands and arguments a Check if multiple tries of the same redirections fail. Test << redirection (it doesn't have to update the history).	and sometimes change > with >>
	⊘ Yes	×No
Pipes		
•	Execute commands with pipes like 'cat file   grep bla   more' Repeat multiple times with different commands and arguments. Try some wrong commands like 'ls filethatdoesntexist   grep bla Try to mix pipes and redirections.	more'
	⊗ Yes	XNo
C	razy and history	
		etry some command?
•	Execute commands that should not work like 'dsbksdgbksdghsd an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	
•	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.	
•	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	'. Ensure minishell doesn't crash and p
Envir	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	'. Ensure minishell doesn't crash and p
Envir	an error. 'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!       Yes   Yes   Tonment variables  Execute echo with some environment variables (\$variable) as an Check that \$ is interpreted as an environment variable.  Check that double quotes interpolate \$.  Check that USER exists. Otherwise, set it.	'. Ensure minishell doesn't crash and pi
Envir	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	'. Ensure minishell doesn't crash and provided with the second second crash and provided with the second crash and the se
Enviir Bo Evalumana	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*. Ensure minishell doesn't crash and provided the state of the state
Enviir Bo Evalumana	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*. Ensure minishell doesn't crash and provided the state of the state
Enviii BO Evalumana defen	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*No  No  Tryuments.  *No  tirely and perfectly done, and the error atory points were not passed during the
Enviii BO Evalumana defen	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*No  No  Tryuments.  *No  tirely and perfectly done, and the error atory points were not passed during the
Enviii BO Evalumana defen	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*No  *No  *No  Tryuments.  *No  *No  *No  *Itirely and perfectly done, and the error atory points were not passed during the liberary behaves the same way bash does.
Bo Evalumana defendand,	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*No  No  Younguments.  *No  Triguments.  *No  *No  *No  *No  *No  *No  *No  *N
Bo Evalumana defendand,	an error.  'cat   cat   ls' should behave in a "normal way".  Try to execute a long command with a ton of arguments.  Have fun with that beautiful minishell and enjoy it!	*No  *No  *No  Tryuments.  *No  *No  tirely and perfectly done, and the error story points were not passed during the libehaves the same way bash does.

- Set the USER environment variable.
- echo "'\$USER'" should print the value of the USER variable.
- echo ""\$USER"" should print "\$USER".

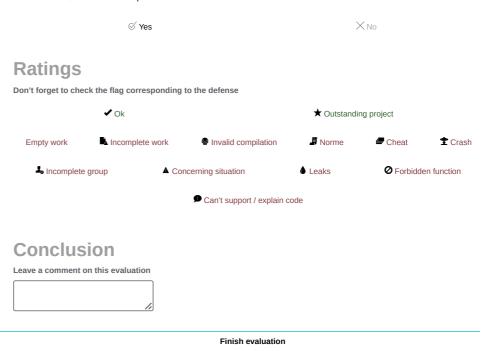

Declaration on the use of cookies (https://profile.intra.42.fr/legal/terms/2) Privacy policy

General term of use of the site

Rules of procedure

Terms of use fc

(https://profile.intra.42.fr/legal/terms/5)

(https://profile.intra.42.fr/legal/terms/6)

(https://profile.intra.42.fr/legal/terms/4)

(https://profile.int