


## Atomic Design manual

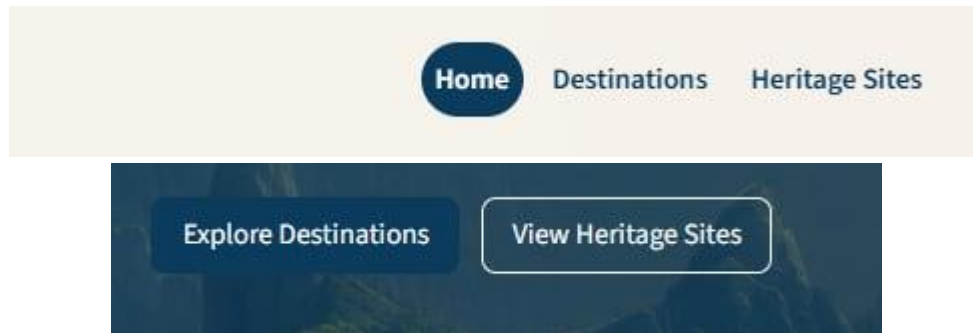

### Context:

The Button will be used when the user needs to perform an action on the website.

### Response Logic:

- **Container or breakpoint considerations:** this uses flexible padding to meet mobile touch target recommendations.
- **Mobile layout:** the button can expand to full width so users can tap it easily. If there are multiple buttons, they may stack vertically with space between them.
- **Tablet layout:** On tablet screens, buttons can appear beside each other in the same row when there is enough space. Their text remains readable without becoming too large.
- **Desktop layout:** On desktop screens, buttons remain content-sized and are commonly placed horizontally in action areas,

- **Responsive design decisions:** uses readable text, sufficient padding, high-contrast colors, and visible keyboard focus states.

```
<template>
  <a class="skip-link" href="#main-content">Skip to main content</a>
  <header class="site-header">
    <nav class="navbar navbar-expand-lg container py-2" aria-label="Primary">
      <RouterLink class="navbar-brand" to="/">
        <span class="brand-title">PangTour</span>
        <span class="brand-tag">A Cultural and Heritage Guide</span>
      </RouterLink>

      <button
        class="navbar-toggler"
        type="button"
        :aria-expanded="isMenuOpen ? 'true' : 'false'"
        aria-controls="primary-nav"
        aria-label="Toggle navigation"
        @click="isMenuOpen = !isMenuOpen"
      >
        <span class="navbar-toggler-icon"></span>
      </button>

      <div id="primary-nav" class="navbar-collapse" :class="{ show: isMenuOpen }">
        <ul class="navbar-nav ms-auto gap-lg-2">
          <li v-for="link in navLinks" :key="link.path" class="nav-item">
            <RouterLink class="nav-link" :to="link.path">{{ link.name }}</RouterLink>
          </li>
        </ul>
      </div>
    </nav>
  </header>
```