

Ex No 1**Downloading and installing Hadoop on Mac, Understanding different Hadoop modes, Startup scripts, Configuration files.****AIM:**

To Download and install Hadoop, Understanding different Hadoop modes, Startup scripts, Configuration files.

PROCEDURE:**Step 1: Download/Update Homebrew**

To set up Hadoop on a Mac OS we need to have Homebrew installed on our system. Homebrew is a package manager specifically designed for the Mac operating system making it simple to install Unix applications. Homebrew you can easily install it by following the instructions provided at this link:

<https://brew.sh/>

Alternatively you can quickly install Homebrew by typing the following command into your terminal:

```
/bin/bash -c "$(curl -fsSL  
https://raw.githubusercontent.com/Homebrew/install/HEAD/install.sh)"
```

Update the repository index of the Homebrew package installer. This can be done through the brew update command.

```
brew update
```

Add below lines to **.bash_profile** or **.zprofile**
`eval "$(/opt/homebrew/bin/brew shellenv)"` **Step**
2: Install Java 1.8 version

Confirm the correct version of java (version 8) installed on the machine. If any other version than 1.8., **make sure to install 1.8 as Hadoop 3.3.6/3.4.0 have dependency and only supported in Java 1.8 versions**

Brew command to cast Java to version 8 / install java 8 using brew
install - cask homebrew/cask-versions/adoptopenjdk8

Add below lines to **.bash_profile** or **.zprofile**
`export JAVA_HOME=$(/usr/libexec/java_home)`

`java -version openjdk`

version "1.8.0_292"

OpenJDK Runtime Environment (AdoptOpenJDK)(build 1.8.0_292-b10)

OpenJDK 64-Bit Server VM (AdoptOpenJDK)(build 25.292-b10, mixed mode)

Step 3: Install Hadoop 3.3.6/3.4.0 using homebrew

To install hadoop use brew command: brew
install hadoop


Check your installed hadoop version 3.3.6/3.4.0
hadoop version

Move to hadoop directory and verify the files/path : `cd`
`/opt/homebrew/Cellar/hadoop/3.4.0`
or `cd /opt/homebrew/Cellar/hadoop/3.3.6` based on hadoop version

Step 4: Updated Hadoop config files -> 5 files

Go into the directory: `cd`
`/opt/homebrew/Cellar/hadoop/3.4.0/libexec/etc/hadoop`

Open this directory in any code editor of choice. E.g — vscode, and update following files with the given code add in the end.

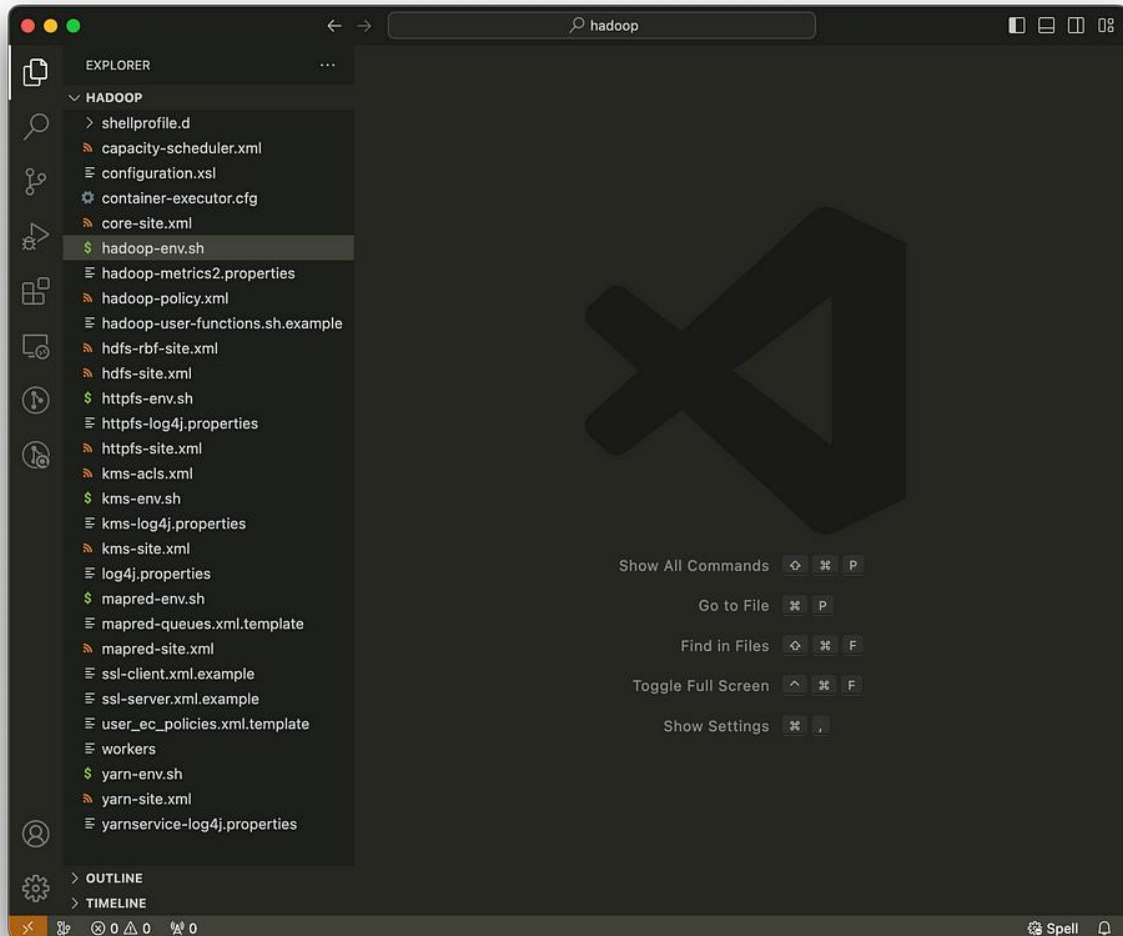

Get Java home path using below command:
`/usr/libexec/java_home`

-> FILE 1: `hadoop-env.sh`

Add the code line to the end of the file and replace the path with your Java home path from your local system

export

JAVA_HOME=/Library/Java/JavaVirtualMachines/adoptopenjdk-8.jdk/Contents/Home

Following are file names and code to add to configure hadoop:

-> **FILE 2: core-site.xml**

```
<configuration>
<property>
<name>fs.defaultFS</name>
<value>hdfs://localhost:9000</value>
<final>true</final>
</property>
</configuration>
```

-> **FILE 3: hdfs-site.xml**

```
<configuration>
<property>
<name>dfs.replication</name>
<value>1</value>
</property>
</configuration>
```


-> **FILE 4: mapred-site.xml**

```
<configuration>
<property>
<name>yarn.app.mapreduce.am.env</name>
<value>HADOOP_MAPRED_HOME=/opt/homebrew/opt/hadoopp</value>
</property>
<property>
<name>mapreduce.map.env</name>
<value>HADOOP_MAPRED_HOME=/opt/homebrew/opt/hadoop</value>
</property>
<property>
<name>mapreduce.reduce.env</name>
<value>HADOOP_MAPRED_HOME=/opt/homebrew/opt/hadoop</value>
</property>
</configuration>
```

-> **FILE 5: yarn-site.xml**

```
<configuration>
<property>
<name>yarn.nodemanager.aux-services</name>
<value>mapreduce_shuffle</value>
</property>
</configuration>
```

Also, Now open **System Preferences** and open Sharing and select Remote Login

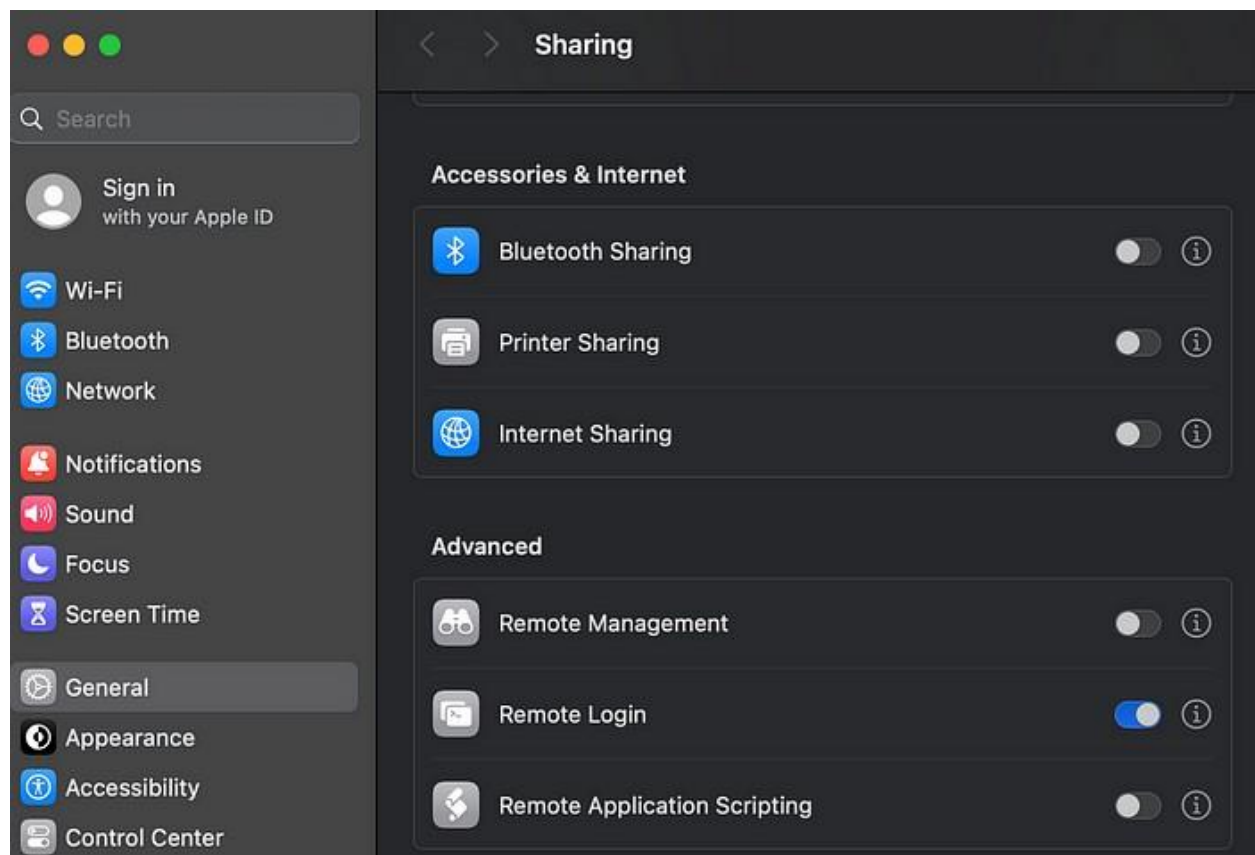

Step 5: Format HDFS and Start Hadoop

Run following commands to start hadoop: `hadoop namenode -format`

Start hadoop:
start-all.sh

You can stop hadoop by using command : **stop-all.sh**

If Error: [Hadoop "Permission denied \(publickey,password,keyboard-interactive\)" warning](#)

Proceed with the following steps:

1. Generate new keygen.

ssh-keygen -t rsa -P "" -f ~/.ssh/id_rsa 2.

Register key gen: cat ~/.ssh/id_rsa.pub >>

~/.ssh/authorized_keys

You can start hadoop by using command : **start-all.sh**

We can verify if all processes are running in machine using this command.

jps



```
vikramchoudhary — zsh — 80x8
vikramchoudhary@Vikrams-MBP ~ % jps
5216 ResourceManager
4883 DataNode
5317 NodeManager
4780 NameNode
10190 Jps
5022 SecondaryNameNode
vikramchoudhary@Vikrams-MBP ~ %
```

<http://localhost:9864/>

<http://localhost:8088/cluster>

RESULT:

The step-by-step installation and configuration of Hadoop on Mac system have been successfully completed.