

EXPERIMENT 7

240701426

IPC shared memory

```
rs@localhost:~ — /usr/bin/vim IPC.c


#include<stdio.h>
#include<sys/ipc.h>
#include<sys/shm.h>
#include<string.h>

int main(){
    key_t key = ftok("shmfile",65);
    int shmid = shmget(key,1024,0666|IPC_CREAT);
    char *str = (char*) shmatt(shmid,(void*)0,0);
    printf("Write Data: ");
    scanf("%s",str);
    printf("Data Written: %s\n",str);
    shmdt(str);
    return 0;
}
```

"IPC.c" 16L, 320B 16,0-1 All

```
rs@localhost:~

[rs@localhost ~]$ vi reciver.c
[rs@localhost ~]$ gcc reciver.c
[rs@localhost ~]$ gcc reciver.c -o reciver
[rs@localhost ~]$ ./reciver
Data received: hiii
[rs@localhost ~]$
```

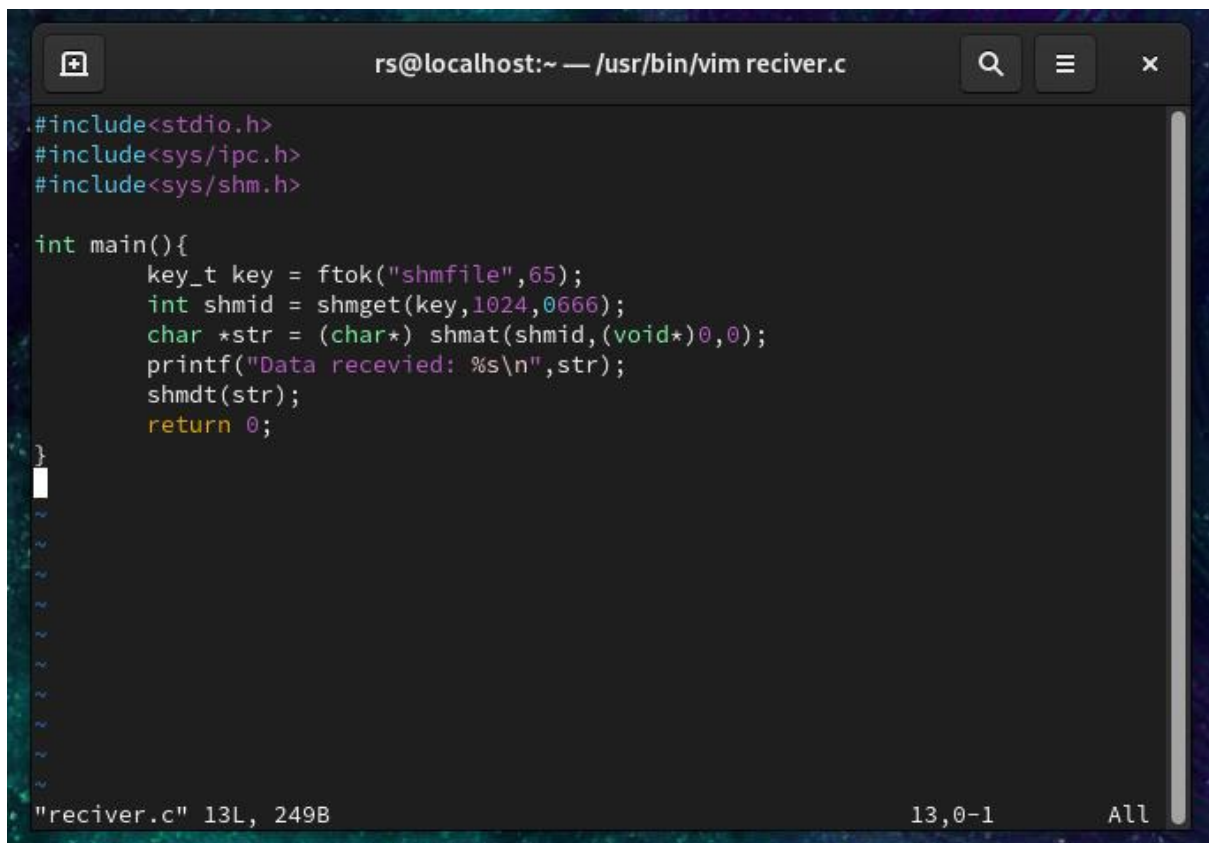


```
rs@localhost:~ — /usr/bin/vim reciver.c

#include<stdio.h>
#include<sys/ipc.h>
#include<sys/shm.h>

int main(){
    key_t key = ftok("shmfile",65);
    int shmid = shmget(key,1024,0666);
    char *str = (char*) shmat(shmid,(void*)0,0);
    printf("Data received: %s\n",str);
    shmdt(str);
    return 0;
}

"reciver.c" 13L, 249B                               13,0-1    All
```

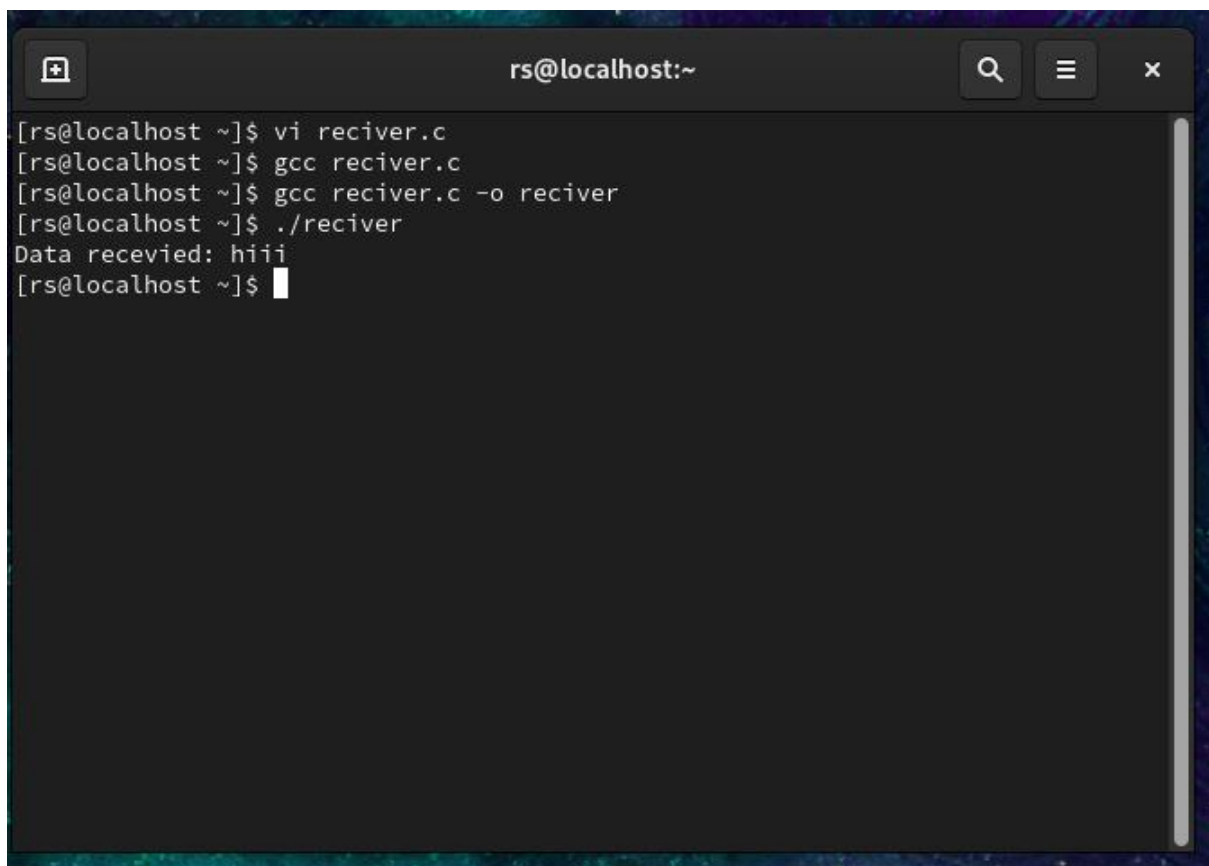

```
rs@localhost:~

[rs@localhost ~]$ vi reciver.c
[rs@localhost ~]$ gcc reciver.c
[rs@localhost ~]$ gcc reciver.c -o reciver
[rs@localhost ~]$ ./reciver
Data received: hiii
[rs@localhost ~]$
```