1. ¿Qué identificadores directos fueron eliminados?

Se eliminaron todos los que permiten saber quién es la persona de forma inmediata: **`nombre`**, **`correo`**, **`telefono`** y **`rfc`**.

2. ¿Qué cuasi-identificadores permanecen?

Permanecen la **edad** (transformada en `rango_edad`) y la ubicación a través del **`codigo_postal`** (reducido a `region` con los dos primeros dígitos).

3. ¿Qué combinaciones de atributos podrían reducir el anonimato?

Si se combina un **rango de edad muy específico** con una **región geográfica pequeña** (o si se agregan más datos en el futuro, como sexo o fecha exacta de alta), se limita tanto la población que un atacante con información externa podría deducir a quién pertenece cada registro.

4. ¿Qué sucede cuando un grupo contiene pocos registros?

Se incrementa el riesgo de **reidentificación** o filtración por inferencia. Por ejemplo, si en la región "80" y rango "46+" solo hay 1 persona, cualquiera que sepa que un cliente vive ahí y tiene esa edad sabrá exactamente cuál es su registro.

5. ¿Qué atributos deberían generalizarse?

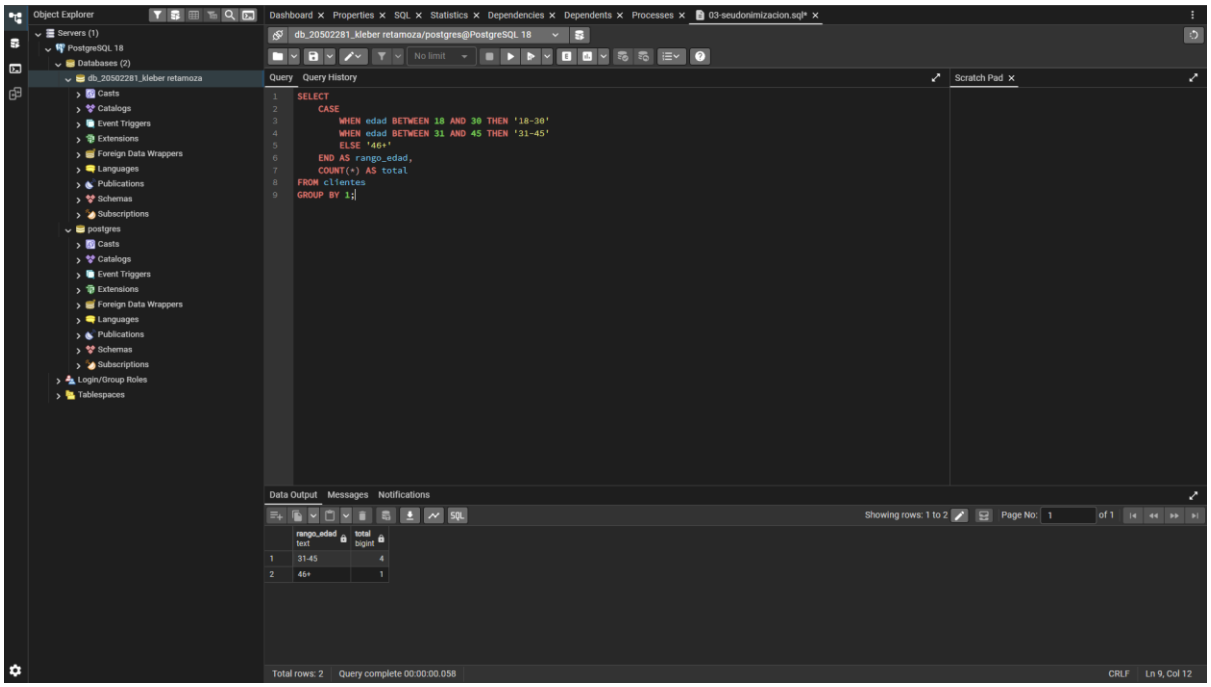
Atributos numéricos o de ubicación muy detallados, como el **código postal completo (5 dígitos)** o la **edad exacta en años**, deben agruparse en categorías más amplias (ej. rangos de edad de 10-20 años o regiones generales por estado/zona).

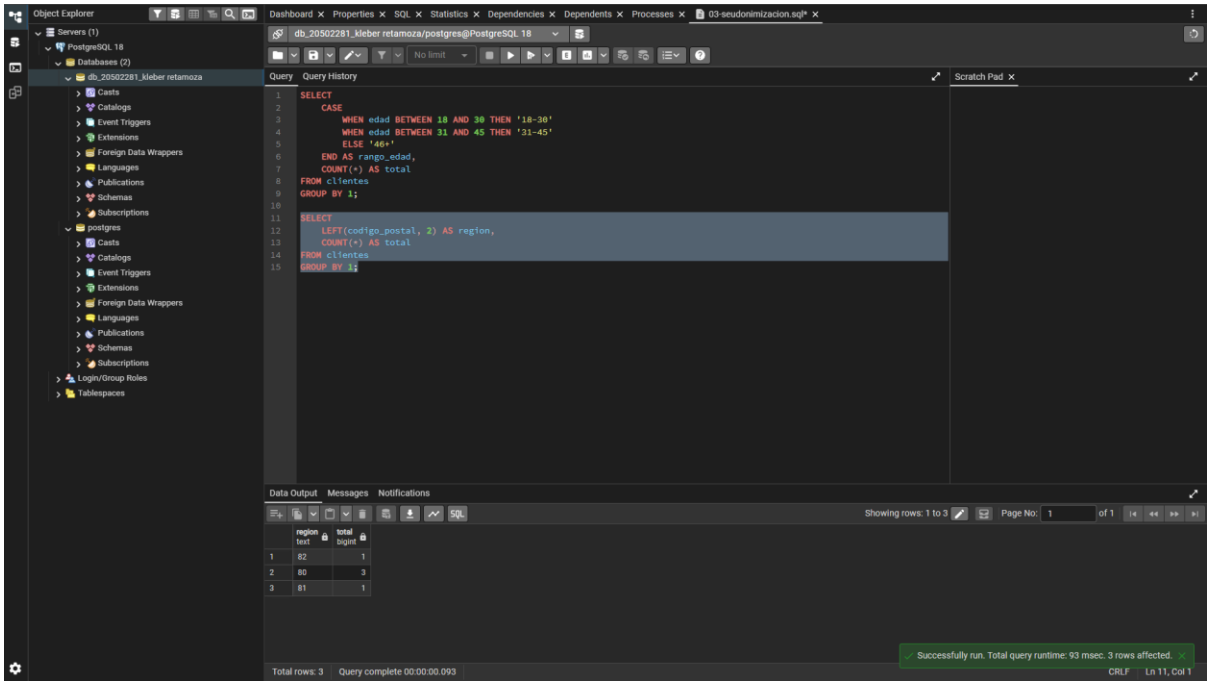
6. ¿Qué información debería suprimirse?

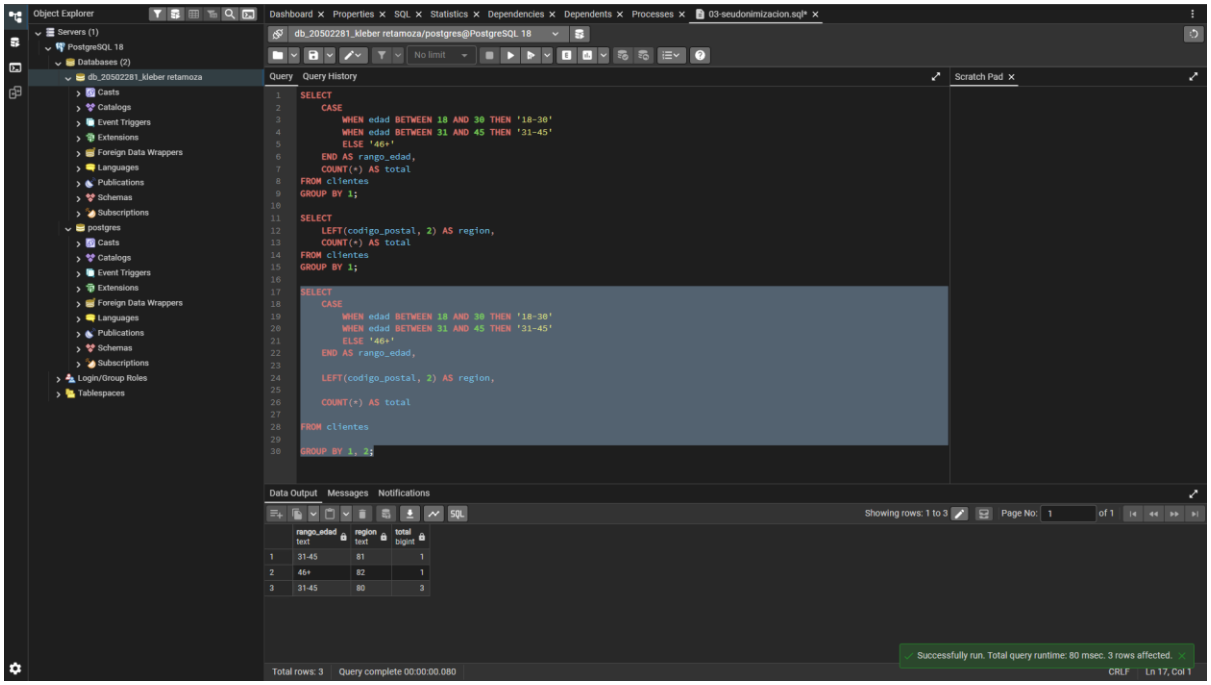
Aquellos grupos o filas resultantes que no alcancen el umbral de registros seguros (por ejemplo, grupos con menos de k personas) o los campos irrelevantes que no aportan a la estadística global pero aumentan el riesgo.

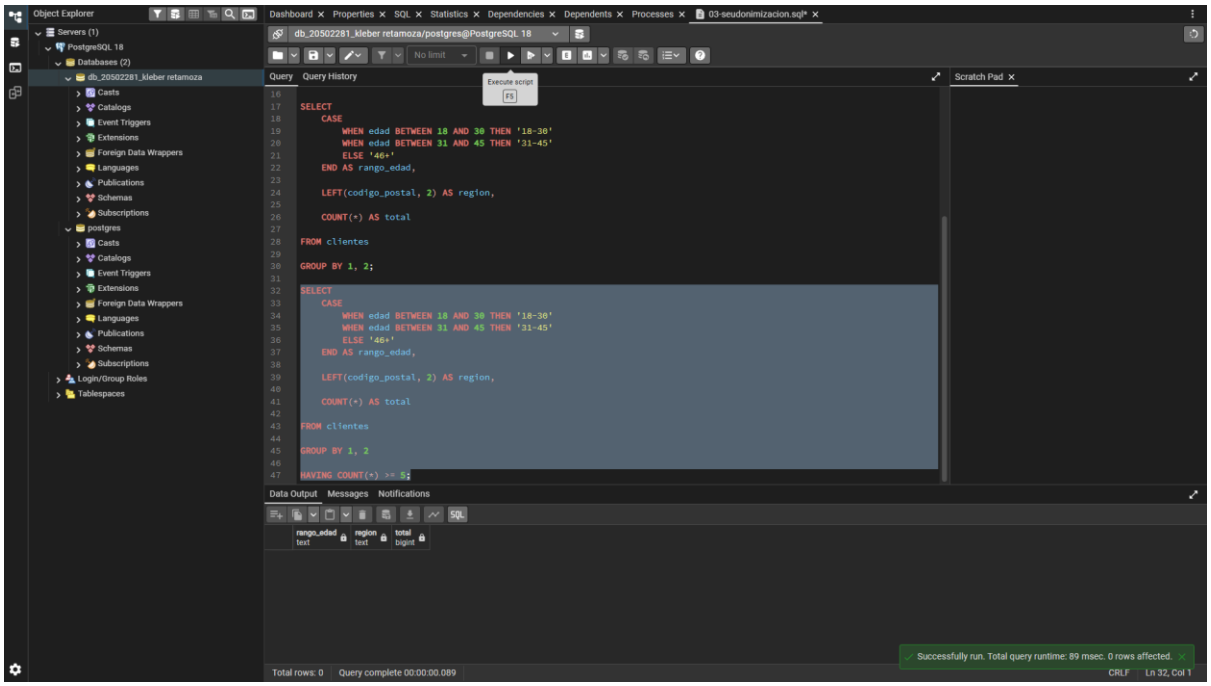
7. ¿Es correcto afirmar que el conjunto de datos es “100 % anónimo”? ¿Por qué?

No. No existe el "100 % anónimo". Siempre existe un riesgo residual de reidentificación por ataques de vinculación (*linkage attacks*) cruzando la información con bases de datos públicas o externas.


Object Explorer
Servers (1)
PostgreSQL 18
Databases (2)
db_20502281_kleber retamoza
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
Login/Group Roles
Tablespaces
Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
03-seudonimizacion.sql*
db_20502281_kleber retamoza/postgres@PostgreSQL 18
No limit
Query
Query History
Scratch Pad
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
Data Output
Messages
Notifications
Showing rows: 1 to 2
Page No: 1
of 1
rango_edad text
total bigint
1 31-45 4
2 46+ 1
Total rows: 2
Query complete 00:00:00.058
CRLF
Ln 9, Col 12


Object Explorer
Servers (1)
PostgreSQL 18
Databases (2)
db_20502281_kleber retamoza
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
Login/Group Roles
Tablespaces
Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
03-seudonimizacion.sql*
db_20502281_kleber retamoza/postgres@PostgreSQL 18
No limit
Query
Query History
Scratch Pad
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
SELECT
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
Data Output
Messages
Notifications
Showing rows: 1 to 3
Page No: 1
of 1
region text
total bigint
1 82 1
2 80 3
3 81 1
Successfully run. Total query runtime: 93 msec. 3 rows affected.
Total rows: 3
Query complete 00:00:00.093
CRLF
Ln 11, Col 1


Object Explorer
Servers (1)
PostgreSQL 18
Databases (2)
db_20502281_kleber retamoza
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
postgres
Login/Group Roles
Tablespaces
Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
03-seudonimizacion.sql*
db_20502281_kleber retamoza/postgres@PostgreSQL 18
No limit
Query
Query History
Scratch Pad
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
SELECT
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1;
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1, 2;
Data Output
Messages
Notifications
Showing rows: 1 to 3
Page No: 1
of 1
rango_edad text
region text
total bigint
1 31-45 81 1
2 46+ 82 1
3 31-45 80 3
Successfully run. Total query runtime: 80 msec. 3 rows affected.
Total rows: 3
Query complete 00:00:00.080
CRLF
Ln 17, Col 1


Object Explorer
Servers (1)
PostgreSQL 18
Databases (2)
db_20502281_kleber retamoza
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
postgres
Login/Group Roles
Tablespaces
Dashboard
Properties
SQL
Statistics
Dependencies
Dependents
Processes
03-seudonimizacion.sql*
db_20502281_kleber retamoza/postgres@PostgreSQL 18
No limit
Execute script
F5
Query
Query History
Scratch Pad
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1, 2;
SELECT
CASE
WHEN edad BETWEEN 18 AND 30 THEN '18-30'
WHEN edad BETWEEN 31 AND 45 THEN '31-45'
ELSE '46+'
END AS rango_edad,
LEFT(codigo_postal, 2) AS region,
COUNT(*) AS total
FROM clientes
GROUP BY 1, 2
HAVING COUNT(*) >= 5;
Data Output
Messages
Notifications
rango_edad text
region text
total bigint
Successfully run. Total query runtime: 89 msec. 0 rows affected.
Total rows: 0
Query complete 00:00:00.089
CRLF
Ln 32, Col 1