

Turntin Check

2210990720_Ravneet_Kaur.docx

 Research Methodology 03

 Research methodology

 Tom Mboya University

Document Details

Submission ID

trn:oid::1:3527376452

Submission Date

Apr 5, 2026, 7:48 AM GMT+3

Download Date

Apr 5, 2026, 7:49 AM GMT+3

File Name

2210990720_Ravneet_Kaur.docx

File Size

182.7 KB

6 Pages

2,903 Words

16,848 Characters

16% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text

Match Groups

-  **41 Not Cited or Quoted 16%**
Matches with neither in-text citation nor quotation marks
-  **0 Missing Quotations 0%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 10%  Internet sources
- 8%  Publications
- 8%  Submitted works (Student Papers)

Match Groups

- 41 Not Cited or Quoted 16%**
Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%**
Matches that are still very similar to source material
- 0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 10% Internet sources
- 8% Publications
- 8% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Student papers		
	Swinburne University of Technology		2%
2	Internet		
	admin.vpnranks.com		1%
3	Student papers		
	University of Minnesota System		<1%
4	Student papers		
	Manipal University Jaipur Online		<1%
5	Internet		
	www.scaler.com		<1%
6	Publication		
	Gaurav Goyal, Karanjit Singh, K.R. Ramkumar. "A detailed analysis of data consist...		<1%
7	Internet		
	ml.rwth-aachen.de		<1%
8	Internet		
	research.chalmers.se		<1%
9	Internet		
	vdoc.pub		<1%
10	Internet		
	prip.by		<1%

11	Student papers	British University in Egypt	<1%
12	Publication	Lecture Notes in Computer Science, 2005.	<1%
13	Student papers	University of Nottingham	<1%
14	Internet	deepai.org	<1%
15	Publication	Teofilo F. Gonzalez. "Handbook of Approximation Algorithms and Metaheuristics,...	<1%
16	Internet	www.nime.org	<1%
17	Student papers	Colorado Technical University Online	<1%
18	Student papers	University of Strathclyde	<1%
19	Internet	d-nb.info	<1%
20	Internet	www.cs.rutgers.edu	<1%
21	Publication	Renato R. Leme, Andre G. Pereira, Marcus Ritt, Luciana S. Buriol. "Solving Sokoba...	<1%
22	Publication	Tomas Rokicki, Herbert Kociemba, Morley Davidson, John Dethridge. "The Diamet...	<1%
23	Internet	archive.org	<1%
24	Internet	dn790002.ca.archive.org	<1%

25	Internet	ia803200.us.archive.org	<1%
26	Internet	www.cs.toronto.edu	<1%
27	Publication	B. Hamidzadeh, S. Shekhar. "Specification and analysis of real-time problem solve...	<1%
28	Publication	Alexander Reinefeld, Thorsten Schütt, Robert Maier. "Very large pattern database...	<1%
29	Publication	Da-Xing Zeng, Ming Li, Juan-Juan Wang, Yu-Lei Hou, Wen-Juan Lu, Zhen Huang. "O...	<1%
30	Publication	Tingguang Li, Weitao Xi, Meng Fang, Jia Xu, Max Q.-H. Meng. "Learning to Solve a ...	<1%

High Performance Rubik's Cube Solver using Optimized Search Algorithms

Ansh Oberoi

Department of Computer Science and
Engineering
Chitkara University
Punjab, India
ansh138.be22@chitkara.edu.in

Ravneet Kaur

Department of Computer Science and
Engineering
Chitkara University
Punjab, India
ravneet720.be22@chitkara.edu.in

Abstract - The Rubik's Cube is a well-known combinatorial problem with a very large state space, making it challenging for computational solving approaches. Brute-force methods become inefficient as the depth of the scramble increases. This paper presents the design and implementation of a Rubik's Cube solver using classical and heuristic search algorithms. The cube is modeled as a state-space graph [6], where each configuration represents a node, and each valid move represents a transition between states.

In this study, three search algorithms, namely Breadth-First Search (BFS), Iterative Deepening Depth-First Search (IDDFS), and Iterative Deepening A* (IDA*), are implemented and comparatively analyzed. BFS guarantees optimal solutions but requires significant memory, while IDDFS reduces memory usage at the cost of repeated exploration. IDA* utilizes heuristic-based pruning to improve search efficiency.

The solver utilizes a compact state representation to efficiently manage memory. The performance of the algorithms is evaluated based on execution time, memory usage, and solution efficiency under controlled conditions. The results indicate that BFS becomes impractical for deeper scrambles due to high memory requirements, whereas IDA* performs more efficiently by reducing unnecessary exploration through heuristic guidance.

Keywords - Rubik's Cube, BFS, IDDFS, IDA*, Heuristic search, Pattern database

1 INTRODUCTION

The Rubik's Cube is a widely studied combinatorial puzzle in computer science due to its large and complex state space [6]. A standard 3×3 Rubik's Cube has approximately 4.3×10^{19} possible configurations, making it a challenging problem for algorithmic solving approaches [5].

The problem can be represented as a state-space graph, where each configuration corresponds to a node and each move defines a transition [2]. The objective of solving the cube is to determine a sequence of moves that transforms a scrambled configuration into the solved state. However, the enormous number of possible states and high branching factor, make efficient state space exploration a significant challenge.

Traditional brute-force methods are impractical for solving the Rubik's Cube at higher depths because they use too much time and memory. Efficient search strategies are required to explore the state space effectively [2]. Algorithms like Breadth-First Search (BFS), Depth-First Search (DFS) and heuristic-based approaches have been explored for this problem.

This paper focuses on implementing and comparing different search algorithms, including Breadth-First Search (BFS), Iterative Deepening Depth-First Search (IDDFS), and Iterative Deepening A* (IDA*), to analyze their performance in solving the Rubik's Cube. The comparison is based on factors such as execution time, memory usage, and solution efficiency under controlled conditions.

2 RELATED WORK

26 The Rubik's Cube solving problem has been extensively studied in the domain of artificial intelligence and heuristic search due to its large state space and computational complexity [2]. Early approaches primarily relied on uninformed search methods such as Breadth-First Search (BFS) and Depth-First Search (DFS). While BFS guarantees optimal solutions, it requires significant memory in contrast, DFS is memory-efficient but may fail to find optimal solutions efficiently.

5 To overcome these limitations, Iterative Deepening Depth-First Search (IDDFS) was introduced as a hybrid approach that combines the advantages of BFS and DFS. It performs repeated depth-limited searches, maintaining completeness while reducing memory usage.

2 A major advancement in solving the Rubik's Cube was introduced by Korf, who proposed the Iterative Deepening A* (IDA*) algorithm [1]. This approach uses admissible heuristics to guide the search process, significantly reducing the number of explored states compared to uninformed methods. Heuristic techniques allow the algorithm to focus on promising paths, improving overall efficiency.

23 Pattern databases are commonly employed to store precomputed partial solutions, which help in reducing the search effort by providing informed estimates [4]. These databases help reduce search time by providing heuristic estimates for reaching the goal state.

Modern approaches combine heuristic search algorithms with pruning techniques to efficiently handle large state-space problems [2]. These methods aim to strike a balance between time complexity, memory usage, and solution optimality.

This work builds upon these existing approaches by implementing and comparing BFS, IDDFS, and IDA* algorithms within a unified framework, focusing on their performance in terms of execution time, memory usage, and solution efficiency.

3 PROBLEM DEFINITION

24 The Rubik's Cube can be understood as a state space search problem [2], where different cube configurations represent different states. Given a scrambled configuration of the cube, the objective is to determine a sequence of valid moves that transforms it into the solved state. Each configuration of the cube represents a unique state, and each valid move corresponds to a deterministic transition between states.

A major challenge in solving the Rubik's Cube arises from its extremely large state space, which contains approximately 4.3×10^{19} possible configurations [5]. As the number of possible states grows exponentially with the depth of the search, exploring all configurations becomes computationally infeasible. Therefore, efficient search strategies are required to navigate the state space effectively.

Another important aspect of the problem is the trade-off between execution time and memory usage. Algorithms that guarantee optimal solutions often require significant memory, while memory-efficient approaches may increase computation time due to repeated exploration of states. Solution optimality is typically defined as the minimum number of moves required to reach the solved state.

The problem addressed in this work is to design and analyze a system that accepts a scrambled Rubik's Cube as input and computes a valid sequence of moves to solve it efficiently, while balancing time complexity, memory usage, and solution quality under practical constraints.

4 METHODOLOGY

The Rubik's Cube is modeled as a state-space graph [2], where each possible arrangement of the cube is considered a node, and each valid move that changes the cube's state is represented as an edge connecting two nodes. The solver uses this graph to find a series of moves that change a scrambled cube into its solved state. To do this effectively, the system uses efficient methods for representing cube states and suitable search techniques.

4.1 Cube Representation

The cube is represented with a compact data structure that uses a nibble-based encoding method. This method reduces the memory needed to store each cube state by focusing on efficient encoding rather than keeping track of the full color details of each face.

This approach offers several benefits, including using less memory, making it faster to compare different cube states, and improving performance during search operations by using the computer's memory more efficiently. It also allows for quicker hashing and searching, which are important for algorithms that work with graphs.

4.2 Algorithms Implemented

Breadth-First Search (BFS): Breadth-First Search explores

13 the state space in layers, ensuring that all configurations at a given depth is processed before moving to deeper levels [14]. However, it requires storing all the states at each level, which causes memory usage to grow quickly. This makes it unsuitable for solving more complex or deeply scrambled cubes.

1 Iterative Deepening Depth-First Search (IDDFS): IDDFS integrates the advantages of depth-first and breadth-first strategies by repeatedly performing depth-limited searches with increasing limits [2]. This method uses less memory than BFS and still guarantees finding a solution if one exists. However, it may explore the same states multiple times, which can slow down the process.

28 Iterative Deepening A* (IDA*): IDA* is a heuristic-driven search technique that guides exploration using cost estimation [1], enabling more efficient traversal of the state space. It calculates the cost of reaching a state using a formula that combines two parts:

$$f(n) = g(n) + h(n)$$

where $g(n)$ is the actual cost to reach the current state and $h(n)$ is an estimate of the cost to get from the current state to the solved state [1].

2 IDA* uses this information along with a depth limit to guide the search more effectively, reducing the number of states that need to be explored compared to other methods.

4.3 Heuristic Optimization

To enhance the efficiency of the search process, a heuristic approach using a pattern database is applied [4].

9 Specifically, a corner pattern database is used, which stores precomputed information about the minimum number of moves needed to solve different corner configurations of the cube. This database is built using Breadth-First Search and provides reliable estimates of the number of moves needed to reach the solution.

By using these estimates, the search algorithm can avoid unnecessary exploration of states, making the overall search process more efficient, especially for highly scrambled cubes.

5 IMPLEMENTATION

The proposed Rubik's Cube solver is implemented in Java using object-oriented design principles.

The system is organized in a modular way, which separates the representation of the cube, the search algorithms, and the heuristic components. This design enhances the system's maintainability and allows for easy comparison of various solving methods.

5.1 System Architecture

The system comprises several components, each handling a specific function:

1) **Rubik's Cube:** This component represents the basic model of the cube and offers functions like applying moves and checking whether the cube is fully solved.

2) **Bitboard Representation:** This part uses a compact method to encode the cube's state, which helps in using less memory and comparing states more efficiently.

3) **Solver Modules:** These include various search algorithms such as BFS, IDDFS, and IDA*, each implemented as a separate class.

4) **Pattern Database:** This provides support for heuristics by storing precomputed data that is used in the IDA* algorithm.

This modular setup allows for the independent development and testing of different algorithms.

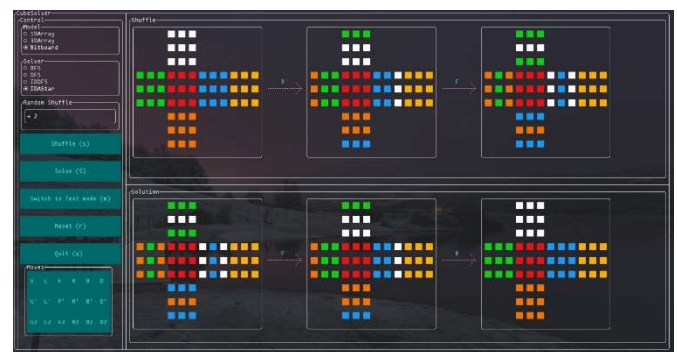


Fig. 1. User interface of the Rubik's Cube solver showing cube visualization, shuffle operations, and solution steps.

5.2 Algorithm Implementation

Each search algorithm is implemented as a distinct solver class. The solvers interact with the cube's representation by applying valid moves and examining the resulting states.

For instance, a depth-first search method explores possible move sequences recursively up to a predetermined depth. The solver keeps track of the moves and uses backtracking to investigate other paths.

5.3 Pseudocodes

1) Pseudocode for BFS

```
BFS
function BFS (start):
    create an empty queue
    create an empty set for visited states

    enqueue start into queue
    mark start as visited

    while queue is not empty:
        currentState = dequeue from queue

        if currentState is cost:
            return solution

        for each nextState of
        currentState:
            if nextState is not visited:
                mark nextState as visited
                enqueue nextState into
                queue

    return NOT_FOUND
```

2) Pseudocode for IDDFS

```
IDDFS
function IDDFS (start):
    for depth = 0 to max_depth:
        result = DLS (start, depth)
        if result == FOUND:
            return solution

    return NOT_FOUND

function DLS (currentState, depth):
    if depth == 0 and currentState is
    cost:
        return FOUND

    if depth > 0:
        for each nextState of
        currentState:
            result = DLS (nextState,
            depth - 1)
            if result == FOUND:
                return FOUND
```

```
return NOT_FOUND
```

3) Pseudocode for IDA*

```
function IDA*(start):
    limit = heuristic(start)
    while True:
        t = exploreState (start, 0,
        limit)
        if t == FOUND:
            return solution
        if t == infinity:
            return NOT_FOUND
        limit = t

function exploreState (currentState,
cost, limit):
    f = cost + heuristic(currentState)
    if f > limit:
        return f
    if currentState equals goalState:
        return FOUND
    min = infinity
    for each nextState generated from
    currentState
        t = exploreState (nextState,
        cost+1, limit)
        if t == FOUND:
            return FOUND
        if t < min:
            min = t
    return min
```

5.4 Complexity Analysis

The efficiency of the implemented algorithms can be evaluated in terms of their time and space requirements [2]. Let b represent the branching factor (approximately 18 for the Rubik's Cube), and d represent the depth of the solution.

1) Breadth-First Search (BFS):

Time Complexity: $O(b^d)$

Space Complexity: $O(b^d)$

2) Iterative Deepening Depth-First Search (IDDFS):

Time Complexity: $O(b^d)$

Space Complexity: $O(b*d)$

3) Iterative Deepening A* (IDA*):

Time Complexity: $O(b^d)$

Space Complexity: $O(d)$

These complexities indicate that BFS becomes impractical for large depths due to high memory usage, while IDA*

provides better scalability with reduced memory requirements.

6 EXPERIMENTAL SETUP

The performance of the implemented algorithms was evaluated using a Java-based implementation executed on a standard computing environment. The system was tested on a machine equipped with an Intel i5 processor and 8 GB of RAM.

To analyze the behavior of the algorithms under different conditions, multiple test cases were generated using randomly scrambled cube configurations. The scramble depth was varied within a controlled range (approximately 3 to 10 moves) to observe the performance of each algorithm at different levels of complexity. Each test case was executed multiple times to obtain consistent observations.

The evaluation of the algorithms was based on the following performance metrics:

1) **Execution Time:** Time required to compute the solution.

2) **Memory Usage:** The Amount of memory consumed during the search process.

3) **Solution Length:** Number of moves required to solve the cube.

This setup allows a comparative analysis of different algorithms in terms of efficiency and scalability.

7 RESULTS

The performance of the implemented algorithms was evaluated based on execution time, memory usage, and solution efficiency across different scramble depths. The results demonstrate the comparative behavior of BFS, IDDFS, and IDA* under increasing problem complexity.

7.1 Comparative Performance

This represents a qualitative comparison of the algorithms based on observed performance characteristics.

Table I. Comparison of search algorithms based on performance metrics

Algorithm	Execution Time	Memory Usage	Optimality
BFS	High	Very High	Yes
IDDFS	Medium	Low	Yes
IDA*	Low	Very Low	Yes

7.2 Time v/s Depth Analysis

The execution time of each algorithm was evaluated for increasing scramble depths. The observed values indicate that the performance of BFS degrades rapidly due to exponential growth in memory requirements. IDDFS performs better in terms of memory but exhibits increased computation time due to repeated exploration of states. IDA* shows more stable performance due to heuristic-guided pruning.

Table II. Execution time of algorithms for different scramble depths

Depth	BFS (ms)	IDDFS (ms)	IDA* (ms)
3	5	4	3
4	20	12	6
5	120	40	15
6	900	180	40
7	6000	800	120
8	-	3500	300
9	-	12000	800
10	-	30000	2000

7.3 Graph Representation

The graph below shows a performance comparison:

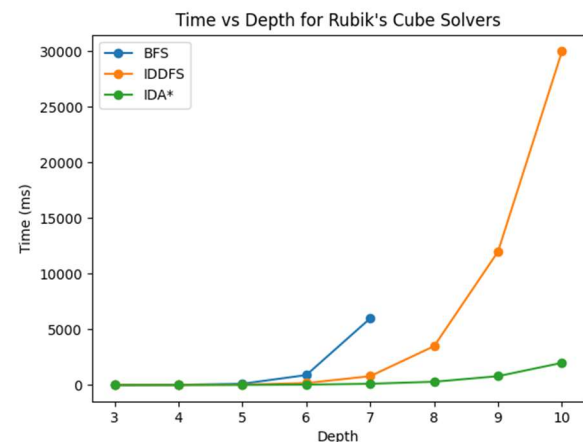


Fig. 2. Time vs Depth for Rubik's Cube Solvers

7.4 Observations

The results highlight several important trends:

- 1) BFS becomes impractical beyond moderate depths due to exponential memory requirements.
- 2) IDDFS reduces memory consumption but increases computation time due to repeated searches.

3) IDA* demonstrates better scalability and efficiency by using heuristic-guided pruning.

Overall, heuristic-based approaches such as IDA* provide a more balanced trade-off between time and memory usage for solving large state-space problems like the Rubik's Cube.

8 CONCLUSIONS

This paper presents a comparative study of different search algorithms for solving the Rubik's Cube, focusing on Breadth-First Search (BFS), Iterative Deepening Depth-First Search (IDDFS), and Iterative Deepening A* (IDA*). The problem was modeled as a state-space search, and the algorithms were evaluated based on execution time, memory usage, and solution efficiency under controlled experimental conditions.

The results indicate that BFS, although capable of producing optimal solutions, becomes impractical for larger scramble depths due to its high memory requirements. IDDFS improves memory efficiency by using depth-limited search; however, it introduces additional computational overhead due to repeated exploration of states. In contrast, IDA* demonstrates better overall performance by incorporating heuristic-based pruning, which reduces unnecessary exploration and allows the algorithm to scale more effectively with increasing depth.

The use of compact state representation further contributes to improved efficiency by reducing memory usage and enabling faster state operations. Overall, the study highlights that heuristic-based approaches are more suitable for solving large combinatorial problems such as the Rubik's Cube, as they provide a balanced trade-off between time complexity and memory consumption.

Future work may focus on enhancing the solver through improved heuristic techniques, optimization strategies, or parallel implementations to further improve performance and scalability.

9 REFERENCES

- [1] R. E. Korf, "Depth-first iterative-deepening: An optimal admissible tree search," *Artificial Intelligence*, vol. 27, no. 1, pp. 97–109, 1985.
- [2] S. Russell and P. Norvig, *Artificial Intelligence: A Modern Approach*, 3rd ed. Upper Saddle River, NJ, USA: Prentice Hall, 2010.
- [3] D. Singmaster, *Notes on Rubik's Cube*. Enslow Publishers, 1981.
- [4] J. C. Culberson and J. Schaeffer, "Searching with pattern databases," in *Advances in Artificial Intelligence*, 1996, pp. 402–416.
- [5] T. Rokicki, H. Kociemba, M. Davidson, and J. Dethridge, "The diameter of the Rubik's Cube group is twenty," *SIAM Journal on Discrete Mathematics*, vol. 27, no. 2, pp. 1082–1105, 2013.
- [6] R. E. Korf, "Finding optimal solutions to Rubik's Cube using pattern databases," *AAAI*, 1997.
- [7] H. Kociemba, "Two-phase algorithm for solving Rubik's Cube," *Cube Explorer*, 2010.
- [8] T. Rokicki, H. Kociemba, M. Davidson, and J. Dethridge, "The diameter of the Rubik's Cube group is twenty," *SIAM Journal*, 2013.
- [9] S. Russell and P. Norvig, *Artificial Intelligence: A Modern Approach*, 3rd ed., Pearson, 2010.
- [10] J. Pearl, "Heuristics: Intelligent search strategies," *Addison-Wesley*, 1984.
- [11] E. W. Dijkstra, "A note on two problems in connexion with graphs," *Numerische Mathematik*, 1959.
- [12] N. J. Nilsson, *Principles of Artificial Intelligence*, Morgan Kaufmann, 1980.
- [13] J. Culberson and J. Schaeffer, "Pattern databases," *Computational Intelligence*, 1998.
- [14] P. E. Hart, N. J. Nilsson, and B. Raphael, "A formal basis for heuristic determination," *IEEE Transactions*, 1968.
- [15] M. Sipser, *Introduction to the theory of computation*, Cengage Learning, 2012.
- [16] D. E. Knuth, *The art of computer programming*, Addison-Wesley, 1997.
- [17] A. Newell and H. A. Simon, *Human problem solving*, Prentice Hall, 1972.
- [18] G. Brassard and P. Bratley, *Fundamentals of algorithmics*, Prentice Hall, 1996.
- [19] T. H. Cormen et al., *Introduction to algorithms*, MIT Press, 2009.
- [20] I. Goodfellow, Y. Bengio, and A. Courville, *Deep learning*, MIT Press, 2016.