

AI Assisted Coding

ASSIGNMENT 1.2

Name:P.Revanth

HT No:2303a52421

Batch:32

Question: Task 1: AI-Generated Logic Without Modularization
(Factorial without Functions)

Scenario You are building a small command-line utility for a startup intern onboarding task. The program is simple and must be written quickly without modular design.


Task Description Use GitHub Copilot to generate a Python program that computes a mathematical product-based value (factorial-like logic) directly in the main execution flow, without using any user-defined functions.

- Constraint:


Do not define any custom function Logic must be implemented using loops and variables only

-


Prompt:

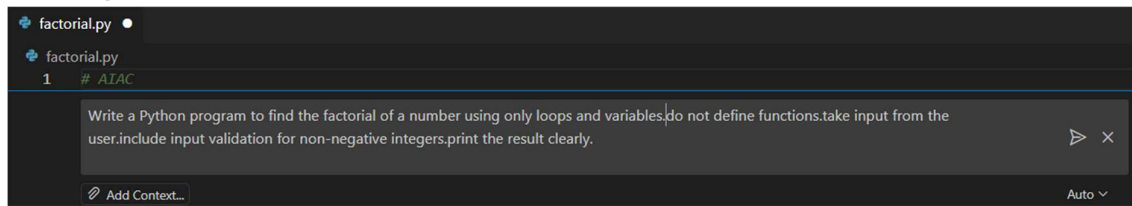

Code Screenshot:

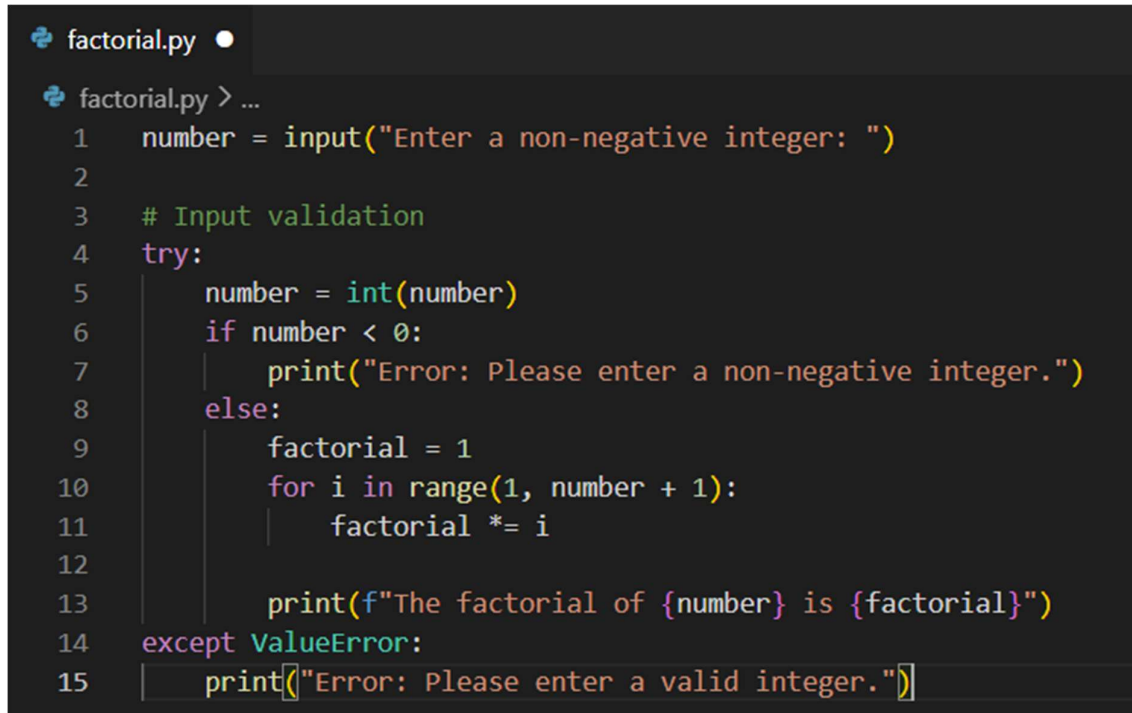

Output(O/P):

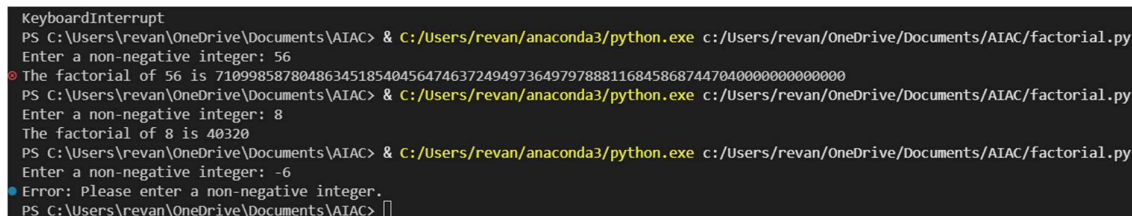

Explanation:

Copilot was very helpful for a beginner as it quickly generated correct logic based on the prompt. It reduced the time required to write the code by suggesting a complete solution. The generated code followed best practices such as input validation and edge case handling. Copilot also helped in avoiding syntax errors and logical mistakes. Overall, it made coding easier & faster.

Question 2:

Scenario Your team lead asks you to review AI-generated code before committing it to a shared repository. Task Description Analyze the code generated in Task 1 and use Copilot again to: Reduce unnecessary variables Improve loop clarity Enhance readability and efficiency Hint: Prompt Copilot with phrases like “optimize this code”, “simplify logic”, or “make it more readable”

Code:

```
factorial.py > ...
1  try:
2      n = int(input("Enter a non-negative integer: ").strip())
3      if n < 0:
4          print("Factorial is not defined for negative numbers.")
5      else:
6          result = 1
7          for i in range(1, n + 1):
8              result *= i
9          print(f"{n}! = {result}")
10 except ValueError:
11     print("Invalid input. Please enter an integer.")
```

Output:

```
PS C:\Users\revan\OneDrive\Documents\AIAC> & C:/Users/revan/anaconda3/python.exe c:/Users/revan/OneDrive/Documents/AIAC/factorial.py
Enter a non-negative integer: 9
9! = 362880
PS C:\Users\revan\OneDrive\Documents\AIAC> & C:/Users/revan/anaconda3/python.exe c:/Users/revan/OneDrive/Documents/AIAC/factorial.py
Enter a non-negative integer: -8
Factorial is not defined for negative numbers.
```

Explanation:

Optimized the code in minimal number of lines and short variable names

Question 3:

Scenario:

The same logic now needs to be reused in multiple scripts.

Task Description Use GitHub Copilot to generate a modular version of the program by: Creating a user-defined function

Calling the function from the main block Constraints: Use meaningful function and variable names Include inline comments (preferably suggested by Copilot)

Code:

```
factorial.py > ...
1  try:
    Zencoder
2  def calculate_factorial(n):
3      """Calculate factorial of a non-negative integer."""
4      if n < 0:
5          return None
6      result = 1
7      for i in range(1, n + 1):
8          result *= i
9      return result
10
11  Zencoder
12  def get_user_input():
13      """Get and validate non-negative integer from user."""
14      return int(input("Enter a non-negative integer: ").strip())
15
16  Zencoder
17  def main():
18      """Main function to run the factorial program."""
19      n = get_user_input()
20      factorial = calculate_factorial(n)
21
22      if factorial is None:
23          print("Factorial is not defined for negative numbers.")
24      else:
25          print(f"{n}! = {factorial}")
26
27  if __name__ == "__main__":
28      main()
```

Output:

```
PS C:\Users\revan\OneDrive\Documents\AIAC> & C:/Users/revan/anaconda3/python.exe c:/Users/revan/OneDrive/Documents/AIAC/factorial.py
Enter a non-negative integer: 9
9! = 362880
```

Explanation:

Copilot Modified The Code To Function Type & main block is created
Handled Edge Cases Well

Question 4:

Scenario As part of a code review meeting, you are asked to justify design choices. Task Description Compare the non-function and function-based Copilot-generated programs on the following criteria:

Logic clarity Reusability Debugging ease Suitability for large projects AI dependency risk

Aspect Logic clarity Non-function based Logic is in one block. Harder to understand Function-based Logic is separated. Easy to understand Reusability Debugging ease Suitability for large projects AI dependency risk Code cannot be reused Debugging is difficult Not suitable for large projects High risk of blind copying Code can be reused easily Debugging is easy Suitable for large projects Lower risk due to clear structure

Explanation:

Aspect	Non function based	Function based
Logic clarity	Logic is is one block. Harder to understand	Logic is separated. Easy to understand
Reusability	Code cannot be reused	Code can be reused easily
Debugging ease	Debugging is difficult	Debugging is easy
Suitability for large projects	Not suitable for large projects	Suitable for large projects
Ai dependency risk	High risk of blind copying	Lower risk due to clear structure

Question 5:

Scenario:

Your mentor wants to test how well AI understands different computational paradigms. Task Description: Prompt Copilot to generate: An iterative version of the logic A recursive version of the same logic Constraints: Both implementations must produce identical outputs Students must not manually write the code first

```

from typing import Union
Zencoder
import argparse

Zencoder
def factorial(n: int) -> int:
    """Return n! computed iteratively. Raises ValueError for negative inputs."""
    if not isinstance(n, int):
        raise TypeError("n must be an integer")
    if n < 0:
        raise ValueError("n must be non-negative")
    result = 1
    for i in range(2, n + 1):
        result *= i
    return result

if __name__ == "__main__":
    parser = argparse.ArgumentParser(description="Compute factorial iteratively.")
    parser.add_argument("n", type=int, help="Non-negative integer")
    args = parser.parse_args()
    print(factorial(args.n))

```

Output:

```

iterative.py: error: the following arguments are required: n
● PS Z:\AIAC> python iterative.py 5
>>
120

```

Prompt 2:

```

3 import sys
4
5 Zencoder
6 def factorial(n: int) -> int:
7     """Return n! for a non-negative integer n using recursion."""
8     if not isinstance(n, int):
9         raise TypeError("n must be an integer")
10    if n < 0:
11        raise ValueError("n must be non-negative")
12    if n <= 1:
13        return 1
14    return n * factorial(n - 1)
15
16 if __name__ == "__main__":
17     if len(sys.argv) > 1:
18         try:
19             n = int(sys.argv[1])
20         except ValueError:
21             print("Please provide an integer.")
22             sys.exit(1)
23     else:
24         try:
25             n = int(input("Enter a non-negative integer: "))
26         except ValueError:
27             print("Invalid input.")
28             sys.exit(1)
29     try:
30         print(factorial(n))
31     except Exception as e:
32         print(e)
33         sys.exit(1)

```

```

PS C:\Users\revan\OneDrive\Documents\AIAC> & C:/Users/revan/anaconda3/python.exe c:/
Enter a non-negative integer: 9
362880
362880

```

Iterative version:

The program starts with an initial value and repeatedly updates it using a loop until the condition is satisfied. The control flow stays within a single function and finishes once the loop ends.

Recursive version:

The program calls itself with a smaller input each time. Each call waits on the stack until the base condition is reached. After that, results are returned step by step.

Aspect	Iterative	Recursive
Readability	Easy to follow for beginners	Slightly harder due to function calls
Stack usage	Uses constant memory	Uses call stack for each function call
Performance implications	Faster and memory efficient	Slower for large inputs due to stack overhead
When recursion is not recommended	Always safe for large inputs	Not recommended when input size is large or stack overflow is possible