

CS2313 Computer Programming

LT3 – Language Syntax, Variable, Data types and Basic I/O-Part II



香港城市大學
City University of Hong Kong

專業 創新 胸懷全球
Professional • Creative
For The World

Overflow


When a variable is assigned a value that is too large to be stored, it causes overflow.

For example, executing the following statement causes overflow, because the largest value that can be stored in a variable of the short type is 32767. However, 32768 is too large.

short value = 32767 + 1;

Overflow

```
short value0 = 32767;  
short value1 = 32768;  
  
cout << value0 <<endl;  
cout << value1 <<endl;
```

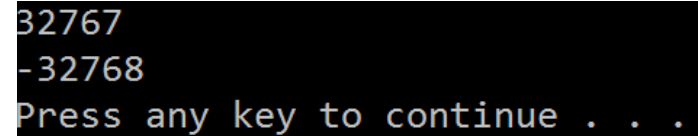
A black rectangular box representing a terminal window. It contains white text showing the output of the C++ program. The first line is '32767', the second line is '-32768', and the third line is 'Press any key to continue . . .'.

```
32767  
-32768  
Press any key to continue . . .
```

double vs. float

The double type values are more accurate than the float type values.
For example,

```
cout << "1.0F / 3.0F is " << setprecision(16) << 1.0F / 3.0F << endl;  
cout << "1.0 / 3.0 is " << setprecision(16) << 1.0 / 3.0 << endl;
```

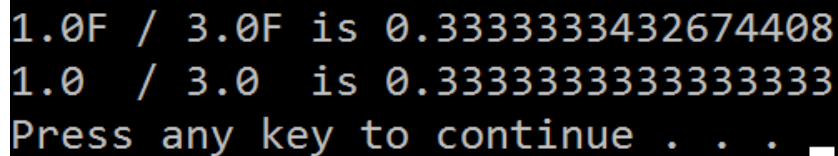

```
1.0F / 3.0F is 0.3333333432674408  
1.0 / 3.0 is 0.3333333333333333  
Press any key to continue . . .
```

A **suffix** can be appended to a floating constant to specify its type; the default is **double** which is the working floating type in C++.

why called floating-point?

The float and double types are used to represent numbers with a decimal point. Why are they called floating-point numbers? These numbers are stored into scientific notation. When a number such as 505.34 is converted into scientific notation such as 5.0534×10^2 , its decimal point is moved (i.e., floated) to a new position.

The World is Not Just Integers

Type Conversion

Arithmetic **conversions** occur when necessary as the operands of a binary operator are evaluated.

```
short  i = 100;
```

```
long   k = i * 3 + 4;
```

```
double d = i * 3.1 + k / 2;
```

Type Conversion

- **Implicit** type conversion

`double d = 3; (type widening)`


- **Explicit** type conversion

`int i = static_cast<int>(3.0); (type narrowing)`

`int i = (int)3.9; (Fraction part is truncated)`

Type Conversion

- **Implicit** type conversion (casting)
 - binary expressions (e.g. $x + y$): lower-ranked operand is promoted to higher-ranked operand.
 - assignment (e.g. $x = y$): right operand is promoted/demoted to match the variable type on the left.
- **Explicit** type conversion
 - example: `j = (double) i;`
- Demoted values might **change** or become **invalid**.

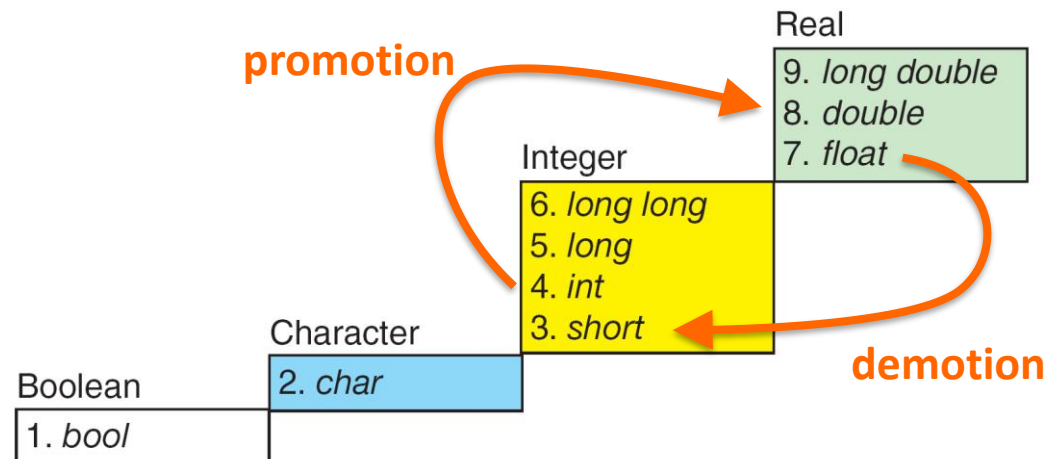

Type Conversion (Note)

- Type conversion may **not** change the variable being cast.
 - For example, d is not changed after casting in the following code

```
double d = 4.5;  
int      i = static_cast<int>(d); // d is not changed
```

- For user defined data types, the compiler does not support automatic type conversions.
- We must define the conversion routines by ourselves

Constants

- Like variable, constant store data for program access but its value will not be changed after declaration.

```
const float pi = 3.14159;
```

- Constants can be numeric-, character- or string-based.
 - e.g., `13`, `7.11`, `'\n'`, `"Tuesday"`.
- Numbers are represented in **decimal** system but **octal** (preceded by 0) or **hexadecimal** integers (preceded by 0x) can be represented, e.g., the following number are equal to a decimal 26.
 - `032` `/* an octal integer */`
 - `0x1a` `/* an hexadecimal integer */`
- Character constant is enclosed by single quotation marks.
 - e.g., `'a'`, `'\n'`, `'\t'`.

Numeric Literals

A **literal** is a constant value that appears directly in a program. For example, 34, 1000000, and 5.0 are literals in the following statements:

```
int i = 34;
```

```
long k = 1000000;
```

```
double d = 5.0;
```

octal and hex literals

By default, an integer literal is a decimal number. To denote an octal integer literal, use a leading 0 (zero), and to denote a hexadecimal integer literal, use a leading 0x or 0X (zero x). For example, the following code displays the decimal value 65535 for hexadecimal number FFFF and decimal value 8 for octal number 10.

```
cout << 0xFFFF << " " << 010;
```

Declaration – Constant

- Format:
 - `const Data_type variable/constant identifier = value;`
- Examples:


```
const float pi = 3.14159;  
const int maxValue = 500;  
const char initial = 'D';  
const char student_name[] = "John Chan";
```

Constants

- String constants are delimited by double quotes ("").
- String is treated as an *array* of characters in C++
 - C++ call it cstring.
 - Another type of string is `String` object which will be covered in the future lecture.

```
#include <iostream>
#include <string>

const string a = "hello world";
cout << a << endl;
```

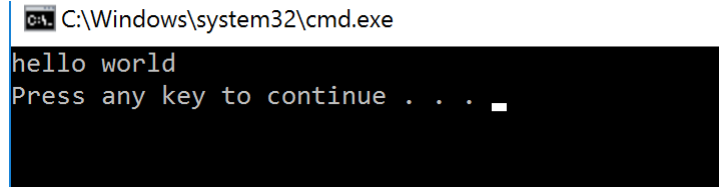

C:\Windows\system32\cmd.exe

hello world

Press any key to continue . . .

Operators and Punctuators

Operators and Punctuators

- Punctuators and operators are used to separate language elements, e.g.,

```
int a, b = 4 , c = 4;  
  
a = b + c;
```

- Some operators:

`+, -, *, /, %, ++, --, >>, <<.`

- Some symbols have meaning that depends on context, e.g.,

```
printf("%d", 40%7);
```


Numeric Operators

Name	Meaning	Example	Result
+	Addition	$34 + 1$	35
-	Subtraction	$34.0 - 0.1$	33.9
*	Multiplication	$300 * 30$	9000
/	Division	$1.0 / 2.0$	0.5
%	Remainder	$20 \% 3$	2

Integer Division

+, -, *, /, and %

5 / 2 yields an integer 2.

5.0 / 2 yields a double value 2.5

5 % 2 yields 1 (the remainder of the division)

Remainder Operator

Remainder is very useful in programming.

For example, an even number % 2 is always 0 and an odd number % 2 is always 1.

**Suppose today is Saturday and you and your friends are going to meet in 10 days.
What day is in 10 days?**

Saturday is the 6th day in a week



$(6 + 10) \% 7$ is 2

A week has 7 days

The 2nd day in a week is Tuesday

After 10 days


Bitwise Operator

Assuming variable A holds 60 (00111100) and variable B holds 13 (00001101)

Operator	Description	Example
&	Binary AND operator copies a bit to the result if it exists in both operands.	A&B will give 12 which is 00001100
	Binary OR operator copies a bit to the result if it exists in either operands.	A B will give 61 which is 0011 1101
^	Binary XOR Operator copies the bit (1) to the result if it exists in one operand but not both	A^B will give 49 which is 0011 0001
<<	Binary left shift operator, moved left by the number of bits specified by the right operand	A<<2 will give 240, which is 1111 0000
>>	Binary right shift operator, moved right by the number of bits specified by the right operand	A>>2 will give 15, which is 0000 1111

Exponent Operations

```
cout << pow(2.0, 3) << endl;  
cout << pow(4.0, 0.5) << endl;  
cout << pow(2.5, 2) << endl;  
cout << pow(2.5, -2) << endl;
```

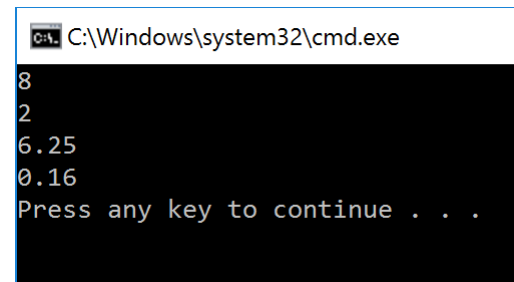

A screenshot of a Windows command prompt window. The title bar shows the path 'C:\Windows\system32\cmd.exe'. The window has a black background with white text. The output of the program is displayed on four lines: '8', '2', '6.25', and '0.16'. Below the output, the prompt 'Press any key to continue . . .' is visible.

```
C:\Windows\system32\cmd.exe  
8  
2  
6.25  
0.16  
Press any key to continue . . .
```

Increment & Decrement Operators

- Increment and decrement operators: `++` and `--`
 - `k++` and `++k` are equivalent to `k=k+1`.
 - `k--` and `--k` are equivalent to `k=k-1`.
- Post-increment and post-decrement: `k++` and `k--`
 - `k`'s value is altered **AFTER** the expression is evaluated.

```
int k=1, j;  
j=k++;    /* result: j==1, k==2 */
```

- Pre-increment and pre-decrement: `++k` and `--k`
 - `k`'s value is altered **BEFORE** the expression is evaluated.

```
int k=1, j=0;  
j=++k;    /* result: j==2, k==2 */
```

Precedence and Associativity of Operators

- An expression may have more than one operator and its precise meaning depends on the precedence and associativity of the involved operators.
- What is the value of variables a, b and c after the execution of the following statements

```
int a, b = 2, c = 1;  
a = b+++c;
```

- Which of the following interpretation is right?

```
a = (b++) + c; /* right */  
or a = b + (++c); /* wrong */
```


Precedence and Associativity of Operators

Precedence Decreases ↓	Operator Precedence (high to low)					Associativity
	::					None
	.	->	[]			Left to right
	()	++(postfix)	--(postfix)			Left to right
	+	-(unary)	++ (prefix)	-- (prefix)		Right to left
	*	/	%			Left to right
	+	-				Left to right
	=	+=	-=	*=	/=	etc.

Precedence: order of evaluation for different operators.

Associativity: order of evaluation for operators with the same precedence.

Precedence and Associativity of Operators

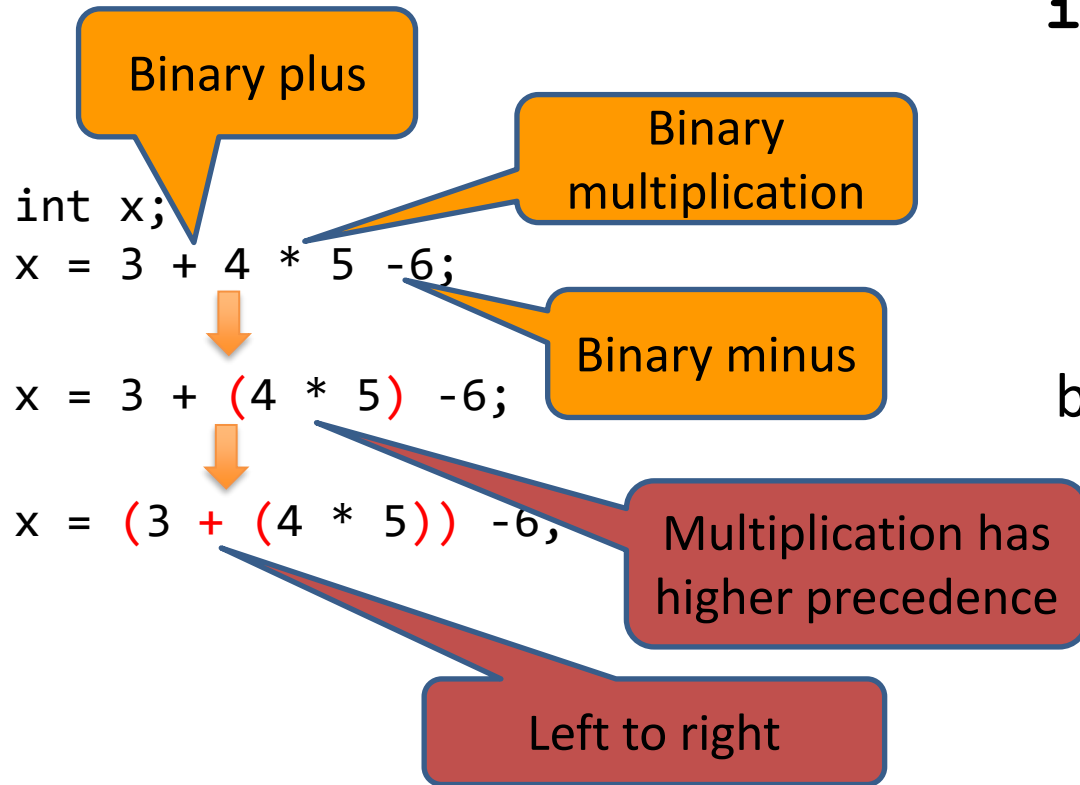

```
int a, b = 2, c = 1;  
a = b+++c;
```

```
a = (b++) + c;
```

b's value is altered **AFTER** the expression is evaluated.

```
a=3; b=3; c=1;
```



```
a = b+++c;
```

**Never write
program like this!**

Assignment Operators =

- Generic form

variable = expression;

- An expression itself has a value, e.g.,

`a = (b = 32) + (c = 23) ;`

Examples on Assignment Statement

```
/* Invalid: left hand side must be a variable */  
a + 10 = b;
```

```
/*assignment to constant is not allowed*/  
2=c;
```

```
/* valid but not easy to understand */  
int a, b, c;  
a = (b = 2) + (c = 3);
```

```
/* avoid complex expressions*/  
int a, b, c;  
b = 2;  
c = 3;  
a = b + c;
```

Swapping the Values

- If we want to swap the content of two variables, a and b.
- What's the problem for the following program?

```
void main() {  
    int a=3, b=4;  
    a=b;  
    b=a;  
}
```

Swapping the Values

- We need to make use of a temporary variable.

```
c=b; /*save the old value of b*/  
b=a; /*put the value of a into b*/  
a=c; /*put the old value of b to a*/
```

Assignment Operators

- Generic form of efficient assignment operators
variable op= expression;

where *op* is operator; the meaning is
variable = variable op (expression);

- Efficient assignment operators include:

`+=` `-=` `*=` `/=` `%=` `>>=`
`<<=` `&=` `^=` `|=`

- Examples:

<code>a += 5;</code>	is same as	<code>a = a + 5;</code>
<code>a -= 5;</code>	is same as	<code>a = a - 5;</code>
<code>a += b*c;</code>	is same as	<code>a = a + (b*c);</code>
<code>a *= b+c;</code>	is same as	<code>a = a * (b+c);</code>

- `=` is an assignment operator that has nothing to do with mathematical equality (which is `==` in C++)

$a++$ and $++a$

Two things happen:

- (1) Compute the value of the expression $a++$ or $++a$.
- (2) Increment a by 1.

$a++$

do (1) before (2).

Therefore, the value of $a++$ is equal to old value of a .

$++a$

do (2) before (1).

Therefore, the value of $++a$ is equal to the incremented value.

Example

```
int x=3;  
cout << x;  
cout << ++x;  
cout << x;  
cout << x++;  
cout << x;
```


Output

	Old x	New x	Output
<code>int x=3;</code>	3	3	
<code>cout << x;</code>	3	3	3
<code>cout << ++x;</code>	3	4	4
<code>cout << x;</code>	4	4	4
<code>cout << x++;</code>	4	5	4
<code>cout << x;</code>	5	5	5

What Values Are Printed?


```
int a=0,i=0;  
cout << "i= " << i << endl;
```

```
a=0;  
i=1+(a++);  
cout << "i= " << i << endl;  
cout << "a= " << a << endl;
```

```
a=0;  
i=1(++a);  
cout << "i= " << i << endl;  
cout << "a= " << a << endl;
```

a++ and ++a

`i = 1 + (a++) ;`



0

Evaluates `a++`
(value:0)

computes `a=a+1`

`i = 1 + 0`
`= 1`

`i = 1 + (++a) ;`



1

computes `a=a+1`

evaluates `++a`
(value:1)

`i = 1 + 1`
`= 2`

Answer

```
int a,i;  
i=(a=0);  
cout << i= " << i << endl;
```

```
a=0;  
i=1+(a++);  
cout << "i= " << i << endl;  
cout << "a= " << a << endl;
```

```
a=0;  
i=1(++a);  
cout << "i= " << i << endl;  
cout << "a= " << a << endl;
```

Output

```
i=0  
i=1  
a=1  
i=2  
a=1
```

Programming Styles

- **Programmers should write code that is:**
 - **understandable to other programmers as well.**
- Meaningful variable names.
- Which one is more meaningful:

```
tax = temp1*temp2;  
tax = price*tax_rate;
```

- **Meaningful Comments.**
 - Write comments as you're writing the program.
- Indentation.

Use of Comments

- Top of the program:
 - Include information such as *the name of organization, programmer's name, date and purpose of program*.
- What is achieved by the function, the meaning of the arguments and the return value of the function.
- Short comments should occur to **the right of the statements** when the effect of the statement is not obvious and you want to illuminate what the program is doing.

Which one of the following is more meaningful?

```
tax = price * rate; /* sales tax formula */  
tax = price * rate; /* multiply price by rate */
```

Common Errors

- Common Error 1: Undeclared/Uninitialized Variables and Unused Variables
- Common Error 2: Integer Overflow
- Common Error 3: Round-off Errors
- Common Error 4: Unintended Integer Division
- Common Error 5: Forgetting Header Files



Trace ComputeChange

Suppose amount is 11.56

```
int remainingAmount = (int)(amount * 100);
```

```
// Find the number of one dollars
```

```
int numberOfOneDollars = remainingAmount / 100;  
remainingAmount = remainingAmount % 100;
```

```
// Find the number of quarters in the remaining amount
```

```
int numberOfQuarters = remainingAmount / 25;  
remainingAmount = remainingAmount % 25;
```

```
// Find the number of dimes in the remaining amount
```

```
int numberOfDimes = remainingAmount / 10;  
remainingAmount = remainingAmount % 10;
```

```
// Find the number of nickels in the remaining amount
```

```
int numberOfNickels = remainingAmount / 5;  
remainingAmount = remainingAmount % 5;
```

```
// Find the number of pennies in the remaining amount
```

```
int numberOfPennies = remainingAmount;
```

remainingAmount

1156

remainingAmount
initialized

Trace ComputeChange

Suppose amount is 11.56

```
int remainingAmount = (int)(amount * 100);
```

```
// Find the number of one dollars
```

```
int numberOfOneDollars = remainingAmount / 100;
```

```
remainingAmount = remainingAmount % 100;
```

```
// Find the number of quarters in the remaining amount
```

```
int numberOfQuarters = remainingAmount / 25;
```

```
remainingAmount = remainingAmount % 25;
```

```
// Find the number of dimes in the remaining amount
```

```
int numberOfDimes = remainingAmount / 10;
```

```
remainingAmount = remainingAmount % 10;
```

```
// Find the number of nickels in the remaining amount
```

```
int numberOfNickels = remainingAmount / 5;
```

```
remainingAmount = remainingAmount % 5;
```

```
// Find the number of pennies in the remaining amount
```

```
int numberOfPennies = remainingAmount;
```

remainingAmount

1156

numberOfOneDollars

11

numberOfOneDollars
assigned

Trace ComputeChange

Suppose amount is 11.56

```
int remainingAmount = (int)(amount * 100);
```

```
// Find the number of one dollars
```

```
int numberOfOneDollars = remainingAmount / 100;
```

```
remainingAmount = remainingAmount % 100;
```

```
// Find the number of quarters in the remaining amount
```

```
int numberOfQuarters = remainingAmount / 25;
```

```
remainingAmount = remainingAmount % 25;
```

```
// Find the number of dimes in the remaining amount
```

```
int numberOfDimes = remainingAmount / 10;
```

```
remainingAmount = remainingAmount % 10;
```

```
// Find the number of nickels in the remaining amount
```

```
int numberOfNickels = remainingAmount / 5;
```

```
remainingAmount = remainingAmount % 5;
```

```
// Find the number of pennies in the remaining amount
```

```
int numberOfPennies = remainingAmount;
```

remainingAmount

56

numberOfOneDollars

11

remainingAmount
updated

Trace ComputeChange

Suppose amount is 11.56

```
int remainingAmount = (int)(amount * 100);
```

```
// Find the number of one dollars
```

```
int numberOfOneDollars = remainingAmount / 100;
```

```
remainingAmount = remainingAmount % 100;
```

```
// Find the number of quarters in the remaining amount
```

```
int numberOfQuarters = remainingAmount / 25;
```

```
remainingAmount = remainingAmount % 25;
```

```
// Find the number of dimes in the remaining amount
```

```
int numberOfDimes = remainingAmount / 10;
```

```
remainingAmount = remainingAmount % 10;
```

```
// Find the number of nickels in the remaining amount
```

```
int numberOfNickels = remainingAmount / 5;
```

```
remainingAmount = remainingAmount % 5;
```

```
// Find the number of pennies in the remaining amount
```

```
int numberOfPennies = remainingAmount;
```

remainingAmount 56

numberOfOneDollars 11

numberOfOneQuarters 2

numberOfOneQuarters
assigned

Trace ComputeChange

Suppose amount is 11.56

```
int remainingAmount = (int)(amount * 100);
```

```
// Find the number of one dollars
```

```
int numberOfOneDollars = remainingAmount / 100;  
remainingAmount = remainingAmount % 100;
```

```
// Find the number of quarters in the remaining amount
```

```
int numberOfQuarters = remainingAmount / 25;
```

```
remainingAmount = remainingAmount % 25;
```

```
// Find the number of dimes in the remaining amount
```

```
int numberOfDimes = remainingAmount / 10;  
remainingAmount = remainingAmount % 10;
```

```
// Find the number of nickels in the remaining amount
```

```
int numberOfNickels = remainingAmount / 5;  
remainingAmount = remainingAmount % 5;
```

```
// Find the number of pennies in the remaining amount
```

```
int numberOfPennies = remainingAmount;
```

remainingAmount

6

numberOfOneDollars

11

numberOfQuarters

2

remainingAmount
updated

Gaming Statistics

```
unsigned int score = 5000;
cout << "score:" << score << endl;
score += 100;
cout << "score:" << score << endl;

int lives = 3;
++lives;
cout << "lives:" << lives << endl;

lives = 3;
lives++;
cout << "lives:" << lives << endl;

int bouns = ++lives * 10;
cout << "lives, bonus = " << lives << "," << bouns << endl;

lives = 3;
bouns = lives++*10;
cout << "lives, bonus = " << lives << "," << bouns << endl;

score = 4294967295;
cout << "score=" << score << endl;
++score;
cout << "score=" << score << endl;
```

C:\Windows\system32\cmd.exe

```
score:5000
score:5100
lives:4
lives:4
lives, bonus = 5,50
lives, bonus = 4,30
score=4294967295
score=0
Press any key to continue . . .
```

Gaming Statistics

```
unsigned int score = 5000;  
cout << "score:" << score << endl;  
score += 100;  
cout << "score:" << score << endl;
```

score = 5000;
score = 5100

```
int lives = 3;  
++lives;  
cout << "lives:" << lives << endl;  
  
lives = 3;  
lives++;  
cout << "lives:" << lives << endl;
```

lives = 4;
lives = 4;

Gaming Statistics

```
int bouns = ++lives * 10;
cout << "lives, bonus = " << lives << "," << bouns << endl;

lives = 3;
bouns = lives++*10;
cout << "lives, bonus = " << lives << "," << bouns << endl;
```

lives = 5; bonus = 50;
lives = 4; bonus = 30;

```
score = 4294967295;
cout << "score=" << score << endl;
++score;
cout << "score=" << score << endl;
```

score = 4294967295
score = 0; (overflow!)

Summary

- Type conversion
 - Implicit type conversion
 - Explicit type conversion
- Constants
 - String
 - Numeric
- Operators and Punctuators
 - Symbols in different contexts have different meanings
 - Swapping the values
 - `a++` and `++a`
- Programming styles
 - Comments
 - Meaningful variable names.