

Barrel-leg fleece pants with a stacked drawcord waistband. Three crossbone crosses wrap the outer side seams at staggered heights.

KEY FEATURES

- Barrel leg: wide through the knee, curving back in to the hem
- Stacked double waistband, elasticated, with drawcord exiting at centre front
- Slanted side pockets
- Two rear welt pockets
- Centre back seam
- Clean-finished hem
- Screen prints by the manufacturer on cut panels before sewing (see artwork pages)

STYLE CODE	FTD-D01-PT01
STYLE NAME	Crossbone Baggy Pants
COLLECTION	Drop 01
COLOUR	Black
SAMPLE TYPE	First (proto / fit) sample
SAMPLE SIZE	M
SIZE RANGE	XS · S · M · L · XL · XXL
QUANTITY	1 sample, plus a print strike-off on the sample fabric
BRAND CONTACT	—
VERSION / DATE	v0.1 · 21 Oct 2026

IMPORTANT: PRINT BEFORE SEWING

Please screen print the panels listed on the "Cut panels" page while they are **cut but not yet sewn**, then sew the sample. Please send a photo of the strike-off for approval before printing. Fabric matched to the Drop 01 zip hoodies.

Value status: CONFIRMED decided PROPOSED starting point, please advise

TBC answer needed



FRONT




BACK

CALLOUTS

1. Stacked double waistband, elastic
2. Drawcord exits at CF
3. Slanted side pocket
4. Curved outseam (barrel leg)
5. Clean hem, twin-needle
6. Hip cross P1, wraps the outseam
7. Rear welt pocket (×2)
8. Centre back seam
9. Back halves of P1 and P3

POINTS OF MEASURE

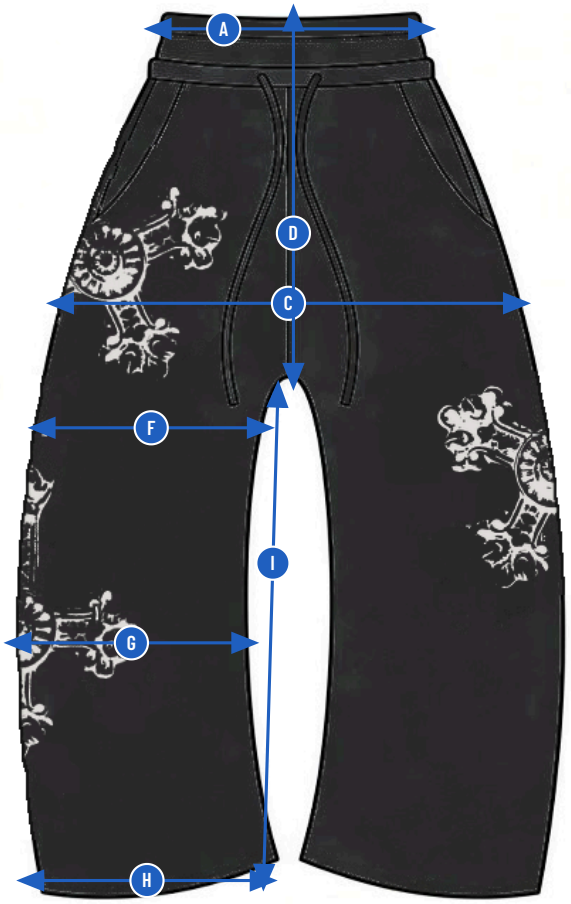

FRONT



BACK

Blue lines show the main points of measure; every point, with how to measure it, is in the measurement chart. Garment laid flat, unstretched unless noted.

A Waist, relaxed
B Waist, extended
C Hip
D Front rise
E Back rise
F Thigh
G Knee (barrel peak)
H Leg opening
I Inseam
J Outseam
K Waistband height (both bands)
L Side pocket opening
M Rear welt pocket width

MEASUREMENT CHART

CODE	POINT OF MEASURE	HOW TO MEASURE	XS	S	M	L	XL	XXL	TOL.	GRADE
A	Waist, relaxed	Top edge of waistband, edge to edge	30	33	**36**	39	42	45	±1	3
B	Waist, extended	Top edge, fully stretched	46	49	**52**	55	58	61	±1	3
C	Hip	18 cm below top of waistband, edge to edge	52	55	**58**	61	64	67	±1	3
D	Front rise	Top of waistband to crotch seam, including band	31	32	**33**	34	35	36	±0.5	1
E	Back rise	Top of waistband to crotch seam, including band	40	41	**42**	43	44	45	±0.5	1
F	Thigh	2.5 cm below crotch, perpendicular to leg	33	34.5	**36**	37.5	39	40.5	±0.5	1.5
G	Knee (barrel peak)	36 cm below crotch	34	35.5	**37**	38.5	40	41.5	±0.5	1.5
H	Leg opening	Hem edge, edge to edge	23	24	**25**	26	27	28	±0.5	1
I	Inseam	Crotch to hem edge	74	75	**76**	77	78	79	±1	1
J	Outseam	Top of waistband to hem edge, along the curved side	105	106.5	**108**	109.5	111	112.5	±1	1.5
K	Waistband height (both bands)	Top edge to lower band seam	9	9	**9**	9	9	9	±0.5	0
L	Side pocket opening	Along the opening edge	15	15.5	**16**	16.5	17	17.5	±0.5	0.5
M	Rear welt pocket width	Each pocket, end to end	12	12.5	**13**	13.5	14	14.5	±0.5	0.5

All values PROPOSED

Centimetres, laid flat. Sample size M highlighted. Proportions follow the flats; please check the pattern against them and advise on any points that won't work.

MATERIALS & TRIMS

COMPONENT	SPECIFICATION	PLACEMENT	COLOUR	STATUS
Main fabric	Same fleece as the zip hoodies: 100% cotton, brushed back, 450–500 gsm, pre-shrunk ≤3%	Legs, waistband	Black	PROPOSED
Elastic	Knitted elastic, 40 mm	Inside upper waistband	Black	PROPOSED
Drawcord	Round cotton cord, 8 mm, approx. 140 cm; tips TBC (knotted or metal aglets)	Lower waistband channel, exits at CF	Black	PROPOSED
Drawcord exits	Two buttonholes or gunmetal metal eyelets	CF lower waistband	Black / gunmetal	TBC
Pocketing	Self fabric or black cotton jersey	Side and rear pocket bags	Black	PROPOSED
Thread	Polyester core-spun, Tex 40	All seams	Black	PROPOSED
Main label	Damask woven, end-fold, same as hoodies. Artwork FTD-LBL-02	Inside CB waistband	Bone thread on black	PROPOSED
Size label	Printed satin tab, folded. Artwork FTD-LBL-04	Under main label	White on black	PROPOSED
Care / composition label	Printed satin, 30 × 80 mm. Artwork FTD-LBL-03_care_joggers	Inside left side seam, below waistband	White on black	PROPOSED
Flag label (optional)	Damask woven loop. Artwork FTD-LBL-05	Right hip seam	Bone thread on black	PROPOSED

Please send fabric and rib swatches with your quote if possible, so FTD can test print on them before sampling.

AREA	DETAILS PROPOSED
Seams	Overlock (4-thread); topstitch as drawn at pockets and waistband.
Barrel leg	Curved outseam and inseam to create the barrel. Manufacturer to advise if knee darts or a shaped front panel are needed to hold the curve.
Waistband	Stacked double band. Upper band carries the 40 mm elastic; lower band carries the drawcord channel with exits at CF. Both bands topstitched as drawn.
Outseam	Each cross is split across the outseam. Notch the panels at every cross and sew with the front and back halves matched within 5 mm.
Side pockets	Slanted opening, topstitched 6 mm, bar-tacked at both ends.
Rear welts	Two single-welt pockets, bar-tacked. Sewn after printing.
Centre back	Centre back seam, overlocked and topstitched.
Hem	Turned and twin-needle stitched, 2.5 cm, as drawn.
Finishing	Trim all threads; press; fold and bag individually.

Stitch details follow the dashed topstitch lines on the flats. Where a different method is standard in your factory for the same look, please suggest it.

ARTWORK & PRINT PLACEMENT



FRONT




BACK

PRINT	APPROX. SIZE CM (W × H)	PLACEMENT	PANELS PRINTED
P1 Hip cross, right outseam (ART-03)	30 × 37.3	Wearer's right. Disc centre 31 cm below the top of the waistband, about 5 cm onto the front panel from the outseam. Tilted as drawn on the flat. Top of the print at least 3 cm below the waistband seam; it crosses the lower end of the side pocket opening.	Front R, Back R
P2 Knee cross, left outseam (ART-03)	30 × 37.3	Wearer's left. Disc centre on the outseam, 57 cm below the top of the waistband. Artwork at its drawn angle.	Front L, Back L
P3 Lower-leg cross, right outseam (ART-03)	30 × 37.3	Wearer's right. Disc centre on the outseam, 77 cm below the top of the waistband. Straightened so the long arm points up the leg.	Front R, Back R
All Seam match		Every cross is one image split at the outseam. The front and back halves must meet at the seam within 5 mm, at the same height and angle. Inseam, crotch, seat and waistband stay clear.	

Method: Screen print by the manufacturer (in house or their usual print partner), one colour, white. Ink: water-based discharge or white plastisol, please advise for this fabric; strike-off on sample fabric to be approved by FTD before the sample panels are printed.

Sizes are taken from the flats and are approximate for the first sample. Please mark each print position on the pattern pieces so prints that cross seams or the zip line up.

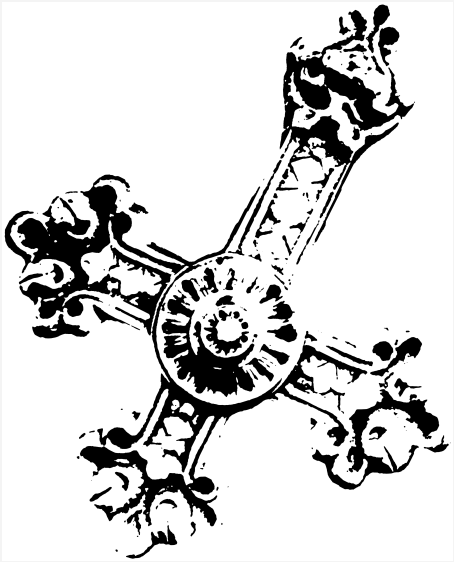

ART-03 · CROSSBONE CROSS PROPOSED

PRINT SIZE (W × H)	30 × 37.3 cm
USED ON	HD01 back ×2, sleeves ×2; PT01 legs ×3
FILES	FTD-ART-03_Crossbone-cross.svg (vector) FTD-ART-03_Crossbone-cross_30cm_300dpi.png

One screen, rotated per placement. Where a cross runs off a panel edge it is printed full size and cut by the seam. On PT01 each cross is split across the outseam: front half on the front panel, back half on the back panel.

One colour: white ink on black. Files are supplied as vector SVG plus a 300 dpi PNG film positive at print size (black = ink). Fine distressed detail in ART-03 is part of the design; please flag any lines too fine to hold on your mesh. Drop 01 uses five screens: ART-01, ART-02 and ART-03 for the hoodies and joggers (ART-01 and ART-03 shared between styles), and ART-01T and ART-02T at T-shirt size.

CUT PANELS: PRINT BEFORE SEWING

WHY

Each cross wraps the outer side seam: half is printed on the front leg panel and half on the back, and the halves have to meet when the outseam is sewn. The legs are printed flat before the seams, pockets and waistband are sewn. The panels are printed flat, then the garment is sewn.

PANELS PRINTED BEFORE SEWING

- Front L
- Front R
- Back L
- Back R

PANELS NOT PRINTED

- Waistband bands
- Pocket bags and facings
- Welt pieces

STEPS

1. Make the sample pattern and mark the print positions on the pattern pieces from the artwork page.
2. Print a **strike-off** of each artwork on the sample fabric; send photos (and the swatch with the sample) for approval.
3. Once approved, cut the sample from pre-shrunk fabric and print the panels flat, matching prints across seams and the zip.
4. Cure and wash-test one printed offcut: no cracking or fading after 3 washes at 30°C.
5. Sew the sample to this pack and send it to FTD for fit and print approval.

If printing before sewing isn't possible for any panel, please tell us before quoting.

LABELS, QUESTIONS & APPROVAL

QUESTIONS FOR THE MANUFACTURER

1. Sample cost per style, lead time, and how many fit rounds are included.
2. Do you screen print in house? If not, who prints, and is printing cut panels before sewing standard for you?
3. Screen set-up cost per screen and print cost per location. Drop 01 uses five screens (ART-01, -02, -03 for the hoodies and joggers; ART-01T, -02T at T-shirt size).
4. Ink you recommend on this fleece (discharge or plastisol), and the cost of a strike-off on our fabric.
5. Production minimum order per style and colour, and how it can be split across sizes.
6. Fleece options at 450–500 gsm, 100% cotton: shrinkage figures and colourfastness.
7. Zip options for the sample (brand, finish), and for production: cost and minimum for a custom puller, including mould fee.
8. Can you grade the pattern XS–XXL? Who owns the pattern, and can we have a copy (PDF or DXF)?
9. Can you source the woven main and size labels, and the care labels?
10. Shipping method, cost and duties to the UK.

LABELS

- UK law requires a fibre composition label on clothing sold in the UK (e.g. "100% cotton"). Care symbols are standard practice.
- Include the brand name and a contact address on the label or packaging so the product can be traced.
- Label artwork is in techpack/labels/ (see FTD-labels-overview.pdf). Please quote the woven and printed labels, or advise your usual label supplier.

REVISION LOG

VERSION	DATE	CHANGE
v0.1	21 Oct 2026	First issue for sample quote

SAMPLE APPROVAL

STAGE	DATE	COMMENTS	APPROVED BY
Fit sample			
Print test			
Pre-production			