


Cropped, boxy heavyweight tee. Small FTD wordmark on the chest, NEVER ENOUGH death-metal logo across the back.

## KEY FEATURES

- Cropped, boxy body with dropped shoulders
- Short, wide sleeves
- Thick 2.5 cm rib crew collar
- Twin-needle hems on body and sleeves
- Screen-printed neck label inside (no sewn tag)
- Screen prints by the manufacturer (see artwork pages)

| | |
|---|---|
| STYLE CODE | FTD-D01-TS01 |
| STYLE NAME | Never Enough Tee |
| COLLECTION | Drop 01 |
| COLOUR | Black |
| SAMPLE TYPE | First (proto / fit) sample |
| SAMPLE SIZE | M |
| SIZE RANGE | XS · S · M · L · XL · XXL |
| QUANTITY | 1 sample, plus a print strike-off on the sample fabric |
| BRAND CONTACT | — |
| VERSION / DATE | v0.1 · 21 Oct 2026 |

## PRINTING

Prints sit on flat areas, so they can go on cut panels or the finished garment, whichever you prefer. Please send a photo of the strike-off for approval before printing. Cropped, boxy fit to match the Drop 01 zip hoodies.

Value status: CONFIRMED decided PROPOSED starting point, please advise

TBC answer needed

# FLATS & FEATURES




FRONT





BACK

## CALLOUTS

1. Crew neck, thick rib collar
2. Dropped shoulder, seam topstitched
3. Short wide sleeve, twin-needle hem
4. Chest print P1 (FTD wordmark)
5. Cropped boxy body, twin-needle hem
6. Back neck tape, neck print label inside
7. Back print P2 (NEVER ENOUGH)

# POINTS OF MEASURE

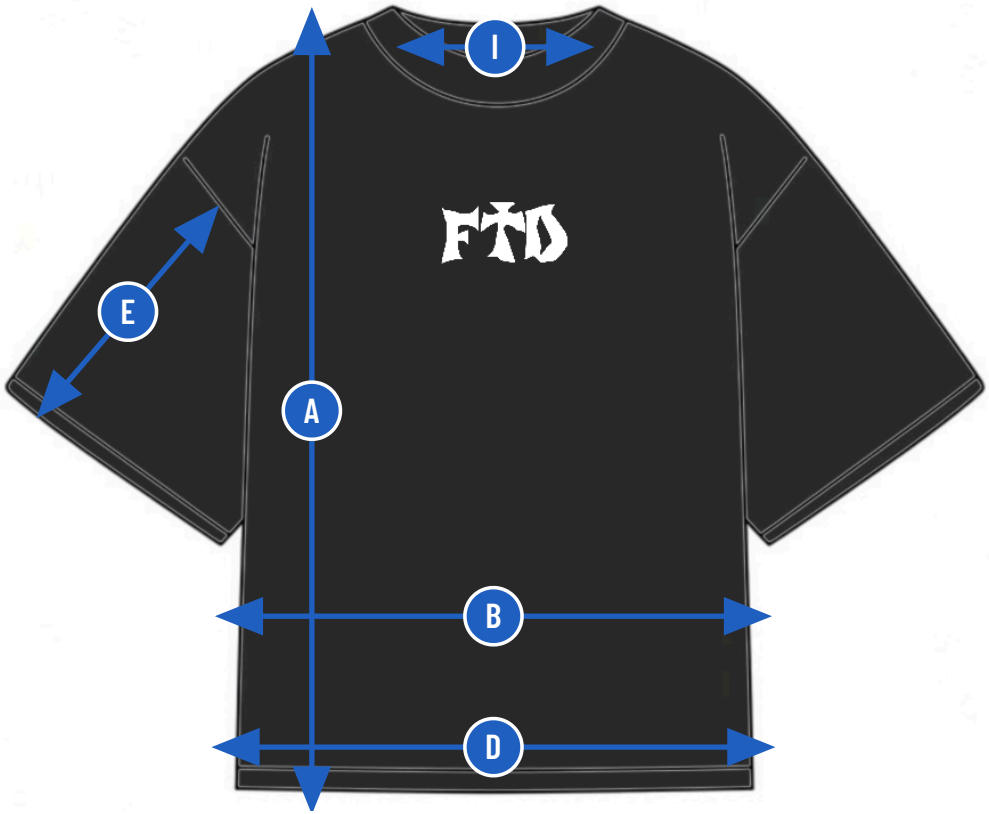


FRONT




BACK

Blue lines show the main points of measure; every point, with how to measure it, is in the measurement chart. Garment laid flat, unstretched unless noted.

| | | | |
|---|---|---|---|
| **A** Body length | **E** Sleeve length | **I** Neck width | **M** Hem height |
| **B** Chest width | **F** Bicep width | **J** Front neck drop | |
| **C** Shoulder width (dropped) | **G** Sleeve opening | **K** Back neck drop | |
| **D** Hem width | **H** Armhole, straight | **L** Collar rib height | |

# MEASUREMENT CHART

| CODE | POINT OF MEASURE | HOW TO MEASURE | XS | S | M | L | XL | XXL | TOL. | GRADE |
|---|---|---|---|---|---|---|---|---|---|---|
| A | Body length | HPS to bottom edge of hem | 62 | 63.5 | **65** | 66.5 | 68 | 69.5 | ±1 | 1.5 |
| B | Chest width | 2.5 cm below armhole, edge to edge | 55 | 58 | **61** | 64 | 67 | 70 | ±1 | 3 |
| C | Shoulder width (dropped) | Shoulder seam point to point, across back | 54 | 57 | **60** | 63 | 66 | 69 | ±1 | 3 |
| D | Hem width | Bottom edge, edge to edge | 55 | 58 | **61** | 64 | 67 | 70 | ±1 | 3 |
| E | Sleeve length | Shoulder seam to sleeve hem edge | 22 | 23 | **24** | 25 | 26 | 27 | ±0.5 | 1 |
| F | Bicep width | 2.5 cm below armhole, perpendicular to sleeve | 23 | 24 | **25** | 26 | 27 | 28 | ±0.5 | 1 |
| G | Sleeve opening | Sleeve hem, edge to edge | 20 | 21 | **22** | 23 | 24 | 25 | ±0.5 | 1 |
| H | Armhole, straight | Shoulder point to underarm, straight | 26 | 27 | **28** | 29 | 30 | 31 | ±0.5 | 1 |
| I | Neck width | Seam to seam at shoulder | 18 | 18.5 | **19** | 19.5 | 20 | 20.5 | ±0.5 | 0.5 |
| J | Front neck drop | HPS to top of collar seam at CF, vertical | 8 | 8.5 | **9** | 9.5 | 10 | 10.5 | ±0.5 | 0.5 |
| K | Back neck drop | HPS to top of collar seam at CB, vertical | 2 | 2 | **2** | 2 | 2 | 2 | ±0.5 | 0 |
| L | Collar rib height | Seam to edge | 2.5 | 2.5 | **2.5** | 2.5 | 2.5 | 2.5 | ±0.3 | 0 |
| M | Hem height | Twin-needle hem, fold to edge | 2.5 | 2.5 | **2.5** | 2.5 | 2.5 | 2.5 | ±0.3 | 0 |

All values PROPOSED

Centimetres, laid flat. Sample size M highlighted. Proportions follow the flats; please check the pattern against them and advise on any points that won't work.

# MATERIALS & TRIMS

| COMPONENT | SPECIFICATION | PLACEMENT | COLOUR | STATUS |
|---|---|---|---|---|
| **Main fabric** | 100% cotton heavyweight single jersey, 260–280 gsm, compact, pre-shrunk; shrinkage ≤3% length and width | Body, sleeves | Black | PROPOSED |
| **Collar rib** | 1×1 rib, 95% cotton / 5% elastane | Neck | Black, matched to main | PROPOSED |
| **Thread** | Polyester core-spun, Tex 40 | All seams | Black | PROPOSED |
| **Neck tape** | Self-fabric or cotton tape covering back neck seam | Inside back neck | Black | PROPOSED |
| **Neck label** | Screen printed, white, 60 × 52 mm. Artwork FTD-LBL-01 (one screen, sizes taped off) | Inside CB, 2 cm below neck seam | White on black | PROPOSED |
| **Flag label (optional)** | Damask woven loop. Artwork FTD-LBL-05 | Left hem side seam | Bone thread on black | PROPOSED |

Please send fabric and rib swatches with your quote if possible, so FTD can test print on them before sampling.

| AREA | DETAILS PROPOSED |
|---|---|
| **Seams** | Overlock (4-thread) shoulder and side seams; shoulder seams taped. |
| **Shoulders** | Dropped shoulder; armhole seam twin-needle topstitched 6 mm on body side as drawn. |
| **Collar** | 2.5 cm 1×1 rib (95% cotton / 5% elastane so it holds shape after washing), joined with overlock, twin-needle topstitched on the body side; back neck taped shoulder to shoulder. |
| **Hems** | Body and sleeve hems turned 2.5 cm, twin-needle cover-stitch. |
| **Printing** | Prints sit on flat areas away from seams; printing on cut panels or the finished garment are both fine, factory's choice. |
| **Finishing** | Trim all threads; press; fold and bag individually. |

Stitch details follow the dashed topstitch lines on the flats. Where a different method is standard in your factory for the same look, please suggest it.

# ARTWORK & PRINT PLACEMENT




FRONT



BACK

| PRINT | APPROX. SIZE CM (W × H) | PLACEMENT | PANELS PRINTED |
|---|---|---|---|
| **P1 FTD wordmark (ART-01T)** | 14 × 6.9 | Centred on CF. Top edge 9 cm below HPS. | Front |
| **P2 NEVER ENOUGH logo (ART-02T)** | 38 × 34.9 | Centred on CB. Top edge 7 cm below the back neck seam. | Back |

**Method:** Screen print by the manufacturer (in house or their usual print partner), one colour, white. Ink: water-based discharge or white plastisol, please advise for this fabric; strike-off on sample fabric to be approved by FTD before the sample panels are printed.

Sizes are taken from the flats and are approximate for the first sample. Please mark each print position on the pattern pieces so prints that cross seams or the zip line up.



### ART-01T · FTD WORDMARK (TEE) PROPOSED

| | |
|---|---|
| PRINT SIZE (W × H) | 14 × 6.9 cm |
| USED ON | TS01 chest |
| FILES | FTD-ART-01T_FTD-wordmark-tee.svg (vector)<br>FTD-ART-01T_FTD-wordmark-tee_14cm_300dpi.png |



### ART-02T · NEVER ENOUGH LOGO (TEE) PROPOSED

| | |
|---|---|
| PRINT SIZE (W × H) | 38 × 34.9 cm |
| USED ON | TS01 back |
| FILES | FTD-ART-02T_Never-Enough-tee.svg (vector)<br>FTD-ART-02T_Never-Enough-tee_38cm_300dpi.png |

Sized for S–L on the cropped body: it fills most of the back, clear of the dropped-shoulder seams. Above a standard screen, so confirm your largest print area.

One colour: white ink on black. Files are supplied as vector SVG plus a 300 dpi PNG film positive at print size (black = ink). Fine distressed detail in ART-03 is part of the design; please flag any lines too fine to hold on your mesh. Drop 01 uses five screens: ART-01, ART-02 and ART-03 for the hoodies and joggers (ART-01 and ART-03 shared between styles), and ART-01T and ART-02T at T-shirt size.

# CUT PANELS: PRINT BEFORE SEWING

## WHY

The prints sit on flat areas of the front and back, clear of seams, so they can be printed before or after sewing. The panels are printed flat, then the garment is sewn.

### PANELS PRINTED BEFORE SEWING

- Front
- Back

### PANELS NOT PRINTED

- Sleeves (×2)
- Collar rib

## STEPS

1. Make the sample pattern and mark the print positions on the pattern pieces from the artwork page.
2. Print a **strike-off** of each artwork on the sample fabric; send photos (and the swatch with the sample) for approval.
3. Once approved, cut the sample from pre-shrunk fabric and print the panels flat, matching prints across seams and the zip.
4. Cure and wash-test one printed offcut: no cracking or fading after 3 washes at 30°C.
5. Sew the sample to this pack and send it to FTD for fit and print approval.

If printing before sewing isn't possible for any panel, please tell us before quoting.

# LABELS, QUESTIONS & APPROVAL

## QUESTIONS FOR THE MANUFACTURER

1. Sample cost per style, lead time, and how many fit rounds are included.
2. Do you screen print in house? If not, who prints, and is printing cut panels before sewing standard for you?
3. Screen set-up cost per screen and print cost per location. Drop 01 uses five screens (ART-01, -02, -03 for the hoodies and joggers; ART-01T, -02T at T-shirt size).
4. Ink you recommend on this fleece (discharge or plastisol), and the cost of a strike-off on our fabric.
5. Production minimum order per style and colour, and how it can be split across sizes.
6. Fleece options at 450–500 gsm, 100% cotton: shrinkage figures and colourfastness.
7. Zip options for the sample (brand, finish), and for production: cost and minimum for a custom puller, including mould fee.
8. Can you grade the pattern XS–XXL? Who owns the pattern, and can we have a copy (PDF or DXF)?
9. Can you source the woven main and size labels, and the care labels?
10. Shipping method, cost and duties to the UK.

### LABELS

- UK law requires a fibre composition label on clothing sold in the UK (e.g. "100% cotton"). Care symbols are standard practice.
- Include the brand name and a contact address on the label or packaging so the product can be traced.
- Label artwork is in techpack/labels/ (see FTD-labels-overview.pdf). Please quote the woven and printed labels, or advise your usual label supplier.

## REVISION LOG

| VERSION | DATE | CHANGE |
|---|---|---|
| v0.1 | 21 Oct 2026 | First issue for sample quote |
| | | |
| | | |

### SAMPLE APPROVAL

| STAGE | DATE | COMMENTS | APPROVED BY |
|---|---|---|---|
| Fit sample | | | |
| Print test | | | |
| Pre-production | | | |