



*iCrash* :  
A Crisis Management Case Study  
**MESSIR** Analysis Document  
- v 1.4 -  
(Report type: Specification)

Sunday 9<sup>th</sup> April, 2017 - 20:02

# Contents

<b>1</b>	<b>Introduction</b>	<b>15</b>
1.1	Overview	15
1.2	Purpose and recipients of the document	15
1.3	Application Domain	15
1.4	Definitions, acronyms and abbreviations	15
1.5	Document structure	16
<b>2</b>	<b>General Description</b>	<b>17</b>
2.1	Domain Stakeholders	17
2.1.1	Communication Company	17
2.1.2	Humans	18
2.1.3	Coordinators	18
2.1.4	Administrator	18
2.1.5	Creator	19
2.1.6	Activator	19
2.2	System's Actors	20
2.3	Use Cases Model	20
2.3.1	Use Cases	20
2.3.2	Use Case Instance(s)	47
<b>3</b>	<b>Environment Model</b>	<b>61</b>
3.1	Local view 01	61
3.2	Local view 02	62
3.3	Local view 03	62
3.4	Local view 04	62
3.5	Local view 05	62
3.6	Local view 08	62
3.7	Local view 09	65
3.8	Local view 10	65
3.9	Local view 11	65
3.10	Local view 12	65
3.11	Global view 01	65
3.12	Actors and Interfaces Descriptions	67
3.12.1	actActivator Actor	67
3.12.2	actAdministrator Actor	67
3.12.3	actAuthenticated Actor	68
3.12.4	actCaptchaGenerator Actor	69
3.12.5	actCaptchaValidator Actor	69
3.12.6	actComCompany Actor	69
3.12.7	actCoordinator Actor	70

3.12.8	actDatabase Actor . . . . .	70
3.12.9	actMailingService Actor . . . . .	71
3.12.10	actMsrCreator Actor . . . . .	71
3.12.11	actSystem Actor . . . . .	71
<b>4</b>	<b>Concept Model . . . . .</b>	<b>73</b>
4.1	PrimaryTypes-Classes . . . . .	73
4.1.1	Local view 01 . . . . .	73
4.1.2	Local view 02 . . . . .	73
4.1.3	Local view 03 . . . . .	73
4.1.4	Local view 04 . . . . .	75
4.1.5	Global view 01 . . . . .	75
4.2	PrimaryTypes-Datatypes . . . . .	75
4.2.1	Local view 06 . . . . .	75
4.2.2	Global view 01 . . . . .	75
4.3	SecondaryTypes-Datatypes . . . . .	75
4.3.1	Local view 01 . . . . .	75
4.4	Concept Model Types Descriptions . . . . .	78
4.4.1	Primary types - Class types descriptions . . . . .	78
4.4.2	Primary types - Datatypes types descriptions . . . . .	81
4.4.3	Primary types - Association types descriptions . . . . .	83
4.4.4	Primary types - Aggregation types descriptions . . . . .	84
4.4.5	Secondary types - Class types descriptions . . . . .	84
4.4.6	Secondary types - Datatypes types descriptions . . . . .	84
4.4.7	Secondary types - Association types descriptions . . . . .	84
4.4.8	Secondary types - Aggregation types descriptions . . . . .	84
4.4.9	Secondary types - Composition types descriptions . . . . .	84
<b>5</b>	<b>Operation Model . . . . .</b>	<b>85</b>
5.1	Environment - Out Interface Operation Scheme for actActivator . . . . .	85
5.1.1	Operation Model for oeSetClock . . . . .	85
5.1.2	Operation Model for oeSollicitateCrisisHandling . . . . .	86
5.2	Environment - Out Interface Operation Scheme for actAdministrator . . . . .	87
5.2.1	Operation Model for oeAddCoordinator . . . . .	87
5.2.2	Operation Model for oeDeleteCoordinator . . . . .	89
5.2.3	Operation Model for oegetstatisticCrises . . . . .	91
5.2.4	Operation Model for oegetstatisticTypesOfCrises . . . . .	92
5.2.5	Operation Model for oegetstatisticUser . . . . .	94
5.3	Environment - Out Interface Operation Scheme for actAuthenticated . . . . .	95
5.3.1	Operation Model for oeLogin . . . . .	95
5.3.2	Operation Model for oeLogout . . . . .	97
5.4	Environment - Out Interface Operation Scheme for actComCompany . . . . .	98
5.4.1	Operation Model for oeAlert . . . . .	98
5.5	Environment - Out Interface Operation Scheme for actCoordinator . . . . .	101
5.5.1	Operation Model for oeCloseCrisis . . . . .	101
5.5.2	Operation Model for oeGetAlertsSet . . . . .	102
5.5.3	Operation Model for oeGetCrisisSet . . . . .	102
5.5.4	Operation Model for oeInvalidateAlert . . . . .	103
5.5.5	Operation Model for oeReportOnCrisis . . . . .	104
5.5.6	Operation Model for oeSetCrisisHandler . . . . .	104

5.5.7	Operation Model for oeSetCrisisStatus . . . . .	105
5.5.8	Operation Model for oeSetCrisisType . . . . .	105
5.5.9	Operation Model for oeValidateAlert . . . . .	106
5.6	Environment - Out Interface Operation Scheme for actMsrCreator . . . . .	107
5.6.1	Operation Model for oeCreateSystemAndEnvironment . . . . .	107
5.7	Environment - Actor Operation Scheme for actMsrCreator . . . . .	110
5.7.1	Operation Model for init . . . . .	110
5.8	Primary Types - Operation Schemes for Class ctAdministrator . . . . .	110
5.8.1	Operation Model for init . . . . .	110
5.9	Primary Types - Operation Schemes for Class ctAlert . . . . .	111
5.9.1	Operation Model for init . . . . .	111
5.9.2	Operation Model for isSentToCoordinator . . . . .	112
5.10	Primary Types - Operation Schemes for Class ctAuthenticated . . . . .	112
5.10.1	Operation Model for init . . . . .	112
5.11	Primary Types - Operation Schemes for Class ctCoordinator . . . . .	113
5.11.1	Operation Model for init . . . . .	113
5.12	Primary Types - Operation Schemes for Class ctCrisis . . . . .	114
5.12.1	Operation Model for init . . . . .	114
5.12.2	Operation Model for handlingDelayPassed . . . . .	115
5.12.3	Operation Model for maxHandlingDelayPassed . . . . .	115
5.12.4	Operation Model for isSentToCoordinator . . . . .	116
5.12.5	Operation Model for isAllocatedIfPossible . . . . .	116
5.13	Primary Types - Operation Schemes for Class ctHuman . . . . .	117
5.13.1	Operation Model for init . . . . .	117
5.13.2	Operation Model for isAcknowledged . . . . .	118
5.14	Primary Types - Operation Schemes for Class ctState . . . . .	119
5.14.1	Operation Model for init . . . . .	119
5.15	Primary Types - Operation Schemes for Datatype dtAlertID . . . . .	120
5.15.1	Operation Model for is . . . . .	120
5.16	Primary Types - Operation Schemes for Datatype dtComment . . . . .	120
5.16.1	Operation Model for is . . . . .	120
5.17	Primary Types - Operation Schemes for Datatype dtCoordinatorID . . . . .	121
5.17.1	Operation Model for is . . . . .	121
5.18	Primary Types - Operation Schemes for Datatype dtCrisisID . . . . .	122
5.18.1	Operation Model for is . . . . .	122
5.19	Primary Types - Operation Schemes for Datatype dtGPSLocation . . . . .	122
5.19.1	Operation Model for is . . . . .	122
5.19.2	Operation Model for isNearTo . . . . .	123
5.20	Primary Types - Operation Schemes for Datatype dtLatitude . . . . .	124
5.20.1	Operation Model for is . . . . .	124
5.21	Primary Types - Operation Schemes for Datatype dtLogin . . . . .	124
5.21.1	Operation Model for is . . . . .	124
5.22	Primary Types - Operation Schemes for Datatype dtLongitude . . . . .	125
5.22.1	Operation Model for is . . . . .	125
5.23	Primary Types - Operation Schemes for Datatype dtPassword . . . . .	126
5.23.1	Operation Model for is . . . . .	126
5.24	Primary Types - Operation Schemes for Datatype dtPhoneNumber . . . . .	126
5.24.1	Operation Model for is . . . . .	126
5.25	Primary Types - Operation Schemes for Enumeration etAlertStatus . . . . .	127

5.25.1	Operation Model for is . . . . .	127
5.26	Primary Types - Operation Schemes for Enumeration etCrisisStatus . . . . .	128
5.26.1	Operation Model for is . . . . .	128
5.27	Primary Types - Operation Schemes for Enumeration etCrisisType . . . . .	128
5.27.1	Operation Model for is . . . . .	128
5.28	Primary Types - Operation Schemes for Enumeration etHumanKind . . . . .	129
5.28.1	Operation Model for is . . . . .	129
5.29	Secondary Types - Operation Schemes for Classes . . . . .	130
5.30	Secondary Types - Operation Schemes for Datatype dtSMS . . . . .	130
5.30.1	Operation Model for is . . . . .	130
5.31	Secondary Types - Operation Schemes for Enumerations . . . . .	130
<b>6</b>	<b>Test Model(s) . . . . .</b>	<b>131</b>
6.1	Test Model for testcase01 . . . . .	131
6.1.1	Test Steps Specification . . . . .	131
6.1.2	Test Case Instance - instance01 . . . . .	152
6.1.3	Test Case Instance - instance01Part01 . . . . .	152
6.1.4	Test Case Instance - instance01Part02 . . . . .	154
<b>7</b>	<b>Additional Constraints . . . . .</b>	<b>157</b>
7.1	Quality Constraints . . . . .	157
7.1.1	Functional suitability . . . . .	157
7.1.2	Performance efficiency . . . . .	157
7.1.3	Compatibility . . . . .	158
7.1.4	Usability . . . . .	158
7.1.5	Reliability . . . . .	159
7.1.6	Security . . . . .	160
7.1.7	Maintainability . . . . .	160
7.1.8	Portability . . . . .	161
7.2	Other Constraints . . . . .	162
<b>A</b>	<b>Undocumented Messir Specification Elements . . . . .</b>	<b>163</b>
A.1	Undocumented Use Cases . . . . .	163
A.1.1	Undocumented Use Cases - User-Goal Level . . . . .	163
A.1.2	Undocumented Use Cases - Subfunction Level . . . . .	163
A.1.3	Undocumented Use Case Views . . . . .	163
A.2	Undocumented Use Case Instances . . . . .	163
A.2.1	Undocumented Use Case Instances - User-Goal Level . . . . .	163
A.2.2	Undocumented Use Case Instance Views . . . . .	163
A.3	Undocumented Environment Model Views . . . . .	164
A.4	Undocumented Primary Types . . . . .	164
A.4.1	Undocumented Primary Classe Types . . . . .	164
A.5	Undocumented Concept Model Views . . . . .	164
A.6	Undocumented Operation Specifications . . . . .	164
A.7	Undocumented Test-Case Instance Specifications . . . . .	164
<b>B</b>	<b>Specification project lu.uni.lassy.excalibur.examples.icrash . . . . .</b>	<b>165</b>
B.1	Use Cases Model . . . . .	166
B.1.1	Use Cases . . . . .	166

<b>C Messir Specification Files Listing . . . . .</b>	<b>167</b>
C.1 File /src-gen/messir-spec/.views.msr . . . . .	167
C.2 File /src-gen/messir-spec/operations/concepts/secondarytypes-datatatypes/dtSMS.msr . . . . .	167
C.3 File /src-gen/messir-spec/operations.../environment-actActivator-oeSetClock.msr . . . . .	168
C.4 File /src-gen.../environment-actActivator-oeSollicitateCrisisHandling.msr . . . . .	168
C.5 File /src-gen/messir-spec.../environment-actAdministrator-oeAddCoordinator.msr . . . . .	169
C.6 File /src-gen.../environment-actAdministrator-oeDeleteCoordinator.msr . . . . .	170
C.7 File /src-gen/messir-spec.../environment-actAdministrator-oeGetStatistic.msr . . . . .	171
C.8 File /src-gen.../environment-actAdministrator-oeGetStatisticCrises.msr . . . . .	172
C.9 File /src-gen.../environment-actAdministrator-oeGetStatisticTypes.msr . . . . .	173
C.10 File /src-gen.../environment-actAdministrator-oeGetStatisticTypesOfCrises.msr . . . . .	174
C.11 File /src-gen.../environment-actAdministrator-oeGetStatisticUser.msr . . . . .	175
C.12 File /src-gen/messir-spec/operations.../environment-actAuthenticated.msr . . . . .	176
C.13 File /src-gen/messir-spec/operations/environment/environment-actComCompany.msr . . . . .	178
C.14 File /src-gen/messir-spec.../environment-actCoordinator-oeCloseCrisis.msr . . . . .	180
C.15 File /src-gen/messir-spec.../environment-actCoordinator-oeGetAlertsSet.msr . . . . .	180
C.16 File /src-gen/messir-spec.../environment-actCoordinator-oeGetCrisisSet.msr . . . . .	180
C.17 File /src-gen/messir-spec.../environment-actCoordinator-oeInvalidateAlert.msr . . . . .	181
C.18 File /src-gen/messir-spec.../environment-actCoordinator-oeReportOnCrisis.msr . . . . .	181
C.19 File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisHandler.msr . . . . .	181
C.20 File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisStatus.msr . . . . .	182
C.21 File /src-gen/messir-spec.../environment-actCoordinator-oeSetCrisisType.msr . . . . .	182
C.22 File /src-gen/messir-spec.../environment-actCoordinator-oeValidateAlert.msr . . . . .	183
C.23 File /src-gen/messir-spec/operations.../environment-actMsrCreator-init.msr . . . . .	183
C.24 File /src-gen.../environment-actMsrCreator-oeCreateSystemAndEnvironment.msr . . . . .	183
C.25 File /src-gen/messir-spec/environment/environment.msr . . . . .	184
C.26 File /src-gen/messir-spec/concepts/primarytypes-associations.msr . . . . .	188
C.27 File /src-gen/messir-spec.../primarytypes-classes-ctAdministrator.msr . . . . .	188
C.28 File /src-gen/messir-spec/operations.../primarytypes-classes-ctAlert.msr . . . . .	189
C.29 File /src-gen/messir-spec.../primarytypes-classes-ctAuthenticated.msr . . . . .	190
C.30 File /src-gen/messir-spec/operations.../primarytypes-classes-ctCoordinator.msr . . . . .	190
C.31 File /src-gen/messir-spec/operations.../primarytypes-classes-ctCrisis.msr . . . . .	191
C.32 File /src-gen.../primarytypes-classes-ctGetStatistic-getStatisticCrises.msr . . . . .	193
C.33 File /src-gen.../primarytypes-classes-ctGetStatistic-getStatisticUser.msr . . . . .	193
C.34 File /src-gen/messir-spec/operations.../primarytypes-classes-ctHuman.msr . . . . .	193
C.35 File /src-gen/messir-spec/operations.../primarytypes-classes-ctState.msr . . . . .	194
C.36 File /src-gen/messir-spec/concepts/primarytypes-classes.msr . . . . .	195
C.37 File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtAlertID.msr . . . . .	197
C.38 File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtComment.msr . . . . .	197
C.39 File /src-gen/messir-spec.../primarytypes-datatypes-dtCoordinatorID.msr . . . . .	198
C.40 File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtCrisisID.msr . . . . .	198
C.41 File /src-gen/messir-spec.../primarytypes-datatypes-dtGPSLocation.msr . . . . .	199
C.42 File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtLogin.msr . . . . .	200
C.43 File /src-gen/messir-spec/operations.../primarytypes-datatypes-dtPassword.msr . . . . .	201
C.44 File /src-gen/messir-spec.../primarytypes-datatypes-dtPhoneNumber.msr . . . . .	201
C.45 File /src-gen/messir-spec.../primarytypes-datatypes-etAlertStatus.msr . . . . .	201
C.46 File /src-gen/messir-spec.../primarytypes-datatypes-etCrisisStatus.msr . . . . .	202
C.47 File /src-gen/messir-spec/operations.../primarytypes-datatypes-etCrisisType.msr . . . . .	202
C.48 File /src-gen/messir-spec/operations.../primarytypes-datatypes-etHumanKind.msr . . . . .	203

C.49	File /src-gen/messir-spec/concepts/primarytypes-datatypes.msr . . . . .	203
C.50	File /src-gen/messir-spec/concepts/secondarytypes-associations.msr . . . . .	205
C.51	File /src-gen/messir-spec/concepts/secondarytypes-classes.msr . . . . .	205
C.52	File /src-gen/messir-spec/concepts/secondarytypes-datatypes.msr . . . . .	205
C.53	File /src-gen/messir-spec/usecases/subfunctions-usecases.msr . . . . .	206
C.54	File /src-gen/messir-spec/test/tc-testcase01.msr . . . . .	209
C.55	File /src-gen/messir-spec/test/tci-testcase01-instance01.msr . . . . .	217
C.56	File /src-gen/messir-spec/usecases/usecase-suDeployAndRun.msr . . . . .	227
C.57	File /src-gen/messir-spec/usecases/usecase-suGlobalCrisisHandling.msr . . . . .	231
C.58	File /src-gen/messir-spec/usecases/usecase-ugAdministrateTheSystem.msr . . . . .	232
C.59	File /src-gen/messir-spec/usecases/usecase-ugAverageTypeofCrisis.msr . . . . .	233
C.60	File /src-gen/messir-spec/usecases/usecase-ugCrisisInTime.msr . . . . .	233
C.61	File /src-gen/messir-spec/usecases/usecase-ugLogin.msr . . . . .	234
C.62	File /src-gen/messir-spec/usecases/usecase-ugManageCrisis.msr . . . . .	235
C.63	File /src-gen/messir-spec/usecases/usecase-ugMonitor.msr . . . . .	235
C.64	File /src-gen/messir-spec/usecases/usecase-ugSecurelyUseSystem.msr . . . . .	236
C.65	File /src-gen/messir-spec/usecases/usecase-ugUserActivity.msr . . . . .	236
C.66	File /src-gen/messir-spec/usecases/usecase-ugVictimSendFamilyNotification.msr . . . . .	237
C.67	File /src-gen/messir-spec/usecases/usecase-ugWitnessSendFamilyNotification.msr . . . . .	238
C.68	File /src-gen/messir-spec/usecases/usecaseinstance-uciugLogin.msr . . . . .	239
C.69	File /.../usecaseinstance-ugAverageTypeofCrisis-uciugStatisticAvergeTypeofCrisis.msr	240
C.70	File /src-gen.../usecaseinstance-ugCrisisInTime-uciugStatisticCrisisInTime.msr . . . . .	241
C.71	File /src-gen.../usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr . . . . .	241
C.72	File /src-gen.../usecaseinstance-ugUserActivity-uciugUserActivity.msr . . . . .	242
C.73	File /.../usecaseinstance-ugVictimSendFamilyNotification-uciugVictimSendFamilyNotification.msr	242
C.74	File /.../usecaseinstance-ugWitnessSendFamilyNotification-uciugWitnessSendFamilyNotification.msr	243

## D Listing of the Prolog Files Referenced in the Operation Model Specification . . . . . 245

D.1	File /src-gen/prolog-ref-spec/Operations.../outactActivator-oeSetClock.pl . . . . .	245
D.2	File /src-gen/prolog-ref-spec.../outactActivator-oeSollicitateCrisisHandling.pl . . . . .	246
D.3	File /src-gen/prolog-ref-spec.../outactAdministrator-oeAddCoordinator.pl . . . . .	248
D.4	File /src-gen/prolog-ref-spec.../outactAdministrator-oeDeleteCoordinator.pl . . . . .	249
D.5	File /src-gen/prolog-ref-spec/Operations.../outactAuthenticated-oeLogin.pl . . . . .	250
D.6	File /src-gen/prolog-ref-spec/Operations.../outactAuthenticated-oeLogout.pl . . . . .	252
D.7	File /src-gen/prolog-ref-spec/Operations.../outactComCompany-oeAlert.pl . . . . .	253
D.8	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeCloseCrisis.pl . . . . .	257
D.9	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeGetAlertsSet.pl . . . . .	258
D.10	File /src-gen/prolog-ref-spec/Operations.../outactCoordinator-oeGetCrisisSet.pl . . . . .	259
D.11	File /src-gen/prolog-ref-spec.../outactCoordinator-oeInvalidateAlert.pl . . . . .	260
D.12	File /src-gen/prolog-ref-spec.../outactCoordinator-oeReportOnCrisis.pl . . . . .	262
D.13	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisHandler.pl . . . . .	263
D.14	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisStatus.pl . . . . .	265
D.15	File /src-gen/prolog-ref-spec.../outactCoordinator-oeSetCrisisType.pl . . . . .	267
D.16	File /src-gen/prolog-ref-spec.../outactCoordinator-oeValidateAlert.pl . . . . .	268
D.17	File /src-gen.../outactMsrCreator-oeCreateSystemAndEnvironment.pl . . . . .	270
D.18	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctAdministrator-init.pl . . . . .	272
D.19	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctAlert-init.pl . . . . .	272
D.20	File /src-gen.../PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl . . . . .	273
D.21	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctAuthenticated-init.pl . . . . .	273

D.22	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctCoordinator-init.pl . . . . .	274
D.23	File /src-gen.../PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl . . . . .	274
D.24	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctCrisis-init.pl . . . . .	275
D.25	File /src-gen.../PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl . . . . .	275
D.26	File /src-gen.../PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl . . . . .	276
D.27	File /src-gen.../PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl . . . . .	277
D.28	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctHuman-init.pl .	278
D.29	File /src-gen/prolog-ref-spec.../PrimaryTypesClasses-ctHuman-isAcknowledged.pl .	278
D.30	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesClasses-ctState-init.pl .	278
D.31	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtAlertID-is.pl . . . . .	279
D.32	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtComment-is.pl . . . . .	280
D.33	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtCoordinatorID-is.pl . .	280
D.34	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtCrisisID-is.pl . . . . .	281
D.35	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtGPSLocation-is.pl . . . .	281
D.36	File /src-gen.../PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl . . . . .	282
D.37	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtLatitude-is.pl . . . . .	283
D.38	File /src-gen/prolog-ref-spec/Operations.../PrimaryTypesDatatypes-dtLogin-is.pl .	283
D.39	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtLongitude-is.pl . . . . .	284
D.40	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtPassword-is.pl . . . . .	284
D.41	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-dtPhoneNumber-is.pl . .	285
D.42	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etAlertStatus-is.pl . . . .	285
D.43	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etCrisisStatus-is.pl . . . .	286
D.44	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etCrisisType-is.pl . . . . .	286
D.45	File /src-gen/prolog-ref-spec.../PrimaryTypesDatatypes-etHumanKind-is.pl . . . . .	287
D.46	File /src-gen/prolog-ref-spec/Operations.../SecondaryTypesDatatypes-dtSMS-is.pl .	287
<b>Glossary</b>	. . . . .	<b>289</b>

# List of Figures

2.1	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-suDeployAndRun . . . . .	22
2.2	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-suGlobalCrisisHandling . .	30
2.3	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugAdministrateTheSystem	30
2.4	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugAverageTypeofCrisis . . .	31
2.5	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugCrisisInTime . . . . .	31
2.6	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugLogin . . . . . . . . .	32
2.7	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugManageCrisis . . . . .	35
2.8	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugMonitor . . . . . . . . .	35
2.9	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugSecurelyUseSystem . . .	36
2.10	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugUserActivity . . . . .	36
2.11	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugVictimSendFamilyNotification	36
2.12	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-ugWitnessSendFamilyNotification	37
2.13	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeSetCrisisHandler . . . . .	42
2.14	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeSollicitateCrisisHandling	42
2.15	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-suDeployAndRun-uciSimpleAndComplete-Part0	
2.16	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-suDeployAndRun-uciSimpleAndComplete-Part0	
2.17	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugStatisticAverageTypeofCrisis	50
2.18	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugStatisticCrisisInTime	51
2.19	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginCaptchaFailure	52
2.20	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginCaptchaSuccess	52
2.21	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginCaptchaToleranceExceeded	53
2.22	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginFailure . . . . .	54
2.23	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginRejected . . . . .	54
2.24	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugLoginSuccess . . . . .	57
2.25	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugSecurelyUseSystem .	57
2.26	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugUserActivity . . . . .	58
2.27	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugVictimSendFamilyNotification	58
2.28	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: uci-uciugWitnessSendFamilyNotification	59
3.1	Environment Model - Local View 01 - environment model local view - Part . . . . .	61
3.2	Environment Model - Local View 02 - environment model local view - Part . . . . .	62
3.3	Environment Model - Local View 03 - administrator actor environment mode . . . . .	63
3.4	Environment Model - Local View 04 - coordinator actor environment model . . . . .	63
3.5	Environment Model - Local View 05 - authenticated actor environment mode . . . . .	64
3.6	Environment Model - Local View 08 - The captcha generator . . . . . . . . . . .	64
3.7	Environment Model - Local View 09 - The captcha answer validator . . . . . . . . . . .	65
3.8	Environment Model - Local View 10 - .	65
3.9	Environment Model - Local View 11 - E-mail service . . . . . . . . . . . . . . . . .	65
3.10	Environment Model - Local View 12 - .	66
3.11	Environment Model - Global View 01 - em-gv-01 environment model global v . . . . .	67

4.1	Concept Model - PrimaryTypes-Classes local view 01 - Local view of all the primary types	73
4.2	Concept Model - PrimaryTypes-Classes local view 02 - local view of the ctState primary ty	74
4.3	Concept Model - PrimaryTypes-Classes local view 03 - local view of the ctAlert primary ty	74
4.4	Concept Model - PrimaryTypes-Classes local view 04 - local view of the ctCrisis primary t	75
4.5	Concept Model - PrimaryTypes-Classes global view 01 - Primary types class types global vi	76
4.6	Concept Model - PrimaryTypes-Datatypes local view 06 - . . . . .	76
4.7	Concept Model - PrimaryTypes-Datatypes global view 01 - global view of primary types dataty	77
4.8	Concept Model - SecondaryTypes-Datatypes local view 01 - Local view of the secondary types da	78
5.1	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactActivator-oeSollicitateCri	
5.2	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactComCompany-oeAlertv2	
5.3	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactComCompany-oeAlertv3	
5.4	lu.uni.lassy.excalibur.examples.icrash Operation Scope: operation-scope-outactMsrCreator-oeCreateSyst	
6.1	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: tci-testcase01-instance01-Part01	153
6.2	lu.uni.lassy.excalibur.examples.icrash Sequence Diagram: tci-testcase01-instance01-Part02	155
B.1	lu.uni.lassy.excalibur.examples.icrash Use Case Diagram: uc-oeCloseCrisis . . . . .	166

# Listings

5.1	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeSetClock</i> . . . . .	85
5.2	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeSollicitateCrisisHandling</i> . . . . .	86
5.3	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeAddCoordinator</i> . . . . .	89
5.4	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeDeleteCoordinator</i> . . . . .	90
5.5	Example for <i>oegetstatisticCrises</i> operation . . . . .	91
5.6	<b>Messir</b> (MCL-oriented) specification of the operation <i>oegetstatisticCrises</i> . . . . .	92
5.7	Example for <i>oegetstatisticTypesOfCrises</i> operation . . . . .	93
5.8	<b>Messir</b> (MCL-oriented) specification of the operation <i>oegetstatisticTypesOfCrises</i> . . . . .	93
5.9	Example for <i>oegetstatisticUser</i> operation . . . . .	94
5.10	<b>Messir</b> (MCL-oriented) specification of the operation <i>oegetstatisticUser</i> . . . . .	94
5.11	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeLogin</i> . . . . .	96
5.12	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeLogout</i> . . . . .	97
5.13	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeAlert</i> . . . . .	99
5.14	<b>Messir</b> (MCL-oriented) specification of the operation <i>oeCreateSystemAndEnvironment</i> . . . . .	107
5.15	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	110
5.16	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	111
5.17	<b>Messir</b> (MCL-oriented) specification of the operation <i>isSentToCoordinator</i> . . . . .	112
5.18	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	113
5.19	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	114
5.20	<b>Messir</b> (MCL-oriented) specification of the operation <i>handlingDelayPassed</i> . . . . .	115
5.21	<b>Messir</b> (MCL-oriented) specification of the operation <i>maxHandlingDelayPassed</i> . . . . .	116
5.22	<b>Messir</b> (MCL-oriented) specification of the operation <i>isSentToCoordinator</i> . . . . .	116
5.23	<b>Messir</b> (MCL-oriented) specification of the operation <i>isAllocatedIfPossible</i> . . . . .	117
5.24	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	118
5.25	<b>Messir</b> (MCL-oriented) specification of the operation <i>init</i> . . . . .	119
5.26	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	120
5.27	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	121
5.28	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	121
5.29	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	122
5.30	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	123
5.31	<b>Messir</b> (MCL-oriented) specification of the operation <i>isNearTo</i> . . . . .	123
5.32	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	124
5.33	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	125
5.34	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	125
5.35	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	126
5.36	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	127
5.37	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	127
5.38	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	128
5.39	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i> . . . . .	129

5.40	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i>	129
5.41	<b>Messir</b> (MCL-oriented) specification of the operation <i>is</i>	130
6.1	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts01oeCreateSystemAndEnvironment</i>	130
6.2	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts02oeSetClock</i>	132
6.3	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts03oeLogin</i>	134
6.4	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts04oeAddCoordinator</i>	135
6.5	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts05oeLogout</i>	136
6.6	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts06oeSetClock02</i>	136
6.7	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts07oeAlert1</i>	138
6.8	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts08oeSetClock03</i>	139
6.9	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts09oeSollicitateCrisisHandling</i>	140
6.10	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts10oeLogin02</i>	141
6.11	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts11oeGetCrisisSet</i>	142
6.12	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts12oeSetCrisisHandler</i>	144
6.13	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts13oeSetClock04</i>	145
6.14	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts14oeValidateAlert</i>	146
6.15	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts15oeAlert2</i>	147
6.16	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts16oeSetClock05</i>	149
6.17	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts17oeSetCrisisStatus</i>	150
6.18	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts18oeReportOnCrisis</i>	151
6.19	<b>Messir</b> (MCL-oriented) specification of the test step <i>testcase01-ts19oeCloseCrisis</i>	152
C.1	Messir Spec. file .views.msr	167
C.2	Messir Spec. file dtsMS.msr	167
C.3	Messir Spec. file environment-actActivator-oeSetClock.msr	168
C.4	Messir Spec. file environment-actActivator-oeSollicitateCrisisHandling.msr	168
C.5	Messir Spec. file environment-actAdministrator-oeAddCoordinator.msr	169
C.6	Messir Spec. file environment-actAdministrator-oeDeleteCoordinator.msr	170
C.7	Messir Spec. file environment-actAdministrator-oegetStatistic.msr	171
C.8	Messir Spec. file environment-actAdministrator-oegetstatisticCrises.msr	172
C.9	Messir Spec. file environment-actAdministrator-oegetstatisticTypes.msr	173
C.10	Messir Spec. file environment-actAdministrator-oegetstatisticTypesOfCrises.msr	174
C.11	Messir Spec. file environment-actAdministrator-oegetstatisticUser.msr	175
C.12	Messir Spec. file environment-actAuthenticated.msr	176
C.13	Messir Spec. file environment-actComCompany.msr	178
C.14	Messir Spec. file environment-actCoordinator-oeCloseCrisis.msr	180
C.15	Messir Spec. file environment-actCoordinator-oeGetAlertsSet.msr	180
C.16	Messir Spec. file environment-actCoordinator-oeGetCrisisSet.msr	180
C.17	Messir Spec. file environment-actCoordinator-oeInvalidateAlert.msr	181
C.18	Messir Spec. file environment-actCoordinator-oeReportOnCrisis.msr	181
C.19	Messir Spec. file environment-actCoordinator-oeSetCrisisHandler.msr	181
C.20	Messir Spec. file environment-actCoordinator-oeSetCrisisStatus.msr	182
C.21	Messir Spec. file environment-actCoordinator-oeSetCrisisType.msr	182
C.22	Messir Spec. file environment-actCoordinator-oeValidateAlert.msr	183
C.23	Messir Spec. file environment-actMsrCreator-init.msr	183
C.24	Messir Spec. file environment-actMsrCreator-oeCreateSystemAndEnvironment.msr	183
C.25	Messir Spec. file environment.msr	184
C.26	Messir Spec. file primarytypes-associations.msr	188
C.27	Messir Spec. file primarytypes-classes-ctAdministrator.msr	188
C.28	Messir Spec. file primarytypes-classes-ctAlert.msr	189

C.29	Messir Spec. file primarytypes-classes-ctAuthenticated.msr.	190
C.30	Messir Spec. file primarytypes-classes-ctCoordinator.msr.	190
C.31	Messir Spec. file primarytypes-classes-ctCrisis.msr.	191
C.32	Messir Spec. file primarytypes-classes-ctgetStatistic-getstatisticCrises.msr.	193
C.33	Messir Spec. file primarytypes-classes-ctgetStatistic-getstatisticUser.msr.	193
C.34	Messir Spec. file primarytypes-classes-ctHuman.msr.	193
C.35	Messir Spec. file primarytypes-classes-ctState.msr.	194
C.36	Messir Spec. file primarytypes-classes.msr.	195
C.37	Messir Spec. file primarytypes-datatypes-dtAlertID.msr.	197
C.38	Messir Spec. file primarytypes-datatypes-dtComment.msr.	197
C.39	Messir Spec. file primarytypes-datatypes-dtCoordinatorID.msr.	198
C.40	Messir Spec. file primarytypes-datatypes-dtCrisisID.msr.	198
C.41	Messir Spec. file primarytypes-datatypes-dtGPSLocation.msr.	199
C.42	Messir Spec. file primarytypes-datatypes-dtLogin.msr.	200
C.43	Messir Spec. file primarytypes-datatypes-dtPassword.msr.	201
C.44	Messir Spec. file primarytypes-datatypes-dtPhoneNumber.msr.	201
C.45	Messir Spec. file primarytypes-datatypes-etAlertStatus.msr.	201
C.46	Messir Spec. file primarytypes-datatypes-etCrisisStatus.msr.	202
C.47	Messir Spec. file primarytypes-datatypes-etCrisisType.msr.	202
C.48	Messir Spec. file primarytypes-datatypes-etHumanKind.msr.	203
C.49	Messir Spec. file primarytypes-datatypes.msr.	203
C.50	Messir Spec. file secondarytypes-associations.msr.	205
C.51	Messir Spec. file secondarytypes-classes.msr.	205
C.52	Messir Spec. file secondarytypes-datatypes.msr.	205
C.53	Messir Spec. file subfunctions-usecases.msr.	206
C.54	Messir Spec. file tc-testcase01.msr.	209
C.55	Messir Spec. file tci-testcase01-instance01.msr.	217
C.56	Messir Spec. file usecase-suDeployAndRun.msr.	227
C.57	Messir Spec. file usecase-suGlobalCrisisHandling.msr.	231
C.58	Messir Spec. file usecase-ugAdministrateTheSystem.msr.	232
C.59	Messir Spec. file usecase-ugAverageTypeofCrisis.msr.	233
C.60	Messir Spec. file usecase-ugCrisisInTime.msr.	233
C.61	Messir Spec. file usecase-ugLogin.msr.	234
C.62	Messir Spec. file usecase-ugManageCrisis.msr.	235
C.63	Messir Spec. file usecase-ugMonitor.msr.	235
C.64	Messir Spec. file usecase-ugSecurelyUseSystem.msr.	236
C.65	Messir Spec. file usecase-ugUserActivity.msr.	236
C.66	Messir Spec. file usecase-ugVictimSendFamilyNotification.msr.	237
C.67	Messir Spec. file usecase-ugWitnessSendFamilyNotification.msr.	238
C.68	Messir Spec. file usecaseinstance-uciugLogin.msr.	239
C.69	Messir Spec. file usecaseinstance-ugAverageTypeofCrisis-uciugStatisticAvergeTypeofCrisis.msr.	240
C.70	Messir Spec. file usecaseinstance-ugCrisisInTime-uciugStatisticCrisisInTime.msr.	241
C.71	Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr.	241
C.72	Messir Spec. file usecaseinstance-ugUserActivity-uciugUserActivity.msr.	242
C.73	Messir Spec. file usecaseinstance-ugVictimSendFamilyNotification-uciugVictimSendFamilyNotification.msr.	243
C.74	Messir Spec. file usecaseinstance-ugWitnessSendFamilyNotification-uciugWitnessSendFamilyNotification.msr.	244
D.1	Prolog file outactActivator-oeSetClock.pl.	245
D.2	Prolog file outactActivator-oeSollicitateCrisisHandling.pl.	246
D.3	Prolog file outactAdministrator-oeAddCoordinator.pl.	248

D.4 Prolog file outactAdministrator-oeDeleteCoordinator.pl . . . . .	249
D.5 Prolog file outactAuthenticated-oeLogin.pl . . . . .	250
D.6 Prolog file outactAuthenticated-oeLogout.pl . . . . .	252
D.7 Prolog file outactComCompany-oeAlert.pl . . . . .	253
D.8 Prolog file outactCoordinator-oeCloseCrisis.pl . . . . .	257
D.9 Prolog file outactCoordinator-oeGetAlertsSet.pl . . . . .	258
D.10 Prolog file outactCoordinator-oeGetCrisisSet.pl . . . . .	259
D.11 Prolog file outactCoordinator-oeInvalidateAlert.pl . . . . .	260
D.12 Prolog file outactCoordinator-oeReportOnCrisis.pl . . . . .	262
D.13 Prolog file outactCoordinator-oeSetCrisisHandler.pl . . . . .	263
D.14 Prolog file outactCoordinator-oeSetCrisisStatus.pl . . . . .	265
D.15 Prolog file outactCoordinator-oeSetCrisisType.pl . . . . .	267
D.16 Prolog file outactCoordinator-oeValidateAlert.pl . . . . .	268
D.17 Prolog file outactMsrCreator-oeCreateSystemAndEnvironment.pl . . . . .	270
D.18 Prolog file PrimaryTypesClasses-ctAdministrator-init.pl . . . . .	272
D.19 Prolog file PrimaryTypesClasses-ctAlert-init.pl . . . . .	272
D.20 Prolog file PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl . . . . .	273
D.21 Prolog file PrimaryTypesClasses-ctAuthenticated-init.pl . . . . .	273
D.22 Prolog file PrimaryTypesClasses-ctCoordinator-init.pl . . . . .	274
D.23 Prolog file PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl . . . . .	274
D.24 Prolog file PrimaryTypesClasses-ctCrisis-init.pl . . . . .	275
D.25 Prolog file PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl . . . . .	275
D.26 Prolog file PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl . . . . .	276
D.27 Prolog file PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl . . . . .	277
D.28 Prolog file PrimaryTypesClasses-ctHuman-init.pl . . . . .	278
D.29 Prolog file PrimaryTypesClasses-ctHuman-isAcknowledged.pl . . . . .	278
D.30 Prolog file PrimaryTypesClasses-ctState-init.pl . . . . .	278
D.31 Prolog file PrimaryTypesDatatypes-dtAlertID-is.pl . . . . .	279
D.32 Prolog file PrimaryTypesDatatypes-dtComment-is.pl . . . . .	280
D.33 Prolog file PrimaryTypesDatatypes-dtCoordinatorID-is.pl . . . . .	280
D.34 Prolog file PrimaryTypesDatatypes-dtCrisisID-is.pl . . . . .	281
D.35 Prolog file PrimaryTypesDatatypes-dtGPSLocation-is.pl . . . . .	281
D.36 Prolog file PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl . . . . .	282
D.37 Prolog file PrimaryTypesDatatypes-dtLatitude-is.pl . . . . .	283
D.38 Prolog file PrimaryTypesDatatypes-dtLogin-is.pl . . . . .	283
D.39 Prolog file PrimaryTypesDatatypes-dtLongitude-is.pl . . . . .	284
D.40 Prolog file PrimaryTypesDatatypes-dtPassword-is.pl . . . . .	284
D.41 Prolog file PrimaryTypesDatatypes-dtPhoneNumber-is.pl . . . . .	285
D.42 Prolog file PrimaryTypesDatatypes-etAlertStatus-is.pl . . . . .	285
D.43 Prolog file PrimaryTypesDatatypes-etCrisisStatus-is.pl . . . . .	286
D.44 Prolog file PrimaryTypesDatatypes-etCrisisType-is.pl . . . . .	286
D.45 Prolog file PrimaryTypesDatatypes-etHumanKind-is.pl . . . . .	287
D.46 Prolog file SecondaryTypesDatatypes-dtSMS-is.pl . . . . .	287

# Chapter 1

## Introduction

### 1.1 Overview

*iCrash* is a simple system dedicated to any person who wants to inform of a car crash crisis situation in order to allow for crisis handling. At anytime and anywhere, anyone can be the witness or victim of a car crash and might be in a situation allowing for alerting this crisis. The *iCrash* system has for objectives to support crisis declaration and secure administration and crisis handling by the *iCrash* professional users.

### 1.2 Purpose and recipients of the document

This document is an analysis document complying with the **Messip** methodology [1]. Its intent is to provide an example of a precise specification of the functional properties of the *iCrash* system.

The recipients of this document are:

- the *iCrash* system's buyer company (ABC): this document is used as a contractual document jointly with any other document considered as useful (as requirement elicitation document, ...) in order to have a higher degree of precision in requirement description. It is also used as a basis document for the *iCrash* system validation using specification based testing.
- the *iCrash* system development company (ADC) is expected to use this document as the basis for development (mainly design, implementation, maintenance). It is also used for verification and validation using test plans defined using the analysis models described in this document and according to the **Messip** methodology.

### 1.3 Application Domain

The *iCrash* system belongs to the Crisis Management Systems Domain. It is a system dedicated to crisis professional and non professional end users. It has to be considered as an autonomous and external service for the society. It is not an institutional system certified and guaranteed by any governmental entity and thus, must be used with caution.

### 1.4 Definitions, acronyms and abbreviations

N.A.

## 1.5 Document structure

The document structure is designed to be coherent with the **Messip** methodology [1]. Section 2 provides a general description of the system purpose, its users, its environment and some general non functional requirements. A more detailed description of the non functional requirements, if any, are provided in section ???. The **system operation** triggered by events sent by the external **actors** belonging to the environment are described in Section 3. The *iCrash* concepts used to represent the any persistent or transient information is given in Section 4. The precise specification of the system operations in term of system's state changes, events sent together with the constraints on the allowed sequences of system operations are described in Section 5.

# Chapter 2

## General Description

In the context of the **Messip** method, the information provided in this section is intended to present the system for which the **Messip** analysis is provided. The content of this section is made accordingly to the requirements elicitation document that might have been done during the project but also adapted coherently in order to be an abstract introduction to the **Messip** analysis.

### 2.1 Domain Stakeholders

All stakeholders of the system are detailed in this section. After a brief description of a stakeholder, its objectives are first stated. Thereafter, the responsibilities of the stakeholder are detailed which help to achieve the stakeholder objectives to a certain degree. While the objectives characterize the general problems addressed by the *iCrash* system, the responsibilities describe concrete actions that are expected from a stakeholder. Some of these responsibilities can be traced looking at the use case described in Section B.1, and hence must be supported by the *iCrash* system. All stakeholders listed in this section have an interest in the system or are affected by the system in some way, but only a subset of the stakeholders are directly involved in the use cases described. Let us remind that use case diagrams or descriptions are not **Messip** analysis phase mandatory outputs. They are proposed as informal means to help understanding the semantics of the system specification made of the mandatory analysis models, which provide a complete executable specification.

#### 2.1.1 Communication Company

A Communication Company is a company that has the capacity to ensure communication of information between its customers and the *iCrash* system. The objectives of a Communication Company are:

- to be able to deliver any SMS sent by any human to the *iCrash* 's phone number.
- to be able to transmit SMS messages from the ABC company that owns the *iCrash* system to any human having an SMS compatible device accessible using a phone number.

In order to achieve these objectives, the responsibilities of a Communication Company are:

- ensure confidentiality and integrity of the information sent by a human to the *iCrash* system or from the system to a human.
- to be always available and reliable.

### 2.1.2 Humans

A human is any person who considers himself related to a car crash either as a witness, a victim or an anonymous person. The objectives of a human are:

- inform the *iCrash* system about the crisis situation he detected.
- be sure that the ABC company has been informed about the situation.
- to be informed about the situation of the crisis he is related to as a victim or witness.

In order to achieve these objectives, the responsibilities of a human are:

- to provide as much details as possible concerning the crisis to the ABC company.
- to declare a crisis only if the crisis is real.
- to have access to the SMS compatible communication device he used to communicate with the *iCrash* system.

### 2.1.3 Coordinators

A coordinator is an employee of the ABC company being responsible of handling one or several crises. The objectives of a coordinator are:

- to securely monitor the existing alerts and crisis.
- to securely manage alerts and crisis until their termination.

In order to achieve these objectives, the responsibilities of a coordinator are:

- to be capable to determine how an alert received should be considered.
- to be available to react to requests to handle alerts and crisis.
- to be autonomous in handling crisis and to report on its handling.
- to be able to decide when a crisis or an alert can be closed.
- to know its system identification information for secure usage of the system.

### 2.1.4 Administrator

An administrator is an employee of the ABC company being responsible of administrating the *iCrash* system. The objectives of an administrator are:

- to add or delete coordinator actors from the system and its environment.

In order to achieve these objectives, the responsibilities of a coordinator are:

- know the company employees that can be coordinators and that have access to the system.
- to know its system identification information for secure usage of the system.
- to know the security policy of the ABC company.
- to communicate the coordinators their identification information for secure system usage.

### 2.1.5 Creator

Any system has a `Creator` stakeholder which is a technician who is installing the *iCrash* system on the targeted deployment infrastructure.

The objectives of a `Creator` are:

- to install the *iCrash* system
- to define the values for the initial system's state
- to define the values for the initial system's environment
- to ensure the integration of the *iCrash* system with its initial environment

In order to achieve these objectives, the responsibilities of a `Creator` are:

- provide the necessary data to the *iCrash* system for its initialization.

### 2.1.6 Activator

An `activator` is a logical representation of the active part the *iCrash* system. It represents an implicit stakeholder belonging to the system's environment that interacts with the *iCrash* system autonomously without the need of a external entity. It is usually used for representing time triggered functionalities.

The objectives of a `activator` are:

- to communicate the current time to the system
- to notify the administrator that some crisis are still pending for a too long time.

In order to achieve these objectives, the responsibilities of a `activator` are:

- to know the current universal time
- to send the messages to the system according to the time constraints specifically defined for it.

## 2.2 System's Actors

The objective of this section is not to provide the full requirement elicitation document in this section but to reuse a part of this document to provide a informal introduction to the **Messir** specification of the system under development. The use case model is made of a use case diagrams modelling abstractly and informally the actors and their use cases together with a set of use cases descriptions. In addition, those diagrams and description tables are adapted to the **Messir** specification since actor and messages names together with parameters are partly adapted to be consistent with the specification identifiers (see [1] for more details).

Among all the stakeholders presented in the previous section, we can determine five types of direct actors<sup>1</sup>:

- `actComCompany`: for the Communication Company stakeholder.
- `actAdministrator`: for the Administrator stakeholder.
- `actCoordinator`: for the Coordinators stakeholders.
- `actActivator`: for the Activator stakeholder.
- `actMsrCreator`: for the Creator stakeholder.

In addition to those system actors, we can add five other types of actors related to the system's ones. Those five actors are grouped into two categories:

- *Indirect actors*
  - *Witness*: for any human that is a witness of a car crash
  - *Victim*: for any human that is a victim of a car crash
  - *Anonymous*: for any human that want to inform about a car crash while staying anonymous.
- *Abstract actors*
  - `actHuman`: represent abstractly any kind of human being actor wanting to communicate with the ABC system in the context of a car crash.
  - `actAuthenticated`: for the logical Activator stakeholder.

## 2.3 Use Cases Model

This section contains the use cases elicited during the requirements elicitation phase. The use cases are textually described as suggested by the **Messir** method and inspired by the standard Cokburn template [2].

### 2.3.1 Use Cases

#### 2.3.1.1 summary-suDeployAndRun

The goal is to install the iCrash system on its infrastructure and to exploit its capacities related to the secure administration and efficient handling of car crash situations depending on alerts received.

---

<sup>1</sup>The naming conventions in **Messir** propose to start each type name by lowercase letters indicating the meta model type used (i.e. act for actors, ct for class type, ....). In addition to ease the reading it makes the translational semantics into Prolog code more straightforward.

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	suDeployAndRun
<i>Scope</i>	system
<i>Level</i>	summary
<b>Primary actor(s)</b>	
1	actAdministrator [active]
<b>Secondary actor(s)</b>	
1	actMsrCreator [active]
2	actCoordinator [active, multiple]
3	actActivator [proactive]
4	actComCompany [active]
<b>Goal(s) description</b>	
The goal is to install the iCrash system on its infrastructure and to exploit its capacities related to the secure administration and efficient handling of car crash situations depending on alerts received.	
<b>Reuse</b>	
1	<u>oeCreateSystemAndEnvironment [1..1]</u>
2	<u>ugAdministrateTheSystem [1..*]</u>
3	<u>suGlobalCrisisHandling [1..*]</u>
4	<u>oeSetClock [1..*]</u>
5	<u>oeSollicitateCrisisHandling [0..*]</u>
6	<u>oeAlert [1..*]</u>
<b>Protocol condition(s)</b>	
1	the iCrash system has never been deployed and used
<b>Pre-condition(s)</b>	
1	none
<b>Main post-condition(s)</b>	
1	the iCrash system has been created and has handled the crisis situations for which it received alerts through the communication company.
<b>Main Steps</b>	
a	the actor actMsrCreator executes the <u>oeCreateSystemAndEnvironment</u> use case
b	the actor actAdministrator executes the <u>ugAdministrateTheSystem</u> use case
c	the actor actComCompany executes the <u>oeAlert</u> use case
d	the actor actActivator executes the <u>oeSetClock</u> use case
e	the actor actActivator executes the <u>oeSollicitateCrisisHandling</u> use case
f	the actor actCoordinator executes the <u>suGlobalCrisisHandling</u> use case
<b>Steps Ordering Constraints</b>	
1	step (a) must be always the first step.
2	step (f) can be executed by different actCoordinator actors.
3	if (e) then previously (d).

Figure 2.1 shows the use case diagram for the suDeployAndRun summary use case

### 2.3.1.2 summary-suGlobalCrisisHandling

the actCoordinator's goal is to monitor the alerts received and the corresponding crisis in order to act as necessary to handle the crisis.

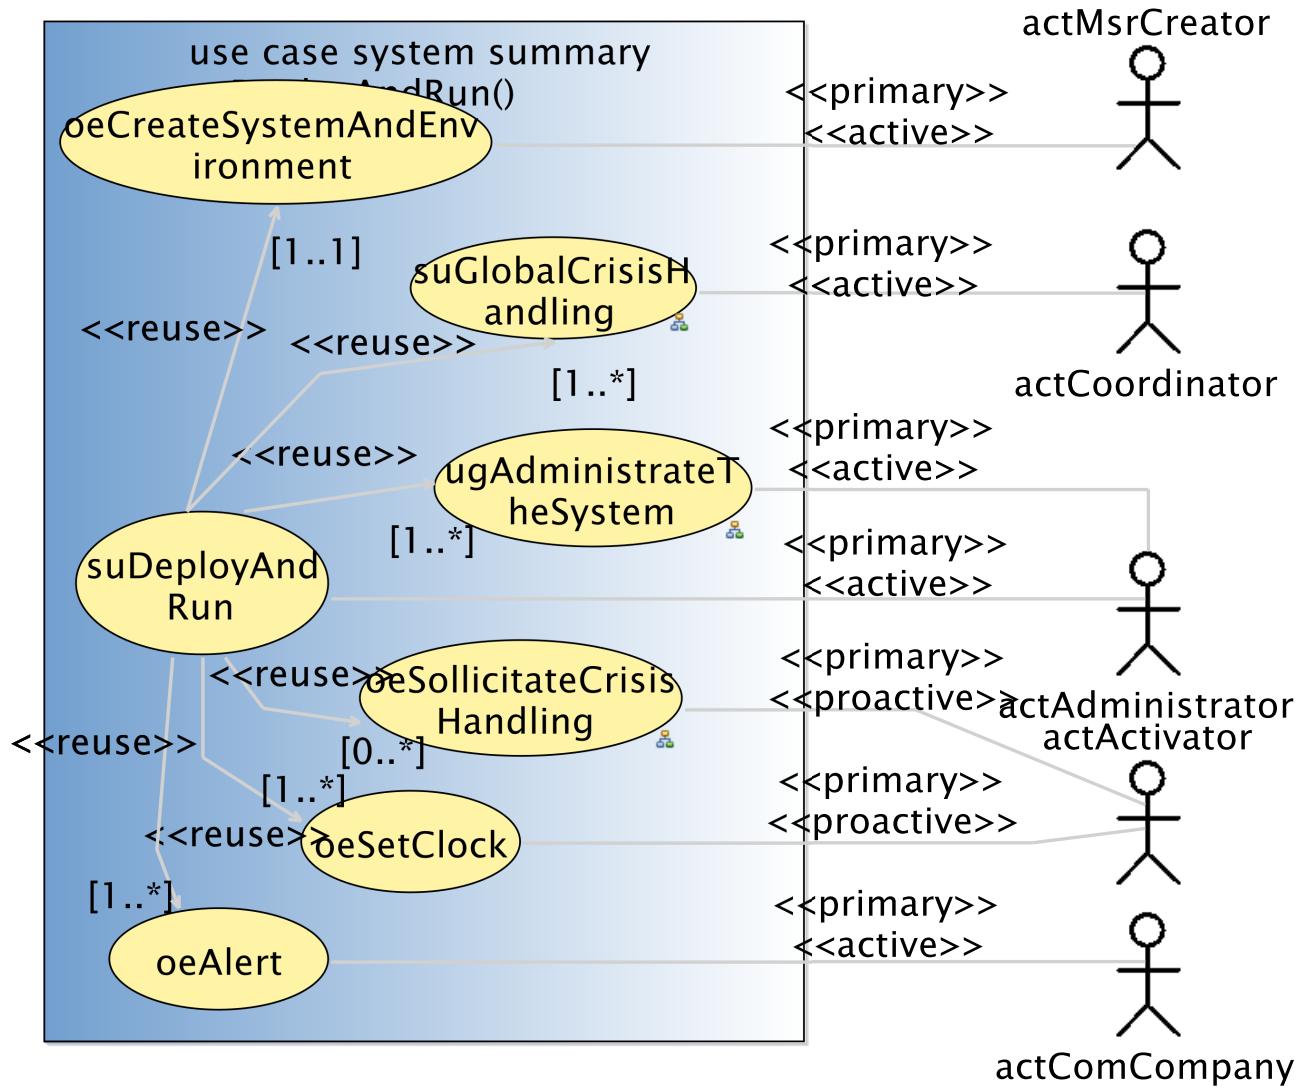


Figure 2.1: suDeployAndRun summary use case

USE-CASE DESCRIPTION	
<i>Name</i>	suGlobalCrisisHandling
<i>Scope</i>	system
<i>Level</i>	summary
<b>Primary actor(s)</b>	
1	actCoordinator [active]
<b>Goal(s) description</b>	the actCoordinator's goal is to monitor the alerts received and the corresponding crisis in order to act as necessary to handle the crisis.
<b>Reuse</b>	
1	ugSecurelyUseSystem [1..*]
2	ugMonitor [1..*]
3	ugManageCrisis [1..*]
<b>Protocol condition(s)</b>	
1	the iCrash system has been deployed
2	the coordinator actor involved in the use case has been declared by the actor actAdministrator
<b>Pre-condition(s)</b>	
1	none
<b>Main post-condition(s)</b>	
1	modifications have been made by the coordinator on existing alerts or crisis OR the coordinator requested an updated status on existing alerts or crisis.
<b>Main Steps</b>	
a	the actor actCoordinator executes the ugSecurelyUseSystem use case
b	the actor actCoordinator executes the ugMonitor use case
c	the actor actCoordinator executes the ugManageCrisis use case
<b>Steps Ordering Constraints</b>	
1	steps (a) (b) and (c) executions are interleaved (steps (b) and (c) have their protocol constrained by steps of (a)).
2	steps (a) (b) and (c) can be executed multiple times.

Figure 2.2 shows the use case diagram for the suGlobalCrisisHandling user goal use case

### 2.3.1.3 usergoal-ugAdministateTheSystem

the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis. Also open the statistic for the administrator.

USE-CASE DESCRIPTION	
<i>Name</i>	ugAdministateTheSystem
<i>Scope</i>	system
<i>Level</i>	usergoal
<b>Primary actor(s)</b>	
1	actAdministrator [active]
<b>Goal(s) description</b>	

*continues in next page ...*

**... Use-Case Description table continuation**

the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis. Also open the statistic for the administrator.

<b>Reuse</b>
1 <u>ugSecurelyUseSystem [1..*]</u>
2 <u>oeAddCoordinator [1..*]</u>
3 <u>oeDeleteCoordinator [0..*]</u>
<b>Protocol condition(s)</b>
1      the iCrash system has been deployed
<b>Pre-condition(s)</b>
1      none
<b>Main post-condition(s)</b>
1      modifications have been made to the system and its environment concerning existing or new coordinators.
<b>Main Steps</b>
a      the actor actAdministrator executes the <u>ugSecurelyUseSystem</u> use case
b      the actor actAdministrator executes the <u>oeAddCoordinator</u> use case
c      the actor actAdministrator executes the <u>oeDeleteCoordinator</u> use case
<b>Steps Ordering Constraints</b>
1      steps (a) (b) and (c) executions are interleaved (steps (b) and (c) have their protocol constrained by steps of (a)).
2      steps (a) (b) and (c) can be executed multiple times.

Figure 2.3 shows the use case diagram for the ugAdministrateTheSystem user goal use case

**2.3.1.4 usergoal-ugAverageTypeofCrisis**

An actor has been login as a Administrator to use the statistic function. So he can see the average time for the different types of a crises

USE-CASE DESCRIPTION	
Name	ugAverageTypeofCrisis
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actAdministrator[active]
2	actDatabase[proactive]
<b>Secondary actor(s)</b>	
1	actSystem[active]
<b>Goal(s) description</b>	
An actor has been login as a Administrator to use the statistic function. So he can see the average time for the different types of a crises	
<b>Reuse</b>	
1	<u>oegetStatistic [1..*]</u>
2	<u>ugSecurelyUserSystem [0..*]</u>
3	<u>oegetstatisticTypesOfCrises [0..*]</u>

*continues in next page ...*

**... Use-Case Description table continuation**

4	<u>ugAdministateTheSystem</u> [1..*]
<b>Protocol condition(s)</b>	
1	The actor has been login as a administrator and he has to click on the button statistic..
2	The actor must be able to access the system (connected to the internet)
<b>Pre-condition(s)</b>	
1	The actor is not login as a administrator, so he can click the button statistic.
<b>Main post-condition(s)</b>	
1	if the login was successful, the actor is now identified and thus able to access the AdministateTheSystem
2	The actor can click the button statistic and so he see the statistic
<b>Main Steps</b>	
a	the actor actSystem executes the <u>ugSercurelyUserSystem</u> use case
b	the actor actSystem executes the <u>oegetStatistic</u> use case
c	the actor actAdministrator executes the <u>oegetstatisticTypesOfCrises</u> use case
d	the actor actAdministrator executes the <u>ugAdministateTheSystem</u> use case
e	the actor actDatabase executes the <u>oegetstatisticTypesOfCrises</u> use case
<b>Steps Ordering Constraints</b>	
1	at least a
2	if b then previously a
3	if c then previously b
4	if d then previously c
<b>Additional Information</b>	
none	

Figure 2.4 The actor administrator will open the statistic. the average time for each type of crises, there the administrator can find out how long the different types of crisis needs. The tree types of a crises are small, medium and huge . Also the abstract user System give the information

**2.3.1.5 usergoal-ugCrisisInTime**

An actor has been login as a Administrator to use the statistic function. So he can see the number of crises compared with the time

USE-CASE DESCRIPTION	
Name	ugCrisisInTime
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actAdministrator[active]
2	actDatabase[proactive]
<b>Secondary actor(s)</b>	
1	actSystem[active]
<b>Goal(s) description</b>	
An actor has been login as a Administrator to use the statistic function. So he can see the number of crises compared with the time	
<b>Reuse</b>	

*continues in next page ...*

**... Use-Case Description table continuation**

1	<u>oegetStatistic [1..*]</u>
2	<u>ugSecurelyUserSystem [0..*]</u>
3	<u>oegetstatisticCrises [0..*]</u>
4	<u>ugAdministateTheSystem [1..*]</u>
<b>Protocol condition(s)</b>	
1	The actor has been login as a administrator and he has to click on the button statistic..
2	The actor must be able to access the system (connected to the internet)
<b>Pre-condition(s)</b>	
1	The actor is not login as a administrator, so he can click the button statistic.
<b>Main post-condition(s)</b>	
1	if the login was successful, the actor is now identified and thus able to access the AdministateTheSystem
2	The actor can click the button statistic and so he see the statistic
<b>Main Steps</b>	
a	the actor actSystem executes the <u>ugSecurelyUserSystem</u> use case
b	the actor actSystem executes the <u>oegetStatistic</u> use case
c	the actor actAdministrator executes the <u>oegetstatisticCrises</u> use case
d	the actor actAdministrator executes the <u>ugAdministateTheSystem</u> use case
e	the actor actDatabase executes the <u>oegetstatisticCrises</u> use case
<b>Steps Ordering Constraints</b>	
1	at least a
2	if b then previously a
3	if c then previously b
4	if d then previously c
<b>Additional Information</b>	
none	

Figure 2.5 The actor administrator will open the statistic. The number of crisis at the time, there he can find out how many crisis are send at the different time. Also the abstract user System give the information

### 2.3.1.6 usergoal-ugLogin

An actor wants to identify himself in order to gain access to the systems functionalities

USE-CASE DESCRIPTION	
Name	ugLogin
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actAuthenticated[active]
<b>Secondary actor(s)</b>	
1	actCaptchaGenerator[active]
2	actCaptchaValidator[active]
3	actMailingService[active]
<b>Goal(s) description</b>	

*continues in next page ...*

***... Use-Case Description table continuation***

An actor wants to identify himself in order to gain access to the systems functionalities	
<b>Reuse</b>	
1	<u>oeLogin [1..1]</u>
2	<u>oeSendCaptcha [1..1]</u>
3	<u>oeSubmitCaptcha [1..1]</u>
4	<u>oeCaptchaInvalid [1..1]</u>
5	<u>oeCaptchaValid [1..1]</u>
<b>Protocol condition(s)</b>	
1	the system has to be started
2	the actor (client) must be able to access the system (connected to the internet)
<b>Pre-condition(s)</b>	
1	the actor is not identified (logged in) and thus not able to access the systems functionalities
<b>Main post-condition(s)</b>	
1	if the login was successful, the actor is now identified and thus able to access the systems functionalities
2	if an attempt to log in failed, the authentication is refused and the actor has to try again
3	if the actor failed three times to log in, each further attempt to log in is accompanied by a captcha verification test
4	if the actor failed three times to log in without and five times with captcha verification, the requested user name will be blocked from further log in attempts
<b>Main Steps</b>	
a	the actor <code>actAuthenticated</code> executes the <u>oeLogin</u> use case
b	the actor <code>actCaptchaGenerator</code> executes the <u>oeSendCaptcha</u> use case
c	the actor <code>actAuthenticated</code> executes the <u>oeSubmitCaptcha</u> use case
d	the actor <code>actCaptchaValidator</code> executes the <u>oeCaptchaInvalid</u> use case
e	the actor <code>actCaptchaValidator</code> executes the <u>oeCaptchaValid</u> use case
<b>Steps Ordering Constraints</b>	
1	at least a
2	if b then previously a
3	if c then previously b
4	if d then previously c
5	if e then previously c
<b>Additional Information</b>	
none	

Figure 2.6 An actor tries to log in to the system using his credentials

**2.3.1.7 usergoal-ugManageCrisis**

The goal is to do an action that makes the handling of a crisis or an alert progress.

USE-CASE DESCRIPTION	
Name	ugManageCrisis
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	

*continues in next page ...*

**... Use-Case Description table continuation**

1	actCoordinator[active]
<b>Goal(s) description</b>	
The goal is to do an action that makes the handling of a crisis or an alert progress.	
<b>Reuse</b>	
1	<u>oeValidateAlert [0..*]</u>
2	<u>oeSetCrisisStatus [0..*]</u>
3	<u>oeSetCrisisHandler [0..*]</u>
4	<u>oeReportOnCrisis [0..*]</u>
5	<u>oeCloseCrisis [0..*]</u>
6	<u>oeInvalidateAlert [0..*]</u>
<b>Protocol condition(s)</b>	
1	the iCrash system has been deployed
<b>Pre-condition(s)</b>	
1	none
<b>Main post-condition(s)</b>	
1	there exist one alert or one crisis whose related information has been changed.
<b>Main Steps</b>	
a	the actor actCoordinator executes the <u>oeValidateAlert</u> use case
b	the actor actCoordinator executes the <u>oeSetCrisisStatus</u> use case
c	the actor actCoordinator executes the <u>oeSetCrisisHandler</u> use case
d	the actor actCoordinator executes the <u>oeReportOnCrisis</u> use case
e	the actor actCoordinator executes the <u>oeCloseCrisis</u> use case
f	the actor actCoordinator executes the <u>oeInvalidateAlert</u> use case
<b>Steps Ordering Constraints</b>	
1	managing a crisis is doing one of the indicated use cases.

Figure 2.7 shows the use case diagram for the ugManageCrisis user goal use case

### 2.3.1.8 usergoal-ugMonitor

the actCoordinator's goal is to get the detailed list of existing crisis or alerts to decide on next actions to undertake.

USE-CASE DESCRIPTION	
Name	ugMonitor
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actCoordinator[active]
<b>Goal(s) description</b>	
the actCoordinator's goal is to get the detailed list of existing crisis or alerts to decide on next actions to undertake.	
<b>Reuse</b>	
1	<u>oeGetCrisisSet [0..*]</u>
2	<u>oeGetAlertsSet [0..*]</u>
<b>Protocol condition(s)</b>	

*continues in next page ...*

**... Use-Case Description table continuation**

1	the iCrash system has been deployed
<b>Pre-condition(s)</b>	
1	none
<b>Main post-condition(s)</b>	
1	none
<b>Main Steps</b>	
a	the actor <code>actCoordinator</code> executes the <code>oeGetAlertsSet</code> use case
b	the actor <code>actCoordinator</code> executes the <code>oeGetCrisisSet</code> use case

Figure 2.8 shows the use case diagram for the ugMonitor user goal use case

**2.3.1.9 usergoal-ugSecurelyUseSystem**

the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis.

USE-CASE DESCRIPTION	
Name	ugSecurelyUseSystem
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	<code>actAuthenticated[active]</code>
<b>Goal(s) description</b>	
the actAdministrator's goal is to follow an identification procedure to be allowed to add or delete the necessary crisis coordinators that will be granted the responsibility to handle alerts and crisis.	
<b>Reuse</b>	
1	<code>oeLogin [1..1]</code>
2	<code>oeLogout [1..1]</code>
<b>Protocol condition(s)</b>	
1	the iCrash system has been deployed
<b>Pre-condition(s)</b>	
1	none
<b>Main post-condition(s)</b>	
1	the <code>actAuthenticated</code> is known by the system not to be logged.
<b>Main Steps</b>	
a	the actor <code>actAuthenticated</code> executes the <code>oeLogin</code> use case
b	the actor <code>actAuthenticated</code> executes the <code>oeLogout</code> use case
<b>Steps Ordering Constraints</b>	
1	step (a) must always precede step (b).

Figure 2.9 shows the use case diagram for the ugSecurelyUseSystem user goal use case

**2.3.1.10 usergoal-ugUserActivity**

An actor has been login as a Administrator to use the statistic function. So he can see the number of user compared with the time

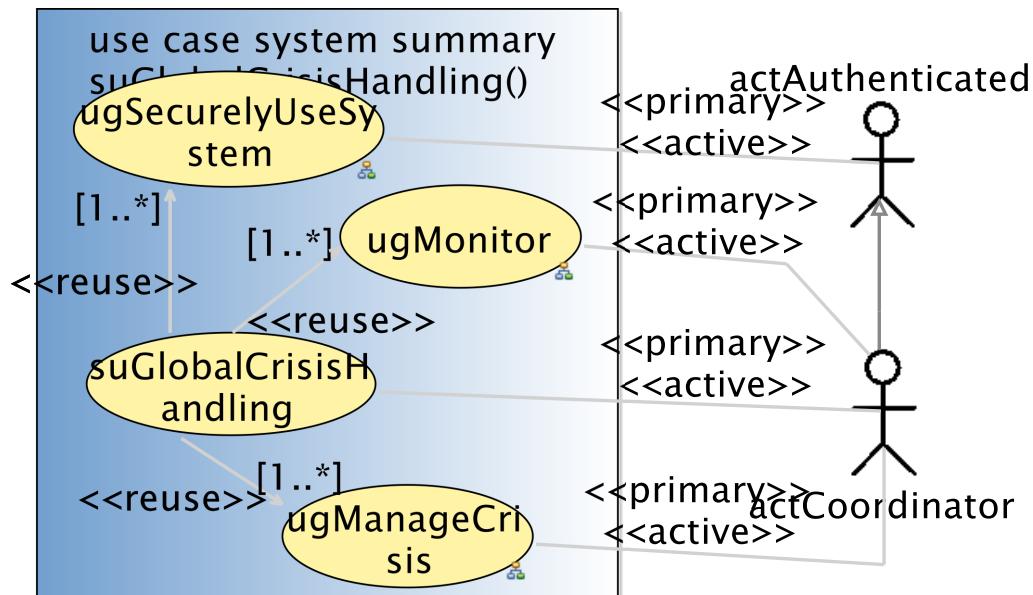


Figure 2.2: suGlobalCrisisHandling user goal use case

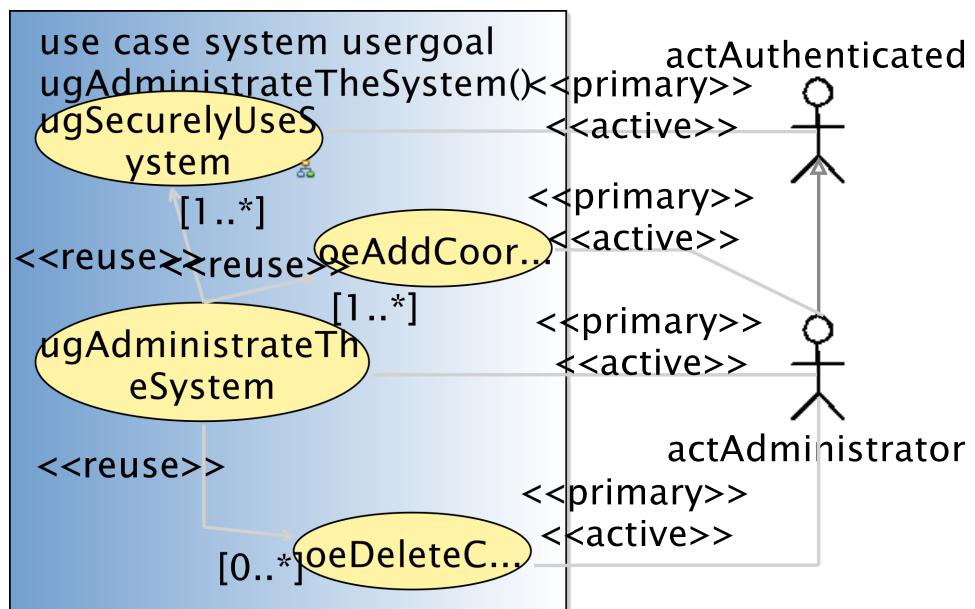


Figure 2.3: ugAdministateTheSystem user goal use case

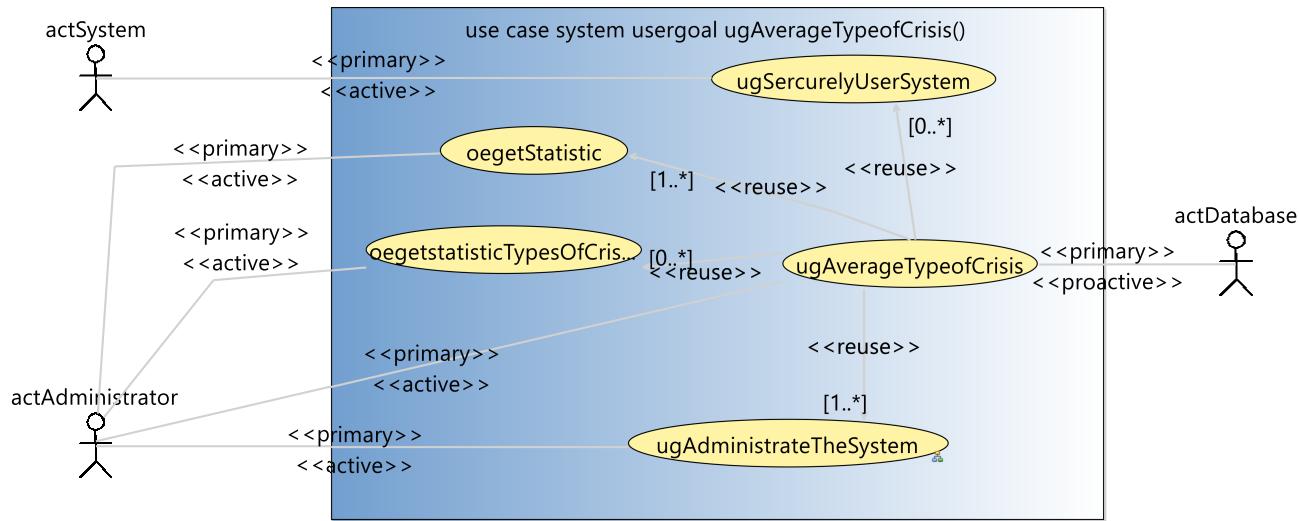


Figure 2.4: The average time for each type of crises

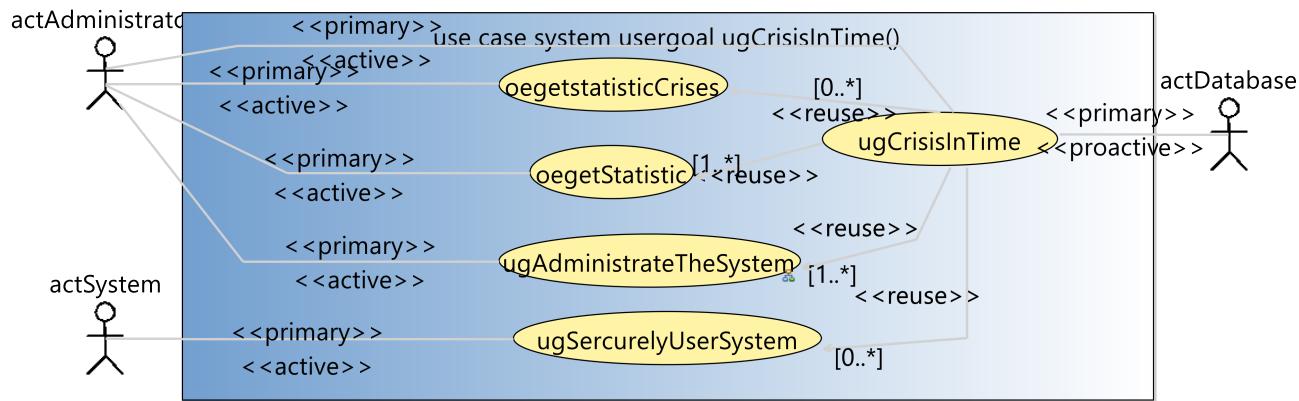


Figure 2.5: The number of crisis at the time

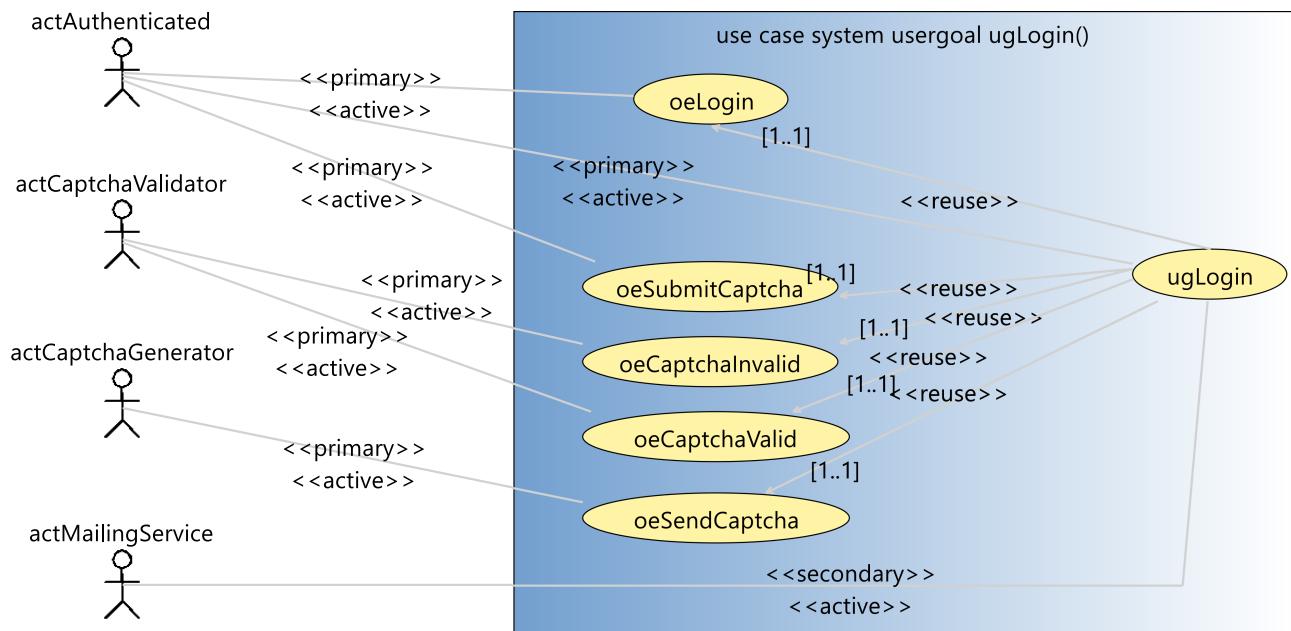


Figure 2.6: User goal: log in to the system

USE-CASE DESCRIPTION	
Name	ugUserActivity
Scope	system
Level	usergoal
<i>Primary actor(s)</i>	
1	actAdministrator[active]
2	actDatabase[proactive]
<i>Secondary actor(s)</i>	
1	actSystem[active]
<i>Goal(s) description</i>	
An actor has been login as a Administrator to use the statistic function. So he can see the number of user compared with the time	
<i>Reuse</i>	
1	<u>oegetStatistic [1...*]</u>
2	<u>ugSercurelyUserSystem [0...*]</u>
3	<u>oegetstatisticUser [0...*]</u>
4	<u>ugAdministateTheSystem [1...*]</u>
<i>Protocol condition(s)</i>	
1	The actor has been login as a administrator and he has to click on the button statistic.
2	The actor must be able to access the system (connected to the internet)
<i>Pre-condition(s)</i>	
1	The actor is not login as a administrator, so he can click the button statistic.
<i>Main post-condition(s)</i>	
1	if the login was successful, the actor is now identified and thus able to access the AdministateTheSystem
2	The actor can click the button statistic and so he see the statistic

continues in next page ...

**... Use-Case Description table continuation**

<b>Main Steps</b>	
a	the actor actSystem executes the <u>ugSecurelyUserSystem</u> use case
b	the actor actSystem executes the <u>oeGetStatistic</u> use case
c	the actor actAdministrator executes the <u>oeGetstatisticUser</u> use case
d	the actor actAdministrator executes the <u>ugAdministrateTheSystem</u> use case
e	the actor actDatabase executes the <u>oeGetstatisticUser</u> use case
<b>Steps Ordering Constraints</b>	
1	at least a
2	if b then previously a
3	if c then previously b
4	if d then previously c
<b>Additional Information</b>	
none	

Figure 2.10 The actor administrator will open the statistic. the activity of the users, there he can find out how many users are active at any time. Also the abstract user System give the information

**2.3.1.11 usergoal-ugVictimSendFamilyNotification**

<b>USE-CASE DESCRIPTION</b>	
Name	ugVictimSendFamilyNotification
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actSystem[active]
<b>Secondary actor(s)</b>	
1	actAuthenticated[active]
2	actCoordinator[proactive]
<b>Goal(s) description</b>	
<b>Reuse</b>	
1	<u>oeCreateAlert</u> [1..*]
2	<u>oeCreateCrisis</u> [1..1]
3	<u>oeUpdateCrisis</u> [0..*]
<b>Protocol condition(s)</b>	
1	
<b>Pre-condition(s)</b>	
1	
<b>Main post-condition(s)</b>	
1	
<b>Main Steps</b>	
a	the actor actAuthenticated executes the <u>oeCreateAlert</u> use case
b	the actor actCoordinator executes the <u>oeCreateAlert</u> use case
c	the actor actCoordinator executes the <u>oeCreateCrisis</u> use case
d	the actor actSystem executes the <u>oeChooseInformation</u> use case

***continues in next page ...***

**... Use-Case Description table continuation**

e	the actor actCoordinator executes the <u>oeUpdateCrisis</u> use case
<b>Steps Ordering Constraints</b>	
1	if c then previously a or b
2	if d then previously a or b
3	if e then previously a or b
<b>Additional Information</b>	
none	

Figure 2.11

**2.3.1.12 usergoal-ugWitnessSendFamilyNotification**

USE-CASE DESCRIPTION	
Name	ugWitnessSendFamilyNotification
Scope	system
Level	usergoal
<b>Primary actor(s)</b>	
1	actSystem[active]
<b>Secondary actor(s)</b>	
1	actAuthenticated[active]
2	actCoordinator[proactive]
<b>Goal(s) description</b>	
<b>Reuse</b>	
1	<u>oeCreateAlert</u> [1...*]
2	<u>oeCreateCrisis</u> [1..1]
3	<u>oeUpdateCrisis</u> [0...*]
<b>Protocol condition(s)</b>	
1	
<b>Pre-condition(s)</b>	
1	
<b>Main post-condition(s)</b>	
1	
<b>Main Steps</b>	
a	the actor actAuthenticated executes the <u>oeCreateAlert</u> use case
b	the actor actCoordinator executes the <u>oeCreateAlert</u> use case
c	the actor actCoordinator executes the <u>oeCreateCrisis</u> use case
d	the actor actSystem executes the <u>oeChooseInformation</u> use case
e	the actor actCoordinator executes the <u>oeUpdateCrisis</u> use case
<b>Steps Ordering Constraints</b>	
1	if c then previously a or b
2	if d then previously a or b
3	if e then previously a or b
<b>Additional Information</b>	
none	

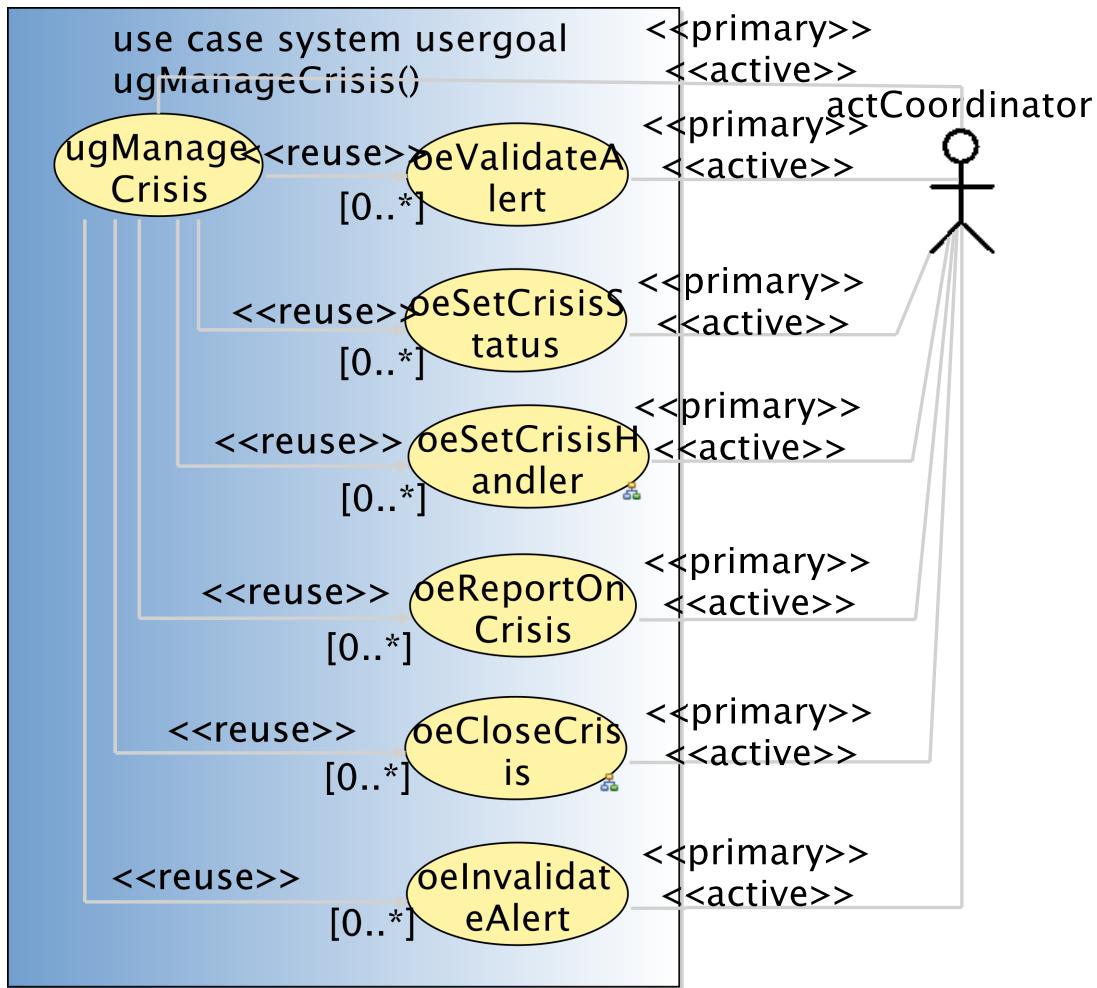


Figure 2.7: ugManageCrisis user goal use case

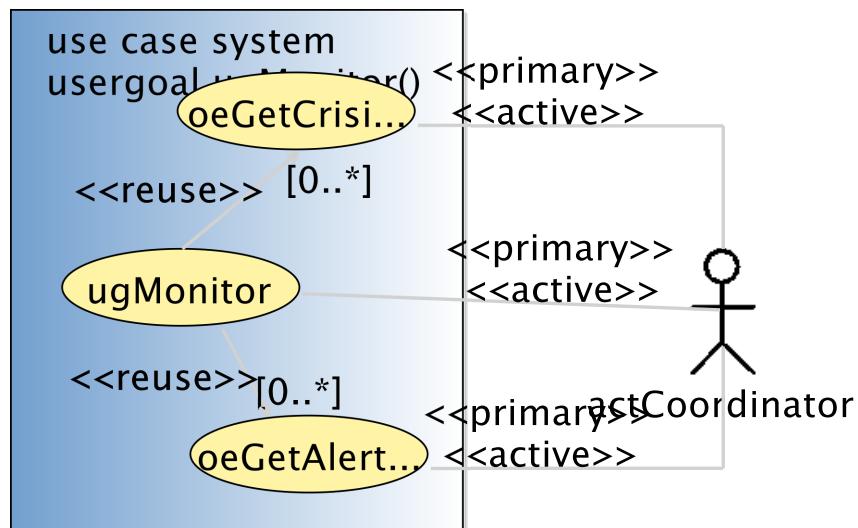


Figure 2.8: ugMonitor user goal use case

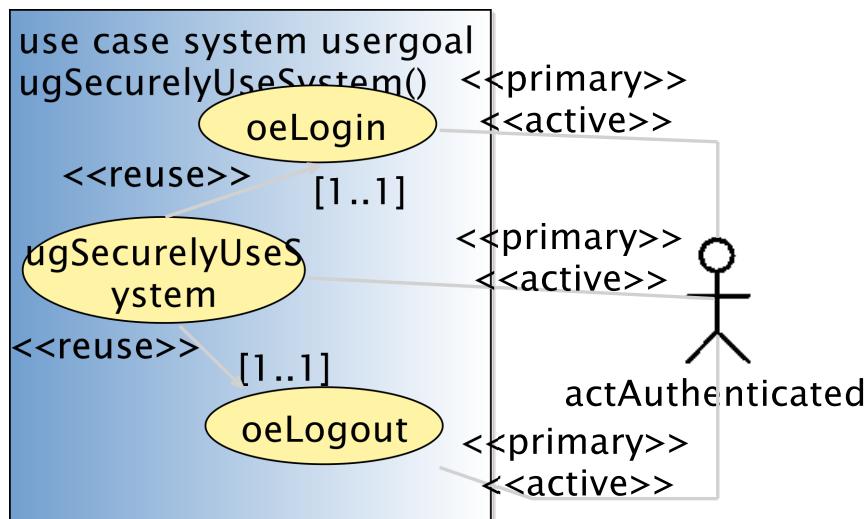


Figure 2.9: ugSecurelyUseSystem user goal use case

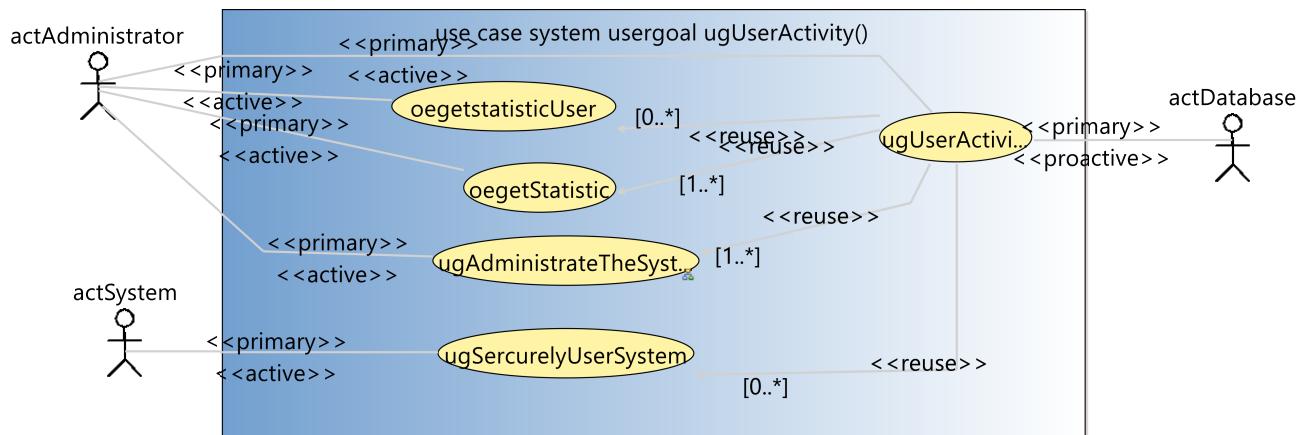


Figure 2.10: The activity of the users

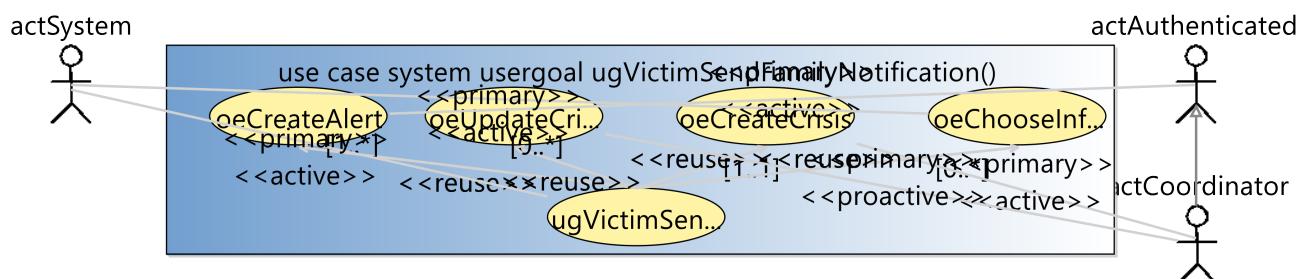


Figure 2.11:

Figure 2.12 The authenticated Witness creates an alert in which he can identify the victim by name and surname. The system sends the notification. The coordinator creates a crisis for the alert and a new notification is sent with every update of the crisis.

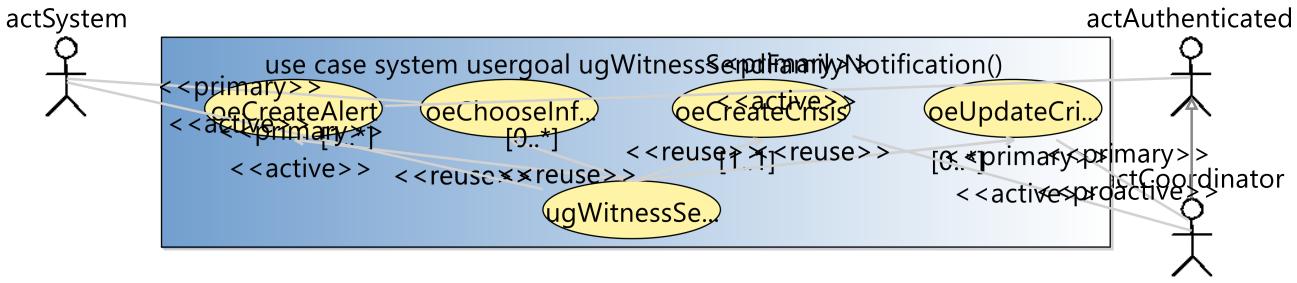


Figure 2.12: Witness family notification

### 2.3.1.13 subfunction-oeCaptchaInvalid

Notifies the system that the supplied captcha answer is invalid

USE-CASE DESCRIPTION	
Name	oeCaptchaInvalid
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actCaptchaValidator[active]
<i>Secondary actor(s)</i>	
1	actMailingService[]
2	actAuthenticated[]
<i>Goal(s) description</i>	
Notifies the system that the supplied captcha answer is invalid	
<i>Protocol condition(s)</i>	
1	The system must have requested the generation of a captcha test from the generation actor first and should have received a captcha test
2	The system must have submitted or forwarded an answer to the captcha test to the validation actor
<i>Pre-condition(s)</i>	
1	The submitted answer to the captcha test is incorrect
<i>Main post-condition(s)</i>	
1	The system is notified about the failure state of the submitted answer to the captcha test
2	If the requested user name failed five times in a row to log in, the user name will be blocked and a mail with instructions to unblock the user name will be send to the affected user
<i>Additional Information</i>	
none	

### 2.3.1.14 subfunction-oeCaptchaValid

Notifies the system that the supplied captcha answer is valid

USE-CASE DESCRIPTION	
Name	oeCaptchaValid
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actCaptchaValidator[active]
<i>Secondary actor(s)</i>	
1	actAuthenticated[]
<i>Goal(s) description</i>	
Notifies the system that the supplied captcha answer is valid	
<i>Protocol condition(s)</i>	
1	The system must have requested the generation of a captcha test from the generation actor first and should have received a captcha test
2	The system must have submitted or forwarded an answer to the captcha test to the validation actor
<i>Pre-condition(s)</i>	
1	The submitted answer to the captcha test is correct
<i>Main post-condition(s)</i>	
1	The system is notified about the success state of the submitted answer to the captcha test
<i>Additional Information</i>	
none	

### 2.3.1.15 subfunction-oeChooseInformation

USE-CASE DESCRIPTION	
Name	oeChooseInformation
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actSystem[active]
<i>Secondary actor(s)</i>	
1	actAuthenticated[]
<i>Goal(s) description</i>	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

### 2.3.1.16 subfunction-oeCreateAlert

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	oeCreateAlert
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Primary actor(s)</i>	
1	actAuthenticated[active]
<i>Secondary actor(s)</i>	
1	actCoordinator[]
<i>Goal(s) description</i>	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

### 2.3.1.17 subfunction-oeCreateCrisis

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	oeCreateCrisis
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Primary actor(s)</i>	
1	actCoordinator[active]
<i>Goal(s) description</i>	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

### 2.3.1.18 subfunction-oeSendCaptcha

The actor responsible for captcha generation sends a captcha test and its answer to the system

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	oeSendCaptcha
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Primary actor(s)</i>	

*continues in next page ...*

**... Use-Case Description table continuation**

1	actCaptchaGenerator[active]
<b>Secondary actor(s)</b>	
1	actAuthenticated[]
<b>Goal(s) description</b>	
The actor responsible for captcha generation sends a captcha test and its answer to the system	
<b>Protocol condition(s)</b>	
1	the system has to be started
2	the captcha generator has to be available
<b>Pre-condition(s)</b>	
1	the system must have notified the actor first in order that he can generate the captcha
<b>Main post-condition(s)</b>	
1	due to the request of the system, the captcha test and its answer has been generated and sent back to the system
<b>Additional Information</b>	
none	

**2.3.1.19 subfunction-oeSendNotification**

USE-CASE DESCRIPTION	
Name	oeSendNotification
Scope	system
Level	subfunction
<b>Primary actor(s)</b>	
1	actSystem[active]
<b>Goal(s) description</b>	
<b>Protocol condition(s)</b>	
1	
<b>Pre-condition(s)</b>	
1	
<b>Main post-condition(s)</b>	
1	
<b>Additional Information</b>	
none	

**2.3.1.20 subfunction-oeSendStatistic**

Send the statistic to the system that the system send it to the administrator

USE-CASE DESCRIPTION	
Name	oeSendStatistic
Scope	system
Level	subfunction
<b>Primary actor(s)</b>	
1	actSystem[active]
<b>Secondary actor(s)</b>	

*continues in next page ...*

**... Use-Case Description table continuation**

1	actAdministrator [passive]
2	actDatabase [passive]
<b>Goal(s) description</b>	
Send the statistic to the system that the system send it to the administrator	
<b>Protocol condition(s)</b>	
1	The actor has been login as a administrator to call the statistic so the subfunction can send the data to the system
<b>Pre-condition(s)</b>	
1	The administrator has call the statistic, so the function will send the information
<b>Main post-condition(s)</b>	
1	if the administrator click to the button statistic so the system will find the information.
2	the Database has send back the information to the system and after to the actor.
<b>Additional Information</b>	
none	

**2.3.1.21 subfunction-oeSetCrisisHandler**

goal is to declare himself as been the handler of a crisis having the specified id.

USE-CASE DESCRIPTION	
Name	oeSetCrisisHandler
Scope	system
Level	subfunction
<b>Parameters</b>	
AdtCrisisID: dtCrisisID 1	
<b>Primary actor(s)</b>	
1	actCoordinator [active]
<b>Secondary actor(s)</b>	
1	actCoordinator [passive]
2	actComCompany [passive, multiple]
<b>Goal(s) description</b>	
goal is to declare himself as been the handler of a crisis having the specified id.	
<b>Protocol condition(s)</b>	
1	
<b>Pre-condition(s)</b>	
1	
<b>Main post-condition(s)</b>	
1	
<b>Additional Information</b>	
none	

Figure 2.13 shows the use case diagram for the oeSetCrisisHandler subfunction use case

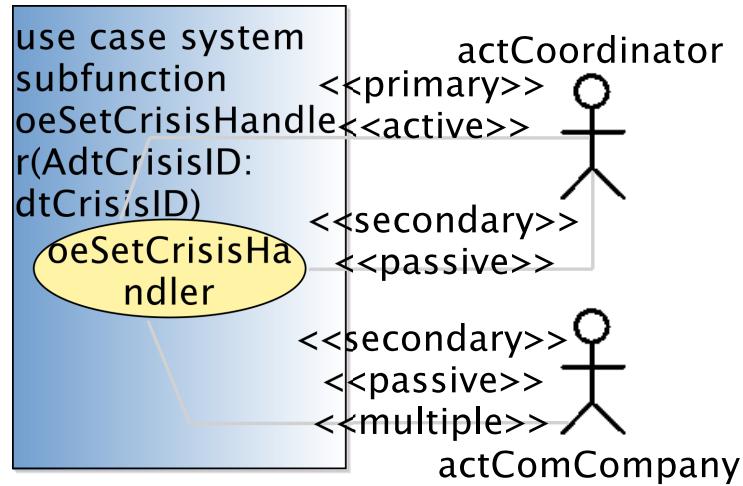



Figure 2.13: oeSetCrisisHandler subfunction use case

### 2.3.1.22 subfunction-oeSollicitateCrisisHandling

the actActivator's goal is to decrease the number of unhandled crisis.

USE-CASE DESCRIPTION	
Name	oeSollicitateCrisisHandling
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actActivator [proactive]
<i>Secondary actor(s)</i>	
1	actCoordinator [passive, multiple]
2	actAdministrator [passive]
<i>Goal(s) description</i>	
the actActivator's goal is to decrease the number of unhandled crisis.	
<i>Protocol condition(s)</i>	
1	the iCrash system has been deployed.
2	there exist some crisis still pending and for which no solicitation has been sent to the administrator and the coordinators for more than a predefined maximum delay.
<i>Pre-condition(s)</i>	
1	none
<i>Main post-condition(s)</i>	
1	a simple text message ieMessage('There are alerts not treated since more than the defined delay. Please REACT !') is sent to the system administrator and to all the coordinators of the environment for each crisis that is known to be not handled and for which no solicitation has been sent to the administrator and the coordinators for more than a predefined maximum delay.'
2	the reminder period for the concerned crisis is initialized.

Figure 2.14 shows the use case diagram for the oeSollicitateCrisisHandling subfunction use case

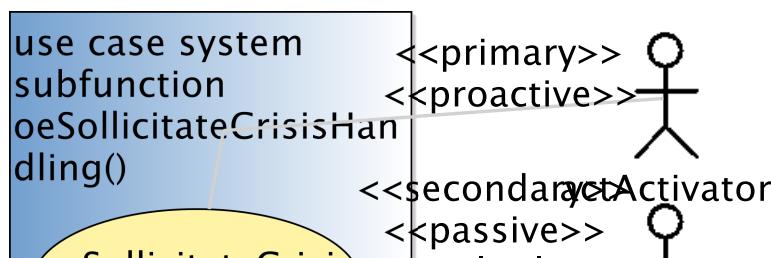

### 2.3.1.23 subfunction-oeSubmitCaptcha

The actor submits his answer to a captcha test to the system for validation

USE-CASE DESCRIPTION	
<i>Name</i>	oeSubmitCaptcha
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Primary actor(s)</i>	
1	actAuthenticated[active]
<i>Secondary actor(s)</i>	
1	actCaptchaValidator[]
<i>Goal(s) description</i>	
The actor submits his answer to a captcha test to the system for validation	
<i>Protocol condition(s)</i>	
1	the system has to be started
2	the actor has to be connected but not yet identified to the system
3	the system must have received first the captcha test and its answer from the actor responsible for captcha generation
<i>Pre-condition(s)</i>	
1	the actor receives the captcha test from the system
<i>Main post-condition(s)</i>	
1	the actor submitted an answer to the given captcha test back to the system
<i>Additional Information</i>	
none	

### 2.3.1.24 subfunction-oeUpdateCrisis

USE-CASE DESCRIPTION	
<i>Name</i>	oeUpdateCrisis
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Primary actor(s)</i>	
1	actCoordinator[proactive]
<i>Goal(s) description</i>	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

### 2.3.1.25 subfunction-oegetStatistic

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	oegetStatistic
<i>Scope</i>	system
<i>Level</i>	subfunction
<b>Primary actor(s)</b>	
1	actAdministrator [active]
<b>Secondary actor(s)</b>	
1	actSystem [passive]
<b>Goal(s) description</b>	
<b>Protocol condition(s)</b>	
1	
<b>Pre-condition(s)</b>	
1	
<b>Main post-condition(s)</b>	
1	
<b>Additional Information</b>	
none	

### 2.3.1.26 subfunction-oegetstatisticCrises

An actor has been login as a Administrator to use the statistic function. So he can see the sending number of crises compared with the time

<b>USE-CASE DESCRIPTION</b>	
<i>Name</i>	oegetstatisticCrises
<i>Scope</i>	system
<i>Level</i>	subfunction
<b>Primary actor(s)</b>	
1	actAdministrator [active]
<b>Secondary actor(s)</b>	
1	actDatabase [passive]
<b>Goal(s) description</b>	
An actor has been login as a Administrator to use the statistic function. So he can see the sending number of crises compared with the time	
<b>Protocol condition(s)</b>	
1	The actor has been login as a administrator and he has to click on the button statistic.
2	The actor must be able to access the system (connected to the Internet)
3	The system must run.
4	The database must bee open
<b>Pre-condition(s)</b>	
1	The actor is not login as a administrator, so he can click the button statistic.
<b>Main post-condition(s)</b>	
1	if the login was successful, the actor is now identified and thus able to access the AdministateTheSystem
2	So later the statistic will be show to the administrator and also the information of the Database will be send to the system.
<b>Additional Information</b>	

*continues in next page ...*

*... Use-Case Description table continuation*

none
------

**2.3.1.27 subfunction-oegetstatisticTypesOfCrises**

An actor has been login as a Administrator to use the statistic function. So he can see the average time for the different types of a crises(small, medium and high)

USE-CASE DESCRIPTION	
Name	oegetstatisticTypesOfCrises
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actAdministrator [active]
<i>Secondary actor(s)</i>	
1	actDatabase [passive]
2	actSystem [passive]
<i>Goal(s) description</i>	
An actor has been login as a Administrator to use the statistic function. So he can see the average time for the different types of a crises(small, medium and high)	
<i>Protocol condition(s)</i>	
1	The actor has been login as a administrator and he has to click on the button statistic..
2	The actor must be able to access the system (connected to the Internet)
3	The system must run.
4	The database must bee open
<i>Pre-condition(s)</i>	
1	The actor is not login as a administrator, so he can click the button statistic.
<i>Main post-condition(s)</i>	
1	if the login was successful, the actor is now identified and thus able to access the AdministateTheSystem
2	So later the statistic will be show to the administrator and also the information of the Database will be send to the system.
<i>Additional Information</i>	
none	

**2.3.1.28 subfunction-oegetstatisticUser**

An actor has been login as a Administrator to use the statistic function. So he can see number of the user login compared with the time

USE-CASE DESCRIPTION	
Name	oegetstatisticUser
Scope	system
Level	subfunction
<i>Primary actor(s)</i>	
1	actAdministrator [active]
<i>Secondary actor(s)</i>	
1	actDatabase [passive]

*continues in next page ...*

**... Use-Case Description table continuation**

<b>Goal(s) description</b>
An actor has been login as a Administrator to use the statistic function. So he can see number of the user login compared with the time
<b>Protocol condition(s)</b>
1 The actor has been login as a administrator and he has to click on the button statistic. 2 The actor must be able to access the system (connected to the Internet) 3 The system must run. 4 The database must bee open
<b>Pre-condition(s)</b>
1 The actor is not login as a administrator, so he can click the button statistic.
<b>Main post-condition(s)</b>
1 if the login was successful, the actor is now identified and thus able to access the AdministrateTheSystem 2 So later the statistic will be show to the administrator and also the information of the Database will be send to the system.
<b>Additional Information</b>
none

**2.3.1.29 subfunction-ugSercurelyUserSystem**

USE-CASE DESCRIPTION
<i>Name</i> ugSercurelyUserSystem
<i>Scope</i> system
<i>Level</i> subfunction
<b>Primary actor(s)</b>
1 actSystem[active]
<b>Goal(s) description</b>
<b>Protocol condition(s)</b>
1
<b>Pre-condition(s)</b>
1
<b>Main post-condition(s)</b>
1
<b>Additional Information</b>
none

### 2.3.2 Use Case Instance(s)

#### 2.3.2.1 Use-Case Instance - uciSimpleAndCompletePart01:suDeployAndRun

First part of a use case instance for the summary use case `suDeployAndRun` illustrating a simple and complete interaction scenario primarily handled by an administrator in a concrete situation.

<b>SUMMARY USE-CASE INSTANCE</b>	
<i>Instantiated Use Case</i>	
<code>suDeployAndRun</code>	
<i>Instance ID</i>	
<code>uciSimpleAndCompletePart01</code>	
<i>Remarks</i>	
a	shows the system initialization and the first administrative tasks by the administrator.
b	The unique and always existing <code>actMsrCreator</code> actor instance (named here <code>theCreator</code> ) requests the initialization of the system and its environment (made of one administrator identified here by <code>bill</code> ), one activator actor (identified by <code>theClock</code> ) and indicating that the number of communication company actor instances for the system's environment is 4 (one of them is identified here by <code>tango</code> )
c	the administrator logs in to initialize a coordinator
d	an alert is received. Time is going on without having the coordinator handling the alert which let's the proactive actor trigger the automatic solicitation of crisis handling.
e	this first part stops before the coordinator logs in the system.

Figure 2.15 shows the sequence diagram representing the first part of a simple and complete use case instance for the summary use case `suDeployAndRun`.

#### 2.3.2.2 Use-Case Instance - uciSimpleAndCompletePart02:suDeployAndRun

Second part of a simple and complete use case instance for the summary use case `suDeployAndRun` illustrating a simple and complete interaction scenario primarily handled by an administrator in a concrete situation.

<b>SUMMARY USE-CASE INSTANCE</b>	
<i>Instantiated Use Case</i>	
<code>suDeployAndRun</code>	
<i>Instance ID</i>	
<code>uciSimpleAndCompletePart02</code>	
<i>Remarks</i>	
a	starts when the coordinator logs in the system until the full handling of all the existing crisis.
b	shows an instantiated case of handling of a crisis by a coordinator until its closure after reporting.

Figure 2.16 shows the sequence diagram representing the second part of a simple and complete use case instance for the summary use case `suDeployAndRun`.

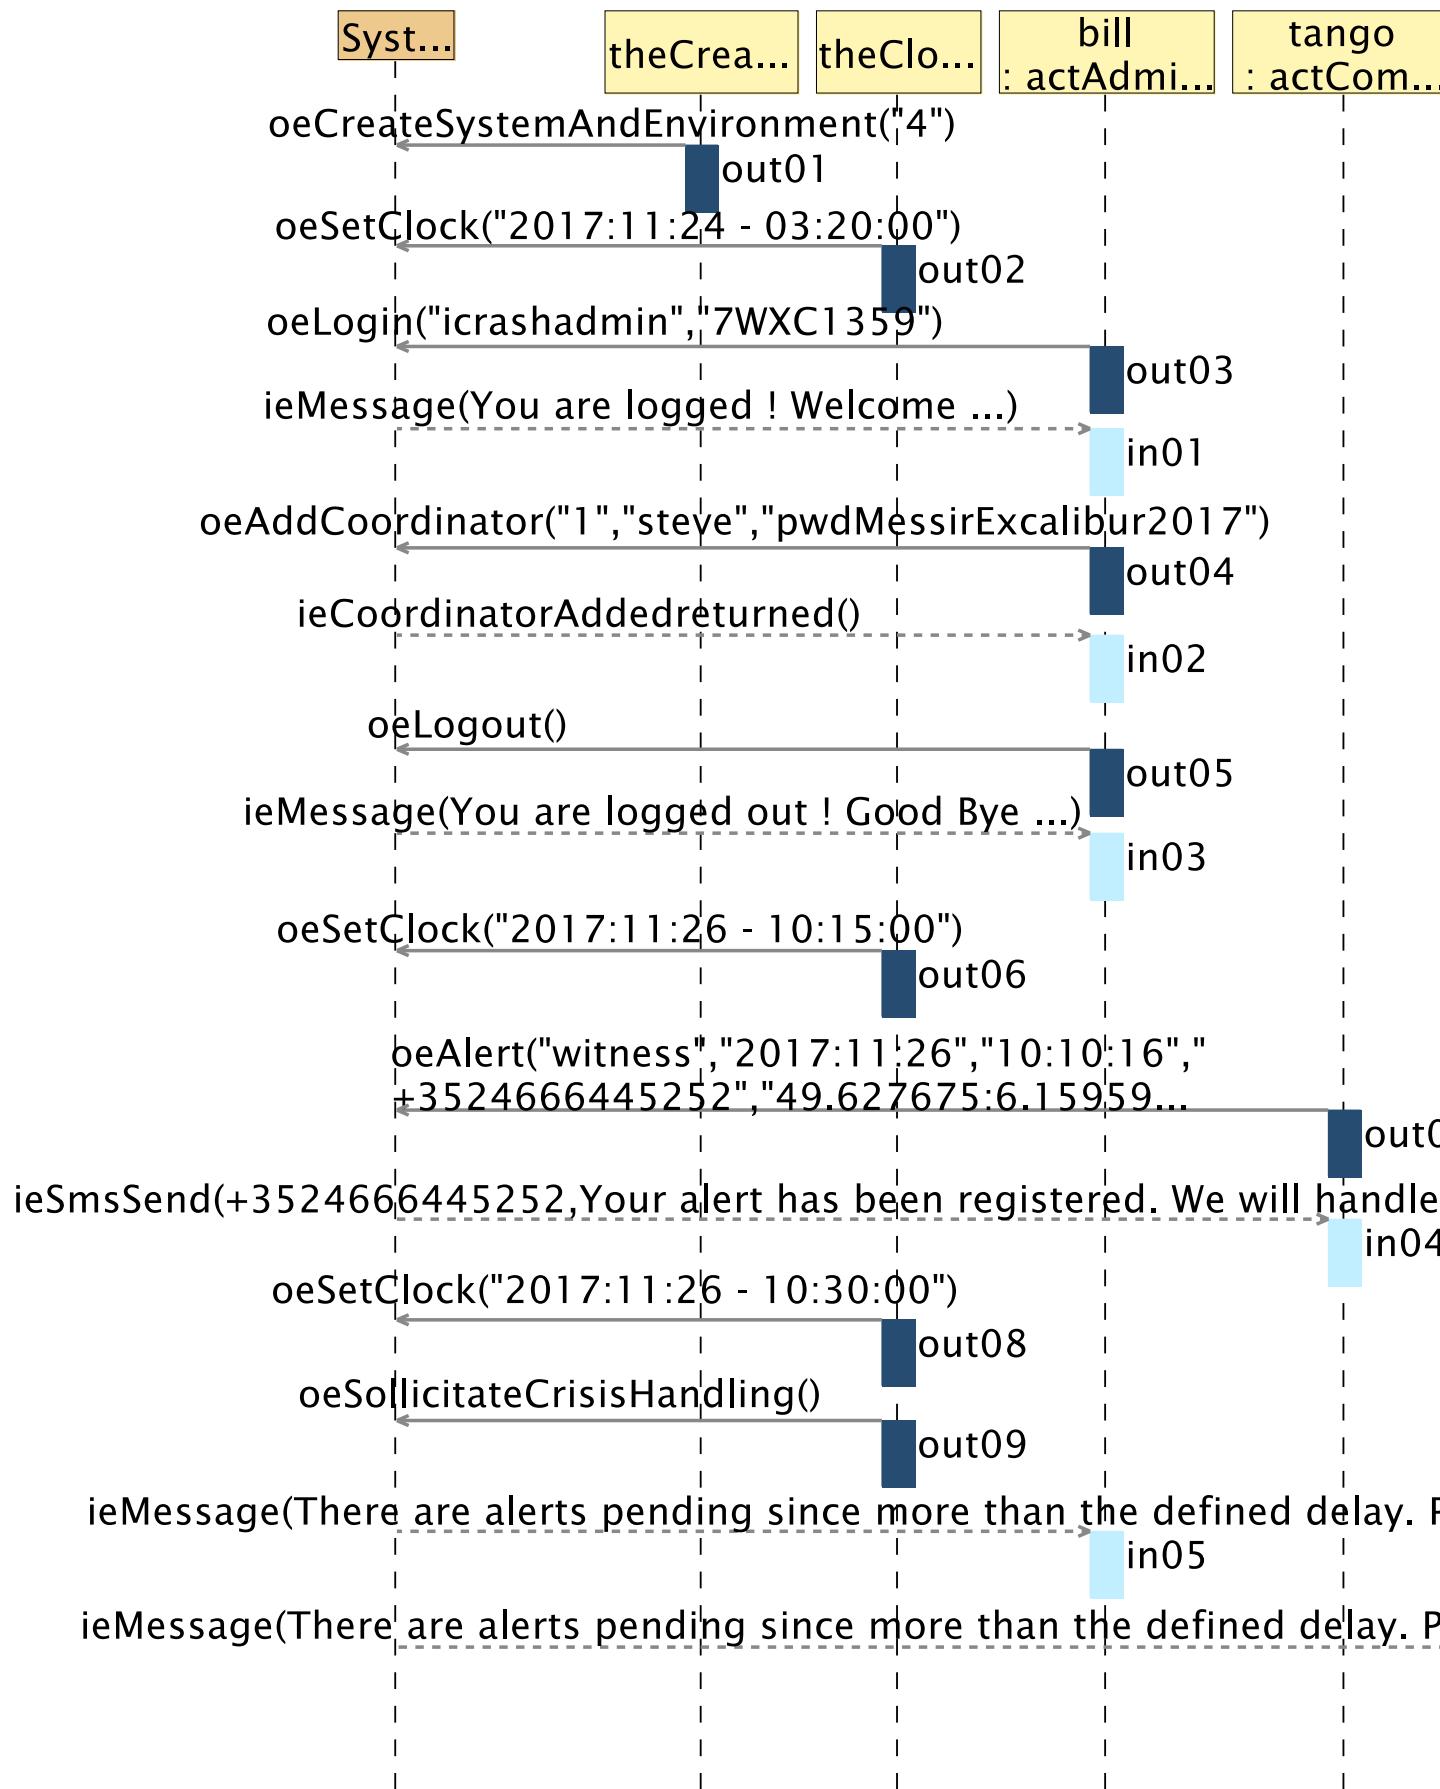


Figure 2.15: uci-suDeployAndRun-uciSimpleAndComplete-Part01

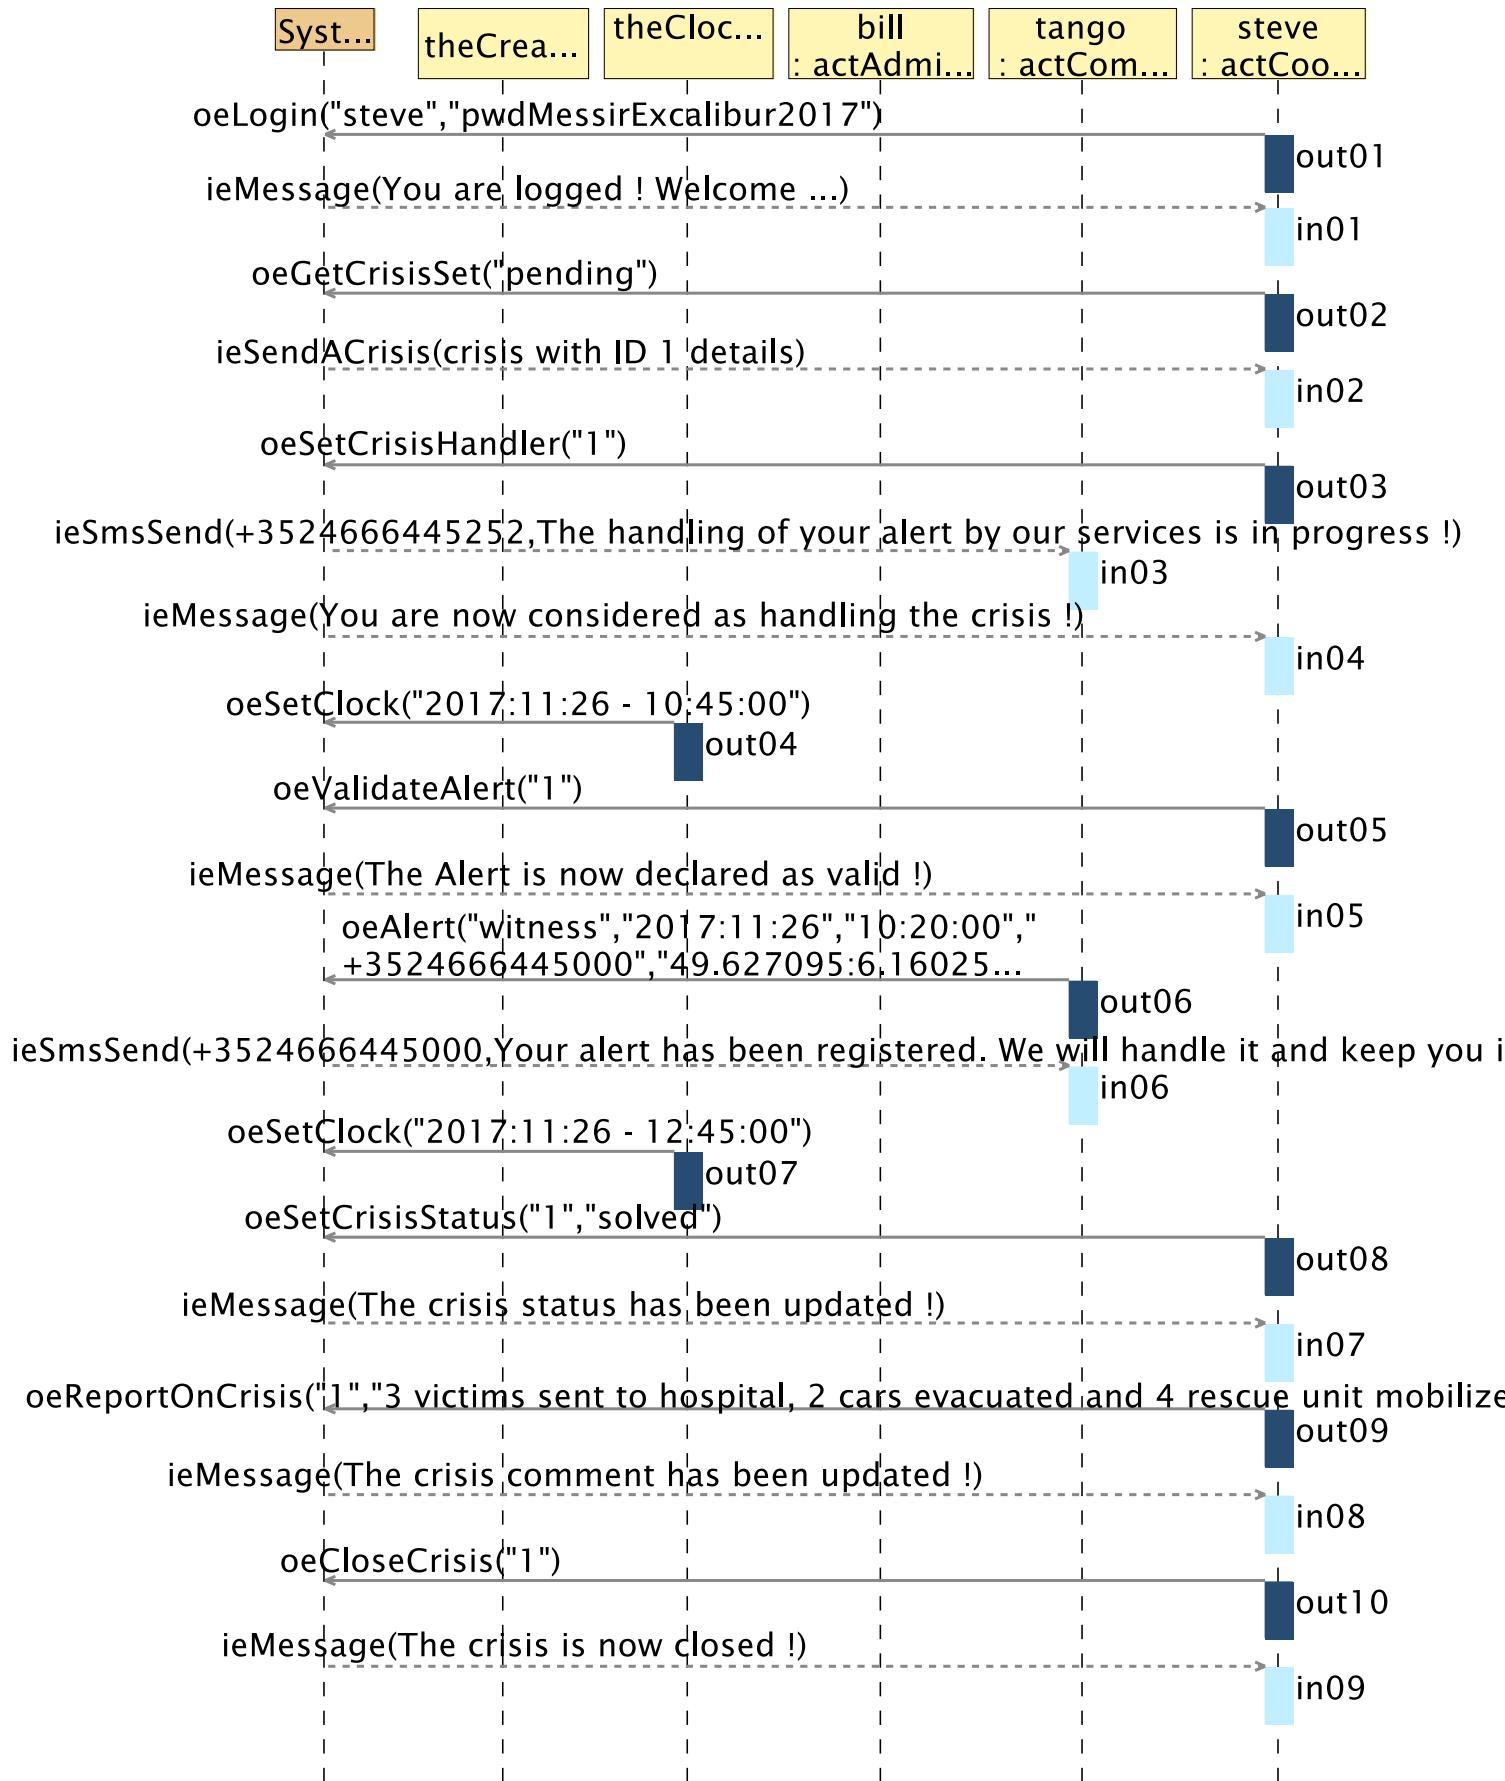


Figure 2.16: uci-suDeployAndRun-uciSimpleAndComplete-Part02 use case instance sequence diagram

### 2.3.2.3 Use-Case Instance - uciugStatisticAverageTypeofCrisis:ugAverageTypeofCrisis

The Administrator click the button to open the statistic so the system has to call the information for the average time of the different types and send it back to the Administrator so he can see it.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i>
ugAverageTypeofCrisis
<i>Instance ID</i>
uciugStatisticAverageTypeofCrisis

Figure 2.17 The Administrator click the button to open the statistic so the system has to call the information for the average time of the different types and send it back to the Administrator so he can see it.

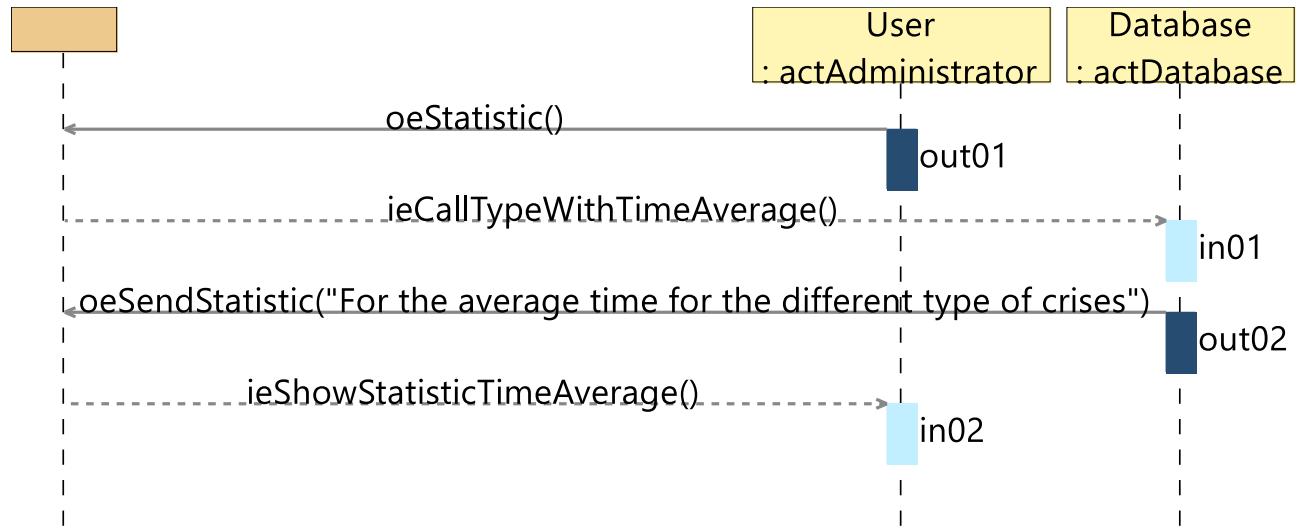


Figure 2.17: The average time of the different types

### 2.3.2.4 Use-Case Instance - uciugStatisticCrisisInTime:ugCrisisInTime

The administrator click the button to open the statistic so the system has to call the information for the number of the crises compared with the time and send it back to the Administrator so he can see it.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i>
ugCrisisInTime
<i>Instance ID</i>
uciugStatisticCrisisInTime

Figure 2.18 The administrator click the button to open the statistic so the system has to call the information for the number of the crises compared with the time and send it back to the Administrator

so he can see it.

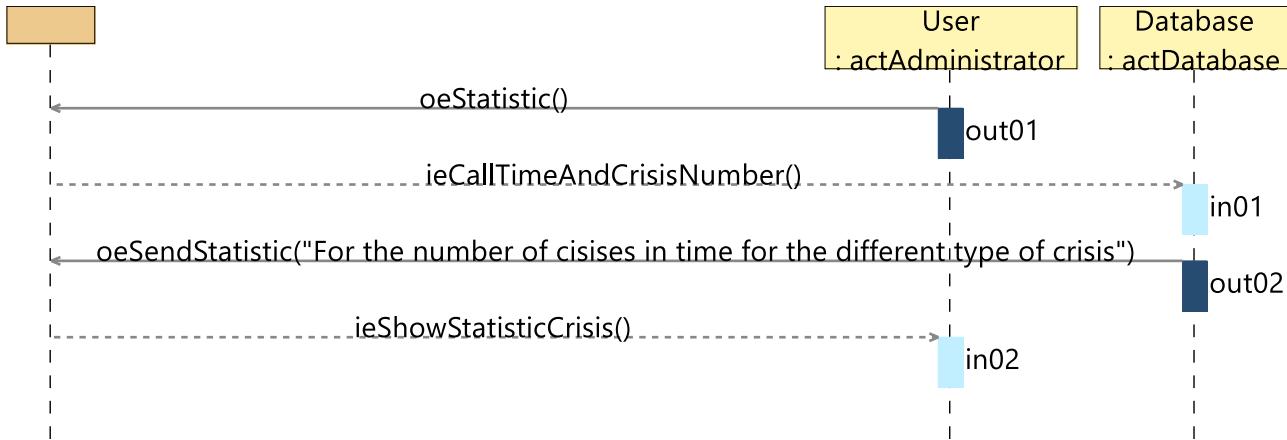


Figure 2.18: The number of the crises compared with the time

### 2.3.2.5 Use-Case Instance - uciugLoginCaptchaFailure:ugLogin

A failed captcha response submission after at least three failed login attempts

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugLogin
Instance ID
uciugLoginCaptchaFailure

Figure 2.19 The actor tries to log in with captcha verification and incorrect credentials. The log in process will be aborted.

### 2.3.2.6 Use-Case Instance - uciugLoginCaptchaSuccess:ugLogin

A successful login attempt with captcha verification

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugLogin
Instance ID
uciugLoginCaptchaSuccess

Figure 2.20 The actor tries to log in with captcha verification and correct credentials. The log in will be allowed.

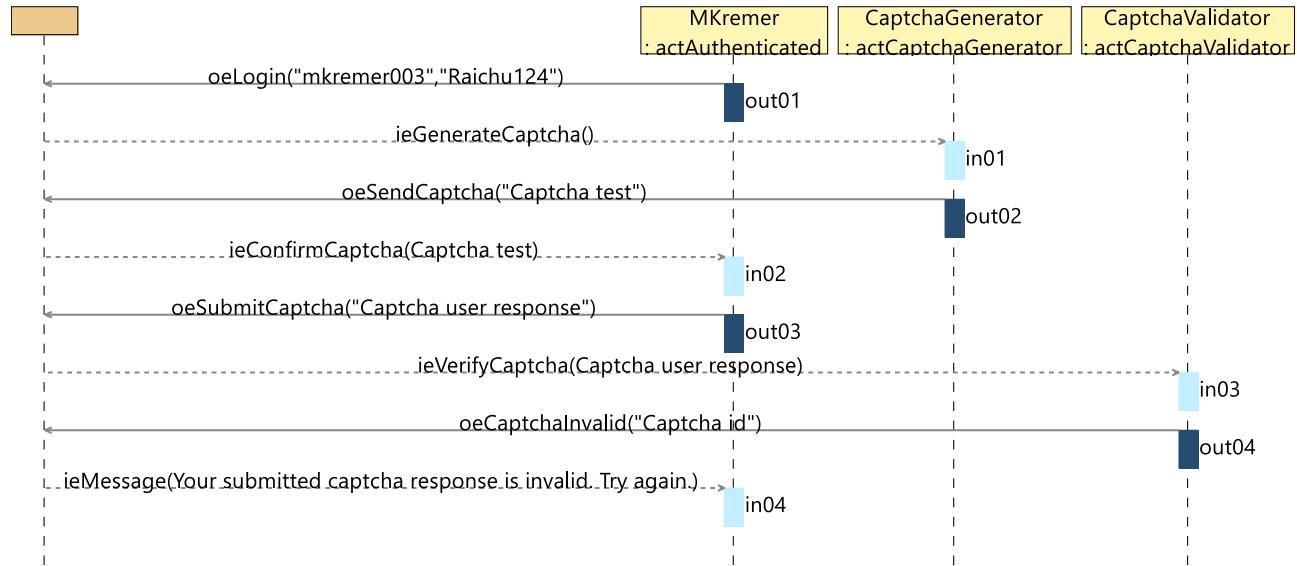


Figure 2.19: A failed login with captcha verification

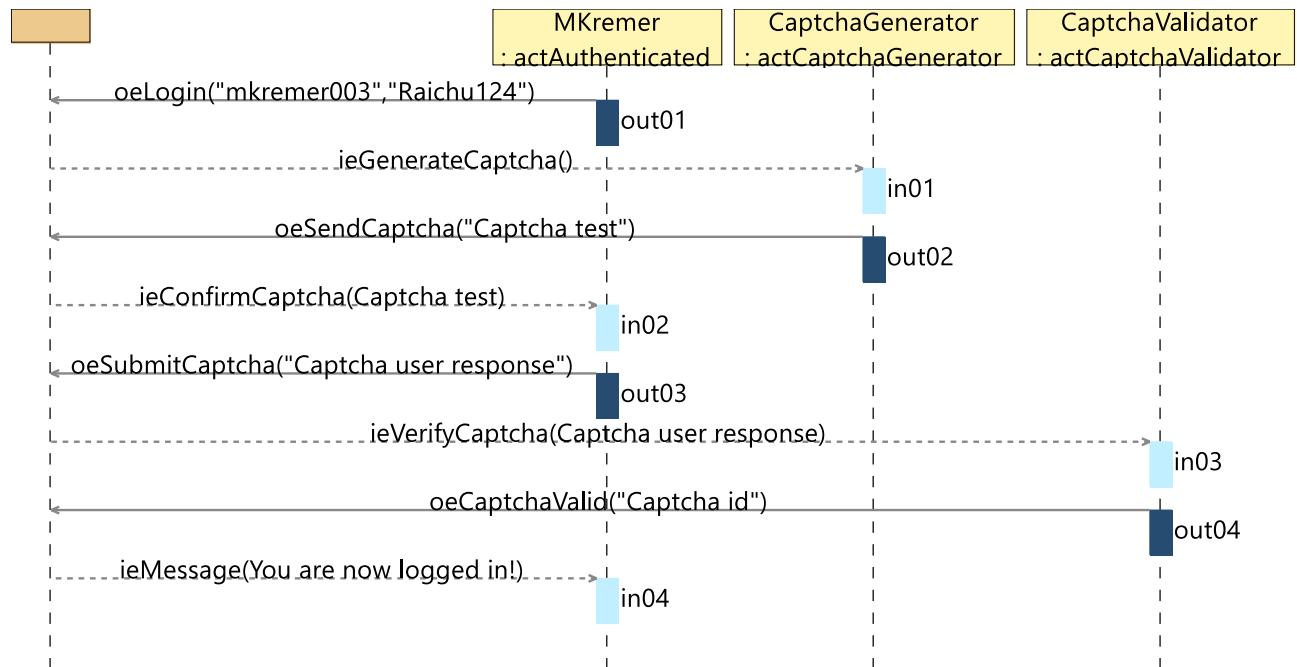


Figure 2.20: A successful login with captcha verification

### 2.3.2.7 Use-Case Instance - uciugLoginCaptchaToleranceExceeded:ugLogin

After three failed login attempts without and five login attempts with captcha verification, the requested login user name will be blocked for further login attempts

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugLogin
<i>Instance ID</i> uciugLoginCaptchaToleranceExceeded

Figure 2.21 The actor failed to log in three times without and five times with captcha verification. The login availability for the requested user name will be blocked.

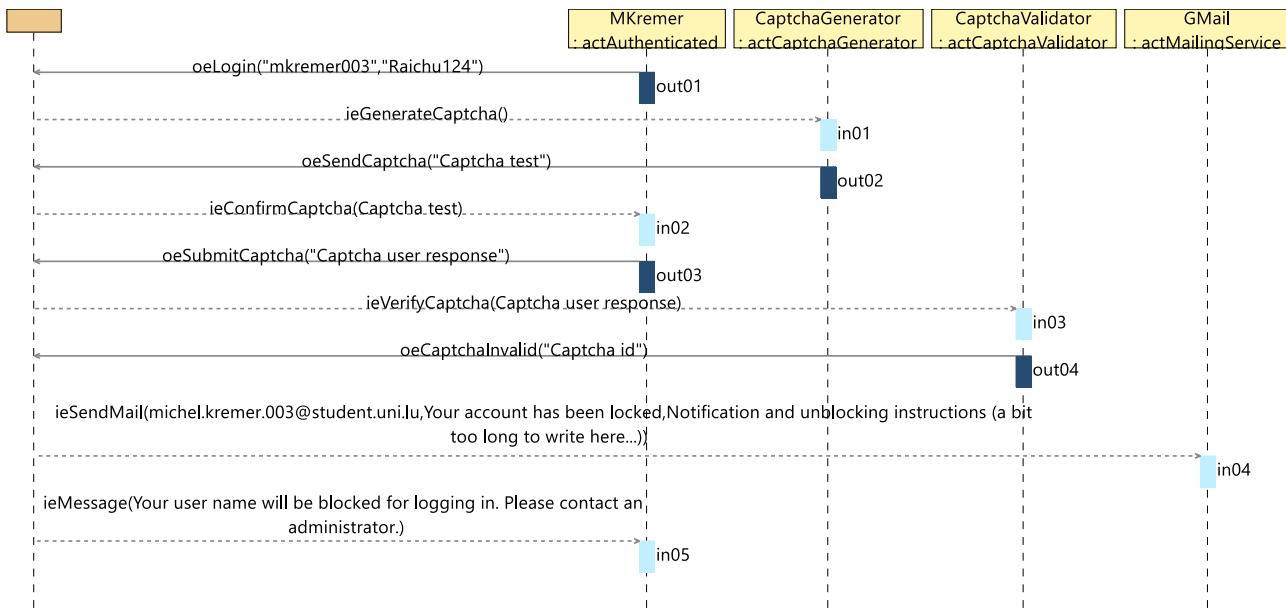


Figure 2.21: The tolerance of login attempts is exceeded

### 2.3.2.8 Use-Case Instance - uciugLoginFailure:ugLogin

A user submitted a wrong combination of user name and password during the login process. The authentication is refused.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i> ugLogin
<i>Instance ID</i> uciugLoginFailure

Figure 2.22 A user has submitted an incorrect combination of user name and password during the login process

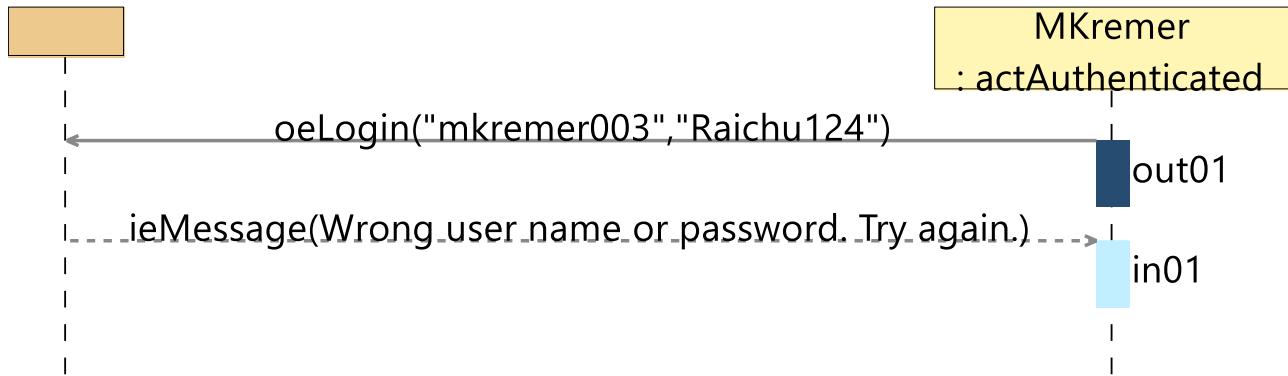


Figure 2.22: A failed login attempt

### 2.3.2.9 Use-Case Instance - uciugLoginRejected:ugLogin

A user tried to log in with a user name which is blocked by the system (because of many erroneous attempts to log in in a row). The login attempt will be rejected and the user will be notified.

USERGOAL USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	<code>ugLogin</code>
<i>Instance ID</i>	<code>uciugLoginRejected</code>

Figure 2.23 A user has tried to log in with a user name who has been blocked by the system from any further login attempts



Figure 2.23: A rejected login attempt

### 2.3.2.10 Use-Case Instance - uciugLoginSuccess:ugLogin

A successful login attempt without captcha verification

USERGOAL USE-CASE INSTANCE	
<i>Instantiated Use Case</i>	<code>ugLogin</code>
<i>Instance ID</i>	<code>uciugLoginSuccess</code>

**... *usergoal Use-Case Instance table continuation***

ugSecurelyUseSystem
<i>Instance ID</i>
uciugSecurelyUseSystem

Figure 2.25

**2.3.2.12 Use-Case Instance - uciugUserActivity:ugUserActivity**

The actor administrator will open the statistic the activity of the users, there he can find out how many users are active at any time. Also the abstract user System give the information

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i>
ugUserActivity
<i>Instance ID</i>
uciugUserActivity

Figure 2.26 The administrator click the button to open the statistic so the system has to call the information for the number of the user compared with the time and send it back to the Administrator so he can see it.

**2.3.2.13 Use-Case Instance - uciugVictimSendFamilyNotification:ugVictimSendFamilyNotification**

The authenticated Victim creates an alert in which he can choose to sent a notification to his family with a personal commentary. The system sends the notification. The coordinator creates a crisis for the alert and a new notification is sent with every update of the crisis.

USERGOAL USE-CASE INSTANCE
<i>Instantiated Use Case</i>
ugVictimSendFamilyNotification
<i>Instance ID</i>
uciugVictimSendFamilyNotification

Figure 2.27 The authenticated Victim creates an alert in which he can choose to sent a notification to his family with a personal commentary. The system sends the notification. The coordinator creates a crisis for the alert and a new notification is sent with every update of the crisis.

**2.3.2.14 Use-Case Instance - uciugWitnessSendFamilyNotification:ugWitnessSendFamilyNotification**

The authenticated Witness creates an alert in which he can identify the victim by name and surname. The system sends the notification. The coordinator creates a crisis for the alert and a new notification is sent with every update of the crisis.

USERGOAL USE-CASE INSTANCE
<i>continues in next page ...</i>

***... usergoal Use-Case Instance table continuation***

<b><i>Instantiated Use Case</i></b>
ugWitnessSendFamilyNotification
<b><i>Instance ID</i></b>
uciugWitnessSendFamilyNotification

Figure 2.28 The authenticated Witness creates an alert in which he can identify the victim by name and surname. The system sends the notification. The coordinator creates a crisis for the alert and a new notification is sent with every update of the crisis.

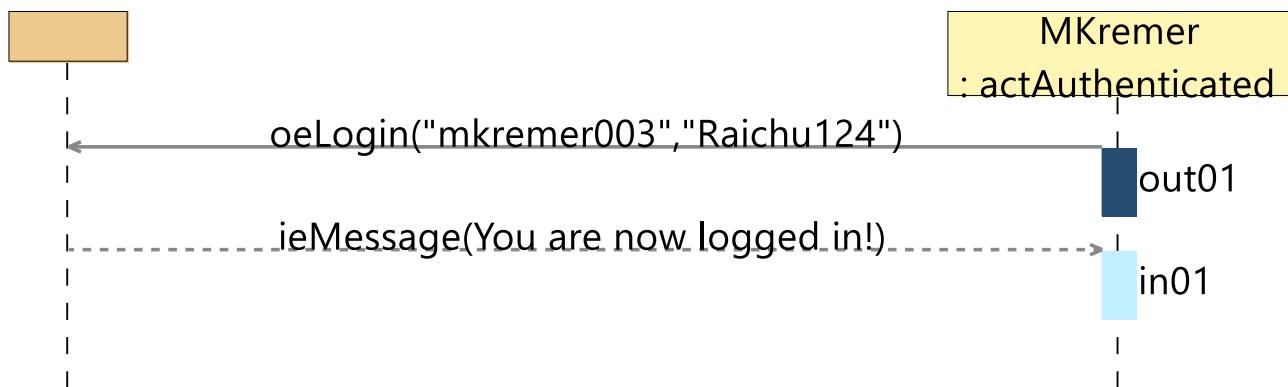


Figure 2.24: A successful login attempt

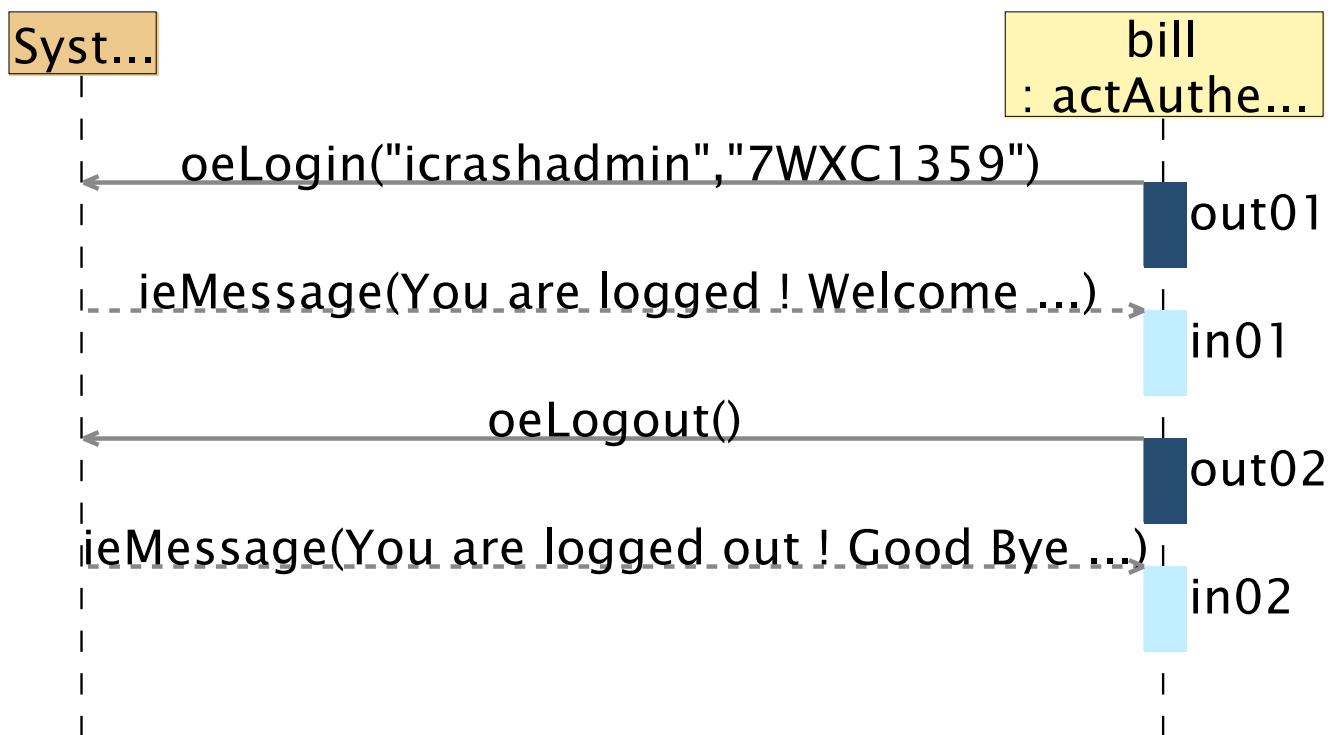


Figure 2.25:

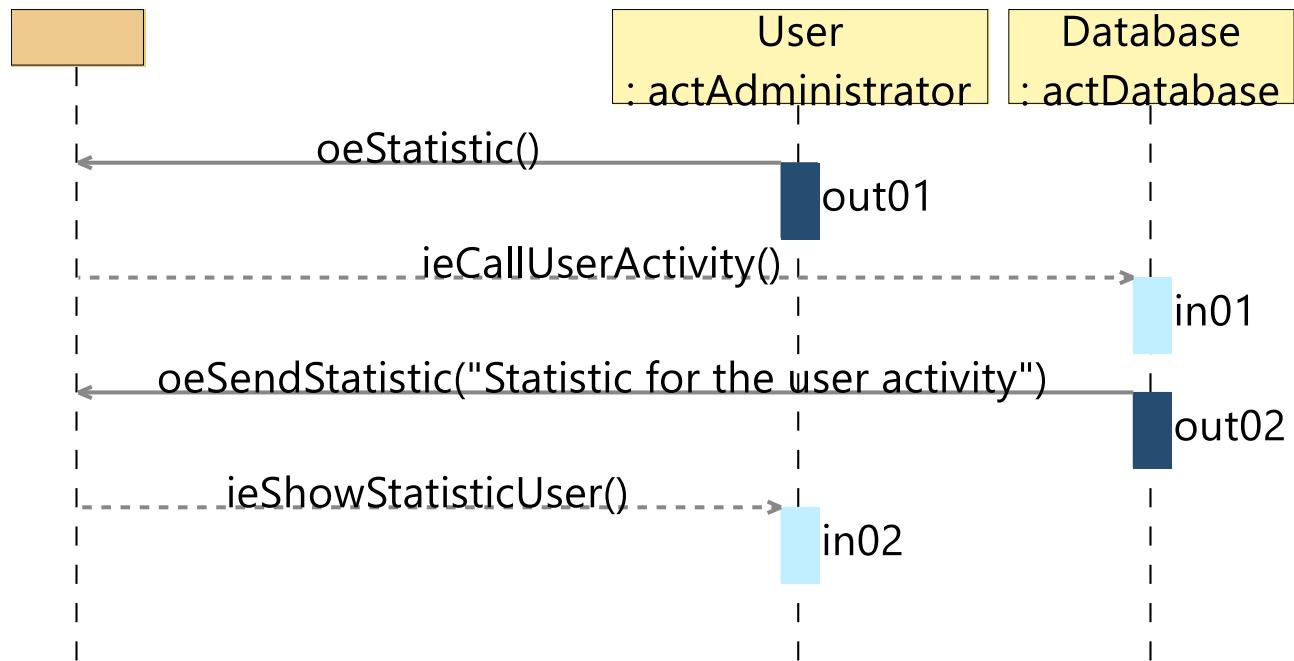


Figure 2.26: The number of the user compared with the time

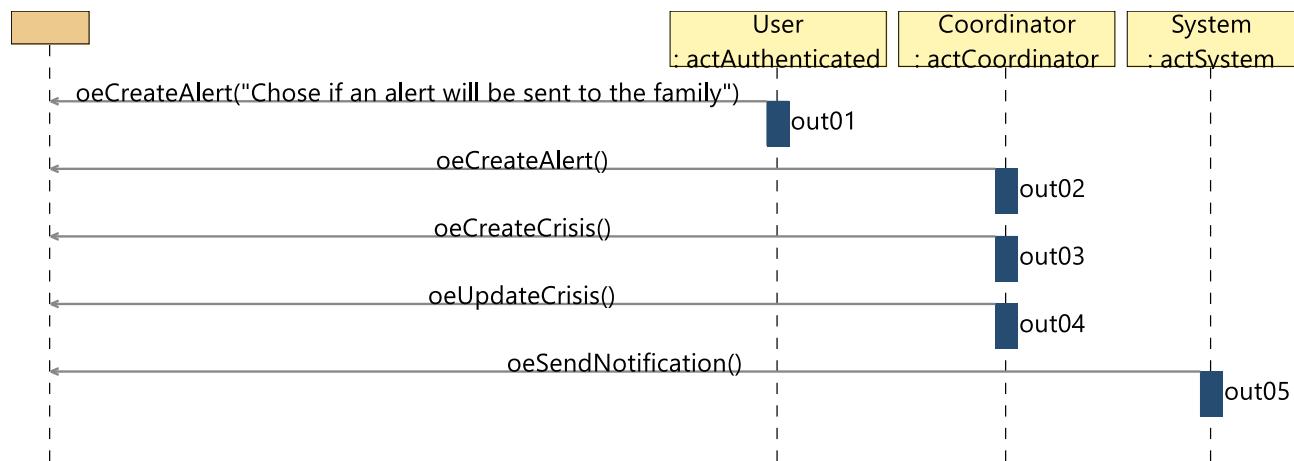


Figure 2.27: Use case instance of ugVictimSendFamilyNotification

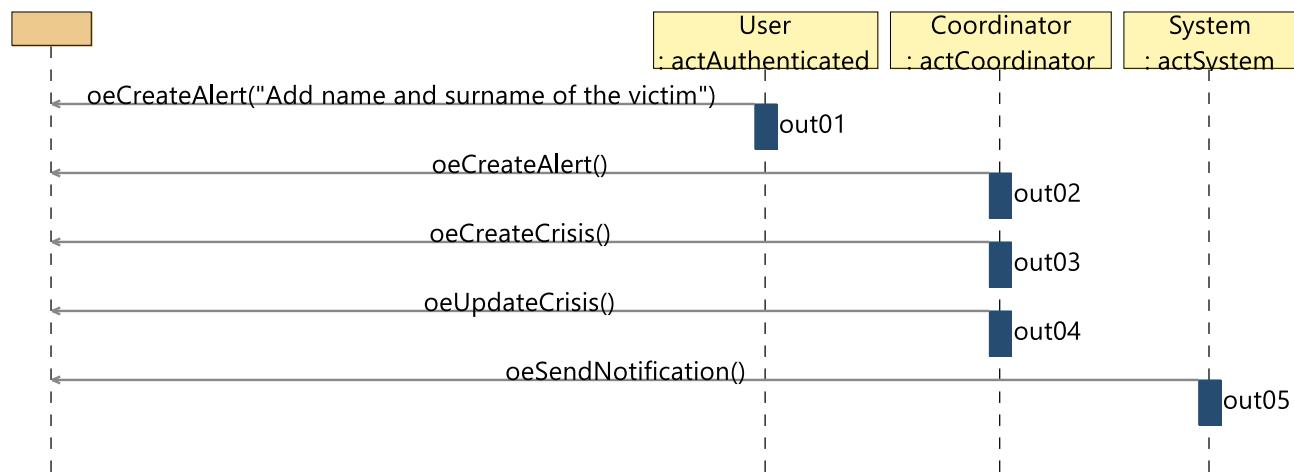


Figure 2.28: Use case instance of ugWitnessSendFamilyNotification



# Chapter 3

## Environment Model

We provide below the view(s) defined for the **Messip** environment model (cf. [1]) of the system.

### 3.1 Local view 01

Figure 3.1 shows the local view giving the second part of the environment model of the system in term of its state class, actors with their input and output interfaces and all related associations.

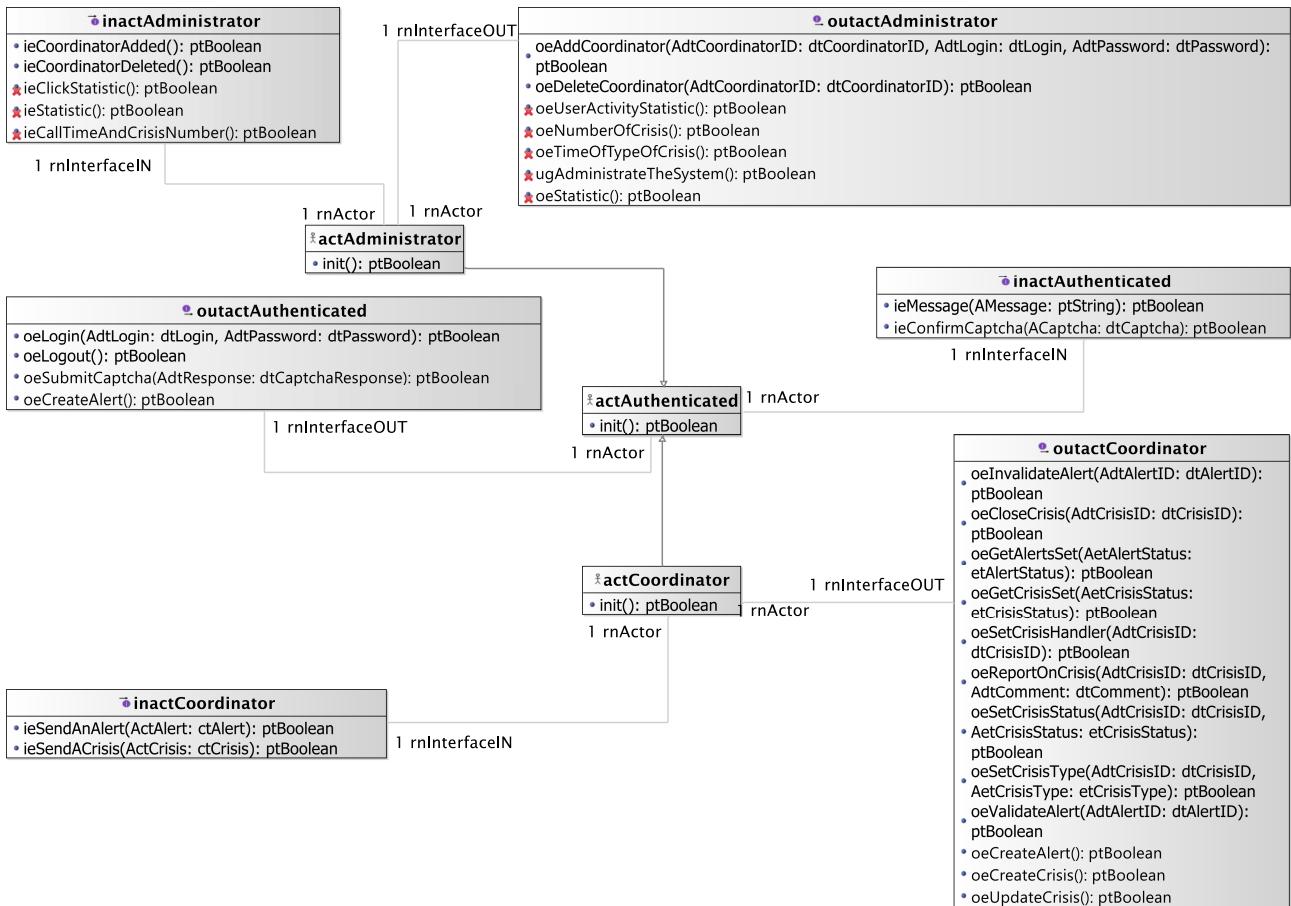


Figure 3.1: Environment Model - Local View 01. environment model local view - Part 1.

### 3.2 Local view 02

Figure 3.2 shows the local view giving the second part the environment model of the system in term of its state class, actors with their input and output interfaces and all related associations.

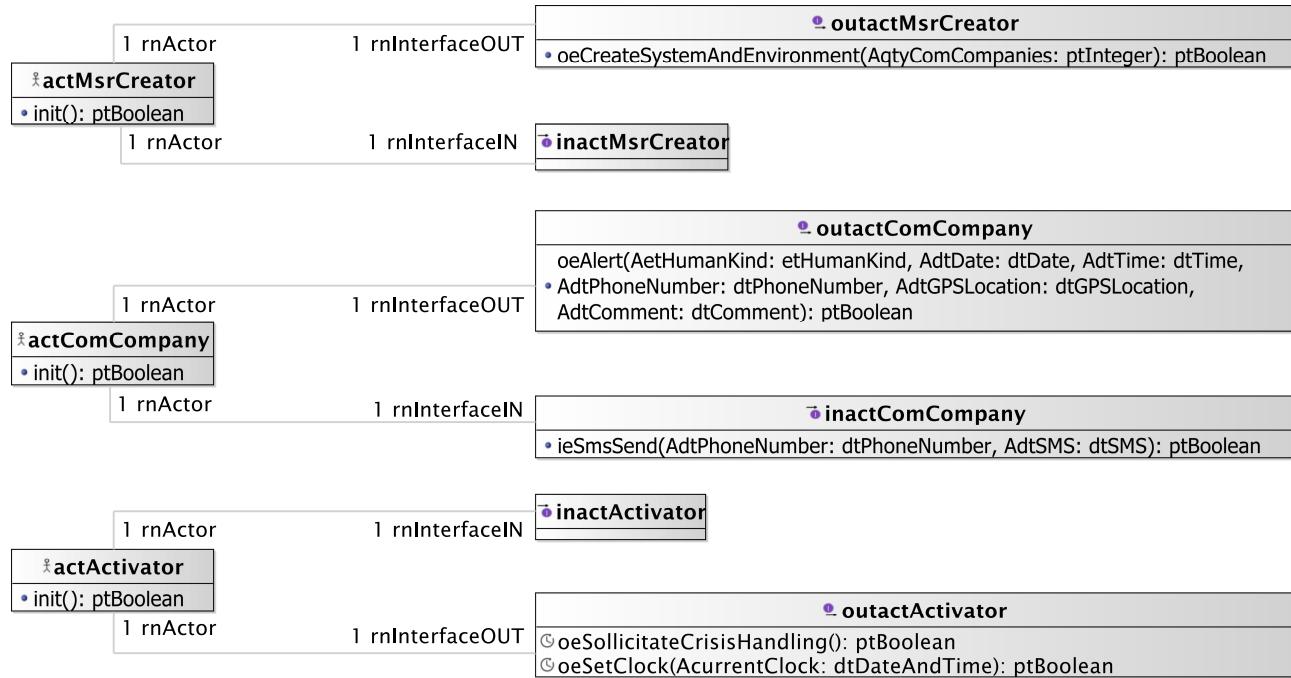


Figure 3.2: Environment Model - Local View 02. environment model local view - Part 2.

### 3.3 Local view 03

Figure 3.3 shows the local view for the administrator actor and interfaces

### 3.4 Local view 04

Figure 3.4 shows the local view for the coordinator actor and interfaces

### 3.5 Local view 05

Figure 3.5 shows the local view for the authenticated actor and interfaces

### 3.6 Local view 08

Figure 3.6 The actor responsible for captcha generation

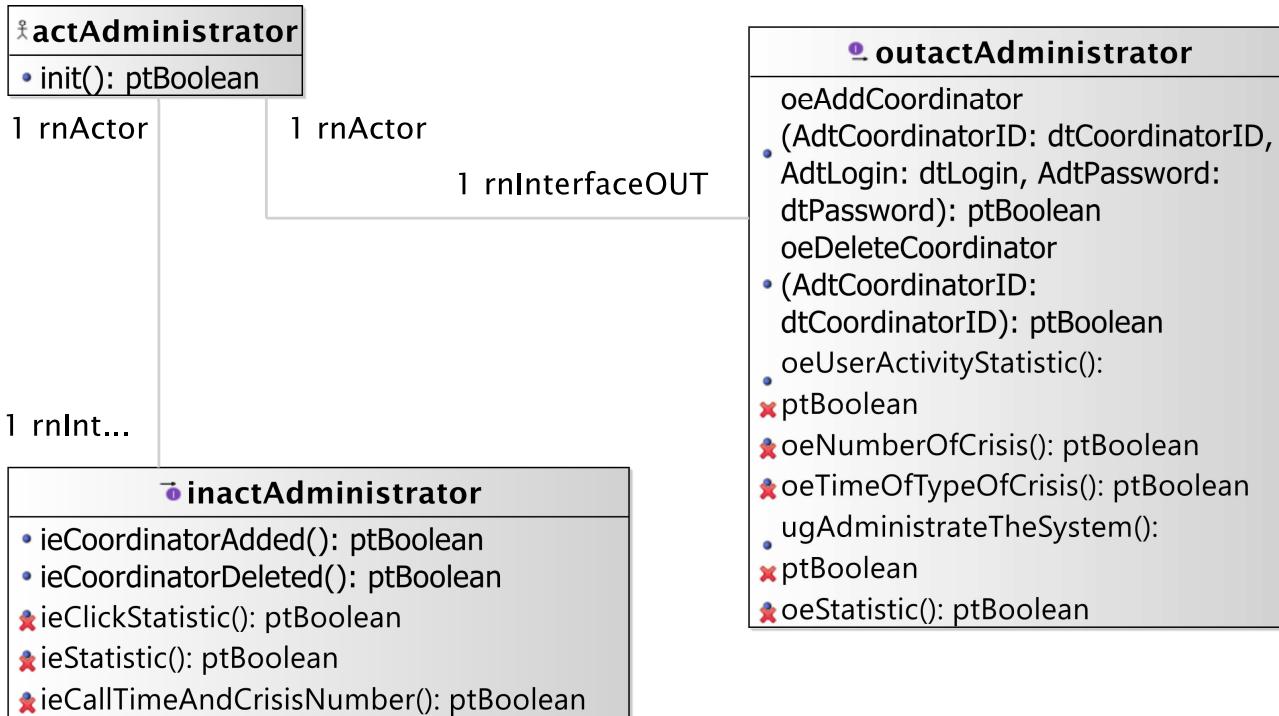


Figure 3.3: Environment Model - Local View 03. administrator actor environment model view.

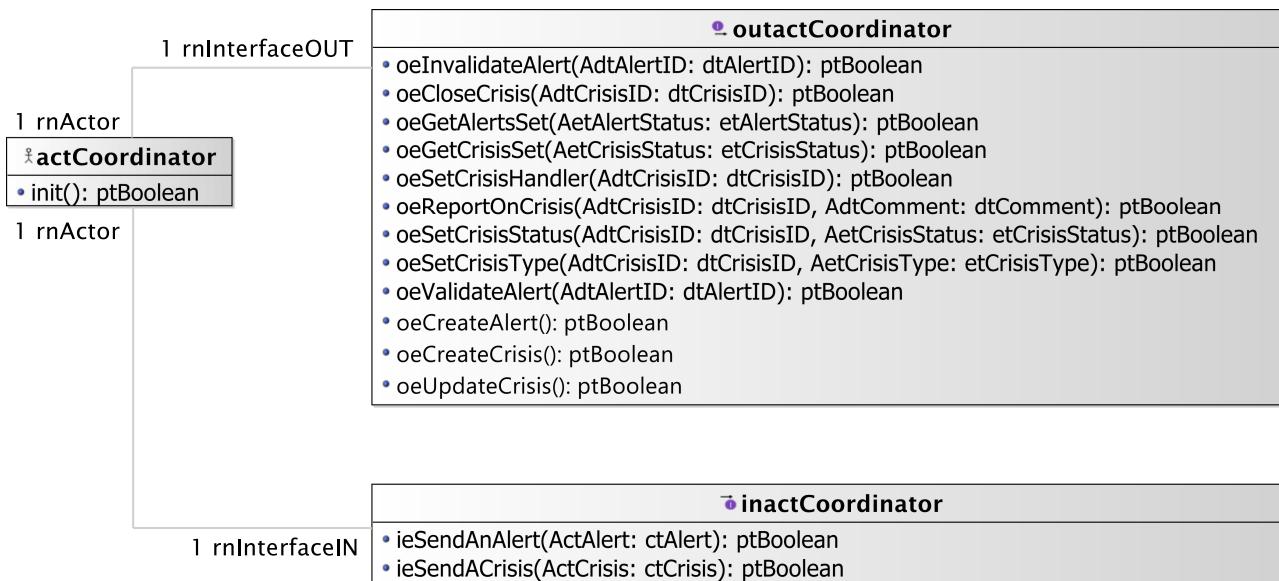


Figure 3.4: Environment Model - Local View 04. coordinator actor environment model view.

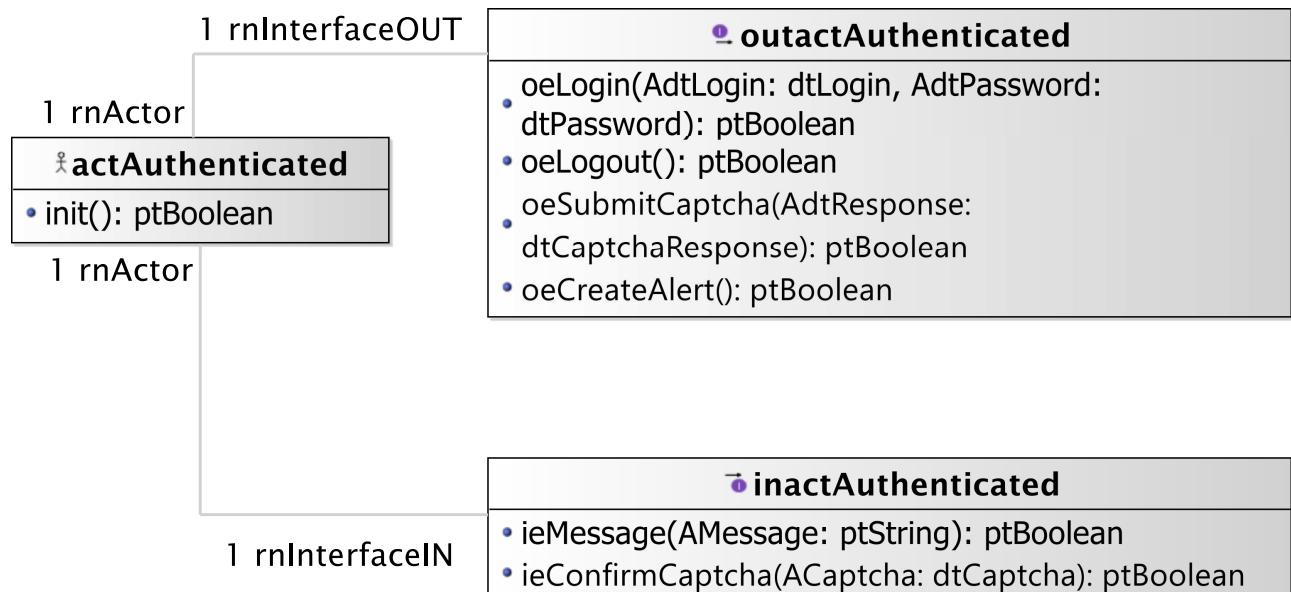


Figure 3.5: Environment Model - Local View 05. authenticated actor environment model local view.



Figure 3.6: Environment Model - Local View 08. The captcha generator.

### 3.7 Local view 09

Figure 3.7 The actor responsible to validate answers to a captcha test



Figure 3.7: Environment Model - Local View 09. The captcha answer validator.

### 3.8 Local view 10

Figure 3.8



Figure 3.8: Environment Model - Local View 10. .

### 3.9 Local view 11

Figure 3.9 The actor responsible to send e-mails



Figure 3.9: Environment Model - Local View 11. E-mail service.

### 3.10 Local view 12

Figure 3.10

### 3.11 Global view 01



Figure 3.10: Environment Model - Local View 12. .

Figure 3.11 shows a global view for all actors with their relationships with ctState

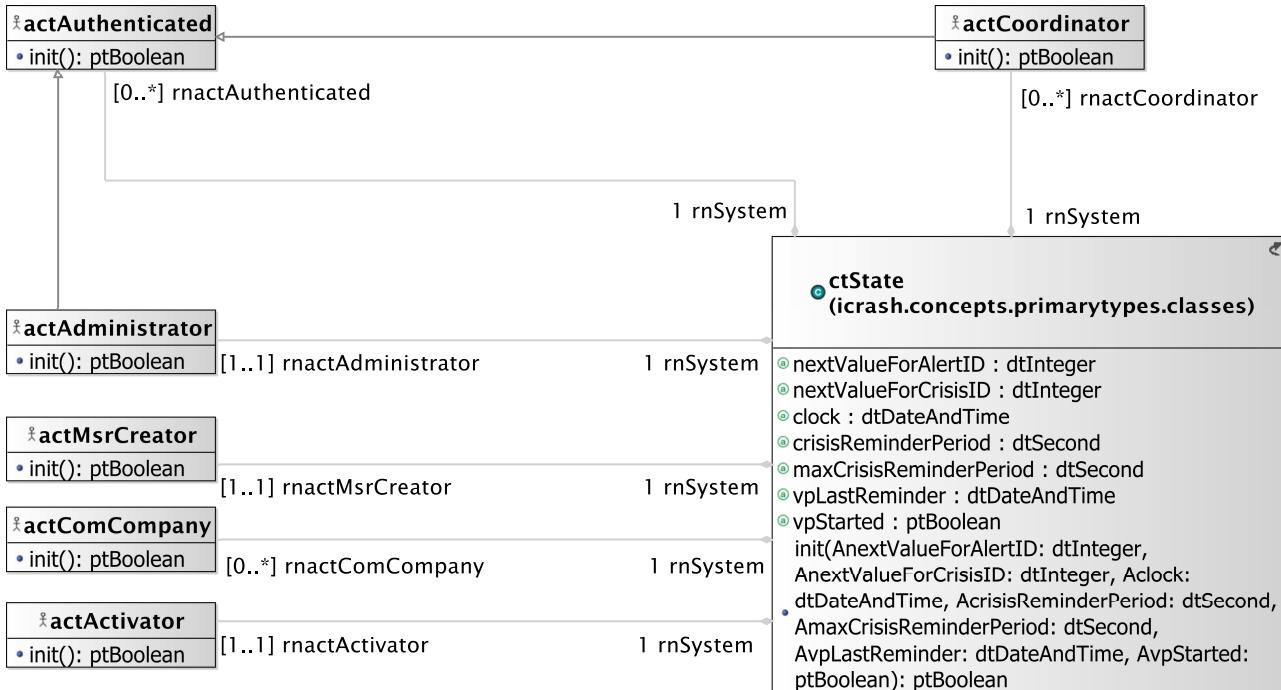


Figure 3.11: Environment Model - Global View 01. em-gv-01 environment model global view.

## 3.12 Actors and Interfaces Descriptions

We provide for the given views the description of the actors together with their associated input and output interface descriptions.

### 3.12.1 **actActivator** Actor

ACTOR	
<i>actActivator</i>	
represents a logical actor for time automatic message sending based on system's or environment status.	
<i>OutputInterfaces</i>	
OUT 1	<b>[proactive] oeSollicitateCrisisHandling() :ptBoolean</b> used to avoid crisis to stay too long in an not handled status.
OUT 2	<b>[proactive] oeSetClock(AcurrentClock:dtDateAndTime) :ptBoolean</b> used to update the system's time

### 3.12.2 **actAdministrator** Actor

ACTOR	
<i>actAdministrator</i>	
represents an actor responsible of administration tasks for the <i>iCrash</i> system.	

*continues in next page ...*

*...Actor table continuation*

<i>Extends</i>	
icrash.environment.actAuthenticated	
<i>Operations</i>	
<b><i>init () :ptBoolean</i></b>	
<b><i>oegetStatistic () :ptBoolean</i></b>	
<i>OutputInterfaces</i>	
OUT 1	<b><i>oeAddCoordinator (AdtCoordinatorID:dtCoordinatorID, AdtLogin:dtLogin, AdtPassword:dtPassword) :ptBoolean</i></b> sent to add a new coordinator in the system's post state and environment's post state.
OUT 2	<b><i>oeDeleteCoordinator (AdtCoordinatorID:dtCoordinatorID) :ptBoolean</i></b> sent to delete an existing coordinator in the system's post state and environment's post state.
OUT 3	<b><i>oegetStatisticUser (statisticUser:dtgetStatisticUserActivity) :ptBoolean</i></b> send the statistic for the user activity with the time.
OUT 4	<b><i>oegetStatisticCrises (statisticCrises:dtgetStatisticCrisisinTime) :ptBoolean</i></b> send the statistic for the number of sending crises with the time.
OUT 5	<b><i>oegetStatisticTypesOfCrises (statisticTypes:dtgetStatisticTypeCrisis) :ptBoolean</i></b> send the statistic for the average time of the 3 different types of a crises.
<i>InputInterfaces</i>	
IN 1	<b><i>ieCoordinatorAdded () :ptBoolean</i></b> its reception confirms the creation of the requested coordinator.
IN 2	<b><i>ieCoordinatorDeleted () :ptBoolean</i></b> its reception confirms the deletion of the requested coordinator.
IN 3	<b><i>iegetStatistic () :ptBoolean</i></b> It show the statistic

**3.12.3 actAuthenticated Actor**

<b>ACTOR</b>	
<i>actAuthenticated</i>	
	abstract actor providing reusable input and output interfaces for actors that need to authenticate themselves.
<i>OutputInterfaces</i>	
OUT 1	<b><i>oeLogin (AdtLogin:dtLogin, AdtPassword:dtPassword) :ptBoolean</i></b> sent to request authorization to request access secured system operations.
OUT 2	<b><i>oeLogout () :ptBoolean</i></b> sent to end the secured access to specific system operations.
OUT 3	<b><i>oeSubmitCaptcha (AdtResponse:dtCaptchaResponse) :ptBoolean</i></b> sent to submit an answer to a previously given captcha test
OUT 4	<b><i>oeCreateAlert () :ptBoolean</i></b> sent to create a new alert
<i>InputInterfaces</i>	
IN 1	<b><i>ieMessage (AMessage:ptString) :ptBoolean</i></b> allows for receiving general textual messages.
IN 2	<b><i>ieConfirmCaptcha (ACaptcha:dtCaptcha) :ptBoolean</i></b>

*continues in next page ...*

**...Actor table continuation**

The request of the system to the user to field a captcha test
---

**3.12.4 actCaptchaGenerator Actor**

ACTOR	
<i>actCaptchaGenerator</i>	
Actor providing a randomly generated captcha test to hedge a users login process	
<i>OutputInterfaces</i>	
OUT 1 <b>oeSendCaptcha (AdtCaptcha:dtCaptcha) :ptBoolean</b>	The response by the actor which provides a captcha test to the system
<i>InputInterfaces</i>	
IN 1 <b>ieGenerateCaptcha () :ptBoolean</b>	The request to the actor to generate and provide a captcha test
IN 2 <b>ieValidateCaptcha (AResponse:dtCaptchaResponse) :ptBoolean</b>	The request to the actor to validate a response to a captcha test

**3.12.5 actCaptchaValidator Actor**

ACTOR	
<i>actCaptcha Validator</i>	
Actor responsible for validating a captcha test	
<i>OutputInterfaces</i>	
OUT 1 <b>oeCaptchaInvalid (AdtCaptchaId:ptInteger) :ptBoolean</b>	Returns an answer to the system to notify that the supplied captcha was invalid
OUT 2 <b>oeCaptchaValid (AdtCaptchaId:ptInteger) :ptBoolean</b>	Returns an answer to the system to notify that the supplied captcha was valid
<i>InputInterfaces</i>	
IN 1 <b>ieVerifyCaptcha (AdtCaptchaResponse:dtCaptchaResponse) :ptBoolean</b>	Submits a captcha response to the actor to be verified

**3.12.6 actComCompany Actor**

ACTOR	
<i>actComCompany</i>	
represents the communication company stakeholder ensuring the input/ouput of textual messages with humans having communicaiton devices.	
<i>OutputInterfaces</i>	
OUT 1 <b>oeAlert (AetHumanKind:etHumanKind, AdtDate:dtDate, AdtTime:dtTime, AdtPhoneNumber:dtPhoneNumber, AdtGPSLocation:dtGPSLocation, AdtComment:dtComment) :ptBoolean</b>	sent to alert of a potential crisis situation.
<i>InputInterfaces</i>	
IN 1 <b>ieSmsSend (AdtPhoneNumber:dtPhoneNumber, AdtSMS:dtSMS) :ptBoolean</b>	allows for receiving textual messages to be dispatched to the communication company customers having the provided phone number.

### 3.12.7 actCoordinator Actor

<b>ACTOR</b>	
<i>actCoordinator</i>	
represents actor responsible of handling one or several crisis for the <i>iCrash</i> system.	
<i>Extends</i>	
icrash.environment.actAuthenticated	
<i>OutputInterfaces</i>	
OUT 1	<b>oeInvalidateAlert (AdtAlertID:dtAlertID) :ptBoolean</b> sent to indicate that an alert should be considered as closed.
OUT 2	<b>oeCloseCrisis (AdtCrisisID:dtCrisisID) :ptBoolean</b> sent to indicate that a crisis should be considered as closed.
OUT 3	<b>oeGetAlertsSet (AetAlertStatus:etAlertStatus) :ptBoolean</b> sent to request all the ctAlert instances having a specific status.
OUT 4	<b>oeGetCrisisSet (AetCrisisStatus:etCrisisStatus) :ptBoolean</b> sent to request all the ctCrisis instances having a specific status.
OUT 5	<b>oeSetCrisisHandler (AdtCrisisID:dtCrisisID) :ptBoolean</b> sent to declare himself as been the handler of a crisis having the specified id.
OUT 6	<b>oeReportOnCrisis (AdtCrisisID:dtCrisisID, AdtComment:dtComment) :ptBoolean</b> sent to update the textual information available for a specific handled crisis.
OUT 7	<b>oeSetCrisisStatus (AdtCrisisID:dtCrisisID, AetCrisisStatus:etCrisisStatus) :ptBoolean</b> sent to define the handling status of a specific crisis.
OUT 8	<b>oeSetCrisisType (AdtCrisisID:dtCrisisID, AetCrisisType:etCrisisType) :ptBoolean</b> sent to define the gravity type of a specific crisis.
OUT 9	<b>oeValidateAlert (AdtAlertID:dtAlertID) :ptBoolean</b> sent to indicate that a specific alert is not a fake.
OUT 10	<b>oeCreateAlert () :ptBoolean</b>
OUT 11	<b>oeCreateCrisis () :ptBoolean</b>
OUT 12	<b>oeUpdateCrisis () :ptBoolean</b>
<i>InputInterfaces</i>	
IN 1	<b>ieSendAnAlert (ActAlert:ctAlert) :ptBoolean</b> allows for receiving a requested ctAlert instance.
IN 2	<b>ieSendACrisis (ActCrisis:ctCrisis) :ptBoolean</b> allows for receiving a requested ctCrisis instance.

### 3.12.8 actDatabase Actor

<b>ACTOR</b>	
<i>actDatabase</i>	
This is the abstract actor Database.This save all Information.	
<i>OutputInterfaces</i>	
OUT 1	<b>oeSendStatistic () :ptBoolean</b> send the statistic to the GUI
OUT 2	<b>oegetStatistic () :ptBoolean</b>

*continues in next page ...*

### *...Actor table continuation*

	give the statistic
<i>InputInterfaces</i>	
IN 1	<b>ieCallTimeAndCrisisNumber () :ptBoolean</b> give Time for the crises
IN 2	<b>ieCallUserActivity () :ptBoolean</b> Give the user activity with the time
IN 3	<b>ieCallTypeWithTimeAverage () :ptBoolean</b> Give the average time of the 3 type of crises.

### 3.12.9 actMailingService Actor

ACTOR
<i>actMailingService</i>
An actor who is responsible for sending mails to actors who are registered in the system with an e-mail address
<i>InputInterfaces</i>

### 3.12.10 **actMsrCreator** Actor

ACTOR
<i>actMsrCreator</i>
Represents the creator stakeholder in charge of state and environment initialization.
<i>Operations</i>
<i>init () :ptBoolean</i>
<i>OutputInterfaces</i>
OUT 1 <b>oeCreateSystemAndEnvironment (AqtyComCompanies :ptInteger) :ptBoolean</b> sent to request the initialization of the system's class instances and the environment actors instances.

### 3.12.11 `actSystem` Actor

ACTOR
<i>actSystem</i>
This is the actor System
<i>OutputInterfaces</i>
OUT 1 <b>ugSercurelyUserSystem() :ptBoolean</b> For the login
OUT 2 <b>ugVictimSendFamilyNotification() :ptBoolean</b>
OUT 3 <b>ugWitnessSendFamilyNotification() :ptBoolean</b>

*continues in next page . . .*

**...Actor table continuation**

OUT 4	<b>oeChooseInformation() :ptBoolean</b>
OUT 5	<b>oeSendNotification() :ptBoolean</b>
OUT 6	<b>oeSendStatistic() :ptBoolean</b> Send the statistic
OUT 7	<b>oeGetStatistic() :ptBoolean</b> Get the statistic

# Chapter 4

## Concept Model

### 4.1 PrimaryTypes-Classes

#### 4.1.1 Local view 01

Figure 4.1 shows the local view on all the primary types class types.

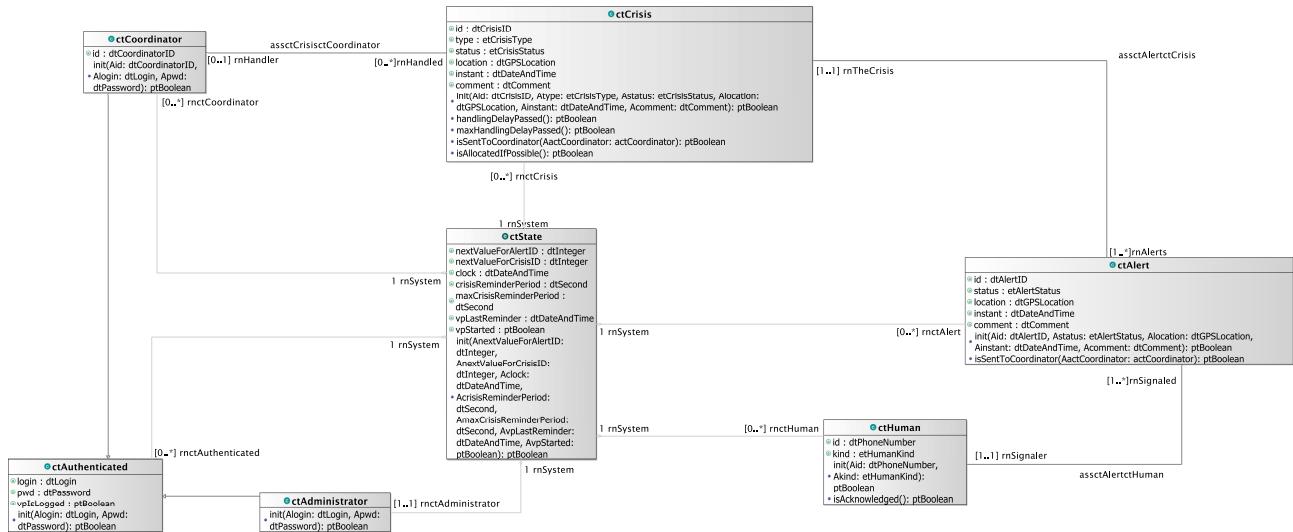


Figure 4.1: Concept Model - PrimaryTypes-Classes local view 01. Local view of all the primary types class types .

#### 4.1.2 Local view 02

Figure 4.2 shows the local view of the **ctState** primary type class type.

#### 4.1.3 Local view 03

Figure 4.3 shows the local view of the **ctAlert** primary type class type.

<b>ctState</b>	
@	nextValueForAlertID : dtInteger
@	nextValueForCrisisID : dtInteger
@	clock : dtDateAndTime
@	crisisReminderPeriod : dtSecond
@	maxCrisisReminderPeriod : dtSecond
@	vpLastReminder : dtDateAndTime
@	vpStarted : ptBoolean
	init(AnextValueForAlertID: dtInteger, AnextValueForCrisisID: dtInteger, Aclock: • dtDateAndTime, AcrisisReminderPeriod: dtSecond, AmaxCrisisReminderPeriod: dtSecond, AvpLastReminder: dtDateAndTime, AvpStarted: ptBoolean): ptBoolean

Figure 4.2: Concept Model - PrimaryTypes-Classes local view 02. local view of the ctState primary type.

<b>ctAlert</b>	
@	id : dtAlertID
@	status : etAlertStatus
@	location : dtGPSLocation
@	instant : dtDateAndTime
@	comment : dtComment
	init(Aid: dtAlertID, Astatus: etAlertStatus, Alocation: dtGPSLocation, Ainstant: dtDateAndTime, • Acomment: dtComment): ptBoolean
	• isSentToCoordinator(AactCoordinator: actCoordinator): ptBoolean

Figure 4.3: Concept Model - PrimaryTypes-Classes local view 03. local view of the ctAlert primary type.

#### 4.1.4 Local view 04

Figure 4.4 shows the local view of the ctCrisis primary type class type.

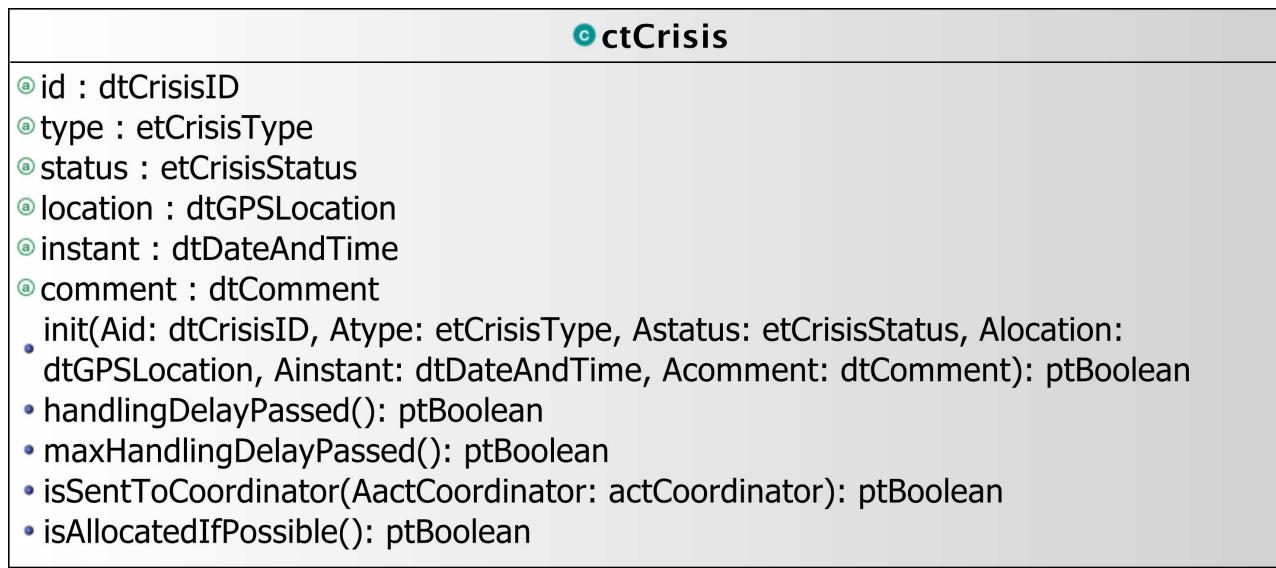


Figure 4.4: Concept Model - PrimaryTypes-Classes local view 04. local view of the ctCrisis primary type.

#### 4.1.5 Global view 01

Figure 4.5 shows the global view on primary types class types showing the association(s) types with the actor classes of the environment model.

## 4.2 PrimaryTypes-Datatypes

### 4.2.1 Local view 06

Figure 4.6

### 4.2.2 Global view 01

Figure 4.7 shows a global view on the *iCrash* primary types datatype types.

## 4.3 SecondaryTypes-Datatypes

### 4.3.1 Local view 01

Figure 4.8 shows the local view of the secondary types datatype types.

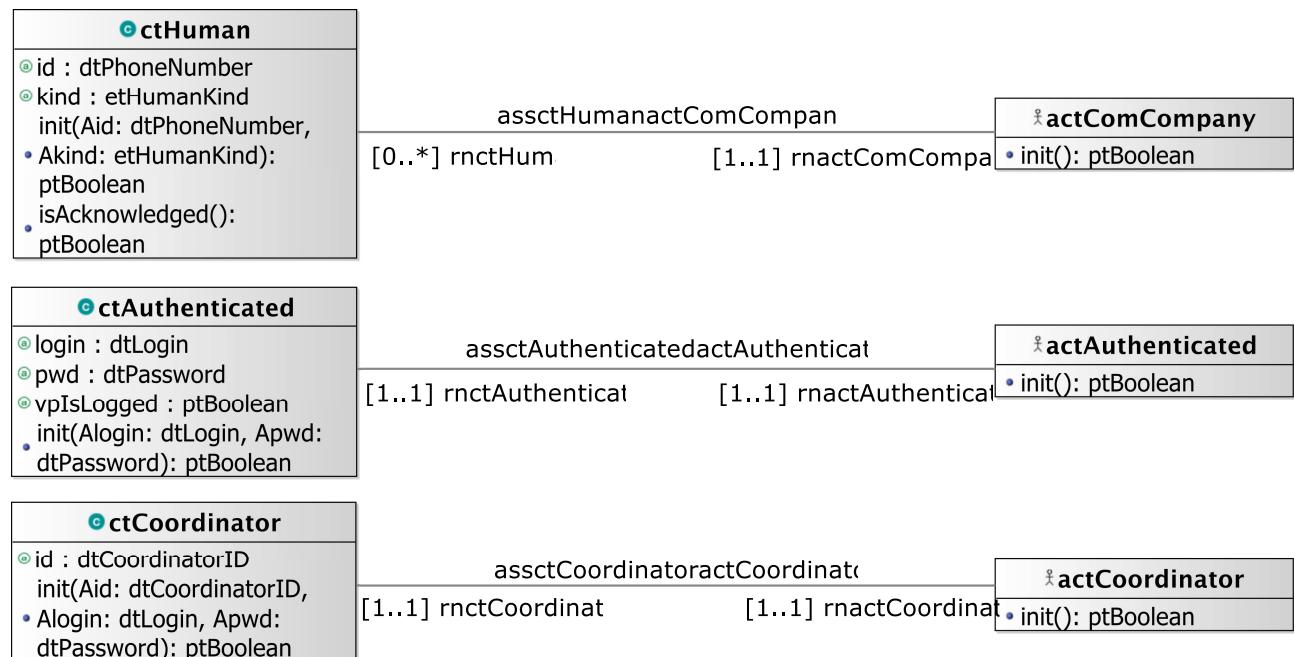


Figure 4.5: Concept Model - PrimaryTypes-Classes global view 01. Primary types class types global view - cm-pt-ct-gv-01 .

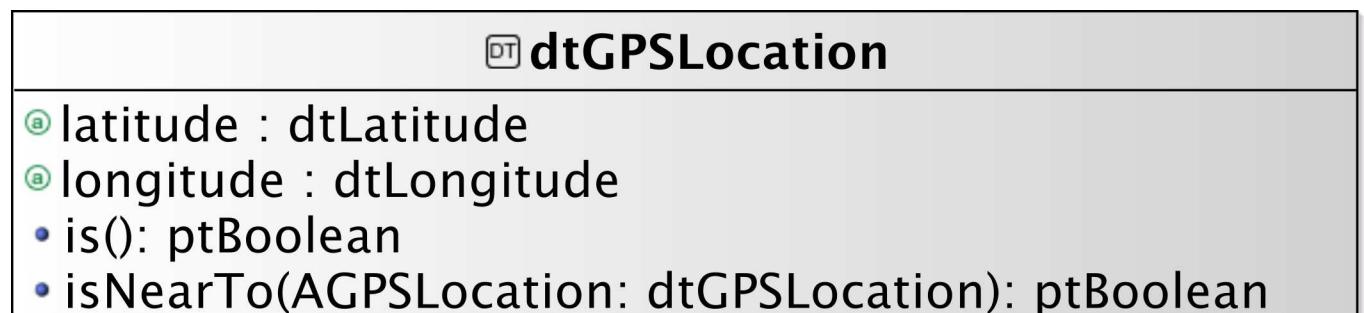


Figure 4.6: Concept Model - PrimaryTypes-Datatypes local view 06. .

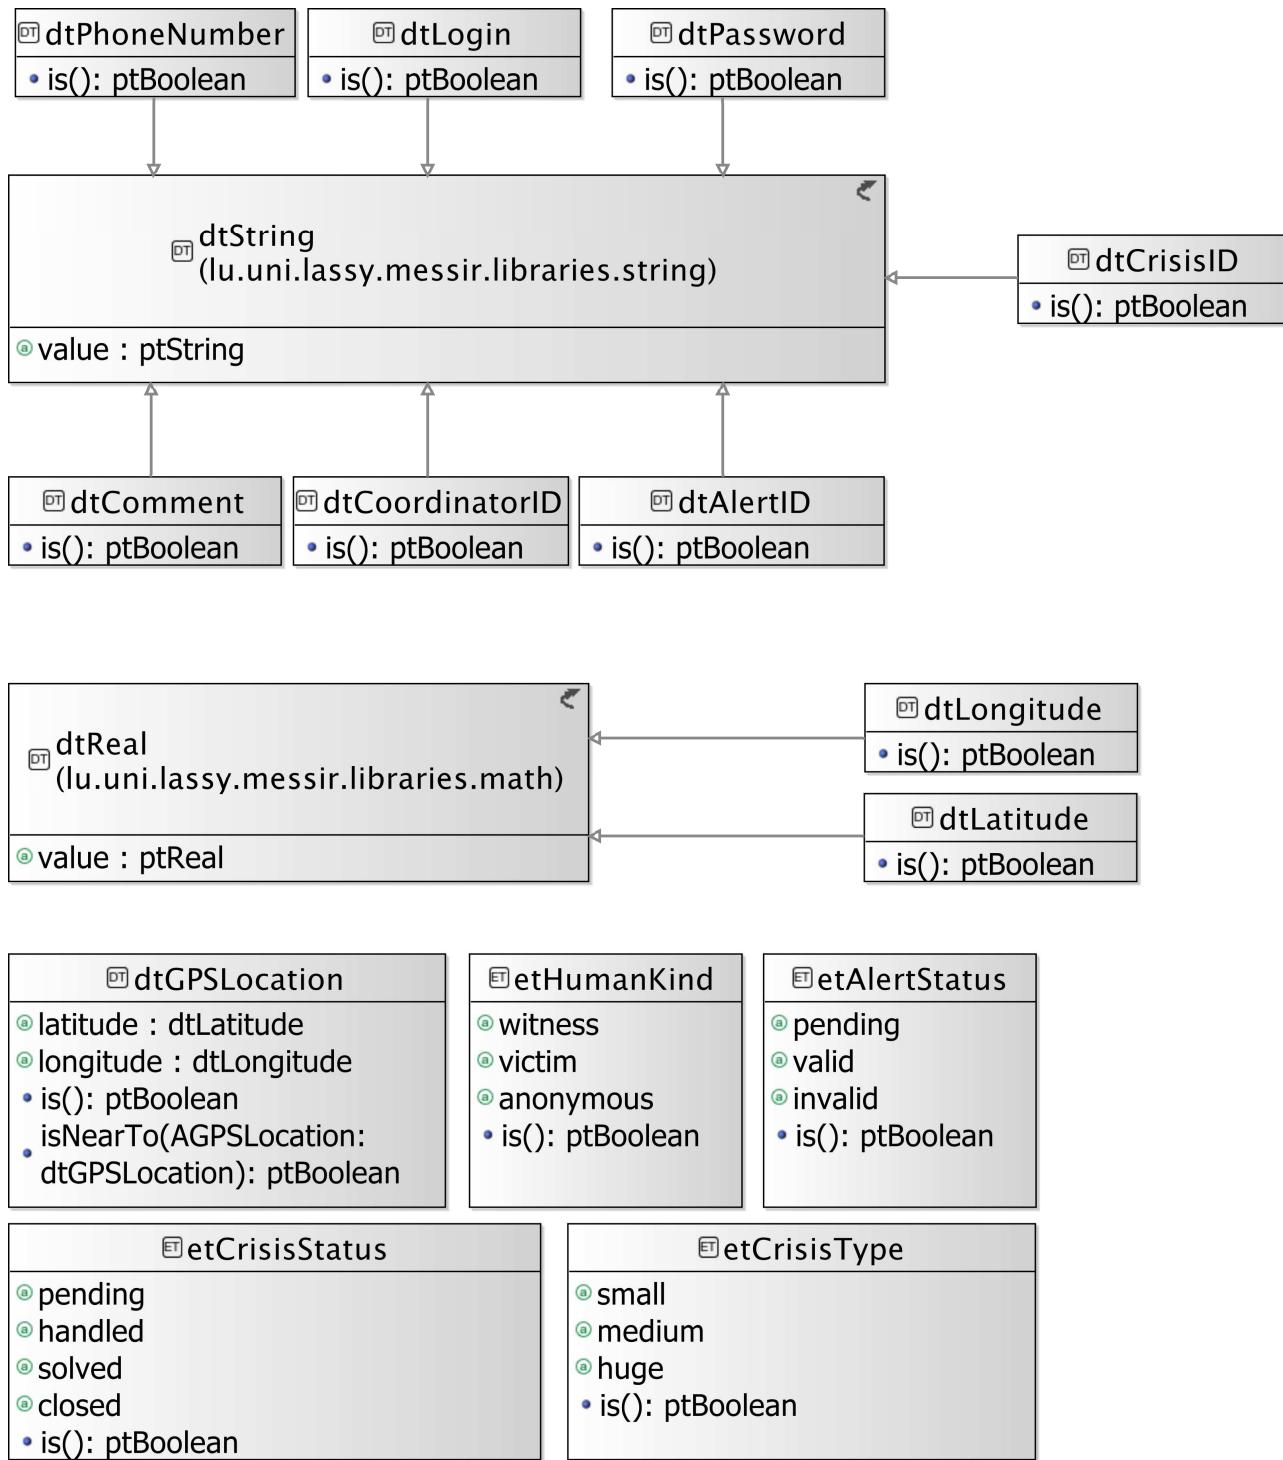


Figure 4.7: Concept Model - PrimaryTypes-Datatypes global view 01. global view of primary types datatype types - cm-pt-dt-gv-01 .

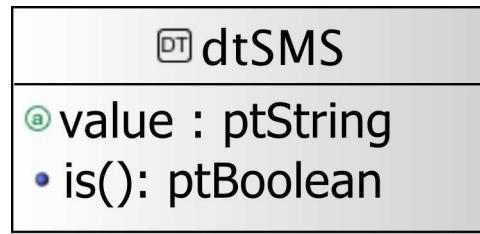


Figure 4.8: Concept Model - SecondaryTypes-Datatypes local view 01. Local view of the secondary types datatype types.

## 4.4 Concept Model Types Descriptions

This section provides the textual descriptions of all the types defined in the concept model and that can be part of the graphical views provided.

### 4.4.1 Primary types - Class types descriptions

The table below is providing comments on the graphical views given for the class types of the primary types. Type logical operations are precisely specified in the operation model.

CLASSES	
<i>ctAdministrator</i>	
used to characterize internally the entity that is responsible of administrating the <i>iCrash</i> system.	
<i>extends</i>	icrash.concepts.primarytypes.classes.ctAuthenticated
operation	<b>init (Alogin:dtLogin, Apwd:dtPassword) :ptBoolean</b> used to initialize the current object as a new instance of the ctAdministrator type.
<i>ctAlert</i>	
Used to model crisis alerts sent by any human having communication capability using communication companies belonging to the system's environment	
attribute	<b>comment: dtComment</b> a textual description providing unstructured information on the alert.
attribute	<b>id: dtAlertID</b> the alert unique identification information.
attribute	<b>instant: dtDateAndTime</b> the date and time at which the alert notification has been sent.
attribute	<b>location: dtGPSLocation</b> the position of the alert provided by the space-based satellite navigation system used by the human using the communication company to inform the <i>iCrash</i> system of a crisis.
attribute	<b>status: etAlertStatus</b> the alert validation status
operation	<b>init (Aid:dtAlertID, Astatus:etAlertStatus, Alocation:dtGPSLocation, Ainstant:dtDateAndTime, Acomment:dtComment) :ptBoolean</b> used to initialize the current object as a new instance of the ctAlert type.
operation	<b>isSentToCoordinator (AactCoordinator:actCoordinator) :ptBoolean</b> used to provide a given coordinator with current alert information.

*continues in next page ...*

*... Classes table continuation*

<b><i>ctAuthenticated</i></b>	
used to model system's representation about actors that need to authenticate to access some specific functionalities.	
attribute	<b>login: dtLogin</b> an identifier for authentication.
attribute	<b>pwd: dtPassword</b> a key for authentication.
attribute	<b>vpIsLogged: ptBoolean</b> used to determine the access status.
operation	<b>init (Alogin:dtLogin, Apwd:dtPassword) :ptBoolean</b> used to initialize the current object as a new instance of the ctAuthenticated type.
<b><i>ctCoordinator</i></b>	
used to model system's representation about the actors that have the responsibility to handle alerts and crisis.	
extends	icrash.concepts.primarytypes.classes.ctAuthenticated
attribute	<b>id: dtCoordinatorID</b> a unique identification information.
operation	<b>init (Aid:dtCoordinatorID, Alogin:dtLogin, Apwd:dtPassword) :ptBoolean</b> used to initialize the current object as a new instance of the ctCoordinator type.
<b><i>ctCrisis</i></b>	
Used to model crisis that are inferred from the reception of at least one alert message. Crisis are entities that are handled by the <i>iCrash</i> system.	
attribute	<b>comment: dtComment</b> a textual description providing unstructured information on the crisis handling.
attribute	<b>id: dtCrisisID</b> the crisis unique identification information.
attribute	<b>instant: dtDateAndTime</b> the date and time at which the first related alert notification has been sent.
attribute	<b>location: dtGPSLocation</b> the position of the crisis equal to the one of the first alert received and associated to the crisis.
attribute	<b>status: etCrisisStatus</b> the crisis handling status.
attribute	<b>type: etCrisisType</b> an indication of the gravity of the crisis.
operation	<b>handlingDelayPassed() :ptBoolean</b> used to determine if the crisis stood too long in a pending status since last reminder.
operation	<b>init (Aid:dtCrisisID, Atype:etCrisisType, Astatus:etCrisisStatus, Alocation:dtGPSLocation, Ainstant:dtDateAndTime, Acomment:dtComment) :ptBoolean</b> used to initialize the current object as a new instance of the ctAlert type.
operation	<b>isAllocatedIfPossible() :ptBoolean</b> used to allocate a crisis to a coordinator if any or to alert the administrator of crisis waiting to be handled.
operation	<b>isSentToCoordinator (AactCoordinator:actCoordinator) :ptBoolean</b> used to provide a given coordinator with current crisis information.
operation	<b>maxHandlingDelayPassed() :ptBoolean</b>

*continues in next page ...*

**... Classes table continuation**

		used to determine if the crisis stood too longly in a pending status since its creation.
<i>ctgetStatistic</i>		
operation	<b>getstatisticCrises (statisticCrises:dtgetStatisticCrisisInTime) :ptBoolean</b>	
operation	<b>getstatisticTypes (statisticTypes:dtgetStatisticTypeCrisis) :ptBoolean</b>	
operation	<b>getstatisticUser (statisticUser:dtgetStatisticUserActivity) :ptBoolean</b>	
operation	<b>init (Alogin:dtLogin, Apwd:dtPassword) :ptBoolean</b>	
operation	<b>sendStatistic () :ptBoolean</b>	
<i>ctHuman</i>		
used to model system's representation about the indirect actors that has alerted of potential crisis.		
attribute	<b>id: dtPhoneNumber</b>	the number of the communication device used to send an alert to <i>iCrash</i> system.
attribute	<b>kind: etHumanKind</b>	role with respect to the alert notified.
operation	<b>init (Aid:dtPhoneNumber, Akind:etHumanKind) :ptBoolean</b>	
operation	<b>isAcknowledged () :ptBoolean</b>	init: used to initialize the current object as a new instance of the ctHuman type.
<i>ctState</i>		
used to model the system. Each system specified using <b>Messip</b> must include a ctState class for which there is only one instance at any state of the abstract machine after creation.		
attribute	<b>clock: dtDateAndTime</b>	used to represent the system local time.
attribute	<b>crisisReminderPeriod: dtSecond</b>	used to define the delay between two reminders after which a reminder must be sent to the administrator and to the known coordinators to encourage them to handle the crisis.
attribute	<b>maxCrisisReminderPeriod: dtSecond</b>	used to define the maximum delay after which the crisis is randomly allocated to a coordinator if any or an alert message is sent to the administrator in order to encourage him to add coordinators.
attribute	<b>nextValueForAlertID: dtInteger</b>	nextValueForAlertID: dtInteger: used to associate each alert declared with a unique identification value.
attribute	<b>nextValueForCrisisID: dtInteger</b>	used to associate each crisis declared with a unique identification value.
attribute	<b>vpLastReminder: dtDateAndTime</b>	date and time of the last reminder.
attribute	<b>vpStarted: ptBoolean</b>	used to avoid reacting to an actor message if the system is not started (i.e. oeCreateSystemAndEnvironment not executed).

*continues in next page ...*

**... Classes table continuation**

operation	<b>init (AnextValueForAlertID:dtInteger, AnextValueForCrisisID:dtInteger, Aclock:dtDateAndTime, AcrisisReminderPeriod:dtSecond, AmaxCrisisReminderPeriod:dtSecond, AvpLastReminder:dtDateAndTime, AvpStarted:ptBoolean) :ptBoolean</b>
	used to initialize the current object as a new instance of the ctState type.

**4.4.2 Primary types - Datatypes types descriptions**

The table below is providing comments on the graphical views given for the datatype types of the primary types.

<b>DATATYPES</b>	
<b>dtAlertID</b>	
A string used to identify alerts.	
<i>extends</i>	dtString
operation	<b>is () :ptBoolean</b>
	used to determine which strings are considered as valid alert identifiers.
<b>dtCaptcha</b>	
Contains the actual representation of an image based captcha test	
attribute	<b>id: ptInteger</b>
	The internal id of this captcha test. This is used for the actCaptchaGenerator to identify the captcha test in case of a response.
attribute	<b>question: ptString</b>
	The human readable question related to this captcha test, needed by a human to be able to solve the captcha test
<b>dtCaptchaImage</b>	
The actual representation of an image related to a captcha test. The inheritance from dtString allows to store the binary data of the image as bytes in string format.	
<i>extends</i>	dtString
attribute	<b>height: ptInteger</b>
	Represents the height of the image in pixels
attribute	<b>width: ptInteger</b>
	Represents the width of the image in pixels
<b>dtCaptchaResponse</b>	
Contains the users response to a given captcha test	
attribute	<b>id: ptInteger</b>
	The internal id which qualifies the related captcha test
attribute	<b>response: ptString</b>
	The response data given by the user
<b>dtComment</b>	
a datatype made of a string value used to receive,store and send textual information about crisis and alerts.	
<i>extends</i>	dtString
operation	<b>is () :ptBoolean</b>
	used to determine which strings are considered as valid comments.
<b>dtCoordinatorID</b>	
A string used to identify coordinators.	
<i>extends</i>	dtString

***continues in next page ...***

**... Datatypes table continuation**

operation	<b>is () :ptBoolean</b>	used to determine which strings are considered as valid coordinators identifiers.
<b>dtCrisisID</b>		
	A string used to identify crisis.	
extends	dtString	
operation	<b>is () :ptBoolean</b>	used to determine which strings are considered as valid crisis identifiers.
<b>dtgetStatisticCrisisInTime</b>		
	Statistic representing a number of crises compared with a specific timespan	
attribute	<b>number: ptInteger</b>	The amount of crises
attribute	<b>time: dtTime</b>	The related timestamp
<b>dtgetStatisticTypeCrisis</b>		
	Show what the attribute for the static the average time of the different crises	
attribute	<b>time: dtTime</b>	The related timestamp representing the date
attribute	<b>typeC: ptString</b>	The type of the crisis
<b>dtgetStatisticUserActivity</b>		
	Represents a statistic of a number of users in relation to a specific timespan	
attribute	<b>number: ptInteger</b>	The amount of involved users
attribute	<b>time: dtTime</b>	The related timestamp
<b>dtGPSLocation</b>		
	used to define coordinates of geographical positions on earth. It is defined a couple made of a latitude and a longitude.	
attribute	<b>latitude: dtLatitude</b>	for the latitude part of the coordinate.
attribute	<b>longitude: dtLongitude</b>	for the longitude part of the coordinate.
operation	<b>is () :ptBoolean</b>	used to determine which couples are considered as valid dtGPSLocation values.
operation	<b>isNearTo (AGPSLocation:dtGPSLocation) :ptBoolean</b>	used to determine if locations are considered enough close to be treated as equivalent in the application domain context.
<b>dtLatitude</b>		
	used to define a latitude value of a geographical positions on earth.	
extends	dtReal	
operation	<b>is () :ptBoolean</b>	used to determine which strings are considered as valid dtLatitude.
<b>dtLogin</b>		
	a login string used to authentify an <i>iCrash</i> user	
extends	dtString	
operation	<b>is () :ptBoolean</b>	used to determine which strings are considered as valid dtLogin.

*continues in next page ...*

***... Datatypes table continuation***

<b><i>dtLongitude</i></b>	used to define a longitude value of a geographical positions on earth.
<i>extends</i>	dtReal
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which strings are considered as valid dtLongitude.
<b><i>dtPassword</i></b>	a password string used to authentify an <i>iCrash</i> user
<i>extends</i>	dtString
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which strings are considered as valid dtPassword.
<b><i>dtPhoneNumber</i></b>	a string used to store the phone number from the human declaring the crisis or the alert.
<i>extends</i>	dtString
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which strings are considered as valid dtPhoneNumber.

<b>ENUMERATIONS</b>	
<b><i>etAlertStatus</i></b>	this type is used to indicate the different validation status of an alert.
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which litteral belongs to the enumeration.
<b><i>etCrisisStatus</i></b>	this type is used to indicate the different handling status of a crisis.
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which litteral belongs to the enumeration.
<b><i>etCrisisType</i></b>	this type is used to indicate the different types of a crisis.
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which litteral belongs to the enumeration.
<b><i>etHumanKind</i></b>	this type is used to indicate the kind of human that informs about a car crash crisis.
<i>operation</i>	<b>is () :ptBoolean</b> used to determine which litteral belongs to the enumeration.

**4.4.3 Primary types - Association types descriptions**

The table below is providing comments on the association types of the primary types.

<b>UNDIRECTED ASSOCIATIONS</b>	
<b><i>assctAlertctCrisis</i></b>	a crisis is related to one or more alerts as the alerts judged to concern all the same crisis due to their location. An alert alerts exactly one crisis.
<b><i>assctAlertctHuman</i></b>	alerts are notified by human through the communication company. We need to keep an internal representation of those human to allow for communication of alert handling.
<b><i>assctAuthenticatedactAuthenticated</i></b>	

***continues in next page ...***

***... Undirected associations table continuation***

mainly used to determine if the login request of an authenticated actor can be granted based on the given credentials and the registered ones.
--

<b><i>assctCoordinatoractCoordinator</i></b>
--

frequent messages must be sent to coordinator especially in relation to crisis they handle.
---

<b><i>assctCrisisctCoordinator</i></b>
--

at any point in time we need to know if a coordinator is handling existing crisis or not.
---

<b><i>assctHumanactComCompany</i></b>
---------------------------------------

in order to communicate with humans who informed about potential crisis, we need to record the communication company to use to send them messages.
--

**4.4.4 Primary types - Aggregation types descriptions**

There are no aggregation types for the primary types.

**4.4.4.1 Primary types - Composition types descriptions**

There are no composition types for the primary types.

**4.4.5 Secondary types - Class types descriptions**

There are no elements in this category in the system analysed.

**4.4.6 Secondary types - Datatypes types descriptions**

The table below is providing comments on the graphical views given for the datatype types of the secondary types.

<b>DATATYPES</b>	
<b><i>dtSMS</i></b>	
attribute	<b>value: ptString</b> the textual information.
operation	<b>is() :ptBoolean</b> used to determine which strings are considered as valid comments.

**4.4.7 Secondary types - Association types descriptions**

There are no association types for the secondary types.

**4.4.8 Secondary types - Aggregation types descriptions**

There are no aggregation types for the secondary types.

**4.4.9 Secondary types - Composition types descriptions**

There are no composition types for the secondary types.

# Chapter 5

# Operation Model

This section contains the operation schemes of each operation defined in either an actor, its output interface, in a primary or secondary type (class, datatype or enumeration types). The **Messip** OCL code listing is joined to the comment table.

## 5.1 Environment - Out Interface Operation Scheme for actActivator

### 5.1.1 Operation Model for oeSetClock

The oeSetClock operation has the following properties:

OPERATION	
<i>oeSetClock[proactive]</i>	
An active message used to statically set the date and time information in the system's state.	
<i>Parameters</i>	
1	<b>AcurrentClock:</b> dtDateAndTime the date and time to be considered as the actual one.
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is supposed to be created and initialized and the provided date and time value is greater than the one known by the system.
<i>Pre-Condition (functional)</i>	
PreF 1	none
<i>Post-Condition (functional)</i>	
PostF 1	the ctState instance post-state is updated to have its clock attribute equal to the given date and time.
<i>Post-Condition (protocol)</i>	
PostP 1	none

The listing 5.1 provides the **Messip** (MCL-oriented) specification of the operation.

```
1
2 /* Pre Protocol:*/
3 preP{let TheSystem: ctState in
```

```

4  let AvpStarted: ptBoolean in
5
6  /* PreP01 */
7  self.rnActor.bnSystem = TheSystem
8  and self.rnActor.bnSystem.vpStarted = AvpStarted
9  and AvpStarted = true
10 and TheSystem.clock.lt(AcurrentClock)
11
12 /* Pre Functional:*/
13 preF{true}
14
15 /* Post Functional:*/
16 postF{let TheSystem: ctState in
17   self.rnActor.bnSystem = TheSystem
18
19 /* PostF01 */
20 and TheSystem@post.clock = AcurrentClock}
21
22 /* Post Protocol:*/
23 postP{ true}

```

Listing 5.1: **Messir** (MCL-oriented) specification of the operation *oeSetClock*.

### 5.1.2 Operation Model for *oeSollicitateCrisisHandling*

The *oeSollicitateCrisisHandling* operation has the following properties:

OPERATION	
<i>oeSollicitateCrisisHandling[proactive]</i>	
A proactive message (message of a pro-active actor with no parameter triggered automatically if the pre protocol condition is true) used to avoid crisis to stay too long in an not handled status.	
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	there exist some crisis that are in pending status and for which the duration between the current ctState clock information and the last reminder is greater than the crisis reminder period duration.
<i>Pre-Condition (functional)</i>	
PreF 1	none
<i>Post-Condition (functional)</i>	
PostF 1	if there exist coordinators and crisis who stood in a not handled status more than the maximum allowed time then those crisis are randomly allocated to the existing coordinators.
PostF 2	for all other crisis who stood too longly in a not handled status but not more than the maximum delay allowed then a reminder message is sent to the administrator and all coordinator actors of the environment to sollicitate handling of those crisis.
<i>Post-Condition (protocol)</i>	
PostP 1	the value of the last reminder known by the system at post state is the system's clock value.

The listing 5.2 provides the **Messir** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol:*/
2

```

```

3 preP{let TheSystem: ctState in
4   let AvpStarted: ptBoolean in
5   let ColctCrisisToHandle:
6     Bag(ctCrisis) in
7
8   self.rnActor.rnSystem = TheSystem
9
10 /* PreP01 */
11 and TheSystem.vpStarted
12
13 /* PreP02 */
14 and TheSystem.rnctCrisis->select(handlingDelayPassed())
15   = ColctCrisisToHandle
16 and ColctCrisisToHandle->size() .geq(1)
17
18 /* Pre Functional:*/
19 preF{true}
20
21 /* Post Functional:*/
22 postF{let TheSystem: ctState in
23   let AMessageForCrisisHandlers: dtComment in
24   let ColctCrisisToAllocateIfPossible:Bag(ctCrisis) in
25
26   self.rnActor.rnSystem = TheSystem
27 /* PostF01 */
28 and TheSystem.rnctCrisis->select(maxHandlingDelayPassed())
29   = ColctCrisisToAllocateIfPossible
30 and ColctCrisisToAllocateIfPossible->forAll(isAllocatedIfPossible())
31
32 /* PostF02 */
33 and TheSystem.rnctCrisis->select(handlingDelayPassed())
34   = ColctCrisisToHandle
35
36 and ColctCrisisToHandle->msrColSubtract(ColctCrisisToAllocateIfPossible)
37   = ColctCrisisToRemind
38
39 and if (ColctCrisisToRemind->size() .geq(1))
40   then (AMessageForCrisisHandlers.value
41     ='There are alerts pending since more than the defined delay. Please REACT !'
42   and TheSystem.rnactAdministrator.
43     rnInterfaceIN^ieMessage(AMessageForCrisisHandlers)
44   and TheSystem.rnactCoordinator
45     ->forAll(rnInterfaceIN^ieMessage(AMessageForCrisisHandlers))
46   )
47 else true
48 endif}
49
50 /* Post Protocol:*/
51 postP{ let TheSystem: ctState in
52   let TheClock: dtDateAndTime in
53
54   self.rnActor.rnSystem = TheSystem
55   and TheSystem.clock = TheClock
56   and TheSystem@post.vpLastReminder = TheClock}

```

Listing 5.2: **Messir** (MCL-oriented) specification of the operation *oeSollicitateCrisisHandling*.

Figure 5.1 shows concept model elements in the scope of the *oeSollicitateCrisisHandling* operation

## 5.2 Environment - Out Interface Operation Scheme for actAdministrator

### 5.2.1 Operation Model for *oeAddCoordinator*

The *oeAddCoordinator* operation has the following properties:

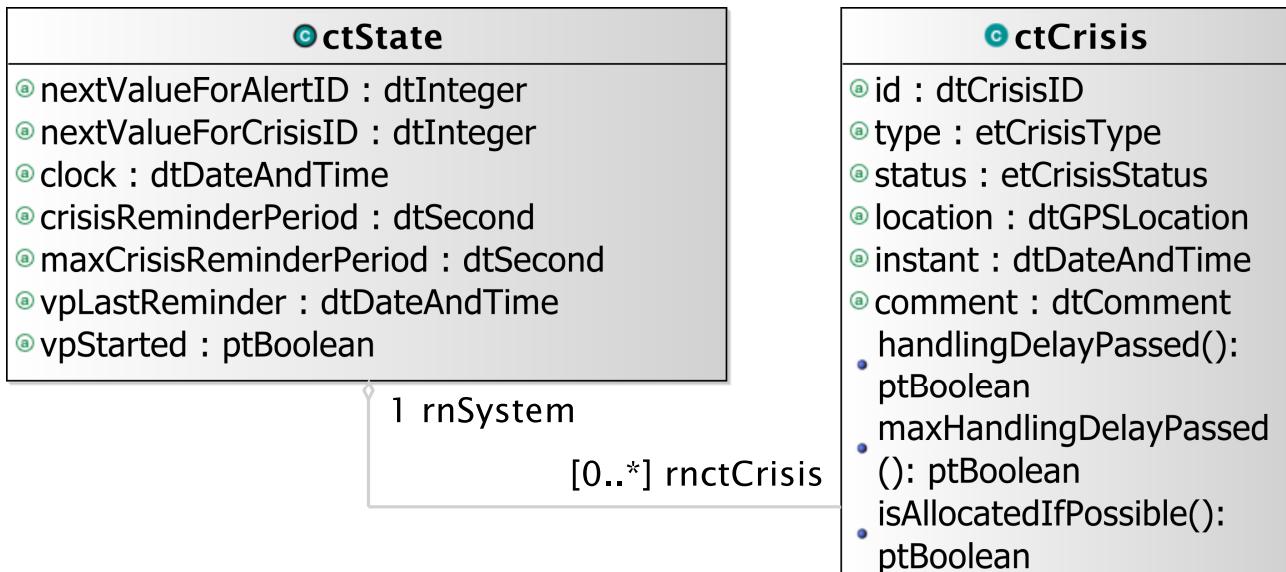


Figure 5.1: oeSollicitateCrisisHandling operation scope

OPERATION	
<i>oeAddCoordinator</i>	
sent to add a new coordinator in the system's post state and environment's post state.	
Parameters	
1	<b>AdtCoordinatorID:</b> dtCoordinatorID used to initialize the id field
2	<b>AdtLogin:</b> dtLogin used to initialize the login field
3	<b>AdtPassword:</b> dtPassword used to initialize the password field
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
Pre-Condition (functional)	
PreF 1	it is supposed that there cannot exist a ctCoordinator instance with the same id attribute as the one the administrator wants to delete.
Post-Condition (functional)	
PostF 1	the environment has a new instance of coordinator actor allowing for input/output message communication with the system.
PostF 2	the system's state has a new instance of ctCoordinator initialized with the given values.
PostF 3	the new actor instance and ctCoordinator instance are related.
PostF 4	the new actor instance and ctCoordinator instance are related according to the authenticated association.
PostF 5	the administrator actor is informed about the satisfaction of its request.

continues in next page ...

**...Operation table continuation**

<i>Post-Condition (protocol)</i>	
PostP 1	none

The listing 5.3 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol*/
2  preP{let TheSystem: ctState in
3    let TheActor:actAdministrator in
4
5
6    self.rnActor.rnSystem = TheSystem
7    and self.rnActor = TheActor
8
9  /* PreP01 */
10  and TheSystem.vpStarted = true
11  /* PreP02 */
12  and TheActor.rnctAuthenticated.vpIsLogged = true}
13
14 /* Pre Functional*/
15 preF{let TheSystem: ctState in
16  let TheActor:actAdministrator in
17  let ColctCoordinators:Bag(ctCoordinator) in
18
19  self.rnActor.rnSystem = TheSystem
20  and self.rnActor = TheActor
21  /* PreF01 */
22  and TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
23    = ColctCoordinators
24  and ColctCoordinators->isEmpty() = true}
25
26 /* Post Functional*/
27 postF{let TheSystem: ctState in
28  let TheactCoordinator:actCoordinator in
29  let ThectCoordinator:ctCoordinator in
30  self.rnActor.rnSystem = TheSystem
31  and self.rnActor = TheActor
32  /* PostF01 */
33  TheactCoordinator.init()
34  /* PostF02 */
35  and ThectCoordinator.init(AdtCoordinatorID,AdtLogin,AdtPassword)
36
37 /* PostF03 */
38  and TheactCoordinator@post.rnctCoordinator = ThectCoordinator
39
40 /* PostF04 */
41  and ThectCoordinator@post.rnactAuthenticated = TheactCoordinator
42
43 /* PostF05 */
44  and TheActor.rnInterfaceIN^ieCoordinatorAdded()}
45
46 /* Post Protocol*/
47 postP{ true}

```

Listing 5.3: **Messip** (MCL-oriented) specification of the operation *oeAddCoordinator*.

### 5.2.2 Operation Model for oeDeleteCoordinator

The *oeDeleteCoordinator* operation has the following properties:

<b>OPERATION</b>	
<i>oeDeleteCoordinator</i>	
sent to delete an existing coordinator in the system's post state and environment's post state.	
<i>Parameters</i>	
1	<b>AdtCoordinatorID: dtCoordinatorID</b> used for ctCoordinator instance retrieval
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctAdministrator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	it is supposed that there exist one ctCoordinator instance with the same id attribute than the one the administrator wants to create.
<i>Post-Condition (functional)</i>	
PostF 1	the ctCoordinator class instance having the required id do not belong anymore to the post state as well as is related actCoordinator actor instance.
PostF 2	the administrator actor is informed about the satisfaction of its request.
<i>Post-Condition (protocol)</i>	
PostP 1	none

The listing 5.4 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol*/
2  preP{let TheSystem: ctState in
3    let TheActor:actAdministrator in
4
5
6    self.rnActor.rnSystem = TheSystem
7    and self.rnActor = TheActor
8
9    /* PreP01 */
10   and TheSystem.vpStarted = true
11   /* PreP02 */
12   and TheActor.rnctAuthenticated.vpIsLogged = true}
13
14 /* Pre Functional*/
15 preF{let TheSystem: ctState in
16   let TheActor:actAdministrator in
17
18   self.rnActor.rnSystem = TheSystem
19   and self.rnActor = TheActor
20   /* PreF01 */
21   TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
22   = ColctCoordinators
23   and ColctCoordinators->size().eq(1)}
24
25 /* Post Functional*/
26 postF{let TheSystem: ctState in
27   let TheActor:actAdministrator in
28   let ThectCoordinator:ctCoordinator in
29   self.rnActor.rnSystem = TheSystem
30   and self.rnActor = TheActor
31   /* PostF01 */
```

```

32 TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
33 = ThectCoordinator
34 and ThectCoordinator.rnactCoordinator->forAll(msrIsKilled)
35 and ThectCoordinator.msrIsKilled
36
37 /* PostF02 */
38 and TheActor.rnInterfaceIN^ieCoordinatorDeleted()
39
40 /* Post Protocol:*/
41 /* PostP01 */
42 and true}
43
44 /* Post Protocol:*/
45 postP{ true}

```

Listing 5.4: **Messir** (MCL-oriented) specification of the operation *oeDeleteCoordinator*.

### 5.2.3 Operation Model for *oegetstatisticCrises*

The *oegetstatisticCrises* operation has the following properties:

OPERATION
<i>oegetstatisticCrises</i>
This operation will send the statistic for the sending number of crises. This mean that it will show the sending crises with the time
<b>Parameters</b>
1 statisticCrises: dtgetStatisticCrisisInTime
<b>Return type</b>
ptBoolean
<b>Pre-Condition (protocol)</b>
PreP 1 The system is started
PreP 2 The function ugAdministarteTheSystem must be executed first. So the Administrator must bee login.
PreP 3 The Database must be open.
<b>Pre-Condition (functional)</b>
PreF 1 none
<b>Post-Condition (functional)</b>
PostF 1 At first search all the information for this statistic. So the database must bee open to get the information
PostF 2 The information from the database will be calculate to the different times.
PostF 3 After this the operation getstatisticCrises() give the statistic
PostF 4 And at least the statistic will bee show it into the interface.
<b>Post-Condition (protocol)</b>
PostP 1 none

#### Example:

1 none

Listing 5.5: Example for *oegetstatisticCrises* operation

The listing 5.6 provides the **Messir** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol:*/
2  preP{let TheSystem : ctState in
3    let TheActor : actAdministrator in
4    let TheSystemToGetTheStatistic : actSystem in
5    let TheSytemDatabase : actSystem in
6
7
8    self. rnActor . rnSystem = TheSystem
9    and self. rnActor = TheActor
10
11   /* PreP01 The system must run(is execute)*/
12   and TheSystem.vpStarted = true
13   /* PreP02 Must login ass Administrator*/
14   and TheActor.rnctAuthenticated . vpIsLogged = true
15   /* PreP02 The Database(SQL) must open because without this the information for the statistic can't
      be called. */
16   and TheSytemDatabase.openDatabase() = true}
17
18  /* Pre Functional:*/
19  preF{true}
20
21  /* Post Functional:*/
22  postF{let TheSystem: ctState in
23    let TheActor:actAdministrator in
24    let TheSystemToGetTheStatistic : actSystem in
25    let TheSytemDatabase : actSystem in
26
27    self.rnActor.rnSystem = TheSystem
28    and self.rnActor = TheActor
29
30    /*PostF01 At first search all the information for this statistic*/
31    and TheSytemDatabase.searchInfromation(AdtStatistic)
32    /*PostF02 This calculate the information*/
33    and TheSystemToGetTheStatistic.calculcTheStatistic(AdtStatisticCrises)
34    /*PostF03 get the Statistic*/
35    and TheSystemToGetTheStatistic.getstatisticCrises()
36    /*PostF04 show the statistic in the Interface.*/
37    and TheActor.rnInterfaceIN^oegetstatisticCrises(AdtStatisticCrises)}
38
39  /* Post Protocol:*/
40  postP{ true}

```

Listing 5.6: **Messip** (MCL-oriented) specification of the operation *oegetstatisticCrises*.

#### 5.2.4 Operation Model for *oegetstatisticTypesOfCrises*

The *oegetstatisticTypesOfCrises* operation has the following properties:

OPERATION
<i>oegetstatisticTypesOfCrises</i>
This operation will send the statistic for the average time for the three different types of crises(Small, medium and high).
Parameters
1 <b>statisticTypes: dtgetStatisticTypeCrisis</b>
Return type
ptBoolean
Pre-Condition (protocol)
PreP 1    The system is started PreP 2    The function ugAdministarteTheSystem must be executed first. So the Administrator must bee login.

*continues in next page ...*

**... Operation table continuation**

PreP 3	The Database must be open.
<b>Pre-Condition (functional)</b>	
PreF 1	none
<b>Post-Condition (functional)</b>	
PostF 1	At first search all the information for this statistic. So the database must bee open to get the information
PostF 2	The information from the database will be calculate to the different times.
PostF 3	After this the operation <code>getstatisticTypesOfCrises()</code> give the statistic
PostF 4	And at least the statistic will bee show it into the interface.
<b>Post-Condition (protocol)</b>	
PostP 1	none

**Example:**

1 none

Listing 5.7: Example for `oegetstatisticTypesOfCrises` operation

The listing 5.8 provides the **Messir** (MCL-oriented) specification of the operation.

```

1
2 /* Pre Protocol:*/
3 preP{let TheSystem : ctState in
4   let TheActor : actAdministrator in
5   let TheSystemToGetTheStatistic : actSystem in
6   let TheSystemDatabase : actSystem in
7
8   self. rnActor . rnSystem = TheSystem
9   and self. rnActor = TheActor
10
11 /* PreP01 The system must run(is execute)*/
12 and TheSystem.vpStarted = true
13 /* PreP02 Must login ass Administrator*/
14 and TheActor.rnctAuthenticated . vpIsLogged = true
15 /* PreP02 The Database(SQL) must open because without this the information for the statistic can't
   be called. */
16 and TheSystemDatabase.openDatabase() = true}
17
18 /* Pre Functional:*/
19 preF{true}
20
21 /* Post Functional:*/
22 postF{let TheSystem: ctState in
23   let TheActor:actAdministrator in
24   let TheSystemToGetTheStatistic : actSystem in
25   let TheSystemDatabase : actSystem in
26
27   self.rnActor.rnSystem = TheSystem
28   and self.rnActor = TheActor
29
30   /*PostF01 At first search all the information for this statistic*/
31   and TheSystemDatabase.searchInfromation(AdtStatistic)
32   /*PostF02 This calculate the information*/
33   and TheSystemToGetTheStatistic.calculeTheStatistic(AdtStatisticTypesOfCrises)
34   /*PostF03 get the Statistic*/
35   and TheSystemToGetTheStatistic.getstatisticTypesOfCrises()
36   /*PostF04 show the statistic in the Interface.*/
37   and TheActor.rnInterfaceIN^oegetstatisticTypesOfCrises(AdtStatisticTypesofCrises) }
38
39 /* Post Protocol:*/

```

```
40 postP{ true}
```

Listing 5.8: **Messir** (MCL-oriented) specification of the operation *oegetstatisticTypesOfCrises*.

### 5.2.5 Operation Model for *oegetstatisticUser*

The *oegetstatisticUser* operation has the following properties:

<b>OPERATION</b>	
<b><i>oegetstatisticUser</i></b>	
This operation will send the statistic for the user activity. This mean that it will show the user number with the time	
<b>Parameters</b>	
1	<b>statisticUser: dtgetStatisticUserActivity</b>
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	The system is started
PreP 2	The function ugAdministarteTheSystem must be executed first. So the Administrator must bee login.
PreP 3	The Database must be open.
<b>Pre-Condition (functional)</b>	
PreF 1	none
<b>Post-Condition (functional)</b>	
PostF 1	At first search all the information for this statistic. So the database must bee open to get the information
PostF 2	The information from the database will be calculate to the different times.
PostF 3	After this the operation getstatisticUser() give the statistic
PostF 4	And at least the statistic will bee show it into the interface.
<b>Post-Condition (protocol)</b>	
PostP 1	none

#### Example:

```
1 none
```

Listing 5.9: Example for *oegetstatisticUser* operation

The listing 5.10 provides the **Messir** (MCL-oriented) specification of the operation.

```
1
2 /* Pre Protocol:*/
3 preP{let TheSystem : ctState in
4 let TheActor : actAdministrator in
5 let TheSystemToGetTheStatistic : actSystem in
6 let TheSystemDatabase : actSystem in
7
8 self. rnActor . rnSystem = TheSystem
9 and self. rnActor = TheActor
10
11 /* PreP01 The system must run(is execute)*/
```

```

12 and TheSystem.vpStarted = true
13 /* PreP02 Must login ass Administrator*/
14 and TheActor.rnctAuthenticated . vpIsLogged = true
15 /* PreP02 The Database (SQL) must open because without this the information for the statistic can't
   be called. */
16 and TheSystemDatabase.openDatabase() = true
17
18 /* Pre Functional:*/
19 preF{true}
20
21 /* Post Functional:*/
22 postF{let TheSystem: ctState in
23   let TheActor:actAdministrator in
24   let TheSystemToGetTheStatistic : actSystem in
25   let TheSystemDatabase : actSystem in
26
27   self.rnActor.rnSystem = TheSystem
28   and self.rnActor = TheActor
29
30 /*PostF01 At first search all the information for this statistic*/
31 and TheSystemDatabase.searchInfromation(AdtStatistic)
32 /*PostF02 This calculate the information*/
33 and TheSystemToGetTheStatistic.calculcTheStatistic(AdtStatisticUser)
34 /*PostF03 get the Statistic*/
35 and TheSystemToGetTheStatistic.getstatisticUser()
36 /*PostF04 show the statistic in the Interface.*/
37 and TheActor.rnInterfaceIN^oegetstatisticUser(AdtStatisticUser)}
38
39 /* Post Protocol:*/
40 postP{ true}

```

Listing 5.10: **Mess1P** (MCL-oriented) specification of the operation *oegetstatisticUser*.

## 5.3 Environment - Out Interface Operation Scheme for actAuthenticated

### 5.3.1 Operation Model for oeLogin

The *oeLogin* operation has the following properties:

OPERATION
<i>oeLogin</i> sent to request authorization to request access secured system operations.
<i>Parameters</i>
1 <b>AdtLogin: dtLogin</b> first information used to determine accessibility rights for the actual actor. 2 <b>AdtPassword: dtPassword</b> second information used to determine accessibility rights for the actual actor.
<i>Return type</i>
ptBoolean
<i>Pre-Condition (protocol)</i>
PreP 1    the system is started PreP 2    the actor is not already logged in ! (i.e. the associated ctAuthenticated instance is not considered logged)
<i>Pre-Condition (functional)</i>
PreF 1    none
<i>Post-Condition (functional)</i>

*continues in next page ...*

*... Operation table continuation*

PostF 1	if the login and password provided by the actor correspond to the ones that belong to the ctAuthenticated instance he is related to then a welcome message is sent to the actor (n.b. the logged status is changed as a post-protocol condition); else the actor is notified that he gave incorrect data and all the administrator actors existing in the environment are notified of an intrusion attempt.
<b><i>Post-Condition (protocol)</i></b>	
PostP 1	if the authentication information is correct then the actor is known to be logged in ! (i.e. the associated ctAuthenticated instance with given login and password is considered logged)

The listing 5.11 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol:*/
2  preP{let TheSystem: ctState in
3    let TheActor:actAuthenticated in
4      self.rnActor.rnSystem = TheSystem
5      and self.rnActor = TheActor
6
7
8  /* PreP01 */
9  and TheSystem.vpStarted = true
10 /* PreP02 */
11 and TheActor.rnctAuthenticated.vpIsLogged = false
12
13 /* Pre Functional:*/
14 preF{/* PreF01 */
15 true
16
17 /* Post Functional:*/
18 postF{let TheSystem: ctState in
19   let TheactAuthenticated:actAuthenticated in
20
21   let AptStringMessageForTheactAuthenticated: ptString in
22   let AptStringMessageForTheactAdministrator:ptString in
23
24   self.rnActor.rnSystem = TheSystem
25   and self.rnActor = TheactAuthenticated
26
27   and /* PostF01 */
28   if (TheactAuthenticated.rnctAuthenticated.pwd
29     = AdtPassword
30     and TheactAuthenticated.rnctAuthenticated.login
31     = AdtLogin
32   )
33   then (AptStringMessageForTheactAuthenticated.eq('You are logged ! Welcome ...')
34     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
35   )
36   else (AptStringMessageForTheactAuthenticated
37     .eq('Wrong identification information ! Please try again ...')
38     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
39     and AptStringMessageForTheactAdministrator.eq('Intrusion tentative !')
40     and TheSystem.rnactAdministrator
41       .rnInterfaceIN^ieMessage(AptStringMessageForTheactAdministrator)
42   )
43   endif
44
45 /* Post Protocol:*/
46 postP{ let TheSystem: ctState in
47   let TheactAuthenticated:actAuthenticated in
48
49   self.rnActor.rnSystem = TheSystem
50   and self.rnActor = TheactAuthenticated

```

```

51 /* PostP01 */
52 if (TheactAuthenticated.rnctAuthenticated.pwd = AdtPassword
53   and TheactAuthenticated.rnctAuthenticated.login = AdtLogin
54 )
55 then (TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = true)
56 else true
57 endif}

```

Listing 5.11: **Messip** (MCL-oriented) specification of the operation *oeLogin*.

### 5.3.2 Operation Model for oeLogout

The *oeLogout* operation has the following properties:

OPERATION
<b><i>oeLogout</i></b>
sent to end the secured access to specific system operations.
<b><i>Return type</i></b>
ptBoolean
<b><i>Pre-Condition (protocol)</i></b>
PreP 1 the system is started
PreP 2 the actor is currently logged in ! (i.e. the associated ctAuthenticated instance is considered logged)
<b><i>Pre-Condition (functional)</i></b>
PreF 1
<b><i>Post-Condition (functional)</i></b>
PostF 1 a logout confirmation message is sent to the actor (n.b. the logged status is changed as a post-protocol condition)
<b><i>Post-Condition (protocol)</i></b>
PostP 1 the actor is known to be logged out ! (i.e. the associated ctAuthenticated instance with given login and password is considered logged out)

The listing 5.12 provides the **Messip** (MCL-oriented) specification of the operation.

```

1
2 /* Pre Protocol:*/
3 preP{let TheSystem: ctState in
4   let TheActor:actAdministrator in
5   self.rnActor.rnSystem = TheSystem
6   and self.rnActor = TheActor
7
8 /* PreP01 */
9   and TheSystem.vpStarted = true
10 /* Prep02 */
11   and TheActor.rnctAuthenticated.vpIsLogged = true}
12
13 /* Pre Functional:*/
14 preF{/* PreF01 */
15   true}
16
17 /* Post Functional:*/
18 postF{let TheSystem: ctState in
19   let TheactAuthenticated:actAuthenticated in
20   let AptStringMessageForTheactAuthenticated: ptString in

```

```

21
22 self.rnActor.rnSystem = TheSystem
23 and self.rnActor = TheactAuthenticated
24
25 /* PostF01 */
26 AptStringMessageForTheactAuthenticated.eq('You are logged out ! Good Bye ...')
27 and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
28
29 /* Post Protocol:*/
30 postP{ let TheSystem: ctState in
31 let TheactAuthenticated:actAuthenticated in
32
33 self.rnActor.rnSystem = TheSystem
34 and self.rnActor = TheactAuthenticated.asSet
35 /* PostP01 */
36 TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = false}

```

Listing 5.12: **Messip** (MCL-oriented) specification of the operation *oeLogout*.

## 5.4 Environment - Out Interface Operation Scheme for actComCompany

### 5.4.1 Operation Model for oeAlert

The *oeAlert* operation has the following properties:

OPERATION	
<i>oeAlert</i>	
Any human having a phone able to connect to the communication companies using the <i>iCrash</i> system can send his company an sms message with structured information in order to declare an alert.	
Parameters	
1	<b>AetHumanKind: etHumanKind</b> the kind of human informing of an alert.
2	<b>AdtDate: dtDate</b> the date of the alert
3	<b>AdtTime: dtTime</b> the time of the alert
4	<b>AdtPhoneNumber: dtPhoneNumber</b> the phone number of the human sending the alert SMS message
5	<b>AdtGPSLocation: dtGPSLocation</b> the GPS position of the phone at the date and time the message was sent.
6	<b>AdtComment: dtComment</b> a free text message sent by the human providing information on the alert that he wants to declare
Return type	
ptBoolean	
Pre-Condition (protocol)	
PreP 1 the system is supposed to be created and initialized.	
Pre-Condition (functional)	
PreF 1 the date and time the alert is declared is supposed to be in the past with respect to the current time known by the system.	
Post-Condition (functional)	

*continues in next page ...*

***...Operation table continuation***

PostF 1	the ctState attribute for the next value for alert IDs is incremented by one at post.
PostF 2	a new alert instance exists in the post state with status pending, instant information (resp. GPS location and comment) based on date and time provided (resp. position and comment); and with alert ID being a string conversion of the dtInteger value available in the pre state in the ctState instance.
PostF 3	if there exist no already registered alert near to the alert currently declared then a new crisis is added in the post state and initialized with: its ID being the one provided by the ctState instance (which is incremented by one in the post state), its type considered as small, its status being pending, its declared time being the same than the alert and a default comment indicating that a report will come later on. else the crisis to which the new alert must be related to is the one related to any alert nearby in the pre-state.
PostF 4	the post state relates the new alert to the previously characterized crisis.
PostF 5	if there is no ctHuman instance having same phone number and same kind in the pre-state then a new one is added in the post-state with given phone number and kind and is associated to the communication company actor used to declare the alert. else the pre-state one is chosen
PostF 6	and this specified ctHuman is related to the new alert thus indicating he has signed the alert.

***Post-Condition (protocol)***

PostP 1	none
---------	------

The listing 5.13 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Pre Protocol*/
2  preP{let TheSystem: ctState in
3    self.rnActor.rnSystem = TheSystem
4
5
6  /* PreP01 */
7  and TheSystem.vpStarted = true
8
9  /* Pre Functional*/
10 preF{let TheSystem: ctState in
11   self.rnActor.rnSystem = TheSystem
12
13 /* PreF01 */
14   and (TheSystem.clock.date.gt(AdtDate)
15     or (TheSystem.clock.date.eq(AdtDate)
16       and TheSystem.clock.time.gt(AdtTime)
17     )
18   )
19
20 /* Post Functional*/
21 postF{let TheSystem: ctState in
22
23   let ActHuman:ctHuman in
24   let TheactComCompany:actComCompany in
25   let ActAlert:ctAlert in
26   let AAlertInstant:dtDateAndTime in
27   let AetAlertStatus:etAlertStatus in
28   let ActAlertNearBy:ctAlert in
29   let ActCrisis:ctCrisis in
30   let AdtCrisisID:dtCrisisID in
31   let AetCrisisType:etCrisisType in
32   let AetCrisisStatus:etCrisisStatus in

```

```

33 let ACrisisInstant:dtDateAndTime in
34 let ACrisisdtComment:dtComment in
35 let AptStringMessage:ptString in
36 let AdtSMS:dtSMS in
37 let AdtAlertID:dtAlertID in
38
39 self.rnActor.rnSystem = TheSystem
40 and self.rnActor = TheactComCompany
41 /* PostF01 */
42 TheSystem.nextValueForAlertID=PrenextValueForAlertID
43 and PrenextValueForAlertID.add(1) = PostnextValueForAlertID
44 and TheSystem@post.nextValueForAlertID = PostnextValueForAlertID
45
46 /* PostF02 */
47 and AAAlertInstant.date=AdtDate
48 and AAAlertInstant.time=AdtTime
49
50 and AetAlertStatus=pending
51
52 and TheSystem.nextValueForAlertID.todtString().eq(AdtAlertID)
53
54 and ActAlert.init(AdtAlertID,
55     AetAlertStatus,
56     AdtGPSLocation,
57     AAAlertInstant,
58     AdtComment)
59
60 /* PostF03 */
61 and TheSystem.rnctAlert.select(location.isNearTo(AdtGPSLocation)) = ColctAlertsNearBy
62 and if (ColctAlertsNearBy->size())=0)
63 then (TheSystem.nextValueForCrisisID = PrenextValueForCrisisID
64     and PrenextValueForCrisisID.add(1) = PostnextValueForCrisisID
65     and TheSystem@post.nextValueForCrisisID = PostnextValueForCrisisID
66     and TheSystem.nextValueForCrisisID.todtString().eq(AdtCrisisID)
67     and AdtCrisisType = small
68     and AetCrisisStatus = pending
69     and ACrisisInstant= AAAlertInstant
70     and ACrisisdtComment = 'no reporting yet defined'
71     and ActCrisis.init( AdtCrisisID,
72         AdtCrisisType,
73         AetCrisisStatus,
74         AdtGPSLocation,
75         ACrisisInstant,
76         ACrisisdtComment)
77 )
78 else (ColctAlertsNearBy.rnTheCrisis->msrAny(true) = ActCrisis)
79 endif
80
81 /* PostF04 */
82 and ActAlert@post.rnTheCrisis = ActCrisis
83
84 /* PostF05 */
85 and TheSystem.rnctHuman->select(id.eq(AdtPhoneNumber)) = HumanColl
86
87 and HumanColl->select(kind.etEq(AetHumanKind)) = HumanCol2
88 and if (HumanCol2->msrIsEmpty)
89 then (ActHuman.init(AdtPhoneNumber,AetHumanKind)
90     and ActHuman@post.rnactComCompany = TheactComCompany
91     )
92 else (HumanCol2->any(true) = ActHuman)
93 endif
94
95 and ActHuman.rnSignaled->msrIncluding(ActAlert) = ColAlerts
96
97 and ActHuman@post.rnSignaled = ColAlerts
98
99 /* PostF06 */
100 AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
101 and TheactComCompany.rnInterfaceIN^ieSmsSend(AdtPhoneNumber,AdtSMS) }
102

```

```

103 /* Post Protocol:*/
104 postP{ true}

```

Listing 5.13: **Messir** (MCL-oriented) specification of the operation *oeAlert*.

Figure 5.2 shows concept model elements in the scope of the *oeAlert* operation

<b>dtDate</b> (lu.uni.lassy.messir.libraries.calendar)	<b>dtAlertID</b>	<b>dtComment</b>
@year : dtYear @month : dtMonth @day : dtDay	<b>dtCrisisID</b>	<b>dtPhoneNumber</b>
<b>dtTime</b> (lu.uni.lassy.messir.libraries.calendar)	<b>ptBoolean</b> (lu.uni.lassy.messir.libraries.primitives)	
@hour : dtHour @minute : dtMinute @second : dtSecond	<b>ptString</b> (lu.uni.lassy.messir.libraries.primitives)	
<b>dtGPSLocation</b>	<b>etHumanKind</b>	<b>etCrisisType</b>
@latitude : dtLatitude @longitude : dtLongitude • isNearTo(AGPSLocation: dtGPSLocation): ptBoolean	@witness @victim @anonymous	@small @medium @huge
<b>dtDateAndTime</b> (lu.uni.lassy.messir.libraries.calendar)	<b>etCrisisStatus</b>	<b>etAlertStatus</b>
@date : dtDate @time : dtTime	@pending @handled @solved @closed	@pending @valid @invalid
	<b>dtSMS</b>	
	@value : ptString	

Figure 5.2: *oeAlert* operation scope

Figure 5.3 shows concept model elements in the scope of the *oeAlert* operation

## 5.5 Environment - Out Interface Operation Scheme for actCoordinator

### 5.5.1 Operation Model for *oeCloseCrisis*

The *oeCloseCrisis* operation has the following properties:

<b>OPERATION</b>	
<i>oeCloseCrisis</i>	
sent to indicate that a crisis should be considered as closed.	
<i>Parameters</i>	
1	<b>AdtCrisisID: dtCrisisID</b> the identification information used to determine the crisis to close

*continues in next page ...*

*... Operation table continuation*

<b>Return type</b>
ptBoolean
<b>Pre-Condition (protocol)</b>
PreP 1 the system is started
PreP 2 the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>
PreF 1 it is supposed that there exist one ctCrisis instance with the same id attribute value as the one provided by the coordinator actor who wants to close.
<b>Post-Condition (functional)</b>
PostF 1 the ctCrisis class instance having the provided id is considered closed in the post state.
PostF 2 There is no handler declared in the system as associated to the crisis.
PostF 3 all the alert instances associated to this crisis do not belong any more to the system's post state.
PostF 4 the coordinator actor is informed about the satisfaction of its request.
<b>Post-Condition (protocol)</b>
PostP 1 none

**5.5.2 Operation Model for oeGetAlertsSet**

The oeGetAlertsSet operation has the following properties:

<b>OPERATION</b>
<b>oeGetAlertsSet</b>
sent to request all the ctAlert instances having a specific status.
<b>Parameters</b>
1 <b>AetAlertStatus: etAlertStatus</b> the criteria used to select the alerts to send back to the actor
<b>Return type</b>
ptBoolean
<b>Pre-Condition (protocol)</b>
PreP 1 the system is started
PreP 2 the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>
PreF 1 none
<b>Post-Condition (functional)</b>
PostF 1 the post state is the one obtained by satisfying the isSentToCoordinator predicate for each alert having the provided status and for the actor sending the message. (cf. specification of isSentToCoordinator predicate given for the ctAlert type.)
<b>Post-Condition (protocol)</b>
PostP 1 none

**5.5.3 Operation Model for oeGetCrisisSet**

The oeGetCrisisSet operation has the following properties:

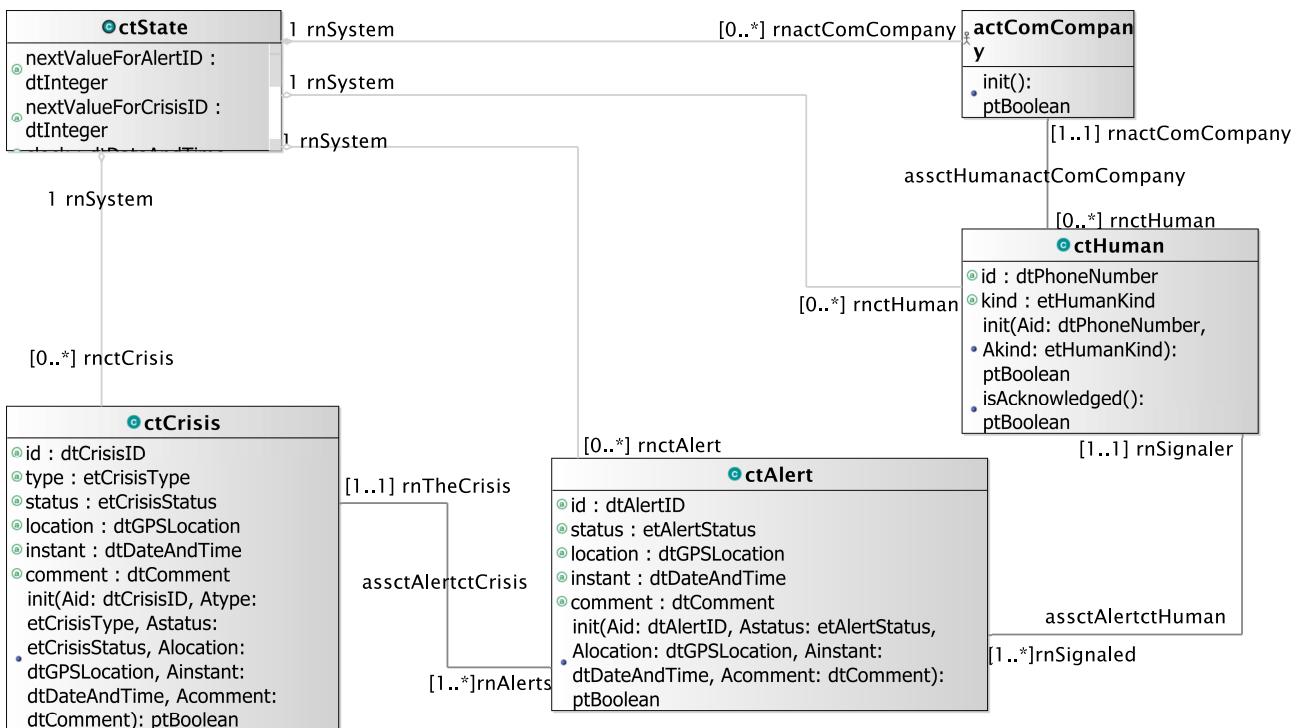


Figure 5.3: oeAlert operation scope

OPERATION	
<b>oeGetCrisisSet</b>	sent to request all the ctCrisis instances having a specific status.
<i>Parameters</i>	
1	<b>AetCrisisStatus: etCrisisStatus</b> the status information used to determine the crisis to send back to the actor
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<i>Pre-Condition (functional)</i>	
PreF 1	none
<i>Post-Condition (functional)</i>	
PostF 1	the post state is the one obtained by satisfying the isSentToCoordinator predicate for each crisis having the provided status and for the actor sending the message ieSendACrisis. (cf. specification of isSentToCoordinator predicate given for the ctCrisis type.)
<i>Post-Condition (protocol)</i>	
PostP 1	none

#### 5.5.4 Operation Model for oeInvalidateAlert

The oeInvalidateAlert operation has the following properties:

OPERATION	
<b>oeInvalidateAlert</b>	sent to indicate that an alert should be considered as closed.
<i>Parameters</i>	

### 5.5.5 Operation Model for oeReportOnCrisis

The `oeReportOnCrisis` operation has the following properties:

<b>OPERATION</b>	
<b><i>oeReportOnCrisis</i></b>	
sent to update the textual information available for a specific handled crisis.	
<b>Parameters</b>	
1	<b>AdtCrisisID: dtCrisisID</b> the identification information used to determine the crisis to report on
2	<b>AdtComment: dtComment</b> the textual information commenting the crisis
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.
<b>Post-Condition (functional)</b>	
PostF 1	the comment attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
<b>Post-Condition (protocol)</b>	
PostP 1	none

### 5.5.6 Operation Model for oeSetCrisisHandler

The `oeSetCrisisHandler` operation has the following properties:

<b>OPERATION</b>	
<b><i>oeSetCrisisHandler</i></b>	
sent to declare himself as been the handler of a crisis having the specified id.	
<b>Parameters</b>	
1	<b>AdtCrisisID: dtCrisisID</b> the identification information used to determine the crisis
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>	
PreF 1	there exist one crisis having the given id in the pre-state.
<b>Post-Condition (functional)</b>	
PostF 1	the ctCrisis instance having the provided id is in handled status at poststate and is associated to the actor that sends the message (which himself is notified with a textual message as confirmation).

*continues in next page ...*

**... Operation table continuation**

PostF 2	All the alerts related to this crisis are sent to the actor such that he can decide how to handle them.
PostF 3	if the crisis was already handled at pre-state then the associated handler actor is notified about the change of handler for one of his crisis (n.b. it might be the same even if not relevant).
PostF 4	a message is sent to the communication company for any human related to an alert associated to the crisis. A human will receive as many messages as alerts he sent despite the fact that they might relate to the same crisis (i.e. one alert, one acknowledgement).
<b>Post-Condition (protocol)</b>	
PostP 1	none

**5.5.7 Operation Model for oeSetCrisisStatus**

The `oeSetCrisisStatus` operation has the following properties:

<b>OPERATION</b>	
<b><i>oeSetCrisisStatus</i></b>	
sent to define the handling status of a specific crisis.	
<b>Parameters</b>	
1	<b>AdtCrisisID: dtCrisisID</b> the identification information used to determine the crisis
2	<b>AetCrisisStatus: etCrisisStatus</b> the new status value
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.
<b>Post-Condition (functional)</b>	
PostF 1	the crisis status attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
<b>Post-Condition (protocol)</b>	
PostP 1	none

**5.5.8 Operation Model for oeSetCrisisType**

The `oeSetCrisisType` operation has the following properties:

<b>OPERATION</b>	
<b><i>oeSetCrisisType</i></b>	
sent to define the gravity type of a specific crisis.	
<b>Parameters</b>	
1	<b>AdtCrisisID: dtCrisisID</b> the identification information used to determine the crisis

***continues in next page ...***

**... Operation table continuation**

2	AetCrisisType: etCrisisType the new type value
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>	
PreF 1	it is supposed that there exist one crisis in the pre state having the given id.
<b>Post-Condition (functional)</b>	
PostF 1	the crisis type attribute of the crisis instance having the given id is replaced by the given one and the requesting actor is notified of this update.
<b>Post-Condition (protocol)</b>	
PostP 1	none

**5.5.9 Operation Model for oeValidateAlert**

The `oeValidateAlert` operation has the following properties:

OPERATION	
<b>oe ValidateAlert</b>	
sent to indicate that a specific alert is not a fake.	
<b>Parameters</b>	
1	<b>AdtAlertID: dtAlertID</b> the identification information used to determine the alert instance
<b>Return type</b>	
ptBoolean	
<b>Pre-Condition (protocol)</b>	
PreP 1	the system is started
PreP 2	the actor logged previously and did not log out ! (i.e. the associated ctCoordinator instance is considered logged)
<b>Pre-Condition (functional)</b>	
PreF 1	it is supposed that there exist one ctAlert instance with the same <code>id</code> attribute value as the one provided by the coordinator actor who wants to validate.
<b>Post-Condition (functional)</b>	
PostF 1	the <code>ctAlert</code> class instance having the provided id is considered as valid in the post state and the coordinator actor is informed about the satisfaction of its request.
<b>Post-Condition (protocol)</b>	
PostP 1	none

## 5.6 Environment - Out Interface Operation Scheme for actMsrCreator

### 5.6.1 Operation Model for oeCreateSystemAndEnvironment

The oeCreateSystemAndEnvironment operation has the following properties:

<b>OPERATION</b>	
<i>oeCreateSystemAndEnvironment</i>	
sent to request the initialization of the system's class instances and the environment actors instances.	
<i>Parameters</i>	
1	<b>AqtyComCompanies:</b> ptInteger the quantity of communication companies to create in the environment
<i>Return type</i>	
ptBoolean	
<i>Pre-Condition (protocol)</i>	
PreP 1	none
<i>Pre-Condition (functional)</i>	
PreF 1	none
<i>Post-Condition (functional)</i>	
PostF 1	the ctState instance is initialized with the integer 1 for the crisis and alert counters used for their identifications, a value for the clock corresponding to a default initial time (i.e. January 1st, 1970) the crisis reminder period is set to 300 seconds, the maximum crisis reminder period is fixed to 1200 seconds (i.e. 20 minutes), an initial value for the automatic reminder period equal to the current date and time and the system is considered in a started state. <b>Those predicates must be satisfied first since all the other depend on the existence of a ctState instance !</b>
PostF 2	the actMsrCreator actor instance is initiated (remember that since the oeCreateSystemAndEnvironment is a special event its role is to make consistent the post state thus creating the actor and its interfaces is required even though the sending of this message logically would need the actor and its interfaces to already exist ...).
PostF 3	the environment for communication company actors, in the post state, is made of AqtyComCompanies instances allowing for receiving and sending messages to humans.
PostF 4	the environment for administrator actors, in the post state, is made of one instance.
PostF 5	the environment for activator actors, in the post state, is made of one instance allowing for automatic message sending based on current system's and environment state'.
PostF 6	the set of ctAdministrator instances at post is made of one instance initialized with 'icrashadmin' (resp. '7WXC1359') for login (resp. password) values.
PostF 7	the association between ctAdministrator and actAdministrator is made of one couple made of the conjointly specified instances.
<i>Post-Condition (protocol)</i>	
PostP 1	none is given since the only protocol variable to be modified in the post state is the one initialized with the ctState instance (i.e. vpStarted).

The listing 5.14 provides the **Messip** (MCL-oriented) specification of the operation.


```

1  /* Pre Protocol:*/
2  preP{true}
3
4
5  /* Pre Functional:*/
6  preF{true}
7
8  /* Post Functional:*/
9  postF{let TheSystem: ctState in
10   let AactMsrCreator: actMsrCreator in
11   let AactAdministrator: actAdministrator in
12   let AnextValueForAlertID: dtInteger in
13   let AnextValueForCrisisID: dtInteger in
14   let Aclock: dtDateAndTime in
15   let AcrisisReminderPeriod: dtSecond in
16   let AmaxCrisisReminderPeriod: dtSecond in
17   let AvpStarted: ptBoolean in
18
19  /* PostF01 -- MUST ALWAYS BE MADE FIRST -- */
20  AnextValueForAlertID.value.eq(1)
21  and AnextValueForCrisisID.value.eq(1)
22  and Aclock.date.year.value = 1970
23  and Aclock.date.month.value = 01
24  and Aclock.date.day.value = 01
25  and Aclock.time.hour.value = 00
26  and Aclock.time.minute.value = 00
27  and Aclock.time.second.value = 00
28
29  and AcrisisReminderPeriod.value.eq(300)
30  and AmaxCrisisReminderPeriod.value.eq(1200)
31  and AvpStarted = true
32  and TheSystem.init(AnextValueForAlertID,
33           AnextValueForCrisisID,
34           Aclock,
35           AcrisisReminderPeriod,
36           AmaxCrisisReminderPeriod,
37           Aclock,
38           AvpStarted
39           )
40  /* PostF02*/
41  and AactMsrCreator.init()
42  /* PostF03 */
43  and let AactComCompanyCol: Bag(actComCompany) in
44  AactComCompanyCol->size() = AqtyComCompanies
45  AactComCompanyCol-> forAll(init())
46  /* PostF04*/
47  and AactAdministrator.init()
48  /* PostF05*/
49  and let AactActivator:actActivator in
50  AactActivator.init()
51  /* PostF06 */
52  and let ActAdministrator:ctAdministrator in
53   let AdtLogin:dtLogin in
54   let AdtPassword:dtPassword in
55   AdtLogin.value.eq('icrashadmin')
56   and AdtPassword.value.eq('7WXC1359')
57   and ActAdministrator.init(AdtLogin,AdtPassword)
58  /* PostF07*/
59  and ActAdministrator@post.rnactAuthenticated = AactAdministrator}
60
61  /* Post Protocol:*/
62  postP{ true}

```

Listing 5.14: **Messir** (MCL-oriented) specification of the operation *oeCreateSystemAndEnvironment*.

Figure 5.4 shows all the concept model elements in the scope of the *oeCreateSystemAndEnvironment* operation

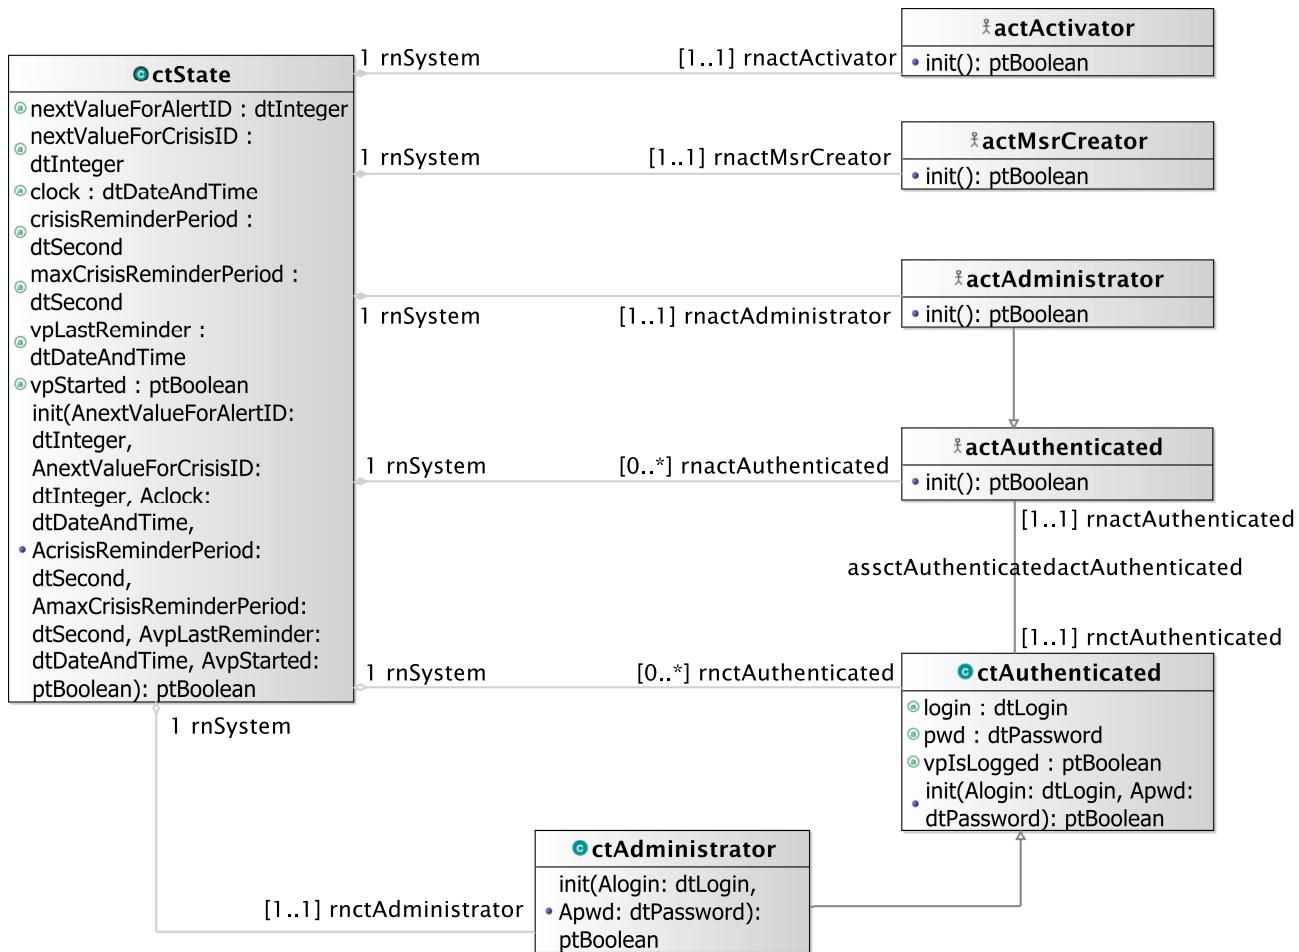Figure 5.4: `oeCreateSystemAndEnvironment` operation scope

## 5.7 Environment - Actor Operation Scheme for actMsrCreator

### 5.7.1 Operation Model for init

The `init` operation has the following properties:

OPERATION
<i>init</i>
used to create an instance of the actor together with its interface instances and update the associations with the <code>ctState</code> instance.
<i>Return type</i>
<code>ptBoolean</code>

## 5.8 Primary Types - Operation Schemes for Class ctAdministrator

### 5.8.1 Operation Model for init

The `init` operation has the following properties:

OPERATION
<i>init</i>
used to initialize the current object as a new instance of the <code>ctAdministrator</code> type.
<i>Parameters</i>
1 <b>Alogin: dtLogin</b> used to initialize the login field
2 <b>Apwd: dtPassword</b> used to initialize the password field
<i>Return type</i>
<code>ptBoolean</code>
<i>Post-Condition (functional)</i>
PostF 1    true iff the system poststate includes the current object as a new <code>ctAdministrator</code> instance having its login and password attributes equal to the one provided as parameters and its <code>vpIsLogged</code> attribute equal to false.

The listing 5.15 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  let Self:ctAdministrator in
4  (
5  let Self:ctAdministrator in
6  /* Post F01 */
7  Self.login(Alogin)
8  and Self.pwd = Apwd
9  and Self.vpIsLogged = false
10
11 /* Post F02 */
12 and (Self.oclIsNew and self = Self)
13 )
14 then (result = true)
15 else (result = false)

```

```
16 endif}
```

Listing 5.15: **Messip** (MCL-oriented) specification of the operation *init*.

## 5.9 Primary Types - Operation Schemes for Class ctAlert

### 5.9.1 Operation Model for init

The *init* operation has the following properties:

<b>OPERATION</b>	
<i>init</i>	
used to initialize the current object as a new instance of the ctAlert type.	
<i>Parameters</i>	
1	<b>Aid: dtAlertID</b> used to initialize the id field
2	<b>Astatus: etAlertStatus</b> used to initialize the status field
3	<b>Alocation: dtGPSLocation</b> used to initialize the location field
4	<b>Ainstant: dtDateAndTime</b> used to initialize the instant field
5	<b>Acomment: dtComment</b> used to initialize the comment field
<i>Return type</i>	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1	true iff the system poststate includes the current object as a new ctAlert instance having its attributes equal to the ones provided as parameters.

The listing 5.16 provides the **Messip** (MCL-oriented) specification of the operation.

```

1
2 /* Post Functional:*/
3 postF{if
4 (
5 /* Post F01 */
6 let Self:ctAlert in
7 Self.id = Aid
8 and Self.status = Astatus
9 and Self.location = Alocation
10 and Self.instant = Ainstant
11 and Self.comment = Acomment
12 /* Post F02 */
13 and (Self.oc1IsNew and self = Self)
14 )
15 then (result = true)
16 else (result = false)
17 endif}
```

Listing 5.16: **Messip** (MCL-oriented) specification of the operation *init*.

### 5.9.2 Operation Model for `isSentToCoordinator`

The `isSentToCoordinator` operation has the following properties:

<b>OPERATION</b>	
<i>isSentToCoordinator</i>	
used to provide a given coordinator with current alert information.	
<b>Parameters</b>	
1	<b>AactCoordinator: actCoordinator</b> the message destination
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	
PostF 1	true iff the message <code>ieSendAnAlert</code> is sent to the input interface of the given coordinator actor with the current alert as parameter value.

The listing 5.17 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  (
4  /* Post F01 */
5  AactCoordinator.rnInterfaceIN.ieSendAnAlert(self)
6  )
7  then (result = true)
8  else (result = false)
9  endif}
10

```

Listing 5.17: **Messip** (MCL-oriented) specification of the operation `isSentToCoordinator`.

## 5.10 Primary Types - Operation Schemes for Class `ctAuthenticated`

### 5.10.1 Operation Model for `init`

The `init` operation has the following properties:

<b>OPERATION</b>	
<i>init</i>	
used to initialize the current object as a new instance of the <code>ctAuthenticated</code> type.	
<b>Parameters</b>	
1	<b>Alogin: dtLogin</b> used to initialize the login field
2	<b>Apwd: dtPassword</b> used to initialize the password field
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	

*continues in next page ...*

**...Operation table continuation**

PostF 1	true iff the system poststate includes the current object as a new ctAuthenticated instance having its attributes equal to the ones provided as parameters.
---------	---

## 5.11 Primary Types - Operation Schemes for Class ctCoordinator

### 5.11.1 Operation Model for init

The `init` operation has the following properties:

OPERATION	
<i>init</i>	used to initialize the current object as a new instance of the ctCoordinator type.
Parameters	
1	<b>Aid: dtCoordinatorID</b> used to initialize the id field
2	<b>Alogin: dtLogin</b> used to initialize the login field
3	<b>Apwd: dtPassword</b> used to initialize the password field
Return type	
ptBoolean	
Post-Condition (functional)	
PostF 1	true iff the system poststate includes the current object as a new ctCoordinator instance having its attributes equal to the ones provided as parameters.

The listing 5.18 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  (
4  /* Post F01 */
5  let Self:ctCoordinator in
6  Self.id = Aid
7  and Self.login = Alogin
8  and Self.pwd = Apwd
9  and Self.vpIsLogged = false
10 /* Post F02 */
11 and (Self.oclIsNew and self = Self)
12 )
13 )
14 then (result = true)
15 else (result = false)
16 endif}

```

Listing 5.18: **Messip** (MCL-oriented) specification of the operation *init*.

## 5.12 Primary Types - Operation Schemes for Class ctCrisis

### 5.12.1 Operation Model for init

The `init` operation has the following properties:

<b>OPERATION</b>	
<b><i>init</i></b>	
used to initialize the current object as a new instance of the <code>ctCrisis</code> type.	
<b>Parameters</b>	
1 <b>Aid:</b> <code>dtCrisisID</code>	used to initialize the id field
2 <b>Atype:</b> <code>etCrisisType</code>	used to initialize the type field
3 <b>Astatus:</b> <code>etCrisisStatus</code>	used to initialize the status field
4 <b>Alocation:</b> <code>dtGPSLocation</code>	used to initialize the location field
5 <b>Ainstant:</b> <code>dtDateAndTime</code>	used to initialize the instant field
6 <b>Acomment:</b> <code>dtComment</code>	used to initialize the comment field
<b>Return type</b>	
<code>ptBoolean</code>	
<b>Post-Condition (functional)</b>	
PostF 1	true iff the system poststate includes the current object as a new <code>ctCrisis</code> instance having its attributes equal to the ones provided as parameters.

The listing 5.19 provides the **Messip** (MCL-oriented) specification of the operation.

```

1
2  /* Post Functional:*/
3  postF{if
4  (
5  /* Post F01 */
6  let Self:ctCrisis in
7  Self.id = Aid
8  and Self.type = Atype
9  and Self.status = Astatus
10 and Self.location = Alocation
11 and Self.instant = Ainstant
12 and Self.comment = Acomment
13 /* Post F02 */
14 and (Self.oclisNew and self = Self)
15 )
16 then (result = true)
17 else (result = false)
18 endif}

```

Listing 5.19: **Messip** (MCL-oriented) specification of the operation `init`.

### 5.12.2 Operation Model for handlingDelayPassed

The handlingDelayPassed operation has the following properties:

<b>OPERATION</b>	
<b>handlingDelayPassed</b>	
used to determine if the crisis stood too longly in a pending status since last reminder.	
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	
PostF 1 true iff the crisis is in pending status and if the duration between the current ctState clock information and the last reminder is greater than the crisis reminder period duration.	

The listing 5.20 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheSystem:ctState in
3  let CurrentClockSecondsQty:dtInteger in
4  let vpLastReminderSecondsQty:dtInteger in
5  let CrisisReminderPeriod:dtSecond in
6  if
7  ( /* Post F01 */
8  self.rnSystem = TheSystem
9  and self.status = pending
10 and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
11 and TheSystem.vpLastReminder.toSecondsQty() = vpLastReminderSecondsQty
12 and TheSystem.crisisReminderPeriod = CrisisReminderPeriod
13 and CurrentClockSecondsQty.sub(vpLastReminderSecondsQty).gt(CrisisReminderPeriod) = true
14 )
15 )
16 then (result = true)
17 else (result = false)
18 endif}

```

Listing 5.20: **Messip** (MCL-oriented) specification of the operation *handlingDelayPassed*.

### 5.12.3 Operation Model for maxHandlingDelayPassed

The maxHandlingDelayPassed operation has the following properties:

<b>OPERATION</b>	
<b>maxHandlingDelayPassed</b>	
used to determine if the crisis stood too longly in a pending status since its creation.	
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	
PostF 1 true iff the crisis is in pending status and if the duration between the current ctState clock information and the crisis instant is greater than the maximum reminder period duration.	

The listing 5.21 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheSystem:ctState in
3  let CurrentClockSecondsQty:dtInteger in
4  let CrisisInstantSecondsQty:dtInteger in
5  let MaxCrisisReminderPeriod:dtSecond in
6  if
7  ( /* Post F01 */
8  self.rnSystem = TheSystem
9  and self.status = pending
10 and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
11 and Self.instant.toSecondsQty() = CrisisInstantSecondsQty
12 and TheSystem.maxCrisisReminderPeriod = MaxCrisisReminderPeriod
13 and CurrentClockSecondsQty.sub(CrisisInstantSecondsQty)
14 .gt (MaxCrisisReminderPeriod)
15 )
16 )
17 then (result = true)
18 else (result = false)
19 endif}

```

Listing 5.21: **Messip** (MCL-oriented) specification of the operation *maxHandlingDelayPassed*.

#### 5.12.4 Operation Model for *isSentToCoordinator*

The *isSentToCoordinator* operation has the following properties:

OPERATION	
<i>isSentToCoordinator</i>	
used to provide a given coordinator with current crisis information.	
<i>Parameters</i>	
1 AactCoordinator: actCoordinator	the message destination actor
<i>Return type</i>	
ptBoolean	
<i>Post-Condition (functional)</i>	
PostF 1 true iff the message ieSendACrisis is sent by the simulator to the input interface of the given coordinator actor with the current crisis as parameter value.	

The listing 5.22 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  (
4  /* Post F01 */
5  AactCoordinator.rnInterfaceIN.ieSendACrisis(self)
6  )
7  then (result = true)
8  else (result = false)
9  endif}

```

Listing 5.22: **Messip** (MCL-oriented) specification of the operation *isSentToCoordinator*.

#### 5.12.5 Operation Model for *isAllocatedIfPossible*

The *isAllocatedIfPossible* operation has the following properties:

OPERATION	
<b>isAllocatedIfPossible</b>	
used to allocate a crisis to a coordinator if any or to alert the administrator of crisis waiting to be handled.	
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	
PostF 1	true iff the duration between the crisis creation and the system's clock is greater than the maximum delay defined and
PostF 2	if there exist at least one coordinator then (a) the post state associates to the crisis any of the existing coordinators and (b) the coordinator is informed that he is now the handlers of the crisis whose ID is communicated
PostF 3	else a message is sent to all known administrators to request creation of new coordinators.

The listing 5.23 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if (
3    /* Post F01 */
4    self.maxHandlingDelayPassed()
5    and
6    if (TheSystem.rnactCoordinator->msrIsEmpty = false)
7    then (
8      /* Post F02 */
9      TheSystem.rnactCoordinator->msrAny(true) = TheCoordinatorActor
10     and TheCoordinatorActor.rnctCoordinator = TheCoordinator
11     and self@post.rnHandler = TheCoordinator
12     and self@post.status = handled
13     and self.id.value = TheCrisisIDptString
14     and 'You are now considered as handling the crisis having ID: '
15       .ptStringConcat(TheCrisisIDptString) = TheMessage
16     and TheCoordinatorActor.rnInterfaceIN^ieMessage(TheMessage)
17   )
18 )
19 else ( /* Post F03 */
20   TheSystem.rnactAdministrator
21   ->forAll(rnInterfaceIN.ieMessage('Please add new coordinators to handle pending crisis !'))
22 )
23 endif
24 )
25 then (result = true)
26 else (result = false)
27 endif}
```

Listing 5.23: **Messip** (MCL-oriented) specification of the operation *isAllocatedIfPossible*.

## 5.13 Primary Types - Operation Schemes for Class ctHuman

### 5.13.1 Operation Model for init

The *init* operation has the following properties:

OPERATION	
<i>continues in next page ...</i>	

*... Operation table continuation*

<b>init</b>
used to initialize the current object as a new instance of the ctHuman type.
<b>Parameters</b>
1 <b>Aid: dtPhoneNumber</b> used to initialize the id field
2 <b>Akind: etHumanKind</b> used to initialize the kind field
<b>Return type</b>
ptBoolean
<b>Post-Condition (functional)</b>
PostF 1    true iff the system poststate includes the current object as a new ctHuman instance having its attributes equal to the ones provided as parameters.

The listing 5.24 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  (
4  /* Post F01 */
5  let Self:ctHuman in
6
7
8  Self.id = Aid
9  and Self.kind = Akind
10
11 /* Post F02 */
12 and (Self.oclIsNew and self = Self)
13 )
14 then (result = true)
15 else (result = false)
16 endif}

```

Listing 5.24: **Messip** (MCL-oriented) specification of the operation *init*.

### 5.13.2 Operation Model for *isAcknowledged*

The *isAcknowledged* operation has the following properties:

<b>OPERATION</b>
<b><i>isAcknowledged</i></b>
used to specify the property of having sent an alert acknowledge message to the human having declared the alert through its own communication company.
<b>Return type</b>
ptBoolean
<b>Post-Condition (functional)</b>
PostF 1    true iff the message ieSmsSend is sent to the related input interface of the related communication company actor with the human phone number and the generic message 'The handling of your alert by our services is in progress !'

## 5.14 Primary Types - Operation Schemes for Class ctState

### 5.14.1 Operation Model for init

The `init` operation has the following properties:

<b>OPERATION</b>	
<b><i>init</i></b>	
used to initialize the current object as a new instance of the <code>ctState</code> type.	
<b>Parameters</b>	
1	<b>AnextValueForAlertID: dtInteger</b> used to initialize the nextValueForAlertID field
2	<b>AnextValueForCrisisID: dtInteger</b> used to initialize the nextValueForCrisisID field
3	<b>Aclock: dtDateAndTime</b> used to initialize the clock field
4	<b>AcrisisReminderPeriod: dtSecond</b> used to initialize the crisisReminderPeriod field
5	<b>AmaxCrisisReminderPeriod: dtSecond</b> used to initialize the maxCrisisReminderPeriod field
6	<b>AvpLastReminder: dtDateAndTime</b> used to initialize the vpLastReminder field
7	<b>AvpStarted: ptBoolean</b> used to initialize the vpStarted field
<b>Return type</b>	
<code>ptBoolean</code>	
<b>Post-Condition (functional)</b>	
PostF 1	true iff the system poststate includes the current object as a new <code>ctState</code> instance having its attributes equal to the ones provided as parameters.

The listing 5.25 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{if
3  (
4  /* Post F01 */
5  let Self:ctState in
6
7
8  Self.nextValueForAlertID = AnextValueForAlertID
9  and Self.nextValueForCrisisID = AnextValueForCrisisID
10 and Self.clock = Aclock
11 and Self.crisisReminderPeriod = AcrisisReminderPeriod
12 and Self.maxCrisisReminderPeriod = AmaxCrisisReminderPeriod
13 and Self.vpLastReminder = AvpLastReminder
14 and Self.vpStarted = AvpStarted
15
16 and (Self.oclIsNew and self = Self)
17 )
18 then (result = true)
19 else (result = false)

```

```
20 endif}
```

Listing 5.25: **Messip** (MCL-oriented) specification of the operation *init*.

## 5.15 Primary Types - Operation Schemes for Datatype dtAlertID

### 5.15.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid alert identifiers.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 if the length of the value attribute of a dtAlertID is a ptInteger greater than zero and lower or equal to 20 then the operation returns the ptBoolean true, else the ptBoolean false.

The listing 5.26 provides the **Messip** (MCL-oriented) specification of the operation.

```
1  /* Post Functional:*/
2 postF{let TheResult: ptBoolean in
3   ( if
4     ( self.value.length().gt(0)
5       and self.value.length().leq(20)
6     )
7   )
8   then (TheResult = true)
9   else (TheResult = false)
10  endif
11  result = TheResult
12 ) }
```

Listing 5.26: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.16 Primary Types - Operation Schemes for Datatype dtComment

### 5.16.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid comments.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the length of the string value is not more than 160 characters.

The listing 5.27 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    ( if
4      ( MaxLength = 160
5        and self.value.length().leq(MaxLength)
6      )
7      then (TheResult = true)
8      else (TheResult = false)
9    endif
10   result = TheResult
11 }
12 }
```

Listing 5.27: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.17 Primary Types - Operation Schemes for Datatype dtCoordinatorID

### 5.17.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which string are considered as valid alert identifiers.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 if the length of the value attribute of a dtCoordinatorID is a ptInteger greater than zero and lower or equal to 5 than the operation returns the ptBoolean true, else the ptBoolean false.

The listing 5.28 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    ( if
4      ( self.value.length().gt(0)
5        and self.value.length().leq(5)
6      )
7      then (TheResult = true)
8      else (TheResult = false)
9    endif
10   result = TheResult
11 }
12 }
```

Listing 5.28: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.18 Primary Types - Operation Schemes for Datatype dtCrisisID

### 5.18.1 Operation Model for `is`

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid crisis identifiers.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 if the length of the value attribute of a dtCrisisID is a ptInteger greater than zero and lower or equal to 10 than the operation returns the ptBoolean true, else the ptBoolean false.

The listing 5.29 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    if
4      ( self.value.length().gt(0)
5       and self.value.length().leq(10)
6     )
7     then (TheResult = true)
8     else (TheResult = false)
9   endif
10  result = TheResult
11 }
12 }
```

Listing 5.29: **Messip** (MCL-oriented) specification of the operation `is`.

## 5.19 Primary Types - Operation Schemes for Datatype dtGPSLocation

### 5.19.1 Operation Model for `is`

The `is` operation has the following properties:

OPERATION
<i>is</i>
used to determine which couples are considered as valid dtGPSLocation values.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true if both latitude and longitude are valid values according to their is operation.

The listing 5.30 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    ( if
4      ( self.latitude.is()
5        and self.longitude.is
6      )
7    then (TheResult = true)
8    else (TheResult = false)
9  endif
10  result = TheResult
11 }
12 }
```

Listing 5.30: **Messip** (MCL-oriented) specification of the operation *is*.

### 5.19.2 Operation Model for *isNearTo*

The *isNearTo* operation has the following properties:

OPERATION	
<b><i>isNearTo</i></b>	
used to determine if locations are considered enough close to be treated as equivalent in the application domain context. In the context of the iCrash system, we compute the distance between two GPS locations using the following Haversine formula. (more details can be found at: <a href="http://www.movable-type.co.uk/scripts/latlong.html">http://www.movable-type.co.uk/scripts/latlong.html</a> and <a href="http://www.gpsvisualizer.com/calculators#distance">http://www.gpsvisualizer.com/calculators#distance</a> )	
<b>Parameters</b>	
1	<b>AGPSLocation: dtGPSLocation</b> the GPS location to be compared to.
<b>Return type</b>	
ptBoolean	
<b>Post-Condition (functional)</b>	
PostF 1	if the Haversine formula ( $\text{ACOS}(\text{SIN}(\text{lat1}) * \text{SIN}(\text{lat2}) + \text{COS}(\text{lat1}) * \text{COS}(\text{lat2}) * \text{COS}(\text{lon2-lon1})) * 6371$ , in which latitudes and longitudes are in radians applied to the two dtGPS coordinates is lower to 100 meters) then the predicate is true and false otherwise.

The listing 5.31 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in true
3    let EarthRadius: dtReal in
4    let MaxDistance: dtReal in
5    let ComparedLatitude: dtLatitude in
6    let ComparedLongitude: dtLongitude in
7    let R1: dtReal in let R1a: dtReal in
8    let R2: dtReal in let R2a: dtReal in
9
10   ( if
11     ( EarthRadius.value = 6371
12       and MaxDistance.value = 100
13
14       and self.latitude = ComparedLatitude
15       and self.longitude = ComparedLongitude
16       and self.latitude.sin() = R1a
17       and self.latitude.sin().mul(R1a) = R1
18       and self.latitude.cos() = R2a
19     )
```

```

20     and self.latitude.cos().mul(R2a) = R2
21
22     and self.longitude = ComparedLongitude
23     and self.longitude.sub(ComparedLongitude).cos().mul(R2)
24         .add(R1).acos().mul(EarthRadius).sub(MaxDistance)
25         .value.leq(0)
26     )
27     then (TheResult = true)
28     else (TheResult = false)
29     endif
30     result = TheResult
31 }

```

Listing 5.31: **Messip** (MCL-oriented) specification of the operation *isNearTo*.

## 5.20 Primary Types - Operation Schemes for Datatype dtLatitude

### 5.20.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLatitude.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1    is true if the value is a real in the interval [-90.0 , +90.0].

The listing 5.32 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2 postF{let TheResult: ptBoolean in
3     if
4         ( AdtValue.value.geq(-90.0)
5             and AdtValue.value.leq(+90.0)
6         )
7     then (TheResult = true)
8     else (TheResult = false)
9     endif
10    result = TheResult
11 }

```

Listing 5.32: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.21 Primary Types - Operation Schemes for Datatype dtLogin

### 5.21.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLogin.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1    is true if the length of the string value is not more than 20 characters.

The listing 5.33 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    let MaxLength: ptInteger in
4    ( if
5      ( MaxLength = 20
6        and self.value.length().leq(MaxLength)
7      )
8      then (TheResult = true)
9      else (TheResult = false)
10     endif
11     result = TheResult
12   )
13 }
```

Listing 5.33: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.22 Primary Types - Operation Schemes for Datatype dtLongitude

### 5.22.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtLongitude.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1    is true if the value is a real in the interval [-180.0 , +180.0].

The listing 5.34 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    let AdtValue: ptReal in
4    ( if
5      ( AdtValue.value.geq(-180.0)
6        and AdtValue.value.leq(+180.0)
7      )
8    )
```

```

8     then (TheResult = true)
9     else (TheResult = false)
10    endif
11    result = TheResult
12  )

```

Listing 5.34: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.23 Primary Types - Operation Schemes for Datatype dtPassword

### 5.23.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtPassword.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1    is true of the length of the string value is at least 6 characters long.

The listing 5.35 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    let MinLength: ptInteger in
4    ( if
5      ( MinLength = 6
6      and self.value.length().geq(MinLength)
7      )
8      then (TheResult = true)
9      else (TheResult = false)
10     endif
11     result = TheResult
12   )

```

Listing 5.35: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.24 Primary Types - Operation Schemes for Datatype dtPhoneNumber

### 5.24.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid dtPhoneNumber.
<i>Return type</i>

*continues in next page ...*

***...Operation table continuation***

ptBoolean
<b><i>Post-Condition (functional)</i></b>
PostF 1    is true if the length of the string value is from 4 to 30 characters. No standard is applied !

The listing 5.36 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    if
4      ( self.value.length().gt(4)
5       and self.value.length().leq(30)
6     )
7     then (TheResult = true)
8     else (TheResult = false)
9   endif
10  result = TheResult
11 }
12 }
```

Listing 5.36: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.25 Primary Types - Operation Schemes for Enumeration etAlertStatus

### 5.25.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<b><i>is</i></b>
used to determine which literal belongs to the enumeration.
<b><i>Return type</i></b>
ptBoolean
<b><i>Post-Condition (functional)</i></b>
PostF 1    true iff the value is equal to one of the following values: pending, valid, invalid

The listing 5.37 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    if
4      ( self = pending
5       or self = valid
6       or self = invalid
7     )
8     then (TheResult = true)
9     else (TheResult = false)
10  endif
11 }
```

```

12     result = TheResult
13 )

```

Listing 5.37: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.26 Primary Types - Operation Schemes for Enumeration etCrisisStatus

### 5.26.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the value is equal to one of the following values: pending, handled, solved, closed.

The listing 5.38 provides the **Messip** (MCL-oriented) specification of the operation.

```

1
2 /* Post Functional:*/
3 postF{let TheResult: ptBoolean in
4   (
5     if
6       ( self = pending
7         or self = handled
8         or self = solved
9         or self = closed
10      )
11      then (TheResult = true)
12      else (TheResult = false)
13    endif
14    result = TheResult
15  )

```

Listing 5.38: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.27 Primary Types - Operation Schemes for Enumeration etCrisisType

### 5.27.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which litteral belongs to the enumeration.

*continues in next page ...*

**...Operation table continuation**

<b>Return type</b>
ptBoolean
<b>Post-Condition (functional)</b>
PostF 1 true iff the value is equal to one of the following values: small, medium, huge

The listing 5.39 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    if
4      ( self = small
5       or self = medium
6       or self = huge
7     )
8    then (TheResult = true)
9    else (TheResult = false)
10   endif
11   result = TheResult
12 }
13 }
```

Listing 5.39: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.28 Primary Types - Operation Schemes for Enumeration etHumanKind

### 5.28.1 Operation Model for *is*

The *is* operation has the following properties:

<b>OPERATION</b>
<i>is</i>
used to determine which litteral belongs to the enumeration.
<b>Return type</b>
ptBoolean
<b>Post-Condition (functional)</b>
PostF 1 true iff the value is equal to one of the following values: witness, victim, anonymous

The listing 5.40 provides the **Messip** (MCL-oriented) specification of the operation.

```

1  /* Post Functional:*/
2  postF{let TheResult: ptBoolean in
3    if
4      ( self = witness
5       or self = victim
6       or self = anonymous
7     )
8    then (TheResult = true)
```

```

10     else (TheResult = false)
11   endif
12   result = TheResult
13 }

```

Listing 5.40: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.29 Secondary Types - Operation Schemes for Classes

There are no elements in this category in the system analysed.

## 5.30 Secondary Types - Operation Schemes for Datatype dtSMS

### 5.30.1 Operation Model for *is*

The *is* operation has the following properties:

OPERATION
<i>is</i>
used to determine which strings are considered as valid comments
<i>Return type</i>
ptBoolean
<i>Post-Condition (functional)</i>
PostF 1 true iff the length of the string value is not more than 160 characters.

The listing 5.41 provides the **Messip** (MCL-oriented) specification of the operation.

```

1
2 /* Post Functional:*/
3 postF{let TheResult: ptBoolean in
4   let MaxLength: ptInteger in
5   ( if
6     ( MaxLength = 160
7       and self.value.length().leq(MaxLength)
8     )
9     then (TheResult = true)
10    else (TheResult = false)
11  endif
12  result = TheResult
13 }

```

Listing 5.41: **Messip** (MCL-oriented) specification of the operation *is*.

## 5.31 Secondary Types - Operation Schemes for Enumerations

There are no elements in this category in the system analysed.

# Chapter 6

## Test Model(s)

### 6.1 Test Model for testcase01

this positive test case intends to verify the correctness of the execution of a simple instance of the suDeployAndRun use case.

#### 6.1.1 Test Steps Specification

##### 6.1.1.1 testcase01-ts01oeCreateSystemAndEnvironment-actMsrCreator.outactMsrCreator.oeCreateSy

The testcase01-ts01oeCreateSystemAndEnvironment-actMsrCreator.outactMsrCreator.oeCreateSy has the following properties:

TEST STEP	
<i>ts01oeCreateSystemAndEnvironment</i>	
This test step initializes the system state and environment.	
<i>Test Sent Message</i>	
TSM 1	<p><b>out:Creator</b></p> <p>sends to system</p> <p><b>actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment</b> (AqtyComCompanies)</p>
<i>Variables</i>	
V 1	<b>Creator:icrash.environment.actMsrCreator</b> only actMsrCreator actors can trigger the system and environment creation and initialization.
<i>Constraints</i>	
C 1	the number of communication company actor instances present in the environment is equal to four to represent all the communication companies available in Luxembourg.
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

The listing 6.1 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   Creator:actMsrCreator
4   AqtyComCompanies: ptInteger
5 }
6
7 constraints{
8   AqtyComCompanies = 4
9 }
10
11 oracle{
12   constraints{
13   true
14   }
15 }

```

Listing 6.1: **Messir** (MCL-oriented) specification of the test step *testcase01-ts01oeCreateSystemAndEnvironment*.

#### 6.1.1.2 testcase01-ts02oeSetClock-actActivator.outactActivator.oeSetClock

The *testcase01-ts02oeSetClock-actActivator.outactActivator.oeSetClock* has the following properties:

<b>TEST STEP</b>	
<i>ts02oeSetClock</i>	
test the update of the current time.	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p style="color: blue;"><b>actActivator.outactActivator.oeSetClock (ACurrentClock)</b></p>
<i>Variables</i>	
V 1	<p><b>TheActor:actActivator</b></p> <p>proactive actor responsible of requesting the update of the system's clock.</p>
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 24th November 2017 at 15:20:00 using a 24-hours notation <sup>1</sup> .
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

The listing 6.2 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor:actActivator
4   ACurrentClock:dtDateAndTime

```

<sup>1</sup>for more details see the ISO 8601 Data elements and interchange formats - Information interchange - Representation of dates and times - <http://www.iso.org/iso/home/standards/iso8601.htm>

```

5 }
6
7 constraints{
8   TheActor=TheSystem.rnactActivator->any2(true)
9   ACurrentClock.date.year.value = 2017
10  ACurrentClock.date.month.value = 11
11  ACurrentClock.date.day.value = 24
12  ACurrentClock.time.hour.value = 15
13  ACurrentClock.time.minute.value = 20
14  ACurrentClock.time.second.value = 00
15 }
16
17 oracle{
18   constraints{
19     true
20   }
21 }

```

Listing 6.2: **Messip** (MCL-oriented) specification of the test step *testcase01-ts02oeSetClock*.

#### 6.1.1.3 testcase01-ts03oeLogin-actAdministrator.outactAdministrator.oeLogin

The `testcase01-ts03oeLogin-actAdministrator.outactAdministrator.oeLogin` has the following properties:

<b>TEST STEP</b>	
<i>ts03oeLogin</i>	
test the authentified access of the administrator	
<i>Test Sent Message</i>	<p>TSM 1</p> <p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actAdministrator.outactAdministrator.oeLogin (AdtLogin, AdtPassword)</b></p>
<i>Variables</i>	
V 1	<p><b>TheActor:actAdministrator</b></p> <p>an actAdministrator actor as subtype of actAuthenticated can send oeLogin messages to the system.</p>
<i>Constraints</i>	
C 1	TheActor is any <code>actAdministrator</code> instance existing in the environment. It is thus expected that there exist at least one.
C 2	AdtLogin has its value attribute equal to the primitive string 'icrashadmin' (which is the correct administrator login known by the system after the step one.)
C 3	AdtPassword has its value attribute equal to the primitive string '7WXC1359' (which is the correct administrator password known by the system after the step one.)
<i>Oracle Constraints</i>	
OC 1	the <code>AMessage</code> value is expected to be equal to the primitive string 'You are logged ! Welcome ...'
OC 2	TheActor receives from system <code>ieMessage(AMessage)</code>

The listing 6.3 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actAdministrator
4   AdtLogin:dtLogin
5   AdtPassword:dtPassword
6 }
7
8 constraints{
9   TheActor=TheSystem.rnactAdministrator->any2(true)
10  AdtLogin.value.eq('icrashadmin')
11  AdtPassword.value.eq('7WXC1359')
12 }
13
14 oracle{
15   variables{
16     AMessage:ptString
17   }
18   constraints{
19     AMessage = 'You are logged ! Welcome ...'
20     TheActor.inactAdministrator.ieMessage(AMessage)
21   }
22 }
```

Listing 6.3: **Messir** (MCL-oriented) specification of the test step *testcase01-ts03oeLogin*.

#### 6.1.1.4 testcase01-ts04oeAddCoordinator-actAdministrator.outactAdministrator.oeAddCoordinator

The *testcase01-ts04oeAddCoordinator-actAdministrator.outactAdministrator.oeAddCoordinator* has the following properties:

<b>TEST STEP</b>	
<i>ts04oeAddCoordinator</i>	
to test the add of a new coordinator by an administrator.	
<i>Test Sent Message</i>	
TSM 1	<b>out:TheActor</b> <b>sends to system</b> <b>actAdministrator.outactAdministrator.oeAddCoordinator (AdtCoordinatorID, AdtLogin, AdtPassword)</b>
<i>Variables</i>	
V 1	<b>TheActor:actAdministrator</b> actAdministor actors as being the only one allowed to add coordinators.
<i>Constraints</i>	
C 1	TheActor is any <code>actAdministrator</code> instance existing in the environment. It is expected that there exists at least one which is the same during all the test case.
C 2	AdtCoordinatorID is equal to 1 to set the new coordinator ID
C 3	AdtLogin has its value attribute equal to the primitive string 'steve' which is the ID defined for the new coordinator.
C 4	AdtPassword has its value attribute equal to the primitive string 'pwdMessirExcalibur2017' which is the password to be set for steve.
<i>Oracle Constraints</i>	
OC 1	the administrator should have been acknowledged for the adding of the new coordinator.

The listing 6.4 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actAdministrator
4   AdtCoordinatorID : dtCoordinatorID
5   AdtLogin:dtLogin
6   AdtPassword:dtPassword
7 }
8
9 constraints{
10  TheActor = TheSystem.rnactAdministrator->any2(true)
11  AdtCoordinatorID.value.eq('1')
12  AdtLogin.value.eq('steve')
13  AdtPassword.value.eq('pwdMessirExcalibur2017')
14 }
15
16 oracle{
17  constraints{
18    TheActor.inactAdministrator.ieCoordinatorAdded()
19  }
20 }
```

Listing 6.4: **Messir** (MCL-oriented) specification of the test step *testcase01-ts04oeAddCoordinator*.

### 6.1.1.5 testcase01-ts05oeLogout-actAdministrator.outactAdministrator.oeLogout

The *testcase01-ts05oeLogout-actAdministrator.outactAdministrator.oeLogout* has the following properties:

<b>TEST STEP</b>	
<i>ts05oeLogout</i>	
to test the logout of a connected administrator.	
<i>Test Sent Message</i>	<p>TSM 1</p> <p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actAdministrator.outactAdministrator.oeLogout ()</b></p>
<i>Variables</i>	
V 1	<b>TheActor:actAdministrator</b> an actAdministrator actor as subtype of actAuthenticated can send oeLogout messages to the system.
<i>Constraints</i>	
C 1	TheActor is any actAdministrator instance existing in the environment. It is expected that there exists at least one which is the same during all the test case.
<i>Oracle Constraints</i>	
OC 1	the AMessage value is expected to be equal to the primitive string 'You are logged out ! Good Bye ...'
OC 2	the administrator should have received the message AMessae.

The listing 6.5 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actAdministrator
4 }
5
6 constraints{
7   TheActor = TheSystem.rnactAdministrator->any2(true)
8 }
9
10 oracle{
11   variables{
12     AMessage:ptString
13   }
14   constraints{
15     AMessage = 'You are logged out ! Good Bye ...'
16     TheActor.inactAdministrator.ieMessage(AMessage)
17   }
18 }
```

Listing 6.5: **Messip** (MCL-oriented) specification of the test step *testcase01-ts05oeLogout*.

#### 6.1.1.6 testcase01-ts06oeSetClock02-actActivator.outactActivator.oeSetClock

The `testcase01-ts06oeSetClock02-actActivator.outactActivator.oeSetClock` has the following properties:

<b>TEST STEP</b>	
<i>ts06oeSetClock02</i>	
test the update of the current time.	
<i>Test Sent Message</i>	
TSM 1	<b>out:TheActor</b> <b>sends to system</b> <b>actActivator.outactActivator.oeSetClock (ACurrentClock)</b>
<i>Variables</i>	
V 1	<b>TheActor:icrash.environment.actActivator</b> proactive actors responsible of requesting the update of the system's clock.
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 26th November 2017 at 10:15:00 using a 24-hours notation.
<i>Oracle Constraints</i>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

The listing 6.6 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
```

```

3 TheActor:actActivator
4 ACurrentClock:dtDateAndTime
5 }
6
7 constraints{
8 TheActor=TheSystem.rnactActivator->any2(true)
9 ACurrentClock.date.year.value = 2017
10 ACurrentClock.date.month.value = 11
11 ACurrentClock.date.day.value = 26
12 ACurrentClock.time.hour.value = 10
13 ACurrentClock.time.minute.value = 15
14 ACurrentClock.time.second.value = 00
15 }
16
17 oracle{
18 constraints{
19 true
20 }
21 }

```

Listing 6.6: **Messip** (MCL-oriented) specification of the test step *testcase01-ts06oeSetClock02*.

#### 6.1.1.7 testcase01-ts07oeAlert1-actComCompany.outactComCompany.oeAlert

The `testcase01-ts07oeAlert1-actComCompany.outactComCompany.oeAlert` has the following properties:

<b>TEST STEP</b>	
<b>ts07oeAlert1</b>	
tests the declaration of a new alert functionality.	
<i>Test Sent Message</i>	
TSM 1	<p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actComCompany.outactComCompany.oeAlert</b> (<b>AetHumanKind</b>, <b>AdtDate</b>, <b>AdtTime</b>, <b>AdtPhoneNumber</b>, <b>AdtGPSLocation</b>, <b>AdtComment</b>)</p>
<i>Variables</i>	
V 1	<p><b>TheActor:actComCompany</b></p> <p>actComCompany actors transfer alert declaration messages.</p>
<i>Constraints</i>	
C 1	TheActor is any instance existing in the current environment status. It is expected to exist at least one.
C 2	AetHumanKind is equal to witness
C 3	AdtDate is equal to the 26th of November 2017
C 4	AdtTime is equal to 10:10:16 using a 24-hours.
C 5	AdtPhoneNumber is equal to the ptString value '+3524666445252'.
C 6	AdtGPSLocation is equal to (49.627675 , 6.159590).
C 7	AdtComment is equal to '3 cars involved in an accident.'
<i>Oracle Constraints</i>	
OC 1	AdtSMS is equal to the ptString 'Your alert has been registered. We will handle it and keep you informed'.

***continues in next page ...***

**... Test Step table continuation**

OC 2	AdtSMS is sent to the phone number AdtPhoneNumber using the communication company having sent the alert using its ieSmsSend input message.
------	--

The listing 6.7 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actComCompany
4   AetHumanKind:etHumanKind
5   AdtDate:dtDate
6   AdtTime:dtTime
7   AdtPhoneNumber:dtPhoneNumber
8   AdtGPSLocation:dtGPSLocation
9   AdtComment:dtComment
10 }
11
12 constraints{
13   TheActor = TheSystem.rnactComCompany->any2(true)
14   AetHumanKind = witness
15   AdtDate.year.value = 2017
16   AdtDate.month.value = 11
17   AdtDate.day.value = 26
18   AdtTime.hour.value = 10
19   AdtTime.minute.value = 10
20   AdtTime.second.value = 16
21   AdtPhoneNumber.value = '+3524666445252'
22   AdtGPSLocation.latitude.value = 49.627675
23   AdtGPSLocation.longitude.value = 6.159590
24   AdtComment.value = '3 cars involved in an accident.'
25 }
26
27 oracle{
28   variables{
29     AdtSMS:dtSMS
30   }
31   constraints{
32     AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
33     TheActor.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
34   }
35 }
```

Listing 6.7: **Messir** (MCL-oriented) specification of the test step *testcase01-ts07oeAlert1*.

#### 6.1.1.8 testcase01-ts08oeSetClock03-actActivator.outactActivator.oeSetClock

The `testcase01-ts08oeSetClock03-actActivator.outactActivator.oeSetClock` has the following properties:

TEST STEP
<i>ts08oeSetClock03</i>
test the update of the current time.
<i>Test Sent Message</i>

*continues in next page ...*

*... Test Step table continuation*

TSM 1	<p><b>out:</b>TheActor</p> <p>sends to system</p> <p><b>actActivator.outactActivator.oeSetClock</b> (ACurrentClock)</p>
<b>Variables</b>	
V 1	TheActor:actActivator proactive actor responsible of requesting the update of the system's clock.
<b>Constraints</b>	
C 1	TheActor is any instance existing in the current environment status.
C 2	ACurrentClock is a fixed date equal to the 26th November 2017 at 10:30:00 using a 24-hours notation.
<b>Oracle Constraints</b>	
OC 1	true for testing only the executability (is available and can be triggered) of the operation.

The listing 6.8 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor:actActivator
4   ACurrentClock:dtDateAndTime
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactActivator->any2(true)
9   ACurrentClock.date.year.value = 2017
10  ACurrentClock.date.month.value = 11
11  ACurrentClock.date.day.value = 26
12  ACurrentClock.time.hour.value = 10
13  ACurrentClock.time.minute.value = 30
14  ACurrentClock.time.second.value = 00
15 }
16
17 oracle{
18   constraints{
19     true
20   }
21 }
```

Listing 6.8: **Messip** (MCL-oriented) specification of the test step *testcase01-ts08oeSetClock03*.

### 6.1.1.9 testcase01-ts09oeSollicitateCrisisHandling-actActivator.outactActivator.oeSollicitateCrisisHand

The testcase01-ts09oeSollicitateCrisisHandling-actActivator.outactActivator.oeSollicit has the following properties:

TEST STEP
<i>ts09oeSollicitateCrisisHandling</i>
test the proactive sollication to handle an alert.

#### Test Sent Message

*continues in next page ...*

*... Test Step table continuation*

TSM 1	<b>out:TheActor</b> <b>sends to system</b> <b>actActivator.outactActivator.oeSollicitateCrisisHandling ()</b>
<b>Variables</b>	
V 1	<b>TheActor:icrash.environment.actActivator</b> proactive actor responsible of triggering sollicitation functionality.
<b>Constraints</b>	
C 1	TheActor is any instance existing in the current environment status. It is expected to exist at least one.
<b>Oracle Variables</b>	
OV 1	<b>TheAdministrator:actAdministrator</b> actAdministrator actors can be sollicitated to handle alerts.
OV 2	<b>TheCoordinator:actCoordinator</b> actCoordinator actors can be sollicitated to handle alerts.
OV 3	<b>AMessageForCrisisHandlers:ptString</b> messages sent to sollicitated actors are of type ptString.
<b>Oracle Constraints</b>	
OC 1	TheAdministrator is any instance existing in the current environment status. It is expected to exist at least one.
OC 2	TheCoordinator is any instance existing in the current environment status. It is expected to exist at least one.
OC 3	AMessageForCrisisHandlers is equal to the ptString 'There are alerts pending since more than the defined delay. Please REACT !'
OC 4	TheCoordinator and TheAdministrator have received the message AMessageForCrisisHandlers.

The listing 6.9 provides the **Mess1P** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actActivator
4 }
5
6 constraints{
7   TheActor = TheSystem.rnactActivator->any2(true)
8 }
9
10 oracle{
11   variables{
12     TheAdministrator:actAdministrator
13     TheCoordinator:actCoordinator
14     AMessageForCrisisHandlers:ptString
15   }
16   constraints{
17     TheAdministrator = TheSystem.rnactAdministrator->any2(true)
18     TheCoordinator = TheSystem.rnactCoordinator->any2(true)
19     AMessageForCrisisHandlers = 'There are alerts pending since more than the defined delay. Please
                                  REACT !'
20     TheAdministrator.inactAdministrator.ieMessage(AMessageForCrisisHandlers)

```

```

21     TheCoordinator.inactAdministrator.ieMessage(AMessageForCrisisHandlers)
22 }
23 }
```

Listing 6.9: **Messir** (MCL-oriented) specification of the test step *testcase01-ts09oeSollicitateCrisisHandling*.

#### 6.1.1.10 testcase01-ts10oeLogin02-actAuthenticated.outactAuthenticated.oeLogin

The *testcase01-ts10oeLogin02-actAuthenticated.outactAuthenticated.oeLogin* has the following properties:

<b>TEST STEP</b>	
<i>ts10oeLogin02</i>	
test the authentified access of the coordinator	
<i>Test Sent Message</i>	
TSM 1	<b>out:TheActor</b> <b>sends to system</b> <b>actAuthenticated.outactAuthenticated.oeLogin (AdtLogin, AdtPassword)</b>
<i>Variables</i>	
V 1	<b>TheActor:actCoordinator</b> an actCoordinator actor as subtype of actAuthenticated can send oeLogin messages to the system.
<i>Constraints</i>	
C 1	TheActor is any actAdministrator instance existing in the environment. It is thus expected that there exist at least one.
C 2	AdtLogin has its value attribute equal to the primitive string 'icrashadmin' (which is the correct administrator login known by the system after the step one.)
C 3	AdtPassword has its value attribute equal to the primitive string '7WXC1359' (which is the correct administrator password known by the system after the step one.)
<i>Oracle Constraints</i>	
OC 1	the AMessage value is expected to be equal to the primitive string 'You are logged ! Welcome ...'

The listing 6.10 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AdtLogin:dtLogin
5   AdtPassword:dtPassword
6 }
7
8 constraints{
9   TheActor = TheSystem.rnactCoordinator->select(a | a.rnctCoordinator.login.value.eq('steve'))->any2
10  (true)
11  AdtLogin.value.eq('steve')
11  AdtPassword.value.eq('pwdMessirExcalibur2017')
```

```

12 }
13
14 oracle{
15   variables{
16     AMessage:ptString
17   }
18 constraints{
19   AMessage = 'You are logged ! Welcome ...'
20   TheActor.inactAuthenticated.ieMessage(AMessage)
21 }
22 }
```

Listing 6.10: **Messip** (MCL-oriented) specification of the test step *testcase01-ts10oeLogin02*.

### 6.1.1.11 testcase01-ts11oeGetCrisisSet-actCoordinator.outactCoordinator.oeGetCrisisSet

The *testcase01-ts11oeGetCrisisSet-actCoordinator.outactCoordinator.oeGetCrisisSet* has the following properties:

TEST STEP	
<i>ts11oeGetCrisisSet</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actCoordinator.outactCoordinator.oeGetCrisisSet (AetCrisisStatus)</b></p>
<i>Variables</i>	
V 1	<b>TheActor:icrash.environment.actCoordinator</b> cf. actor documentation
V 2	<b>AetCrisisStatus:icrash.concepts.primarytypes.datatypes.etCrisisStatus</b> cf. actor documentation
V 3	<b>ActCrisis:icrash.concepts.primarytypes.classes.ctCrisis</b> cf. actor documentation
<i>Constraints</i>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AetCrisisStatus value is pending
<i>Oracle Constraints</i>	
OC 1	ActCrisis is any ctCrisis instance that has been sent to TheActor.

The listing 6.11 provides the **Messip** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AetCrisisStatus : etCrisisStatus
5 }
6
7 constraints{
```

```

8   TheActor=TheSystem.rnactCoordinator
9     ->select(a | a.bnctCoordinator.login.value.eq('steve'))
10    ->any2(true)
11  AetCrisisStatus = pending
12 }
13
14 oracle{
15   variables{
16     ActCrisis:ctCrisis
17   }
18   constraints{
19     TheActor.bnactCoordinator.ieSendACrisis(ActCrisis)
20   }
21 }
```

Listing 6.11: **Messir** (MCL-oriented) specification of the test step *testcase01-ts11oeGetCrisisSet*.

### 6.1.1.12 testcase01-ts12oeSetCrisisHandler-actCoordinator.outactCoordinator.oeSetCrisisHandler

The *testcase01-ts12oeSetCrisisHandler-actCoordinator.outactCoordinator.oeSetCrisisHandler* has the following properties:

<b>TEST STEP</b>	
<i>ts12oeSetCrisisHandler</i> cf. actor documentation	
<b>Test Sent Message</b>	
TSM 1	<b>out:TheActor</b> sends to system <b>actCoordinator.outactCoordinator.oeSetCrisisHandler (AdtCrisisID)</b>
<b>Variables</b>	
V 1	<b>TheActor:icrash.environment.actCoordinator</b> cf. actor documentation
V 2	<b>TheComCompany:icrash.environment.actComCompany</b> cf. actor documentation
V 3	<b>TheCoordinator:icrash.environment.actCoordinator</b> cf. actor documentation
V 4	<b>AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID</b> cf. actor documentation
V 5	<b>AMessage:lu.uni.lassy.messir.libraries.primitives.ptString</b> cf. actor documentation
V 6	<b>AdtPhoneNumber:icrash.concepts.primarytypes.datatypes.dtPhoneNumber</b> cf. actor documentation
V 7	<b>AdtSMS:icrash.concepts.secondarytypes.datatypes.dtSMS</b> cf. actor documentation
V 8	<b>ActAlert:icrash.concepts.primarytypes.classes.ctAlert</b> cf. actor documentation
<b>Constraints</b>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID as a value of 1

*continues in next page ...*

**... Test Step table continuation**

C 3	AMessage is the string 'You are now considered as handling the crisis !'
C 4	AdtPhoneNumber
C 5	AdtSMS has for value the string 'The handling of your alert by our services is in progress !'
<b>Oracle Constraints</b>	
OC 1	there is a communication company actor that received the message ieSmsSend(AdtPhoneNumber,AdtSMS)
OC 2	there is a coordinator actor that received an alert using the message ieSendAnAlert(ActAlert)

The listing 6.12 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AdtCrisisID : dtCrisisID
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactCoordinator
9     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
10    ->any2(true)
11 }
12
13 oracle{
14   variables{
15     AMessage:ptString
16     AdtPhoneNumber:dtPhoneNumber
17     AdtSMS:dtSMS
18     ActAlert:ctAlert
19     TheComCompany: actComCompany
20     TheCoordinator:actCoordinator
21   }
22 constraints{
23   AMessage = 'You are now considered as handling the crisis !'
24   AdtSMS.value = 'The handling of your alert by our services is in progress !'
25   TheComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
26   TheCoordinator.inactCoordinator.ieSendAnAlert(ActAlert)
27   TheActor.inactAuthenticated.ieMessage(AMessage)
28 }
29 }
```

Listing 6.12: **Messir** (MCL-oriented) specification of the test step *testcase01-ts12oeSetCrisisHandler*.

#### 6.1.1.13 testcase01-ts13oeSetClock04-actActivator.outactActivator.oeSetClock

The *testcase01-ts13oeSetClock04-actActivator.outactActivator.oeSetClock* has the following properties:

TEST STEP
<i>ts13oeSetClock04</i>
cf. actor documentation
<i>Test Sent Message</i>

*continues in next page ...*

*... Test Step table continuation*

TSM 1	<p><b>out:</b>TheActor</p> <p>sends to system</p> <p><b>actActivator.outactActivator.oeSetClock</b> (ACurrentClock)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actActivator cf. actor documentation
V 2	ACurrentClock:lu.uni.lassy.messir.libraries.calendar.dtDateAndTime cf. actor documentation
<i>Constraints</i>	
C 1	TheActor
C 2	ACurrentClock

The listing 6.13 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor:actActivator
4   ACurrentClock:dtDateAndTime
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactActivator->any2(true)
9   ACurrentClock.date.year.value = 2017
10  ACurrentClock.date.month.value = 11
11  ACurrentClock.date.day.value = 26
12  ACurrentClock.time.hour.value = 10
13  ACurrentClock.time.minute.value = 45
14  ACurrentClock.time.second.value = 00
15 }
16
17 oracle{
18   constraints{
19     true
20   }
21 }
```

Listing 6.13: **Messir** (MCL-oriented) specification of the test step *testcase01-ts13oeSetClock04*.

#### 6.1.1.14 testcase01-ts14oeValidateAlert-actCoordinator.outactCoordinator.oeValidateAlert

The *testcase01-ts14oeValidateAlert-actCoordinator.outactCoordinator.oeValidateAlert* has the following properties:

TEST STEP
<i>ts14oeValidateAlert</i> cf. actor documentation
<i>Test Sent Message</i>

*continues in next page ...*

*... Test Step table continuation*

TSM 1	<p><b>out:</b>TheActor</p> <p>sends to system</p> <p><b>actCoordinator.outactCoordinator.oeValidateAlert</b> (AdtAlertID)</p>
<b>Variables</b>	
V 1	<b>TheActor:icrash.environment.actCoordinator</b> cf. actor documentation
V 2	<b>AdtAlertID:icrash.concepts.primarytypes.datatypes.dtAlertID</b> cf. actor documentation
V 3	<b>AMessage:lu.uni.lassy.messir.libraries.primitives.ptString</b> cf. actor documentation
<b>Constraints</b>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtAlertID
C 3	AMessage
<b>Oracle Constraints</b>	
OC 1	

The listing 6.14 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AdtAlertID : dtAlertID
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactCoordinator
9     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
10    ->any2(true)
11 }
12
13 oracle{
14   variables{
15     AMessage:ptString
16   }
17   constraints{
18     AMessage = 'The Alert is now declared as valid !'
19     TheActor.actAuthenticated.inactAuthenticated.ieMessage(AMessage)
20   }
21 }
```

Listing 6.14: **Messir** (MCL-oriented) specification of the test step *testcase01-ts14oeValidateAlert*.

#### 6.1.1.15 testcase01-ts15oeAlert2-actComCompany.outactComCompany.oeAlert

The `testcase01-ts15oeAlert2-actComCompany.outactComCompany.oeAlert` has the following properties:

<b>TEST STEP</b>	
<i>ts15oeAlert2</i> cf. actor documentation	
<b>Test Sent Message</b>	
TSM 1	<p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actComCompany.outactComCompany.oeAlert (AetHumanKind, AdtDate, AdtTime, AdtPhoneNumber, AdtGPSLocation, AdtComment)</b></p>
<b>Variables</b>	
V 1	<b>TheActor:icrash.environment.actComCompany</b> cf. actor documentation
V 2	<b>AetHumanKind:icrash.concepts.primarytypes.datatypes.etHumanKind</b> cf. actor documentation
V 3	<b>AdtDate:lu.uni.lassy.messir.libraries.calendar.dtDate</b> cf. actor documentation
V 4	<b>AdtTime:lu.uni.lassy.messir.libraries.calendar.dtTime</b> cf. actor documentation
V 5	<b>AdtPhoneNumber:icrash.concepts.primarytypes.datatypes.dtPhoneNumber</b> cf. actor documentation
V 6	<b>AdtGPSLocation:icrash.concepts.primarytypes.datatypes.dtGPSLocation</b> cf. actor documentation
V 7	<b>AdtComment:icrash.concepts.primarytypes.datatypes.dtComment</b> cf. actor documentation
V 8	<b>AdtSMS:icrash.concepts.secondarytypes.datatypes.dtSMS</b> cf. actor documentation
<b>Constraints</b>	
C 1	TheActor
C 2	AetHumanKind
C 3	AdtDate
C 4	AdtTime
C 5	AdtPhoneNumber
C 6	AdtGPSLocation
C 7	AdtComment
C 8	AdtSMS
<b>Oracle Constraints</b>	
OC 1	

The listing 6.15 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actComCompany
4   AetHumanKind:etHumanKind
5   AdtDate:dtDate
6   AdtTime:dtTime

```

```

7  AdtPhoneNumber:dtPhoneNumber
8  AdtGPSLocation:dtGPSLocation
9  AdtComment:dtComment
10 }
11
12 constraints{
13   TheActor = TheSystem.rnactComCompany->any2(true)
14   AetHumanKind = witness
15   AdtDate.year.value = 2017
16   AdtDate.month.value = 11
17   AdtDate.day.value = 26
18   AdtTime.hour.value = 10
19   AdtTime.minute.value = 20
20   AdtTime.second.value = 00
21   AdtPhoneNumber.value = '+3524666445000'
22   AdtGPSLocation.latitude.value = 49.627095
23   AdtGPSLocation.longitude.value = 6.160251
24   AdtComment.value = 'A car crash just happened.'
25 }
26
27 oracle{
28   variables{
29     AdtSMS:dtSMS
30   }
31   constraints{
32     AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
33     TheActor.actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber, AdtSMS)
34   }
35 }

```

Listing 6.15: **Messir** (MCL-oriented) specification of the test step *testcase01-ts15oeAlert2*.

#### 6.1.1.16 testcase01-ts16oeSetClock05-actActivator.outactActivator.oeSetClock

The *testcase01-ts16oeSetClock05-actActivator.outactActivator.oeSetClock* has the following properties:

<b>TEST STEP</b>	
<i>ts16oeSetClock05</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p><b>out:TheActor</b></p> <p>sends to system</p> <p><b>actActivator.outactActivator.oeSetClock (ACurrentClock)</b></p>
<i>Variables</i>	
V 1	<b>TheActor:icrash.environment.actActivator</b> cf. actor documentation
V 2	<b>ACurrentClock:lu.uni.lassy.messir.libraries.calendar.dtDateAndTime</b> cf. actor documentation
<i>Constraints</i>	
C 1	TheActor
C 2	ACurrentClock

The listing 6.16 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor:actActivator
4   ACurrentClock:dtDateAndTime
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactActivator->any2(true)
9   ACurrentClock.date.year.value = 2017
10  ACurrentClock.date.month.value = 11
11  ACurrentClock.date.day.value = 26
12  ACurrentClock.time.hour.value = 12
13  ACurrentClock.time.minute.value = 45
14  ACurrentClock.time.second.value = 00
15 }
16
17 oracle{
18   constraints{
19     true
20   }
21 }
```

Listing 6.16: **Messir** (MCL-oriented) specification of the test step *testcase01-ts16oeSetClock05*.

#### 6.1.1.17 testcase01-ts17oeSetCrisisStatus-actCoordinator.outactCoordinator.oeSetCrisisStatus

The *testcase01-ts17oeSetCrisisStatus-actCoordinator.outactCoordinator.oeSetCrisisStatus* has the following properties:

TEST STEP	
<i>ts17oeSetCrisisStatus</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p><b>actCoordinator.outactCoordinator.oeSetCrisisStatus</b> (AdtCrisisID, AetCrisisStatus)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 3	AetCrisisStatus:icrash.concepts.primarytypes.datatypes.etCrisisStatus cf. actor documentation
V 4	AMessage:lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
<i>Constraints</i>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID

*continues in next page ...*

**... Test Step table continuation**

C 3	AetCrisisStatus
C 4	AMessage
<b>Oracle Constraints</b>	
OC 1	

The listing 6.17 provides the **Messip** (MCL-oriented) specification of the test step.

```

1  variables{
2    TheActor : actCoordinator
3    AdtCrisisID : dtCrisisID
4    AetCrisisStatus : etCrisisStatus
5  }
6
7
8  constraints{
9    TheActor=TheSystem.rnactCoordinator
10   ->select(a | a.rnctCoordinator.login.value.eq('steve'))
11   ->any2(true)
12 }
13
14 oracle{
15   variables{
16     AMessage:ptString
17   }
18   constraints{
19     AMessage = 'The crisis status has been updated !'
20     TheActor.inactAuthenticated.ieMessage(AMessage)
21   }
22 }
```

Listing 6.17: **Messip** (MCL-oriented) specification of the test step *testcase01-ts17oeSetCrisisStatus*.

#### 6.1.1.18 testcase01-ts18oeReportOnCrisis-actCoordinator.outactCoordinator.oeReportOnCrisis

The *testcase01-ts18oeReportOnCrisis-actCoordinator.outactCoordinator.oeReportOnCrisis* has the following properties:

<b>TEST STEP</b>	
<i>ts18oeReportOnCrisis</i>	
cf. actor documentation	
<i>Test Sent Message</i>	
TSM 1	<p>out:TheActor</p> <p>sends to system</p> <p><b>actCoordinator.outactCoordinator.oeReportOnCrisis</b> (AdtCrisisID, AdtComment)</p>
<i>Variables</i>	
V 1	TheActor:icrash.environment.actCoordinator cf. actor documentation
V 2	AdtCrisisID:icrash.concepts.primarytypes.datatypes.dtCrisisID <i>continues in next page ...</i>

**... Test Step table continuation**

V 3	cf. actor documentation <b>AdtComment:icrash.concepts.primarytypes.datatypes.dtComment</b>
V 4	cf. actor documentation <b>AMessage:lu.uni.lassy.messir.libraries.primitives.ptString</b> cf. actor documentation
<b>Constraints</b>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID
C 3	AdtComment
C 4	AMessage
<b>Oracle Constraints</b>	
OC 1	

The listing 6.18 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AdtCrisisID : dtCrisisID
5   AdtComment : dtComment
6 }
7
8 constraints{
9   TheActor=TheSystem.rnactCoordinator
10   ->select(a | a.rnctCoordinator.login.value.eq('steve'))
11   ->any2(true)
12 }
13
14 oracle{
15   variables{
16     AMessage:ptString
17   }
18   constraints{
19     AMessage = 'The crisis comment has been updated !'
20     TheActor.inactAuthenticated.ieMessage(AMessage)
21   }
22 }
```

Listing 6.18: **Messir** (MCL-oriented) specification of the test step *testcase01-ts18oeReportOnCrisis*.

#### 6.1.1.19 testcase01-ts19oeCloseCrisis-actCoordinator.outactCoordinator.oeCloseCrisis

The *testcase01-ts19oeCloseCrisis-actCoordinator.outactCoordinator.oeCloseCrisis* has the following properties:

TEST STEP
<i>ts19oeCloseCrisis</i>
cf. actor documentation
<i>Test Sent Message</i>

*continues in next page ...*

*... Test Step table continuation*

TSM 1	<p><b>out:</b>TheActor</p> <p>sends to system</p> <p><b>actCoordinator.outactCoordinator.oeCloseCrisis (AdtCrisisID)</b></p>
<b>Variables</b>	
V 1	<b>TheActor:</b> icrash.environment.actCoordinator cf. actor documentation
V 2	<b>AdtCrisisID:</b> icrash.concepts.primarytypes.datatypes.dtCrisisID cf. actor documentation
V 3	<b>AMessage:</b> lu.uni.lassy.messir.libraries.primitives.ptString cf. actor documentation
<b>Constraints</b>	
C 1	TheActor is the coordinator actor related to a coordinator in the system's state having steve as login value
C 2	AdtCrisisID
C 3	AMessage
<b>Oracle Constraints</b>	
OC 1	

The listing 6.19 provides the **Messir** (MCL-oriented) specification of the test step.

```

1
2 variables{
3   TheActor : actCoordinator
4   AdtCrisisID : dtCrisisID
5 }
6
7 constraints{
8   TheActor=TheSystem.rnactCoordinator
9     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
10    ->any2(true)
11 }
12
13 oracle{
14   variables{
15     AMessage:ptString
16   }
17   constraints{
18     AMessage = 'The crisis is now closed !'
19     TheActor.inactAuthenticated.ieMessage(AMessage)
20   }
21 }
```

Listing 6.19: **Messir** (MCL-oriented) specification of the test step *testcase01-ts19oeCloseCrisis*.

### 6.1.2 Test Case Instance - instance01

### 6.1.3 Test Case Instance - instance01Part01

Figure 6.1 Sequence diagram representing the first part of a simple and complete testcase instance for *iCrash*.

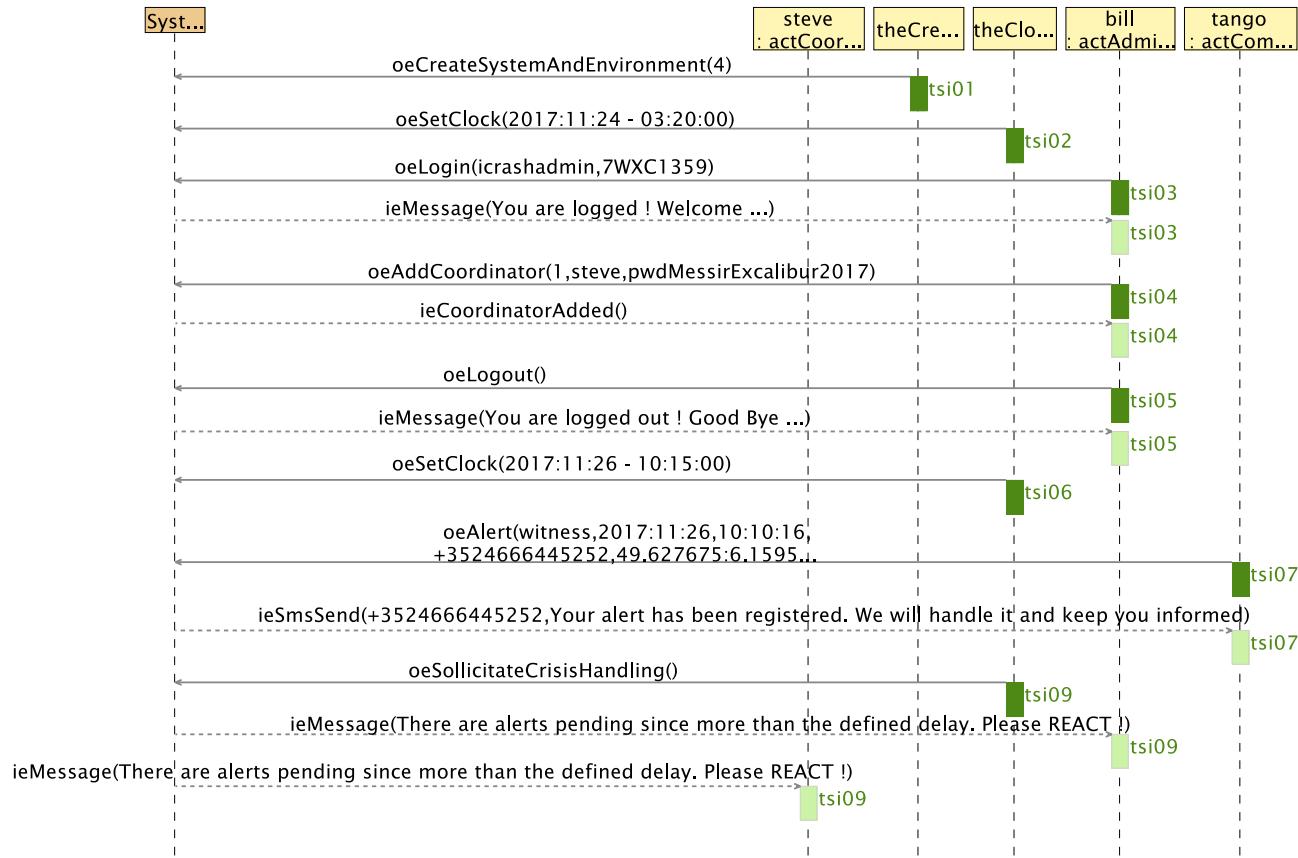


Figure 6.1: tci-testcase01-instance01-Part01 testcase instance sequence diagram

#### 6.1.4 Test Case Instance - instance01Part02

Figure 6.2 Sequence diagram representing the second part of a simple and complete testcase instance for *iCrash*.



Figure 6.2: tci-testcase01-instance01-Part02 testcase instance sequence diagram



# Chapter 7

## Additional Constraints

### 7.1 Quality Constraints

Description of all the constraints that concern the required quality criteria according to their ISO definition [3].

#### 7.1.1 Functional suitability

Constraints on the degree to which the product provides functions that meet stated and implied needs when the product is used under specified conditions.

##### 7.1.1.1 Functional completeness

List of requirements on the degree to which the set of functions covers all the specified tasks and user objectives.

1. (to be filled)

##### 7.1.1.2 Functional correctness

List of requirements on the degree to which the set of functions covers all the specified tasks and user objectives.

1. (to be filled)

##### 7.1.1.3 Functional appropriateness

List of requirements on the degree to which the functions facilitate the accomplishment of specified tasks and objectives.

1. (to be filled)

### 7.1.2 Performance efficiency

Constraints on the performance relative to the amount of resources used under stated conditions

#### 7.1.2.1 Time behaviour

List of requirements on the degree to which the response and processing times and throughput rates of a product or system, when performing its functions, meet requirements.

1. (to be filled)

### 7.1.2.2 Resource utilization

List of requirements on the degree to which the amounts and types of resources used by a product or system, when performing its functions, meet requirements.

1. (to be filled)

### 7.1.2.3 Capacity

List of requirements on the degree to which the maximum limits of a product or system parameter meet requirements.

1. (to be filled)

## 7.1.3 Compatibility

Constraints on the degree to which a product, system or component can exchange information with other products, systems or components, and/or perform its required functions, while sharing the same hardware or software environment.

### 7.1.3.1 Co-existence

List of requirements on the degree to which a product can perform its required functions efficiently while sharing a common environment and resources with other products, without detrimental impact on any other product.

1. (to be filled)

### 7.1.3.2 Interoperability

List of requirements on the degree to which two or more systems, products or components can exchange information and use the information that has been exchanged.

1. (to be filled)

## 7.1.4 Usability

Constraints on the usability degree to which a product or system can be used by specified users to achieve specified goals with effectiveness, efficiency and satisfaction in a specified context of use.

### 7.1.4.1 Appropriateness recognizability

List of requirements on the degree to which users can recognize whether a product or system is appropriate for their needs.

1. (to be filled)

### 7.1.4.2 Learnability

List of requirements on the degree to which a product or system can be used by specified users to achieve specified goals of learning to use the product or system with effectiveness, efficiency, freedom from risk and satisfaction in a specified context of use.

1. (to be filled)

#### 7.1.4.3 Operability

List of requirements on the degree to which a product or system has attributes that make it easy to operate and control.

1. (to be filled)

#### 7.1.4.4 User error protection

List of requirements on the degree to which a system protects users against making errors.

1. (to be filled)

#### 7.1.4.5 User interface aesthetics

List of requirements on the degree to which a user interface enables pleasing and satisfying interaction for the user.

1. (to be filled)

#### 7.1.4.6 Accessibility

List of requirements on the degree to which a product or system can be used by people with the widest range of characteristics and capabilities to achieve a specified goal in a specified context of use.

1. (to be filled)

### 7.1.5 Reliability

Constraints on the degree to which a system, product or component performs specified functions under specified conditions for a specified period of time.

#### 7.1.5.1 Maturity

List of requirements on the degree to which a system, product or component meets needs for reliability under normal operation.

1. (to be filled)

#### 7.1.5.2 Availability

List of requirements on the degree to which a system, product or component is operational and accessible when required for use.

1. (to be filled)

#### 7.1.5.3 Fault tolerance

List of requirements on the degree to which a system, product or component operates as intended despite the presence of hardware or software faults.

1. (to be filled)

#### 7.1.5.4 Recoverability

List of requirements on the degree to which, in the event of an interruption or a failure, a product or system can recover the data directly affected and re-establish the desired state of the system.

1. (to be filled)

#### 7.1.6 Security

Constraints on the degree to which a product or system protects information and data so that persons or other products or systems have the degree of data access appropriate to their types and levels of authorization.

##### 7.1.6.1 Confidentiality

List of requirements on the degree to which a product or system ensures that data are accessible only to those authorized to have access.

1. (to be filled)

##### 7.1.6.2 Integrity

List of requirements on the degree to which a system, product or component prevents unauthorized access to, or modification of, computer programs or data.

1. (to be filled)

##### 7.1.6.3 Non-repudiation

List of requirements on the degree to which actions or events can be proven to have taken place, so that the events or actions cannot be repudiated later.

1. (to be filled)

##### 7.1.6.4 Accountability

List of requirements on the degree to which the actions of an entity can be traced uniquely to the entity.

1. (to be filled)

##### 7.1.6.5 Authenticity

List of requirements on the degree to which the identity of a subject or resource can be proved to be the one claimed.

1. (to be filled)

#### 7.1.7 Maintainability

Constraints on the degree of effectiveness and efficiency with which a product or system can be modified by the intended maintainers.

### 7.1.7.1 Modularity

List of requirements on the degree to which a system or computer program is composed of discrete components such that a change to one component has minimal impact on other components.

1. (to be filled)

### 7.1.7.2 Reusability

List of requirements on the degree to which an asset can be used in more than one system, or in building other assets.

1. (to be filled)

### 7.1.7.3 Analysability

List of requirements on the degree of effectiveness and efficiency with which it is possible to assess the impact on a product or system of an intended change to one or more of its parts, or to diagnose a product for deficiencies or causes of failures, or to identify parts to be modified.

1. (to be filled)

### 7.1.7.4 Modifiability

List of requirements on the degree to which a product or system can be effectively and efficiently modified without introducing defects or degrading existing product quality.

1. (to be filled)

### 7.1.7.5 Testability

List of requirements on the degree of effectiveness and efficiency with which test criteria can be established for a system, product or component and tests can be performed to determine whether those criteria have been met.

1. (to be filled)

## 7.1.8 Portability

Constraints on the degree of effectiveness and efficiency with which a system, product or component can be transferred from one hardware, software or other operational or usage environment to another.

### 7.1.8.1 Adaptability

List of requirements on the degree to which a product or system can effectively and efficiently be adapted for different or evolving hardware, software or other operational or usage environments.

1. (to be filled)

### 7.1.8.2 Installability

List of requirements on the degree of effectiveness and efficiency with which a product or system can be successfully installed and/or uninstalled in a specified environment.

1. (to be filled)

### 7.1.8.3 Replaceability

List of requirements on the degree to which a product can replace another specified software product for the same purpose in the same environment.

1. (to be filled)

## 7.2 Other Constraints

Any other unclassified constraints judged as required for the product under development.

# Appendix A

## Undocumented Messir Specification Elements

### A.1 Undocumented Use Cases

#### A.1.1 Undocumented User-Goal Level Use Cases

- icrash.usecases.ugVictimSendFamilyNotification.ugVictimSendFamilyNotification
- icrash.usecases.ugWitnessSendFamilyNotification.ugWitnessSendFamilyNotification

#### A.1.2 Undocumented Subfunction Level Use Cases

- icrash.usecases.subfunctions.oeChooseInformation
- icrash.usecases.subfunctions.oeCreateAlert
- icrash.usecases.subfunctions.oeCreateCrisis
- icrash.usecases.subfunctions.oeSendNotification
- icrash.usecases.subfunctions.oeUpdateCrisis
- icrash.usecases.subfunctions.oeGetStatistic
- icrash.usecases.subfunctions.ugSecurelyUserSystem

#### A.1.3 Undocumented Use Case Views

- uc-ugVictimSendFamilyNotification

### A.2 Undocumented Use Case Instances

#### A.2.1 Undocumented User-Goal Level Use Case Instances

- usecases.uciugSecurelyUseSystem.uciugSecurelyUseSystem

#### A.2.2 Undocumented Use Case Instance Views

- uci-uciugSecurelyUseSystem

## A.3 Undocumented Environment Model Views

- em-view10
- em-view12

## A.4 Undocumented Primary Types

### A.4.1 Undocumented Primary Classe Types

- icrash.concepts.primarytypes.classes.ctgetStatistic

## A.5 Undocumented Concept Model Views

- cm-pt-dt-lv-02-dtGPSLocation

## A.6 Undocumented Operation Specifications

- icrash.concepts.primarytypes.classes.ctgetStatistic.getstatisticCrises
- icrash.concepts.primarytypes.classes.ctgetStatistic.sendStatistic
- icrash.environment.actAdministrator.oegetStatistic
- icrash.environment.actAuthenticated.outactAuthenticated.oeCreateAlert
- icrash.environment.actCoordinator.outactCoordinator.oeCreateAlert
- icrash.environment.actCoordinator.outactCoordinator.oeCreateCrisis
- icrash.environment.actCoordinator.outactCoordinator.oeUpdateCrisis
- icrash.environment.actDatabase.outactDatabase.oeSendStatistic
- icrash.environment.actDatabase.outactDatabase.oegetStatistic
- icrash.environment.actSystem.outactSystem.oeChooseInformation
- icrash.environment.actSystem.outactSystem.oeSendNotification
- icrash.environment.actSystem.outactSystem.oegetStatistic
- icrash.environment.actSystem.outactSystem.ugSercurelyUserSystem
- icrash.environment.actSystem.outactSystem.ugVictimSendFamilyNotification
- icrash.environment.actSystem.outactSystem.ugWitnessSendFamilyNotification

## A.7 Undocumented Test-Case Instance Specifications

- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01
- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01Part01
- lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01.instance01Part02

## Appendix B

Specification project  
`lu.uni.lassy.excalibur.examples.icrash`

## B.1 Use Cases Model

This section contains the use cases elicited during the requirements elicitation phase. The use cases are textually described as suggested by the **Messir** method and inspired by the standard Cokburn template [2].

### B.1.1 Use Cases

#### B.1.1.1 subfunction-oeCloseCrisis

the `actCoordinator`'s goal is to declare a crisis as closed.

USE-CASE DESCRIPTION	
<i>Name</i>	oeCloseCrisis
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AdtCrisisID: dtCrisisID 1	
<i>Primary actor(s)</i>	
1	<code>actCoordinator</code> [active]
<i>Goal(s) description</i>	
the <code>actCoordinator</code> 's goal is to declare a crisis as closed.	
<i>Protocol condition(s)</i>	
1	the iCrash system has been deployed.
<i>Pre-condition(s)</i>	
1	none
<i>Main post-condition(s)</i>	
1	the crisis is known by the system to be closed.
2	a message <code>ieMessage</code> (AMessage) is sent to the <code>actCoordinator</code> to inform him that his crisis is now considered as closed.

Figure B.1 shows the use case diagram for the oeCloseCrisis subfunction use case

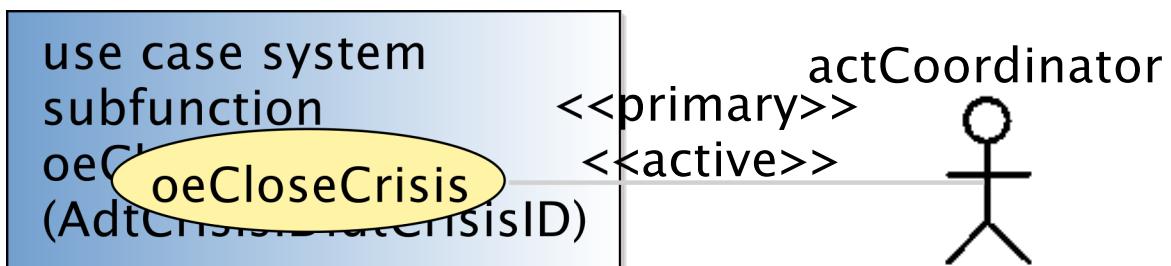


Figure B.1: oeCloseCrisis subfunction use case

# Appendix C

## Messir Specification Files Listing

### C.1 File ./src-gen/messir-spec/.views.msr

```
1 //  
2 //DON'T TOUCH THIS FILE !!!  
3 //  
4 package uuid7e0d382938204f3c9036c123484468fb {  
5   Concept Model {}  
6 }
```

Listing C.1: Messir Spec. file .views.msr.

### C.2 File ./src-gen/messir-spec/operations/concepts/secondarytypes-datatatypes/dtSMS.msr

```
1 package icrash.operations.concepts.secondarytypes.datatypes.dtSMS{  
2  
3 import lu.uni.lassy.messir.libraries.primitives  
4 import lu.uni.lassy.messir.libraries.calendar  
5 import lu.uni.lassy.messir.libraries.math  
6  
7 import icrash.concepts.primarytypes.datatypes  
8 import icrash.concepts.primarytypes.classes  
9 import icrash.concepts.secondarytypes.datatypes  
10 import icrash.concepts.secondarytypes.classes  
11  
12 Operation Model {  
13 operation: icrash.concepts.secondarytypes.datatypes.dtSMS.is():ptBoolean{  
14   postF{  
15     let TheResult: ptBoolean in  
16     let MaxLength: ptInteger in  
17     ( if  
18       ( MaxLength = 160  
19         and self.value.length().leq(MaxLength)  
20       )  
21     then (TheResult = true)  
22     else (TheResult = false)  
23     endif  
24     result = TheResult  
25   })  
26 prolog{ "src/Operations/Concepts/SecondaryTypesDatatypes/SecondaryTypesDatatypes-dtSMS-is.pl"}  
27 }  
28 }  
29 }
```

Listing C.2: Messir Spec. file dtSMS.msr.

### C.3 File ./src-gen/messir-spec/operations/environment/environment-actActivator-oeSetClock.msr

```

1 package icrash.operations.environment.actActivator.oeSetClock {
2
3 import icrash.environment
4
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.calendar
7 import lu.uni.lassy.messir.libraries.math
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11
12 Operation Model {
13
14 operation: actActivator.outactActivator.oeSetClock(AcurrentClock:dtDateAndTime) :ptBoolean
15 {
16 preP{
17 let TheSystem: ctState in
18 let AvpStarted: ptBoolean in
19
20 /* PreP01 */
21 self.rnActor.rnSystem = TheSystem
22 and self.rnActor.rnSystem.vpStarted = AvpStarted
23 and AvpStarted = true
24 and TheSystem.clock.lt(AcurrentClock)
25 }
26 preF{true}
27
28 postF{
29 let TheSystem: ctState in
30 self.rnActor.rnSystem = TheSystem
31
32 /* PostF01 */
33 and TheSystem@post.clock = AcurrentClock
34 }
35 postP{true}
36
37 prolog{"src/Operations/Environment/OUT/outactActivator-oeSetClock.pl"}
38
39 }
40 }
41 }
```

Listing C.3: Messir Spec. file environment-actActivator-oeSetClock.msr.

### C.4 File ./src-gen/messir-spec/operations/environment/environment-actActivator-oeSollicitateCrisisHandling.msr

```

1 package icrash.operations.environment.actActivator.oeSollicitateCrisisHandling {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.concepts.primarytypes.classes
10 import icrash.environment
11
12 Operation Model {
13
14 operation: actActivator.outactActivator.oeSollicitateCrisisHandling():ptBoolean
15 {
16 preP{
17 let TheSystem: ctState in
```

```

18 let AvpStarted: ptBoolean in
19 let ColctCrisisToHandle:
20     Bag(ctCrisis) in
21
22 self.rnActor.rnSystem = TheSystem
23
24 /* PreP01 */
25 and TheSystem.vpStarted
26
27 /* PreP02 */
28 and TheSystem.rnctCrisis->select(handlingDelayPassed())
29     = ColctCrisisToHandle
30 and ColctCrisisToHandle->size().geq(1)
31 }
32 preF{true}
33
34 postF{
35 let TheSystem: ctState in
36 let AMessageForCrisisHandlers: dtComment in
37 let ColctCrisisToAllocateIfPossible:Bag(ctCrisis) in
38
39 self.rnActor.rnSystem = TheSystem
40 /* PostF01 */
41 and TheSystem.rnctCrisis->select(maxHandlingDelayPassed())
42     = ColctCrisisToAllocateIfPossible
43 and ColctCrisisToAllocateIfPossible->forAll(isAllocatedIfPossible())
44
45 /* PostF02 */
46 and TheSystem.rnctCrisis->select(handlingDelayPassed())
47     = ColctCrisisToHandle
48
49 and ColctCrisisToHandle->msrColSubtract(ColctCrisisToAllocateIfPossible)
50     = ColctCrisisToRemind
51
52 and if (ColctCrisisToRemind->size().geq(1))
53     then (AMessageForCrisisHandlers.value
54         ='There are alerts pending since more than the defined delay. Please REACT !'
55         and TheSystem.rnactAdministrator.
56             rnInterfaceIN^ieMessage(AMessageForCrisisHandlers)
57         and TheSystem.rnactCoordinator
58             ->forAll(rnInterfaceIN^ieMessage(AMessageForCrisisHandlers))
59     )
60 else true
61 endif
62 }
63 postP{
64 let TheSystem: ctState in
65 let TheClock: dtDateAndTime in
66
67 self.rnActor.rnSystem = TheSystem
68 and TheSystem.clock = TheClock
69 and TheSystem@post.vpLastReminder = TheClock
70 }
71
72 prolog{"src/Operations/Environment/OUT/outactActivator-oeSollicitateCrisisHandling.pl"}
73 }
74 }
75 }

```

Listing C.4: Messir Spec. file environment-actActivator-oeSollicitateCrisisHandling.msr.

## C.5 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeAddCoordinator.msr

```

1 package icrash.operations.environment.actAdministrator.oeAddCoordinator {
2
3 import lu.uni.lassy.messir.libraries.primitives
4

```

```

5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.environment
8
9 Operation Model {
10
11 operation: actAdministrator.outactAdministrator.oeAddCoordinator(AdtCoordinatorID:dtCoordinatorID,
12 AdtLogin:dtLogin, AdtPassword:dtPassword):ptBoolean
12 {
13 preP{
14 let TheSystem: ctState in
15 let TheActor:actAdministrator in
16
17 self.rnActor.rnSystem = TheSystem
18 and self.rnActor = TheActor
19
20 /* PreP01 */
21 and TheSystem.vpStarted = true
22 /* PreP02 */
23 and TheActor.rnctAuthenticated.vpIsLogged = true
24 }
25 preF{
26 let TheSystem: ctState in
27 let TheActor:actAdministrator in
28 let ColctCoordinators:Bag(ctCoordinator) in
29
30 self.rnActor.rnSystem = TheSystem
31 and self.rnActor = TheActor
32 /* PreF01 */
33 and TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
34 = ColctCoordinators
35 and ColctCoordinators->isEmpty() = true
36 }
37 postF{
38 let TheSystem: ctState in
39 let TheactCoordinator:actCoordinator in
40 let ThectCoordinator:ctCoordinator in
41 self.rnActor.rnSystem = TheSystem
42 and self.rnActor = TheActor
43 /* PostF01 */
44 TheactCoordinator.init()
45 /* PostF02 */
46 and ThectCoordinator.init(AdtCoordinatorID,AdtLogin,AdtPassword)
47
48 /* PostF03 */
49 and TheactCoordinator@post.rnctCoordinator = ThectCoordinator
50
51 /* PostF04 */
52 and ThectCoordinator@post.rnactAuthenticated = TheactCoordinator
53
54 /* PostF05 */
55 and TheActor.rnInterfaceIN^ieCoordinatorAdded()
56 }
57 postP{true}
58
59 prolog{"src/Operations/Environment/OUT/outactAdministrator-oeAddCoordinator.pl"}
60 }
61 }
62 }

```

Listing C.5: Messir Spec. file environment-actAdministrator-oeAddCoordinator.msr.

## C.6 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oeDeleteCoordinator.msr

```

1 package icrash.operations.environment.actAdministrator.oeDeleteCoordinator {
2
3 import lu.uni.lassy.messir.libraries.primitives

```

```

4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.environment
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11
12 Operation Model {
13
14 operation: actAdministrator.outactAdministrator.oeDeleteCoordinator(AdtCoordinatorID:dtCoordinatorID
15 ) :ptBoolean
16 {
17     let TheSystem: ctState in
18     let TheActor:actAdministrator in
19
20     self.rnActor.rnSystem = TheSystem
21     and self.rnActor = TheActor
22
23 /* PreP01 */
24     and TheSystem.vpStarted = true
25 /* PreP02 */
26     and TheActor.rnctAuthenticated.vpIsLogged = true
27 }
28 preF{
29     let TheSystem: ctState in
30     let TheActor:actAdministrator in
31
32     self.rnActor.rnSystem = TheSystem
33     and self.rnActor = TheActor
34 /* PreF01 */
35     TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
36     = ColctCoordinators
37     and ColctCoordinators->size().eq(1)
38 }
39 postF{
40     let TheSystem: ctState in
41     let TheActor:actAdministrator in
42     let ThectCoordinator:ctCoordinator in
43     self.rnActor.rnSystem = TheSystem
44     and self.rnActor = TheActor
45 /* PostF01 */
46     TheSystem.rnctCoordinator->select(id.eq(AdtCoordinatorID))
47     = ThectCoordinator
48     and ThectCoordinator.rnactCoordinator->forAll(msrIsKilled)
49     and ThectCoordinator.msrIsKilled
50
51 /* PostF02 */
52     and TheActor.rnInterfaceIN^ieCoordinatorDeleted()
53
54 /* Post Protocol:*/
55 /* PostP01 */
56     and true
57 }
58 postP{true}
59
60 prolog{"src/Operations/Environment/OUT/outactAdministrator-oeDeleteCoordinator.pl"}
61 }
62     }
63 }

```

Listing C.6: Messir Spec. file environment-actAdministrator-oeDeleteCoordinator.msr.

## C.7 File [./src-gen/messir-spec/operations/environment-actAdministrator-oegetStatistic.msr](#)

```

2 /*
3 * @author samri
4 */
5 package icrash.operations.environment.actAdministrator.ogetStatistic.msr {
6 import lu.uni.lassy.messir.libraries.primitives
7 import lu.uni.lassy.messir.libraries.math
8 import lu.uni.lassy.messir.libraries.string
9 import lu.uni.lassy.messir.libraries.calendar
10
11 import icrash.environment
12
13 import icrash.concepts.primarytypes.classes
14 import icrash.environment
15 import icrash.concepts.primarytypes.datatypes
16 import icrash.concepts.secondarytypes.datatypes
17 /* This is the Operation Model for the statistic */
18 Operation Model {
19
20 }
21 }
```

Listing C.7: Messir Spec. file environment-actAdministrator-ogetStatistic.msr.

## C.8 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-ogetstatisticCrises.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.ogetstatisticCrises {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.environment
9
10 import icrash.concepts.primarytypes.classes
11 import icrash.environment
12 import icrash.concepts.primarytypes.datatypes
13 import icrash.concepts.secondarytypes.datatypes
14
15 //SAM Time statistic for the operation ogetstatisticCrises
16 Operation Model {
17
18 operation: icrash.environment.actAdministrator.outactAdministrator.ogetstatisticCrises(
    statisticCrises:dtgetStatisticCrisisInTime):ptBoolean{
19
20 preP {
21 let TheSystem : ctState in
22 let TheActor : actAdministrator in
23 let TheSystemToGetTheStatistic : actSystem in
24 let TheSystemDatabase : actSystem in
25
26 self. rnActor . rnSystem = TheSystem
27 and self. rnActor = TheActor
28
29 /* PreP01 The system must run(is execute)*/
30 and TheSystem.vpStarted = true
31 /* PreP02 Must login ass Administrator*/
32 and TheActor.rnctAuthenticated . vpIsLogged = true
33 /* PreP02 The Database(SQL) must open because without this the information for the statistic can't
   be called. */
34 and TheSystemDatabase.openDatabase() = true
35 }
36 /*Pre Functional*/
37 preF {
38 true
39 }
40 /*Post Functional*/
```

```

41 postF {
42   let TheSystem: ctState in
43   let TheActor:actAdministrator in
44   let TheSystemToGetTheStatistic : actSystem in
45   let TheSystemDatabase : actSystem in
46
47   self.rnActor.rnSystem = TheSystem
48   and self.rnActor = TheActor
49
50   /*PostF01 At first search all the information for this statistic*/
51   and TheSystemDatabase.searchInfromation(AdtStatistic)
52   /*PostF02 This calculate the information*/
53   and TheSystemToGetTheStatistic.calcluleTheStatistic(AdtStatisticCrises)
54   /*PostF03 get the Statistic*/
55   and TheSystemToGetTheStatistic.getstatisticCrises()
56   /*PostF04 show the statistic in the Interface.*/
57   and TheActor.rnInterfaceIN^oegetstatisticCrises(AdtStatisticCrises)
58
59 }
60 /*Post Protocol*/
61 postP {
62   true
63   // close database and logout. but at the final end not to do it yet.
64 }
65 }
66 }
67 }

```

Listing C.8: Messir Spec. file environment-actAdministrator-oegetstatisticCrises.msr.

## C.9 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oegetstatisticTypes.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.oegetstatisticTypes {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.environment
9
10 import icrash.concepts.primarytypes.classes
11 import icrash.environment
12 import icrash.concepts.primarytypes.datatypes
13 import icrash.concepts.secondarytypes.datatypes
14
15 //SAM Time /statistic for the operation oegetstatisticTypesOfCrises
16 Operation Model {
17
18   operation: icrash.environment.actAdministrator.outactAdministrator.oegetstatisticTypesOfCrises(
19     statisticTypes:dtgetStatisticTypeCrisis):ptBoolean{
20
21   /* Pre Protocol*/
22   preP {
23     let TheSystem : ctState in
24     let TheActor : actAdministrator in
25     let TheSystemToGetTheStatistic : actSystem in
26     let TheSystemDatabase : actSystem in
27
28     self. rnActor . rnSystem = TheSystem
29     and self. rnActor = TheActor
30
31   /* PreP01 The system must run(is execute)*/
32   and TheSystem.vpStarted = true
33   /* PreP02 Must login ass Administrator*/
34   and TheActor.rnctAuthenticated . vpIsLogged = true
35   /* PreP02 The Database(SQL) must open because without this the information for the statistic can't
36   be called. */

```

```

35 and TheSystemDatabase.openDatabase() = true
36 }
37
38 /*Pre Functional*/
39 preF {
40 true
41 }
42
43 /*Post Functional*/
44 postF {
45 let TheSystem: ctState in
46 let TheActor:actAdministrator in
47 let TheSystemToGetTheStatistic : actSystem in
48 let TheSystemDatabase : actSystem in
49
50 self.rnActor.rnSystem = TheSystem
51 and self.rnActor = TheActor
52
53 /*PostF01 At first search all the information for this statistic*/
54 and TheSystemDatabase.searchInfromation(AdtStatistic)
55 /*PostF02 This calculate the information*/
56 and TheSystemToGetTheStatistic.calculcTheStatistic(AdtStatisticTypesOfCrises)
57 /*PostF03 get the Statistic*/
58 and TheSystemToGetTheStatistic.getstatisticTypesOfCrises()
59 /*PostF04 show the statistic in the Interface.*/
60 and TheActor.rnInterfaceIN^oegetstatisticTypesOfCrises(AdtStatisticTypesofCrises)
61
62 }
63
64 /*Post Protocol*/
65 postP {
66 true
67 // close database and logout. but at the final end not to do it yet.
68 }
69
70 }
71 }
72 }

```

Listing C.9: Messir Spec. file environment-actAdministrator-oegetstatisticTypes.msr.

## C.10 File ./src-gen/messir-spec/operations/environment/environment-actAdministrator-oegetstatisticTypesOfCrises.msr

```

1 package icrash.environment.operations.actAdministrator.outactAdministrator.
    oegetstatisticTypesOfCrises {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.environment
8
9 import icrash.concepts.primarytypes.classes
10 import icrash.environment
11 import icrash.concepts.primarytypes.datatypes
12 import icrash.concepts.secondarytypes.datatypes
13
14 Operation Model {
15
16 }
17 }

```

Listing C.10: Messir Spec. file environment-actAdministrator-oegetstatisticTypesOfCrises.msr.

## C.11 File                    ./src-gen/messir-spec/operations/environment-actAdministrator-oegetstatisticUser.msr

```

1 /*
2 * @author samri
3 * @date Tue Apr 04 10:38:02 CEST 2017
4 */
5
6 package icrash.operations.environment.actAdministrator.oegetstatisticUser.msr {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.string
11 import lu.uni.lassy.messir.libraries.calendar
12
13 import icrash.environment
14
15 import icrash.concepts.primarytypes.classes
16 import icrash.environment
17 import icrash.concepts.primarytypes.datatypes
18 import icrash.concepts.secondarytypes.datatypes
19
20 //SAM Time statistic for the operation oegetstatisticUser
21 Operation Model {
22   operation: actAdministrator.outactAdministrator.oegetstatisticUser(mstatisticUser:
23     dtgetStatisticUserActivity) : ptBoolean
24 {
25   /* Pre Protocol*/
26   preP {
27     let TheSystem : ctState in
28     let TheActor : actAdministrator in
29     let TheSystemToGetTheStatistic : actSystem in
30     let TheSytemDatabase : actSystem in
31
32     self. rnActor . rnSystem = TheSystem
33     and self. rnActor = TheActor
34
35     /* Prep01 The system must run(is execute) */
36     and TheSystem.vpStarted = true
37     /* Prep02 Must login ass Administrator*/
38     and TheActor.rnctAuthenticated . vpIsLogged = true
39     /* Prep02 The Database(SQL) must open because without this the information for the statistic can't
40       be called. */
41     and TheSytemDatabase.openDatabase() = true
42 }
43 preF {
44   true
45 }
46
47 /*Post Functional*/
48 postF {
49   let TheSystem: ctState in
50   let TheActor:actAdministrator in
51   let TheSystemToGetTheStatistic : actSystem in
52   let TheSytemDatabase : actSystem in
53
54   self.rnActor.rnSystem = TheSystem
55   and self.rnActor = TheActor
56
57   /*PostF01 At first search all the information for this statistic*/
58   and TheSytemDatabase.searchInfromation(AdtStatistic)
59   /*PostF02 This calculate the information*/
60   and TheSystemToGetTheStatistic.calculeTheStatistic(AdtStatisticUser)
61   /*PostF03 get the Statistic*/
62   and TheSystemToGetTheStatistic.getstatisticUser()
63   /*PostF04 show the statistic in the Interface.*/
64   and TheActor.rnInterfaceIN^oegetstatisticUser(AdtStatisticUser)

```

```

65
66 }
67
68 /*Post Protocol*/
69 postP {
70 true
71 // close database and logout. but at the final end not to do it yet.
72 }
73 }
74
75 }
76
77 }

```

Listing C.11: Messir Spec. file environment-actAdministrator-oegetstatisticUser.msr.

## C.12 File ./src-gen/messir-spec/operations/environment/environment-actAuthenticated.msr

```

1 package icrash.operations.environment.actAuthenticated{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.concepts.secondarytypes.datatypes
8 import icrash.concepts.secondarytypes.classes
9 import icrash.environment
10
11 Operation Model {
12
13 operation: actAuthenticated.outactAuthenticated.oeLogin(AdtLogin:dtLogin, AdtPassword:dtPassword):
14     ptBoolean
15 {
16     let TheSystem: ctState in
17     let TheActor:actAuthenticated in
18     self.rnActor.rnSystem = TheSystem
19     and self.rnActor = TheActor
20
21 /* PreP01 */
22     and TheSystem.vpStarted = true
23 /* PreP02 */
24     and TheActor.rnctAuthenticated.vpIsLogged = false
25 }
26 preF{
27 /* PreF01 */
28 true
29 }
30 postF{
31 let TheSystem: ctState in
32 let TheactAuthenticated:actAuthenticated in
33
34 let AptStringMessageForTheactAuthenticated: ptString in
35 let AptStringMessageForTheactAdministrator:ptString in
36
37 self.rnActor.rnSystem = TheSystem
38 and self.rnActor = TheactAuthenticated
39
40 and /* PostF01 */
41 if (TheactAuthenticated.rnctAuthenticated.pwd
42     = AdtPassword
43     and TheactAuthenticated.rnctAuthenticated.login
44     = AdtLogin
45     )
46 then (AptStringMessageForTheactAuthenticated.eq('You are logged ! Welcome ...')
47     and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
48     )

```

```

49  else (AptStringMessageForTheactAuthenticated
50    .eq('Wrong identification information ! Please try again ...')
51    and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
52    and AptStringMessageForTheactAdministrator.eq('Intrusion tentative !')
53    and TheSystem.rnactAdministrator
54      .rnInterfaceIN^ieMessage(AptStringMessageForTheactAdministrator)
55    )
56  endif
57 }
58 postP{
59  let TheSystem: ctState in
60  let TheactAuthenticated:actAuthenticated in
61
62  self.rnActor.rnSystem = TheSystem
63  and self.rnActor = TheactAuthenticated
64 /* PostP01 */
65  if (TheactAuthenticated.rnctAuthenticated.pwd = AdtPassword
66    and TheactAuthenticated.rnctAuthenticated.login = AdtLogin
67    )
68  then (TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = true)
69  else true
70  endif
71 }
72 prolog{"src/Operations/Environment/OUT/outactAuthenticated-oeLogin.pl"}
73 }
74 /*-----*/
75
76 operation: actAuthenticated.outactAuthenticated.oeLogout () :ptBoolean{
77
78 preP{
79  let TheSystem: ctState in
80  let TheActor:actAdministrator in
81  self.rnActor.rnSystem = TheSystem
82  and self.rnActor = TheActor
83
84 /* PreP01 */
85  and TheSystem.vpStarted = true
86 /* PreP02 */
87  and TheActor.rnctAuthenticated.vpIsLogged = true
88 }
89 preF{
90 /* PreF01 */
91 true
92 }
93 postF{
94  let TheSystem: ctState in
95  let TheactAuthenticated:actAuthenticated in
96  let AptStringMessageForTheactAuthenticated: ptString in
97
98  self.rnActor.rnSystem = TheSystem
99  and self.rnActor = TheactAuthenticated
100
101 /* PostF01 */
102 AptStringMessageForTheactAuthenticated.eq('You are logged out ! Good Bye ...')
103 and TheactAuthenticated.rnInterfaceIN^ieMessage(AptStringMessageForTheactAuthenticated)
104 }
105 postP{
106  let TheSystem: ctState in
107  let TheactAuthenticated:actAuthenticated in
108
109  self.rnActor.rnSystem = TheSystem
110  and self.rnActor = TheactAuthenticated.asset
111 /* PostP01 */
112 TheactAuthenticated.rnctAuthenticated@post.vpIsLogged = false
113 }
114 prolog{"src/Operations/Environment/OUT/outactAuthenticated-oeLogout.pl"}
115 }
116 }
```

117 }

Listing C.12: Messir Spec. file environment-actAuthenticated.msr.

### C.13 File ./src-gen/messir-spec/operations/environment/environment-actComCompany.msr

```

1 // Do not add/remove lines because code is inserted in slides
2
3 package icrash.operations.environment.actComCompany{
4
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.calendar
7 import lu.uni.lassy.messir.libraries.math
8
9 import icrash.concepts.primarytypes.datatypes
10 import icrash.concepts.primarytypes.classes
11 import icrash.concepts.secondarytypes.datatypes
12
13 import icrash.environment
14
15 Operation Model {
16
17 operation: actComCompany.outactComCompany.oeAlert(
18 AetKind:etHumanKind,
19 AdtMyDate:dtDate,
20 AdtTime:dtTime,
21 AdtPhoneNumber:dtPhoneNumber,
22 AdtGPSLocation:dtGPSLocation,
23 AdtComment:dtComment
24 ):ptBoolean{
25
26 preP{
27 let TheSystem: ctState in
28 self.rnActor.rnSystem = TheSystem
29
30 /* PreP01 */
31 and TheSystem.vpStarted = true
32 }
33 pref{
34 let TheSystem: ctState in
35 self.rnActor.rnSystem = TheSystem
36
37 /* PreF01 */
38 and (TheSystem.clock.date.gt(AdtDate)
39 or (TheSystem.clock.date.eq(AdtDate)
40 and TheSystem.clock.time.gt(AdtTime)
41 )
42 )
43 }
44 postF{
45 let TheSystem: ctState in
46
47 let ActHuman:ctHuman in
48 let TheactComCompany:actComCompany in
49 let ActAlert:ctAlert in
50 let AAAlertInstant:dtDateAndTime in
51 let AetAlertStatus:etAlertStatus in
52 let ActAlertNearBy:ctAlert in
53 let ActCrisis:ctCrisis in
54 let AdtCrisisID:dtCrisisID in
55 let AetCrisisType:etCrisisType in
56 let AetCrisisStatus:etCrisisStatus in
57 let ACrisisInstant:dtDateAndTime in
58 let ACrisisdtComment:dtComment in
59 let AptStringMessage:ptString in
60 let AdtSMS:dtSMS in
61 let AdtAlertID:dtAlertID in

```

```

62
63 self.rnActor.rnSystem = TheSystem
64 and self.rnActor = TheactComCompany
65 /* PostF01 */
66 TheSystem.nextValueForAlertID=PrenextValueForAlertID
67 and PrenextValueForAlertID.add(1) = PostnextValueForAlertID
68 and TheSystem@post.nextValueForAlertID = PostnextValueForAlertID
69
70 /* PostF02 */
71 and AAlertInstant.date=AdtDate
72 and AAlertInstant.time=AdtTime
73
74 and AetAlertStatus=pending
75
76 and TheSystem.nextValueForAlertID.todtString().eq(AdtAlertID)
77
78 and ActAlert.init(AdtAlertID,
79         AetAlertStatus,
80         AdtGPSLocation,
81         AAlertInstant,
82         AdtComment)
83
84 /* PostF03 */
85 and TheSystem.rnctAlert.select(location.isNearTo(AdtGPSLocation)) = ColctAlertsNearBy
86 and if (ColctAlertsNearBy->size()=0)
87 then (TheSystem.nextValueForCrisisID = PrenextValueForCrisisID
88     and PrenextValueForCrisisID.add(1) = PostnextValueForCrisisID
89     and TheSystem@post.nextValueForCrisisID = PostnextValueForCrisisID
90     and TheSystem.nextValueForCrisisID.todtString().eq(AdtCrisisID)
91     and AdtCrisisType = small
92     and AetCrisisStatus = pending
93     and ACrisisInstant= AAlertInstant
94     and ACrisisdtComment = 'no reporting yet defined'
95     and ActCrisis.init( AdtCrisisID,
96             AdtCrisisType,
97             AetCrisisStatus,
98             AdtGPSLocation,
99             ACrisisInstant,
100            ACrisisdtComment)
101        )
102 else (ColctAlertsNearBy.rnTheCrisis->msrAny(true) = ActCrisis)
103 endif
104
105 /* PostF04 */
106 and ActAlert@post.rnTheCrisis = ActCrisis
107
108 /* PostF05 */
109 and TheSystem.rnctHuman->select(id.eq(AdtPhoneNumber)) = HumanCol1
110
111 and HumanCol1->select(kind.etEq(AetHumanKind)) = HumanCol2
112 and if (HumanCol2->msrIsEmpty)
113 then (ActHuman.init(AdtPhoneNumber,AetHumanKind)
114     and ActHuman@post.rnactComCompany = TheactComCompany
115     )
116 else (HumanCol2->any(true) = ActHuman)
117 endif
118
119 and ActHuman.rnSignaled->msrIncluding(ActAlert) = ColAlerts
120
121 and ActHuman@post.rnSignaled = ColAlerts
122
123 /* PostF06 */
124 AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
125 and TheactComCompany.rnInterfaceIN^ieSmsSend(AdtPhoneNumber,AdtSMS)
126 }
127 /* Post Protocol:*/
128 /* PostP01 */
129 postP{true}
130
131 prolog{"src/Operations/Environment/OUT/outactComCompany-oeAlert.pl"}

```

```

132 }
133 }
134 }
```

Listing C.13: Messir Spec. file environment-actComCompany.msr.

#### C.14 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeCloseCrisis.msr

```

1 package icrash.operations.environment.actCoordinator.oeCloseCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeCloseCrisis(AdtCrisisID:dtCrisisID):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeCloseCrisis.pl"}
14 }
15 }
16 }
```

Listing C.14: Messir Spec. file environment-actCoordinator-oeCloseCrisis.msr.

#### C.15 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeGetAlertsSet.msr

```

1 package icrash.operations.environment.actCoordinator.oeGetAlertsSet {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.environment
10
11 Operation Model {
12
13 operation: actCoordinator.outactCoordinator.oeGetAlertsSet(AetAlertStatus:etAlertStatus):ptBoolean{
14 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeGetAlertsSet.pl"}
15 }
16 }
17 }
```

Listing C.15: Messir Spec. file environment-actCoordinator-oeGetAlertsSet.msr.

#### C.16 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeGetCrisisSet.msr

```

1 package icrash.operations.environment.actCoordinator.oeGetCrisisSet {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
```

```

11
12 operation: actCoordinator.outactCoordinator.oeGetCrisisSet(AetCrisisStatus:etCrisisStatus) :ptBoolean
13 {
14 }
15 }
16 }
```

Listing C.16: Messir Spec. file environment-actCoordinator-oeGetCrisisSet.msr.

## C.17 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeInvalidateAlert.msr

```

1 package icrash.operations.environment.actCoordinator.oeInvalidateAlert {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeInvalidateAlert(AdtAlertID:dtAlertID) :ptBoolean{
13 prolog {"src/Operations/Environment/OUT/outactCoordinator-oeInvalidateAlert.pl"}
14 }
15 }
16 }
```

Listing C.17: Messir Spec. file environment-actCoordinator-oeInvalidateAlert.msr.

## C.18 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeReportOnCrisis.msr

```

1 package icrash.operations.environment.actCoordinator.oeReportOnCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeReportOnCrisis(AdtCrisisID:dtCrisisID, AdtComment:
    dtComment) :ptBoolean{
13 prolog {"src/Operations/Environment/OUT/outactCoordinator-oeReportOnCrisis.pl"}
14 }
15
16 }
17 }
```

Listing C.18: Messir Spec. file environment-actCoordinator-oeReportOnCrisis.msr.

## C.19 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisHandler.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisHandler {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
```

```

6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.datatypes
9 import icrash.concepts.primarytypes.classes
10 import icrash.concepts.secondarytypes.datatypes
11 import icrash.environment
12
13 Operation Model {
14
15 operation: actCoordinator.outactCoordinator.oeSetCrisisHandler(AdtCrisisID:dtCrisisID):ptBoolean{
16 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisHandler.pl"}
17 }
18
19 }
20 }
```

Listing C.19: Messir Spec. file environment-actCoordinator-oeSetCrisisHandler.msr.

## C.20 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisStatus.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisStatus {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeSetCrisisStatus(AdtCrisisID:dtCrisisID,
    AetCrisisStatus:etCrisisStatus):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisStatus.pl"}
14 }
15
16 }
17 }
```

Listing C.20: Messir Spec. file environment-actCoordinator-oeSetCrisisStatus.msr.

## C.21 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeSetCrisisType.msr

```

1 package icrash.operations.environment.actCoordinator.oeSetCrisisType {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeSetCrisisType(AdtCrisisID:dtCrisisID, AetCrisisType:
    etCrisisType):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeSetCrisisType.pl"}
14 }
15
16 }
17 }
```

Listing C.21: Messir Spec. file environment-actCoordinator-oeSetCrisisType.msr.

## C.22 File ./src-gen/messir-spec/operations/environment/environment-actCoordinator-oeValidateAlert.msr

```

1 package icrash.operations.environment.actCoordinator.oeValidateAlert {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.environment
9
10 Operation Model {
11
12 operation: actCoordinator.outactCoordinator.oeValidateAlert(AdtAlertID:dtAlertID):ptBoolean{
13 prolog{"src/Operations/Environment/OUT/outactCoordinator-oeValidateAlert.pl"}
14 }
15
16 }
17 }
```

Listing C.22: Messir Spec. file environment-actCoordinator-oeValidateAlert.msr.

## C.23 File ./src-gen/messir-spec/operations/environment/environment-actMsrCreator-init.msr

```

1 package icrash.operations.icrash.environment.actMsrCreator.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.environment
5
6 Operation Model {
7
8 operation: actMsrCreator.init():ptBoolean{}
9 // generic operation provided by the simulator
10 }
11 }
```

Listing C.23: Messir Spec. file environment-actMsrCreator-init.msr.

## C.24 File ./src-gen/messir-spec/operations/environment/environment-actMsrCreator-oeCreateSystemAndEnvironment.msr

```

1 package icrash.operations.environment.actMsrCreator.oeCreateSystemAndEnvironment{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.concepts.secondarytypes.datatypes
10 import icrash.concepts.secondarytypes.classes
11 import icrash.environment
12
13 Operation Model {
14
15 operation: actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger):
16 ptBoolean
16 {preP{true}
17 preF{true}
18 postF{
19 let TheSystem: ctState in
20 let AactMsrCreator: actMsrCreator in
21 let AactAdministrator: actAdministrator in
```

```

22 let AnextValueForAlertID: dtInteger in
23 let AnextValueForCrisisID: dtInteger in
24 let Aclock: dtDateAndTime in
25 let AcrisisReminderPeriod: dtSecond in
26 let AmaxCrisisReminderPeriod: dtSecond in
27 let AvpStarted: ptBoolean in
28
29 /* PostF01 -- MUST ALWAYS BE MADE FIRST -- */
30 AnextValueForAlertID.value.eq(1)
31 and AnextValueForCrisisID.value.eq(1)
32 and Aclock.date.year.value = 1970
33 and Aclock.date.month.value = 01
34 and Aclock.date.day.value = 01
35 and Aclock.time.hour.value = 00
36 and Aclock.time.minute.value = 00
37 and Aclock.time.second.value = 00
38
39 and AcrisisReminderPeriod.value.eq(300)
40 and AmaxCrisisReminderPeriod.value.eq(1200)
41 and AvpStarted = true
42 and TheSystem.init(AnextValueForAlertID,
43     AnextValueForCrisisID,
44     Aclock,
45     AcrisisReminderPeriod,
46     AmaxCrisisReminderPeriod,
47     Aclock,
48     AvpStarted
49 )
50 /* PostF02*/
51 and AactMsrCreator.init()
52 /* PostF03 */
53 and let AactComCompanyCol: Bag(actComCompany) in
54 AactComCompanyCol->size() = AqtyComCompanies
55 AactComCompanyCol-> forAll(init())
56 /* PostF04*/
57 and AactAdministrator.init()
58 /* PostF05*/
59 and let AactActivator:actActivator in
60 AactActivator.init()
61 /* PostF06 */
62 and let ActAdministrator:ctAdministrator in
63     let AdtLogin:dtLogin in
64         let AdtPassword:dtPassword in
65             AdtLogin.value.eq('icrashadmin')
66             and AdtPassword.value.eq('7WXC1359')
67             and ActAdministrator.init(AdtLogin,AdtPassword)
68 /* PostF07*/
69 and ActAdministrator@post.rnactAuthenticated = AactAdministrator}
70 postP{true}
71
72 prolog{ "src/Operations/Environment/OUT/outactMsrCreator-oeCreateSystemAndEnvironment.pl"}
73
74 }
75 }
76
77 }

```

Listing C.24: Messir Spec. file environment-actMsrCreator-oeCreateSystemAndEnvironment.msr.

## C.25 File ./src-gen/messir-spec/environment/environment.msr

```

1 package icrash.environment{
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.concepts.primarytypes.classes
5 import icrash.concepts.secondarytypes.datatypes
6 import lu.uni.lassy.messir.libraries.primitives
7 import lu.uni.lassy.messir.libraries.math
8 import lu.uni.lassy.messir.libraries.calendar

```

```

9
10 Environment Model {
11
12 actor actMsrCreator role rnactMsrCreator cardinality [1..1] {
13
14 operation init():ptBoolean
15
16 input interface inactMsrCreator {
17 }
18 output interface outactMsrCreator {
19   operation oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger ):ptBoolean
20 }
21 }
22
23 actor actAdministrator
24   role rnactAdministrator
25   cardinality [1..1]
26   extends actAuthenticated {
27
28 operation init():ptBoolean
29 operation oegetStatistic():ptBoolean
30
31 output interface outactAdministrator{
32
33   operation oeAddCoordinator(
34     AdtCoordinatorID:dtCoordinatorID ,
35     AdtLogin:dtLogin ,
36     AdtPassword:dtPassword ):ptBoolean
37
38   operation oeDeleteCoordinator(
39     AdtCoordinatorID:dtCoordinatorID ):ptBoolean
40
41 //Sam:
42   operation oegetstatisticUser(
43     statisticUser: dtgetStatisticUserActivity
44   ) : ptBoolean
45   operation oegetstatisticCrises(
46     statisticCrises: dtgetStatisticCrisisInTime
47   ) : ptBoolean
48   operation oegetstatisticTypesOfCrises(
49     statisticTypes: dtgetStatisticTypeCrisis
50   ) : ptBoolean
51 /*operation oeUserActivityStatistic() : ptBoolean
52 operation oeNumberOfCrisis() : ptBoolean
53 operation oeTimeOfTypeCrisis() : ptBoolean
54 operation ugAdministrateTheSystem() : ptBoolean
55 operation oeStatistic() : ptBoolean*/
56 }
57
58 input interface inactAdministrator{
59
60   operation ieCoordinatorAdded():ptBoolean
61   operation ieCoordinatorDeleted():ptBoolean
62 //Sam:
63   operation iegetStatistic() : ptBoolean
64 }
65 }
66
67 actor actCoordinator
68   role rnactCoordinator
69   cardinality [0..*]
70   extends actAuthenticated{
71
72 operation init():ptBoolean
73
74 output interface outactCoordinator{
75   operation oeInvalidateAlert(AdtAlertID:dtAlertID ):ptBoolean
76   operation oeCloseCrisis(AdtCrisisID:dtCrisisID ):ptBoolean
77   operation oeGetAlertsSet(AetAlertStatus:etAlertStatus ):ptBoolean
78   operation oeGetCrisisSet(AetCrisisStatus:etCrisisStatus ):ptBoolean

```

```

79  operation oeSetCrisisHandler(AdtCrisisID:dtCrisisID ):ptBoolean
80  operation oeReportOnCrisis(
81      AdtCrisisID:dtCrisisID ,
82      AdtComment:dtComment
83      ):ptBoolean
84  operation oeSetCrisisStatus(
85      AdtCrisisID:dtCrisisID ,
86      AetCrisisStatus:etCrisisStatus
87      ):ptBoolean
88  operation oeSetCrisisType(
89      AdtCrisisID:dtCrisisID ,
90      AetCrisisType:etCrisisType
91      ):ptBoolean
92  operation oeValidateAlert(AdtAlertID:dtAlertID ):ptBoolean
93
94 //Vlad:
95  operation oeCreateAlert() : ptBoolean
96  operation oeCreateCrisis() : ptBoolean
97  operation oeUpdateCrisis() : ptBoolean
98 }
99
100 input interface inactCoordinator{
101  operation ieSendAnAlert(ActAlert:ctAlert ):ptBoolean
102  operation ieSendACrisis(ActCrisis:ctCrisis ):ptBoolean
103 }
104 }
105
106 actor actComCompany role rnactComCompany cardinality [0..*]{
107
108  operation init():ptBoolean
109
110  output interface outactComCompany{
111  operation oeAlert(
112      AetHumanKind:etHumanKind ,
113      AdtDate:dtDate ,
114      AdtTime:dtTime ,
115      AdtPhoneNumber:dtPhoneNumber ,
116      AdtGPSLocation:dtGPSLocation ,
117      AdtComment:dtComment
118      ):ptBoolean
119 }
120
121  input interface inactComCompany{
122  operation ieSmsSend(AdtPhoneNumber:dtPhoneNumber ,
123      AdtSMS:dtSMS
124      ):ptBoolean
125 }
126 }
127
128 actor actAuthenticated role rnactAuthenticated cardinality [0..*]{
129
130  operation init():ptBoolean
131
132  output interface outactAuthenticated{
133  operation oeLogin(AdtLogin:dtLogin , AdtPassword:dtPassword ):ptBoolean
134  operation oeLogout():ptBoolean
135
136 //Michel:
137  operation oeSubmitCaptcha(AdtResponse:dtCaptchaResponse):ptBoolean
138
139 //Vlad:
140  operation oeCreateAlert() : ptBoolean
141 }
142
143  input interface inactAuthenticated{
144  operation ieMessage(AMessage:ptString):ptBoolean
145
146 //Michel:
147  operation ieConfirmCaptcha(ACaptcha:dtCaptcha):ptBoolean
148 }

```

```

149 }
150
151 actor actActivator[proactive] role rnactActivator cardinality [1..1] {
152
153   operation init():ptBoolean
154
155   output interface outactActivator{
156     proactive operation oeSollicitateCrisisHandling():ptBoolean
157     proactive operation oeSetClock(AcurrentClock:dtDateAndTime ):ptBoolean
158   }
159
160   input interface inactActivator{
161   }
162 }
163
164 //Michel:
165 actor actCaptchaGenerator role rnactCaptchaGenerator cardinality[1 .. 1] {
166   input interface inactCaptchaGenerator {
167     operation ieGenerateCaptcha():ptBoolean//Documented
168     operation ieValidateCaptcha(AResponse:dtCaptchaResponse):ptBoolean//Documented
169   }
170   output interface outactCaptchaGenerator {
171     operation oeSendCaptcha(AdtCaptcha:dtCaptcha):ptBoolean//Partly Documented
172   }
173 }
174
175 actor actMailingService role rnactMailingService cardinality[1 .. 1] {
176   input interface inactMailingService {
177     operation ieSendMail(AAddress:ptString, ATitle:ptString, AContent:ptString):ptBoolean
178   }
179   output interface outactMailingService {
180   }
181 }
182
183 actor actCaptchaValidator role rnactCaptchaValidator cardinality[1 .. 1] {
184   input interface inactCaptchaValidator {
185     operation ieVerifyCaptcha(AdtCaptchaResponse:dtCaptchaResponse):ptBoolean
186   }
187   output interface outactCaptchaValidator {
188     operation oeCaptchaInvalid(AdtCaptchaId:ptInteger):ptBoolean
189     operation oeCaptchaValid(AdtCaptchaId:ptInteger):ptBoolean
190   }
191 }
192
193 //Sam:
194 actor actSystem role rnactSystem cardinality[1 .. 1] {
195   input interface inactSystem {
196     /* operation ieCallTimeAndCrisisNumber() : ptBoolean
197     operation ieCallUserActivity() : ptBoolean
198     operation ieCallTypeWithTimeAverage() : ptBoolean*/
199   }
200   output interface outactSystem {
201     operation ugSecurelyUserSystem() : ptBoolean
202     operation ugVictimSendFamilyNotification() : ptBoolean
203     operation ugWitnessSendFamilyNotification() : ptBoolean
204     operation oeChooseInformation() : ptBoolean
205     operation oeSendNotification() : ptBoolean
206     operation oeSendStatistic() : ptBoolean
207     operation oegetStatistic() : ptBoolean
208   }
209 }
210
211 actor actDatabase role rnactDatabase cardinality[1 .. 1] {
212   input interface inactDatabase {
213     operation ieCallTimeAndCrisisNumber() : ptBoolean
214     operation ieCallUserActivity() : ptBoolean
215     operation ieCallTypeWithTimeAverage() : ptBoolean
216   }
217 }
218   output interface outactDatabase {

```

```

219     operation oeSendStatistic() : ptBoolean
220     operation oegetStatistic() : ptBoolean
221   }
222 }
223
224 }
225 }
```

Listing C.25: Messir Spec. file environment.msr.

### C.26 File ./src-gen/messir-spec/concepts/primarytypes-associations.msr

```

1 package icrash.concepts.primarytypes.associations {
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.concepts.primarytypes.classes
5 import icrash.environment
6 import lu.uni.lassy.messir.libraries.primitives
7
8 Concept Model {
9
10 Primary Types{
11
12 // Internal
13
14 association assctAlertctCrisis
15 ctAlert(rnAlerts) [1..*]
16 ctCrisis (rnTheCrisis) [1..1]
17
18 association assctAlertctHuman
19 ctAlert(rnSignaled) [1..*]
20 ctHuman (rnSignaler) [1..1]
21
22 association assctCrisisctCoordinator
23 ctCrisis(rnHandled) [0..*]
24 ctCoordinator(rnHandler) [0..1]
25
26 // With Actors
27
28 association assctHumanactComCompany
29 ctHuman(rnctHuman) [0..*]
30 actComCompany(rnactComCompany) [1..1]
31
32 association assctCoordinatoractCoordinator
33 ctCoordinator(rnctCoordinator) [1..1]
34 actCoordinator(rnactCoordinator) [1..1]
35
36 association assctAuthenticatedactAuthenticated
37 ctAuthenticated(rnctAuthenticated) [1..1]
38 actAuthenticated(rnactAuthenticated) [1..1]
39
40 }
41 }
42 }
```

Listing C.26: Messir Spec. file primarytypes-associations.msr.

### C.27 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAdministrator.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAdministrator{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
```

```

6 import icrash.concepts.primarytypes.classes
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.classes.ctAdministrator.init(
11   Alogin:dtLogin ,
12   Apwd:dtPassword
13 ) :ptBoolean{
14 postF{
15 if
16 (
17 let Self:ctAdministrator in
18 /* Post F01 */
19 Self.login(Alogin)
20 and Self.pwd = Apwd
21 and Self.vpIsLogged = false
22
23 /* Post F02 */
24 and (Self.oclIsNew and self = Self)
25 )
26 then (result = true)
27 else (result = false)
28 endif
29 }
30 prolog{ "src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAdministrator-init.pl"
31 }
32 }
33 }

```

Listing C.27: Messir Spec. file primarytypes-classes-ctAdministrator.msr.

## C.28 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAlert.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAlert{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.calendar
5
6 import icrash.concepts.primarytypes.datatypes
7 import icrash.concepts.primarytypes.classes
8
9 import icrash.environment
10
11 Operation Model {
12
13 operation: icrash.concepts.primarytypes.classes.ctAlert.init(Aid:dtAlertID , Astatus:etAlertStatus ,
14   Alocation:dtGPSLocation , Ainstant:dtDateAndTime , Acomment:dtComment
14 ) :ptBoolean{
15 postF{
16 if
17 (
18 /* Post F01 */
19 let Self:ctAlert in
20 Self.id = Aid
21 and Self.status = Astatus
22 and Self.location = Alocation
23 and Self.instant = Ainstant
24 and Self.comment = Acomment
25 /* Post F02 */
26 and (Self.oclIsNew and self = Self)
27 )
28 then (result = true)
29 else (result = false)
30 endif
31 }
32 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAlert-init.pl"
33 }

```

```

34
35 operation: icrash.concepts.primarytypes.classes.ctAlert.isSentToCoordinator(AactCoordinator:
    actCoordinator ):ptBoolean
36 {
37 postF{
38 if
39 (
40 /* Post F01 */
41 AactCoordinator.rnInterfaceIN.ieSendAnAlert(self)
42 )
43 then (result = true)
44 else (result = false)
45 endif
46 }
47 prolog"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAlert-isSentToCoordinator.
    pl"
48
49 }
50 }
51 }
```

Listing C.28: Messir Spec. file primarytypes-classes-ctAlert.msr.

### C.29 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctAuthenticated.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctAuthenticated {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5 import icrash.concepts.primarytypes.classes
6
7 Operation Model {
8
9 operation: icrash.concepts.primarytypes.classes.ctAuthenticated.init(Alogin:dtLogin, Apwd:dtPassword
    ):ptBoolean
10 prolog"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctAuthenticated-init.pl"
11 }
12 }
13
14 }
```

Listing C.29: Messir Spec. file primarytypes-classes-ctAuthenticated.msr.

### C.30 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctCoordinator.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctCoordinator.init {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5 import icrash.concepts.primarytypes.classes
6
7 Operation Model {
8
9 operation: icrash.concepts.primarytypes.classes.ctCoordinator.init(Aid:dtCoordinatorID, Alogin:
    dtLogin, Apwd:dtPassword):ptBoolean
10 {
11 postF{
12 if
13 (
14 /* Post F01 */
15 let Self:ctCoordinator in
16 Self.id = Aid
17 and Self.login = Alogin
18 and Self.pwd = Apwd
```

```

19 and Self.vpIsLogged = false
20 /* Post F02 */
21 and (Self.oclIsNew and self = Self)
22 )
23 then (result = true)
24 else (result = false)
25 endif}
26 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCoordinator-init.pl"}
27 }
28 }
29 }

```

Listing C.30: Messir Spec. file primarytypes-classes-ctCoordinator.msr.

## C.31 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctCrisis.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctCrisis {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.calendar
6
7 import icrash.concepts.primarytypes.datatypes
8 import icrash.concepts.primarytypes.classes
9 import icrash.concepts.secondarytypes.datatypes
10 import icrash.concepts.secondarytypes.classes
11 import lu.uni.lassy.messir.libraries.primitives
12
13 import icrash.environment
14
15 Operation Model {
16 /**
17 operation: icrash.concepts.primarytypes.classes.ctCrisis.init(
18     Aid:dtCrisisID,
19     Atype:etCrisisType,
20     Astatus:etCrisisStatus,
21     Alocation:dtGPSLocation,
22     Ainstant:dtDateAndTime,
23     Acomment:dtComment
24 ) :ptBoolean{
25 postF{
26 if
27 (
28 /* Post F01 */
29 let Self:ctCrisis in
30 Self.id = Aid
31 and Self.type = Atype
32 and Self.status = Astatus
33 and Self.location = Alocation
34 and Self.instant = Ainstant
35 and Self.comment = Acomment
36 /* Post F02 */
37 and (Self.oclIsNew and self = Self)
38 )
39 then (result = true)
40 else (result = false)
41 endif}
42 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-init.pl"}}
43 /**
44 operation: icrash.concepts.primarytypes.classes.ctCrisis.handlingDelayPassed():ptBoolean
45 {
46 postF{
47 let TheSystem:ctState in
48 let CurrentClockSecondsQty:dtInteger in
49 let vpLastReminderSecondsQty:dtInteger in
50 let CrisisReminderPeriod:dtSecond in
51 if

```

```

52 ( /* Post F01 */
53   self.rnSystem = TheSystem
54   and self.status = pending
55   and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
56   and TheSystem.vpLastReminder.toSecondsQty() = vpLastReminderSecondsQty
57   and TheSystem.crisisReminderPeriod = CrisisReminderPeriod
58   and CurrentClockSecondsQty.sub(vpLastReminderSecondsQty).gt(CrisisReminderPeriod) = true
59 )
60 then (result = true)
61 else (result = false)
62 endif
63 }
64 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-handlingDelayPassed
       .pl"}
65 //-----
66 operation: icrash.concepts.primarytypes.classes.ctCrisis.maxHandlingDelayPassed():ptBoolean
67 {
68 postF{
69 let TheSystem:ctState in
70 let CurrentClockSecondsQty:dtInteger in
71 let CrisisInstantSecondsQty:dtInteger in
72 let MaxCrisisReminderPeriod:dtSecond in
73 if
74 ( /* Post F01 */
75   self.rnSystem = TheSystem
76   and self.status = pending
77   and TheSystem.clock.toSecondsQty() = CurrentClockSecondsQty
78   and Self.instant.toSecondsQty() = CrisisInstantSecondsQty
79   and TheSystem.maxCrisisReminderPeriod = MaxCrisisReminderPeriod
80   and CurrentClockSecondsQty.sub(CrisisInstantSecondsQty)
81           .gt(MaxCrisisReminderPeriod)
82 )
83 then (result = true)
84 else (result = false)
85 endif
86 }
87 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-
       maxHandlingDelayPassed.pl"}
88 //-----
89 operation: icrash.concepts.primarytypes.classes.ctCrisis.isSentToCoordinator(AactCoordinator:
       actCoordinator):ptBoolean
90 {
91 postF{
92 if
93 (
94 /* Post F01 */
95 AactCoordinator.rnInterfaceIN.ieSendACrisis(self)
96 )
97 then (result = true)
98 else (result = false)
99 endif}
100 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-isSentToCoordinator
        .pl"}
101 //-----
102 operation: icrash.concepts.primarytypes.classes.ctCrisis.isAllocatedIfPossible():ptBoolean
103 {
104 postF{
105 if (
106 /* Post F01 */
107 self.maxHandlingDelayPassed()
108 and
109 if (TheSystem.rnactCoordinator->msrIsEmpty = false)
110 then (
111   /* Post F02 */
112   TheSystem.rnactCoordinator->msrAny(true) = TheCoordinatorActor
113   and TheCoordinatorActor.rnctCoordinator = TheCoordinator
114   and self@post.rnHandler = TheCoordinator
115   and self@post.status = handled
116   and self.id.value = TheCrisisIDptString
117   and 'You are now considered as handling the crisis having ID: '

```

```

118     .ptStringConcat(TheCrisisIDptString) = TheMessage
119     and TheCoordinatorActor.rnInterfaceIN^ieMessage(TheMessage)
120   )
121 else ( /* Post F03 */
122   TheSystem.rnactAdministrator
123   ->forall(rnInterfaceIN.ieMessage('Please add new coordinators to handle pending crisis !'))
124   )
125 endif
126 )
127 then (result = true)
128 else (result = false)
129 endif
130 }
131 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctCrisis-
  isAllocatedIfPossible.pl"}
132 }
133 }
134 }
```

Listing C.31: Messir Spec. file primarytypes-classes-ctCrisis.msr.

### C.32 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctgetStatistic-getstatisticCrises.msr

```

1 package icrash.concepts.primarytypes.classes.operations.classes.ctgetStatistic.getstatisticCrises {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Operation Model {
9
10 }
11 }
```

Listing C.32: Messir Spec. file primarytypes-classes-ctgetStatistic-getstatisticCrises.msr.

### C.33 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctgetStatistic-getstatisticUser.msr

```

1 package icrash.concepts.primarytypes.classes.operations.classes.ctgetStatistic.getstatisticUser {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Operation Model {
9
10 }
11 }
```

Listing C.33: Messir Spec. file primarytypes-classes-ctgetStatistic-getstatisticUser.msr.

### C.34 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctHuman.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctHuman.init {
2
```

```

3 import lu.uni.lassy.messir.libraries.primitives
4 import icrash.concepts.primarytypes.datatypes
5
6 import icrash.concepts.primarytypes.classes
7
8 Operation Model {
9
10 operation: icrash.concepts.primarytypes.classes.ctHuman.init(Aid:dtPhoneNumber, Akind:etHumanKind):
11     ptBoolean
12 {
13 if
14 (
15 /* Post F01 */
16 let Self:ctHuman in
17
18 Self.id = Aid
19 and Self.kind = Akind
20
21 /* Post F02 */
22 and (Self.oclIsNew and self = Self)
23 )
24 then (result = true)
25 else (result = false)
26 endif
27 }
28 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctHuman-init.pl"}
29 }
30 operation: icrash.concepts.primarytypes.classes.ctHuman.isAcknowledged():ptBoolean{
31 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctHuman-isAcknowledged.pl"}
32 }
33 }
34 }
```

Listing C.34: Messir Spec. file primarytypes-classes-ctHuman.msr.

### C.35 File ./src-gen/messir-spec/operations/concepts/primarytypes-classes/primarytypes-classes-ctState.msr

```

1 package icrash.operations.concepts.primarytypes.classes.ctState{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.calendar
5 import lu.uni.lassy.messir.libraries.math
6
7 import icrash.concepts.primarytypes.classes
8
9 Operation Model {
10
11 operation: icrash.concepts.primarytypes.classes.ctState.init(
12     AnextValueForAlertID: dtInteger,
13     AnextValueForCrisisID: dtInteger ,
14     dtAclock:dtDateAndTime,
15     AcrisisReminderPeriod: dtSecond,
16     AmaxCrisisReminderPeriod: dtSecond ,
17     AvpLastReminder: dtDateAndTime ,
18     AvpStarted:ptBoolean ):ptBoolean{
19 postF{
20 if
21 (
22 /* Post F01 */
23 let Self:ctState in
24
25 Self.nextValueForAlertID = AnextValueForAlertID
26 and Self.nextValueForCrisisID = AnextValueForCrisisID
27 and Self.clock = Aclock
28 and Self.crisisReminderPeriod = AcrisisReminderPeriod
29 and Self.maxCrisisReminderPeriod = AmaxCrisisReminderPeriod
```

```

30 and Self.vpLastReminder = AvpLastReminder
31 and Self.vpStarted = AvpStarted
32
33 and (Self.oclisNew and self = Self)
34 )
35 then (result = true)
36 else (result = false)
37 endif
38 }
39 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesClasses-ctState-init.pl" }
40 }
41 }
42 }

```

Listing C.35: Messir Spec. file primarytypes-classes-ctState.msr.

## C.36 File ./src-gen/messir-spec/concepts/primarytypes-classes.msr

```

1 package icrash.concepts.primarytypes.classes {
2
3 import icrash.concepts.primarytypes.datatypes
4 import icrash.environment
5 import lu.uni.lassy.messir.libraries.primitives
6 import lu.uni.lassy.messir.libraries.math
7 import lu.uni.lassy.messir.libraries.calendar
8
9 Concept Model {
10
11 Primary Types{
12
13 state class ctState {
14     attribute nextValueForAlertID:dtInteger
15     attribute nextValueForCrisisID:dtInteger
16     attribute clock:dtDateAndTime
17     attribute crisisReminderPeriod:dtSecond
18     attribute maxCrisisReminderPeriod:dtSecond
19     attribute vpLastReminder:dtDateAndTime
20     attribute vpStarted:ptBoolean
21
22 operation init( AnextValueForAlertID:dtInteger,
23                 AnextValueForCrisisID:dtInteger,
24                 Aclock:dtDateAndTime,
25                 AcrisisReminderPeriod:dtSecond ,
26                 AmaxCrisisReminderPeriod:dtSecond ,
27                 AvpLastReminder:dtDateAndTime ,
28                 AvpStarted:ptBoolean
29 ): ptBoolean
30 }
31
32 class ctAlert role rnctAlert cardinality [0..*]{
33     attribute id:dtAlertID
34     attribute status: etAlertStatus
35     attribute location:dtGPSLocation
36     attribute instant:dtDateAndTime
37     attribute comment:dtComment
38
39 operation init(    Aid:dtAlertID ,
40                 Astatus:etAlertStatus ,
41                 Alocation:dtGPSLocation ,
42                 Ainstant:dtDateAndTime ,
43                 Acomment:dtComment ):ptBoolean
44 operation isSentToCoordinator(AactCoordinator:actCoordinator ):ptBoolean
45
46 }
47
48 class ctCrisis role rnctCrisis cardinality [0..*]{
49     attribute id:dtCrisisID
50     attribute type:etCrisisType
51     attribute status: etCrisisStatus

```

```

52  attribute location:dtGPSLocation
53  attribute instant:dtDateAndTime
54  attribute comment:dtComment
55
56  operation init(
57      Aid:dtCrisisID ,
58      Atype:etCrisisType ,
59      Astatus:etCrisisStatus ,
60      Alocation:dtGPSLocation ,
61      Ainstant:dtDateAndTime ,
62      Acomment:dtComment ):ptBoolean
63
64  operation handlingDelayPassed():ptBoolean
65  operation maxHandlingDelayPassed():ptBoolean
66  operation isSentToCoordinator(AactCoordinator:actCoordinator ):ptBoolean
67  operation isAllocatedIfPossible():ptBoolean
68 }
69
70 class ctHuman role rnctHuman cardinality [0..*]{
71  attribute id:dtPhoneNumber
72  attribute kind:etHumanKind
73
74  operation init(
75      Aid:dtPhoneNumber ,
76      Akind:etHumanKind ):ptBoolean
77  operation isAcknowledged():ptBoolean
78 }
79
80 class ctAuthenticated
81   role rnctAuthenticated
82   cardinality [0..*]{
83
84   attribute login:dtLogin
85   attribute pwd: dtPassword
86   attribute vpIsLogged:ptBoolean
87
88   operation init(
89       Alogin:dtLogin ,
90       Apwd:dtPassword ):ptBoolean
91 }
92
93 class ctCoordinator
94   role rnctCoordinator
95   cardinality [0..*]
96   extends ctAuthenticated{
97
98   attribute id:dtCoordinatorID
99
100  operation init(
101      Aid:dtCoordinatorID ,
102      Alogin:dtLogin ,
103      Apwd:dtPassword ):ptBoolean
104 }
105
106 class ctAdministrator
107   role rnctAdministrator
108   cardinality [1..1]
109   extends ctAuthenticated{
110
111   operation init(
112       Alogin:dtLogin ,
113       Apwd:dtPassword ):ptBoolean
114 }
115 // Sam class for the time/statistic
116 class ctgetStatistic role rnctSystem cardinality[1..1]{
117   operation init(
118     Alogin:dtLogin,
119     Apwd:dtPassword
120   ) : ptBoolean
121 }
```

```

122 operation getstatisticUser(
123   statisticUser: dtgetStatisticUserActivity
124 ) : ptBoolean
125 operation getstatisticCrises(
126   statisticCrises: dtgetStatisticCrisisInTime
127 ) : ptBoolean
128 operation getstatisticTypes(
129   statisticTypes: dtgetStatisticTypeCrisis
130 ) : ptBoolean
131 operation sendStatistic(): ptBoolean //To do
132 }
133
134 }
135 }
136 }
```

Listing C.36: Messir Spec. file primarytypes-classes.msr.

### C.37 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatype/primarytypes-datatype-dtAlertID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtAlertID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtAlertID.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       (if
12         (self.value.length().gt(0)
13           and self.value.length().leq(20)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18       result = TheResult
19     })
20     prolog"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtAlertID-is.pl"
21   }
22 }
23 }
```

Listing C.37: Messir Spec. file primarytypes-datatype-dtAlertID.msr.

### C.38 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatype/primarytypes-datatype-dtComment.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtComment{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtComment.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       (if
12         (MaxLength = 160
13           and self.value.length().leq(MaxLength)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18     })
19     prolog"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtComment-is.pl"
20   }
21 }
```

```

17     endif
18     result = TheResult
19   )
20 }
21 prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtComment-is.pl"}
22 }
23 }
24 }
```

Listing C.38: Messir Spec. file primarytypes-datatatypes-dtComment.msr.

### C.39 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtCoordinatorID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtCoordinatorID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6   operation: icrash.concepts.primarytypes.datatypes.dtCoordinatorID.is():ptBoolean{
7
8     postF{
9       let TheResult: ptBoolean in
10      ( if
11        ( self.value.length().gt(0)
12          and self.value.length().leq(5)
13        )
14        then (TheResult = true)
15        else (TheResult = false)
16      endif
17      result = TheResult
18    )
19  }
20  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtCoordinatorID-is.pl"
21  }
22 }
23 }
```

Listing C.39: Messir Spec. file primarytypes-datatatypes-dtCoordinatorID.msr.

### C.40 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtCrisisID.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtCrisisID{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtCrisisID.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       ( if
12         ( self.value.length().gt(0)
13           and self.value.length().leq(10)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18       result = TheResult
19     )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtCrisisID-is.pl"
22  }
```

```
23 }
24 }
```

Listing C.40: Messir Spec. file primarytypes-datatatypes-dtCrisisID.msr.

## C.41 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatatypes-dtGPSLocation.msr

```
1 package icrash.operations.concepts.primarytypes.datatypes.dtGPSLocation{
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5
6 import icrash.concepts.primarytypes.datatypes
7 import icrash.concepts.primarytypes.classes
8 import icrash.concepts.secondarytypes.datatypes
9 import icrash.concepts.secondarytypes.classes
10
11 Operation Model {
12
13     operation: icrash.concepts.primarytypes.datatypes.dtGPSLocation.is():ptBoolean{
14         postF{
15             let TheResult: ptBoolean in
16             ( if
17                 ( self.latitude.is()
18                     and self.longitude.is
19                 )
20                 then (TheResult = true)
21                 else (TheResult = false)
22             endif
23             result = TheResult
24         )
25     }
26     prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtGPSLocation-is.pl"}
27 }
28     operation: icrash.concepts.primarytypes.datatypes.dtGPSLocation.isNearTo(aGPSLocation:
29         dtGPSLocation):ptBoolean{
30         postF{
31             let TheResult: ptBoolean in true
32             let EarthRadius: dtReal in
33             let MaxDistance: dtReal in
34             let ComparedLatitude: dtLatitude in
35             let ComparedLongitude: dtLongitude in
36             let R1: dtReal in let R1a: dtReal in
37             let R2: dtReal in let R2a: dtReal in
38
39             ( if
40                 ( EarthRadius.value = 6371
41                   and MaxDistance.value = 100
42
43                   and self.latitude = ComparedLatitude
44                   and self.longitude = ComparedLongitude
45                   and self.latitude.sin() = R1a
46                   and self.latitude.sin().mul(R1a) = R1
47                   and self.latitude.cos() = R2a
48                   and self.latitude.cos().mul(R2a) = R2
49
50                   and self.longitude = ComparedLongitude
51                   and self.longitude.sub(ComparedLongitude).cos().mul(R2)
52                     .add(R1).acos().mul(EarthRadius).sub(MaxDistance)
53                     .value.leq(0)
54
55             then (TheResult = true)
56             else (TheResult = false)
57             endif
58             result = TheResult
59         )
60     }
```

```

60  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtGPSLocation-isNearTo
       .pl"}
61  }
62  operation: icrash.concepts.primarytypes.datatypes.dtLatitude.is():ptBoolean{
63  postF{
64      let TheResult: ptBoolean in
65      ( if
66          ( AdtValue.value.geq(-90.0)
67          and AdtValue.value.leq(+90.0)
68      )
69      then (TheResult = true)
70      else (TheResult = false)
71      endif
72      result = TheResult
73  ) }
74  prolog{ "src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLatitude-is.pl"}
75  }
76  operation: icrash.concepts.primarytypes.datatypes.dtLongitude.is():ptBoolean{
77  postF{
78      let TheResult: ptBoolean in
79      ( if
80          ( AdtValue.value.geq(-180.0)
81          and AdtValue.value.leq(+180.0)
82      )
83      then (TheResult = true)
84      else (TheResult = false)
85      endif
86      result = TheResult
87  ) }
88  prolog{ "src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLongitude-is.pl"}
89  }
90  }
91 }
```

Listing C.41: Messir Spec. file primarytypes-datatypes-dtGPSLocation.msr.

## C.42 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-dtLogin.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtLogin{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7  operation: icrash.concepts.primarytypes.datatypes.dtLogin.is():ptBoolean{
8  postF{
9      let TheResult: ptBoolean in
10     let MaxLength: ptInteger in
11     ( if
12         ( MaxLength = 20
13         and self.value.length().leq(MaxLength)
14     )
15     then (TheResult = true)
16     else (TheResult = false)
17     endif
18     result = TheResult
19   )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtLogin-is.pl"}
22  }
23  }
24 }
```

Listing C.42: Messir Spec. file primarytypes-datatypes-dtLogin.msr.

### C.43 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatype-dtPassword.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtPassword{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtPassword.is():ptBoolean{
8     postF{
9       let TheResult: ptBoolean in
10      let MinLength: ptInteger in
11      ( if
12        ( MinLength = 6
13          and self.value.length().geq(MinLength)
14        )
15        then (TheResult = true)
16        else (TheResult = false)
17      endif
18      result = TheResult
19    )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtPassword-is.pl"}
22 }
23 }
24 }
```

Listing C.43: Messir Spec. file primarytypes-datatypes-dtPassword.msr.

### C.44 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatype-dtPhoneNumber.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.dtPhoneNumber{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.dtPhoneNumber.is():ptBoolean{
8
9     postF{
10       let TheResult: ptBoolean in
11       ( if
12         ( self.value.length().gt(4)
13           and self.value.length().leq(30)
14         )
15         then (TheResult = true)
16         else (TheResult = false)
17       endif
18       result = TheResult
19     )
20  }
21  prolog{"src/Operations/Concepts/PrimaryTypesDatatypes/PrimaryTypesDatatypes-dtPhoneNumber-is.pl"}
22 }
23 }
24 }
```

Listing C.44: Messir Spec. file primarytypes-datatypes-dtPhoneNumber.msr.

### C.45 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatype-etAlertStatus.msr

```
1 package icrash.operations.concepts.primarytypes.datatypes.etAlertStatus{
```

```

2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.etAlertStatus.is():ptBoolean{
8     postF{
9       let TheResult: ptBoolean in
10      ( if
11        ( self = pending
12        or self = valid
13        or self = invalid
14      )
15      then (TheResult = true)
16      else (TheResult = false)
17      endif
18      result = TheResult
19    )
20  }
21 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etAlertStatus-is.pl"}
22 }
23 }
24 }
```

Listing C.45: Messir Spec. file primarytypes-datatatypes-etAlertStatus.msr.

#### C.46 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etCrisisStatus.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etCrisisStatus{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.etCrisisStatus.is():ptBoolean{
8     postF{
9       let TheResult: ptBoolean in
10      ( if
11        ( self = pending
12        or self = handled
13        or self = solved
14        or self = closed
15      )
16      then (TheResult = true)
17      else (TheResult = false)
18      endif
19      result = TheResult
20    )
21  }
22 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etCrisisStatus-is.pl"}
23 }
24 }
25 }
```

Listing C.46: Messir Spec. file primarytypes-datatypes-etCrisisStatus.msr.

#### C.47 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etCrisisType.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etCrisisType{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6 }
```

```

7  operation: icrash.concepts.primarytypes.datatypes.etCrisisType.is():ptBoolean{
8    postF{
9      let TheResult: ptBoolean in
10     (if
11       (self = small
12       or self = medium
13       or self = huge
14     )
15     then (TheResult = true)
16     else (TheResult = false)
17     endif
18     result = TheResult
19   )
20 }
21 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etCrisisType-is.pl"}
22 }
23 }
24 }
```

Listing C.47: Messir Spec. file primarytypes-datatypes-etCrisisType.msr.

## C.48 File ./src-gen/messir-spec/operations/concepts/primarytypes-datatypes/primarytypes-datatypes-etHumanKind.msr

```

1 package icrash.operations.concepts.primarytypes.datatypes.etHumanKind{
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 Operation Model {
6
7   operation: icrash.concepts.primarytypes.datatypes.etHumanKind.is():ptBoolean{
8     postF{
9       let TheResult: ptBoolean in
10      (if
11        (self = witness
12        or self = victim
13        or self = anonymous
14      )
15      then (TheResult = true)
16      else (TheResult = false)
17      endif
18      result = TheResult
19    )
20 prolog{"src/Operations/Concepts/PrimaryTypesClasses/PrimaryTypesDatatypes-etHumanKind-is.pl"}
21 }
22 }
23 }
```

Listing C.48: Messir Spec. file primarytypes-datatypes-etHumanKind.msr.

## C.49 File ./src-gen/messir-spec/concepts/primarytypes-datatypes.msr

```

1 package icrash.concepts.primarytypes.datatypes {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.string
5 import lu.uni.lassy.messir.libraries.math
6 import lu.uni.lassy.messir.libraries.calendar
7
8 Concept Model {
9
10   Primary Types {
11
12     datatype dtAlertID extends dtString {
13       operation is():ptBoolean
```

```

14    }
15  datatype dtCrisisID extends dtString {
16    operation is():ptBoolean
17  }
18  datatype dtLogin extends dtString {
19    operation is():ptBoolean
20  }
21  datatype dtPassword extends dtString {
22    operation is():ptBoolean
23  }
24  datatype dtCoordinatorID extends dtString {
25    operation is():ptBoolean
26  }
27  datatype dtPhoneNumber extends dtString {
28    operation is():ptBoolean
29  }
30  datatype dtComment extends dtString {
31    operation is():ptBoolean
32  }
33  datatype dtLatitude extends dtReal {
34    operation is():ptBoolean
35  }
36  datatype dtLongitude extends dtReal {
37    operation is():ptBoolean
38  }
39  datatype dtGPSLocation {
40    attribute latitude: dtLatitude
41    attribute longitude: dtLongitude
42    operation is():ptBoolean
43    operation isNearTo(AGPSLocation:dtGPSLocation ):ptBoolean
44  }
45
46  enum etCrisisStatus {
47    constants["pending", "handled", "solved","closed"]
48    operation is():ptBoolean
49  }
50  enum etAlertStatus {
51    constants["pending", "valid", "invalid"]
52    operation is():ptBoolean
53  }
54  enum etCrisisType {
55    constants["small", "medium", "huge"]
56    operation is():ptBoolean
57  }
58  enum etHumanKind {
59    constants["witness", "victim", "anonymous"]
60    operation is():ptBoolean
61  }
62
63 //Michel
64  datatype dtCaptcha {//TODO: link to images
65    attribute id: ptInteger
66    attribute question: ptString
67  }
68  datatype dtCaptchaResponse {
69    attribute id: ptInteger
70    attribute response: ptString//TODO: Type?
71  }
72  datatype dtCaptchaImage extends dtString{
73    attribute width : ptInteger
74    attribute height : ptInteger
75  }
76
77 //Sam
78  datatype dtgetStatisticUserActivity{
79    attribute number: ptInteger
80    attribute time : dtTime
81    //is as a control for this dt.
82    //operation is():ptBoolean
83  }

```

```

84  datatype dtgetStatisticCrisisInTime{
85    attribute number : ptInteger
86    attribute time : dtTime
87    //is as a control for this dt.
88    //operation is():ptBoolean
89  }
90  datatype dtgetStatisticTypeCrisis{
91    attribute typeC : ptString
92    attribute time : dtTime
93    //is as a control for this dt.
94    //operation is():ptBoolean
95  }
96
97 }
98 }
99 }
```

Listing C.49: Messir Spec. file primarytypes-datatatypes.msr.

## C.50 File                   ./src-gen/messir-spec/concepts/secondarytypes- associations.msr

```

1 package icrash.concepts.secondarytypes.associations {
2
3 Concept Model {
4
5 Secondary Types{
6
7 }
8 }
9 }
```

Listing C.50: Messir Spec. file secondarytypes-associations.msr.

## C.51 File                   ./src-gen/messir-spec/concepts/secondarytypes- classes.msr

```

1 package icrash.concepts.secondarytypes.classes {
2
3 Concept Model {
4
5 Secondary Types{
6
7 }
8 }
9 }
```

Listing C.51: Messir Spec. file secondarytypes-classes.msr.

## C.52 File                   ./src-gen/messir-spec/concepts/secondarytypes- datatypes.msr

```

1 package icrash.concepts.secondarytypes.datatypes {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.string
5
6 import icrash.concepts.primarytypes.datatypes
7
8 Concept Model {
9
10 Secondary Types {
11
12   datatype dtSMS {
```

```

13     attribute value: ptString
14     operation is():ptBoolean
15   }
16 }
17 }
18 }
```

Listing C.52: Messir Spec. file secondarytypes-datatatypes.msr.

### C.53 File ./src-gen/messir-spec/usecases/subfunctions-usecases.msr

```

1 package icrash.usecases.subfunctions {
2
3 import lu.uni.lassy.messir.libraries.primitives
4
5 import icrash.concepts.primarytypes.datatypes
6 import icrash.concepts.primarytypes.classes
7 import icrash.concepts.secondarytypes.datatypes
8 import lu.uni.lassy.messir.libraries.primitives
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.calendar
11
12 import icrash.environment
13
14 Use Case Model {
15
16 //-----
17 use case system subfunction oeAddCoordinator(AdtCoordinatorID:dtCoordinatorID, AdtLogin:dtLogin,
18     AdtPassword:dtPassword) {
19   actor actAdministrator[primary,active]
20   returned messages {
21     ieCoordinatorAdded() returned to actAdministrator
22   }
23 //}
24 use case system subfunction oeAlert(
25     AetKind:etHumanKind,
26     AdtMyDate:dtDate,
27     AdtTime:dtTime,
28     AdtPhoneNumber:dtPhoneNumber,
29     AdtGPSLocation:dtGPSLocation,
30     AdtComment:dtComment) {
31   actor actComCompany[primary,active]
32   returned messages {
33     ieSmsSend(AdtPhoneNumber,AdtSMS) returned to actComCompany
34   }
35 }
36 //}
37 use case system subfunction oeInvalidateAlert(AdtAlertID:dtAlertID) {
38   actor actCoordinator[primary,active]
39   actor actComCompany[secondary,passive]
40   returned messages {
41     ieMessage(AMessage) returned to actCoordinator
42   }
43 }
44 //}
45 use case system subfunction oeCloseCrisis(AdtCrisisID:dtCrisisID) {
46   actor actCoordinator[primary,active]
47   returned messages {
48     ieMessage(AMessage) returned to actCoordinator
49   }
50 //}
51 use case system subfunction oeCreateSystemAndEnvironment(AqtyComCompanies:ptInteger) {
52   actor actMsrCreator[primary,active]
53 }
54 //}
55 use case system subfunction oeDeleteCoordinator(AdtCoordinatorID:dtCoordinatorID) {
56   actor actAdministrator[primary,active]
57   returned messages {
```

```

58     ieCoordinatorDeleted() returned to actAdministrator
59   }
60 }
61 //-----
62 use case system subfunction oeGetAlertsSet(AetAlertStatus:etAlertStatus) {
63   actor actCoordinator[primary,active]
64   returned messages {
65     ieSendAnAlert(ActAlert) returned to actCoordinator
66   }
67 }
68 //-----
69 use case system subfunction oeGetCrisisSet(AetCrisisStatus:etCrisisStatus) {
70   actor actCoordinator[primary,active]
71   returned messages {
72     ieSendACrisis(ActCrisis) returned to actCoordinator
73   }
74 }
75 //-----
76 use case system subfunction oeSetCrisisHandler(AdtCrisisID:dtCrisisID) {
77   actor actCoordinator[primary,active]
78   actor actCoordinator[secondary,passive]
79   actor actComCompany[secondary,passive,multiple]
80   returned messages {
81     ieMessage(AMessage)
82     returned to actCoordinator
83     ieSendAnAlert(ActAlert)
84     returned to actCoordinator
85     ieSmsSend(AdtPhoneNumber,AdtSMS)
86     returned to actComCompany
87   }
88 }
89 //-----
90 use case system subfunction oeLogin(AdtLogin:dtLogin , AdtPassword:dtPassword) { //Modified by
  Michel
91   actor actAuthenticated[primary,active]
92   returned messages {
93     ieConfirmCaptcha(ACaptcha) returned to actAuthenticated
94     ieGenerateCaptcha returned to actCaptchaGenerator
95     ieMessage(AMessage) returned to actAuthenticated
96   }
97 }
98 //-----
99 use case system subfunction oeLogout() {
100   actor actAuthenticated[primary,active]
101   returned messages {
102     ieMessage(AMessage) returned to actAuthenticated
103   }
104 }
105 //-----
106 use case system subfunction oeReportOnCrisis(AdtCrisisID:dtCrisisID,AdtComment:dtComment) {
107   actor actCoordinator[primary,active]
108   returned messages {
109     ieMessage(AMessage) returned to actCoordinator
110   }
111 }
112 //-----
113 use case system subfunction oeSetClock(AcurrentClock:dtDateAndTime) {
114   actor actActivator[primary,proactive]
115 }
116 //-----
117 use case system subfunction oeSetCrisisStatus(AdtCrisisID:dtCrisisID ,AetCrisisStatus:
  etCrisisStatus) {
118   actor actCoordinator[primary,active]
119   returned messages {
120     ieMessage(AMessage) returned to actCoordinator
121   }
122 }
123 //-----
124 use case system subfunction oeSollicitateCrisisHandling() {
125   actor actActivator[primary,proactive]

```

```

126 actor actCoordinator[secondary,passive,multiple]
127 actor actAdministrator[secondary,passive]
128 returned messages {
129   ieMessage(AMessage) returned to actCoordinator
130   //ieMessage(AMessage) returned to actAdministrator
131 }
132 }
133 /-----
134 use case system subfunction oeValidateAlert(AdtAlertID:dtAlertID) {
135   actor actCoordinator[primary,active]
136   returned messages {
137     ieMessage(AMessage) returned to actCoordinator
138   }
139 }
140
141 //Michel:
142 use case system subfunction oeSendCaptcha() {
143   actor actCaptchaGenerator[primary, active]
144   actor actAuthenticated[secondary]
145   returned messages{
146     ieConfirmCaptcha() returned to actAuthenticated
147   }
148 }
149 use case system subfunction oeSubmitCaptcha() {
150   actor actAuthenticated[primary, active]
151   actor actCaptchaValidator[secondary]
152   returned messages{
153     ieMessage returned to actAuthenticated
154     ieVerifyCaptcha returned to actCaptchaValidator
155   }
156 }
157
158 use case system subfunction oeCaptchaInvalid() {
159   actor actCaptchaValidator[primary, active]
160   actor actMailingService[secondary]
161   actor actAuthenticated[secondary]
162   returned messages{
163     ieSendMail() returned to actMailingService
164     ieMessage() returned to actAuthenticated
165   }
166 }
167 use case system subfunction oeCaptchaValid() {
168   actor actCaptchaValidator[primary, active]
169   actor actAuthenticated[secondary]
170   returned messages{
171     ieMessage() returned to actAuthenticated
172   }
173 }
174
175 //Sam:
176 use case system subfunction oegetStatistic(){
177   actor actAdministrator[primary, active]
178   actor actSystem[secondary,passive]
179   returned messages{
180     ieCallTimeAndCrisisNumber returned to actSystem
181     ieCallUserActivity returned to actSystem
182     ieCallTypeWithTimeAverage returned to actSystem
183   }
184 }
185 use case system subfunction oegetstatisticUser(){
186   actor actAdministrator[primary, active]
187   actor actDatabase[secondary, passive]
188
189   returned messages{
190
191   }
192 }
193 use case system subfunction oegetstatisticCrises(){
194   actor actAdministrator[primary, active]
195   actor actDatabase[secondary, passive]

```

```

196  returned messages{
197
198  }
199 }
200 use case system subfunction oeGetStatisticTypesOfCrises(){
201   actor actAdministrator[primary, active]
202   actor actDatabase[secondary, passive]
203   actor actSystem[secondary, passive]
204   returned messages{
205     ieCallTimeAndCrisisNumber returned to actSystem
206   }
207 }
208 use case system subfunction ugSecurelyUserSystem(){
209   actor actSystem[primary, active]
210
211 }
212 use case system subfunction oeSendStatistic(){
213   actor actSystem[primary, active]
214   actor actAdministrator[secondary, passive]
215   actor actDatabase[secondary, passive]
216   returned messages{
217     ieShowStaticTimeAverage returned to actAdministrator
218     ieShowStaticUser returned to actAdministrator
219     ieShowStaticCrisis returned to actAdministrator
220   }
221 }
222
223 //Vlad:
224 use case system subfunction oeCreateAlert(){
225   actor actAuthenticated[primary, active]
226   actor actCoordinator[secondary]
227 }
228 use case system subfunction oeCreateCrisis(){
229   actor actCoordinator[primary, active]
230 }
231 use case system subfunction oeUpdateCrisis(){
232   actor actCoordinator[primary, proactive]
233 }
234 use case system subfunction oeSendNotification(){
235   actor actSystem[primary, active]
236 }
237
238 //Unidentifiable:
239 use case system subfunction oeChooseInformation(){
240   actor actSystem[primary, active]
241   actor actAuthenticated[secondary]
242 }
243
244 }
245 }
```

Listing C.53: Messir Spec. file subfunctions-usecases.msr.

## C.54 File ./src-gen/messir-spec/test/tc-testcase01.msr

```

1 package lu.uni.lassy.excalibur.examples.icrash.tests.testcase01 {
2
3   import lu.uni.lassy.messir.libraries.string
4   import lu.uni.lassy.messir.libraries.primitives
5   import lu.uni.lassy.messir.libraries.math
6   import lu.uni.lassy.messir.libraries.calendar
7
8   import icrash.concepts.primarytypes.associations
9   import icrash.concepts.primarytypes.classes
10  import icrash.concepts.primarytypes.datatypes
11  import icrash.concepts.secondarytypes.datatypes
12  import icrash.environment
13
14  Test Model{
```

```

15  test case testcase01 order 01 {
16 //-----
17  test step ts01oeCreateSystemAndEnvironment order 01 {
18  variables{
19    Creator:actMsrCreator
20    AqtyComCompanies: ptInteger
21  }
22  constraints{
23    AqtyComCompanies = 4
24  }
25  test message{
26    out:Creator sends to system actMsrCreator.outactMsrCreator.oeCreateSystemAndEnvironment(
27    AqtyComCompanies)
28  }
29  oracle{
30    constraints{
31      true
32    }
33    prolog{"src/Tests/system/01/system-sim-01-01-oeCreateSystemAndEnvironment.pl"}
34  }
35 //-----
36  test step ts02oeSetClock order 02{
37  variables{
38    TheActor:actActivator
39    ACurrentClock:dtDateAndTime
40  }
41  constraints{
42    TheActor=TheSystem.rnactActivator->any2(true)
43
44    ACurrentClock.date.year.value = 2017
45    ACurrentClock.date.month.value = 11
46    ACurrentClock.date.day.value = 24
47    ACurrentClock.time.hour.value = 15
48    ACurrentClock.time.minute.value = 20
49    ACurrentClock.time.second.value = 00
50  }
51  test message{
52    out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
53  }
54  oracle{
55    constraints{
56      true
57    }
58  }
59  }
60 //-----
61
62  test step ts03oeLogin order 03{
63  variables{
64    TheActor : actAdministrator
65    AdtLogin:dtLogin
66    AdtPassword:dtPassword
67  }
68  constraints{
69    TheActor=TheSystem.rnactAdministrator->any2(true)
70    AdtLogin.value.eq('icrashadmin')
71    AdtPassword.value.eq('7WXC1359')
72  }
73  test message{
74    out:TheActor sends to system actAdministrator.outactAdministrator.oeLogin(AdtLogin,AdtPassword)
75  }
76  oracle{
77  variables{
78    AMESSAGE:ptString
79  }
80  constraints{
81    AMESSAGE = 'You are logged ! Welcome ...'
82    TheActor.inactAdministrator.ieMessage(AMESSAGE)
83  }

```

```

84     }
85   }
86 //-----
87 test step ts04oeAddCoordinator order 04{
88   variables{
89     TheActor : actAdministrator
90     AdtCoordinatorID : dtCoordinatorID
91     AdtLogin:dtLogin
92     AdtPassword:dtPassword
93   }
94   constraints{
95     TheActor = TheSystem.rnactAdministrator->any2(true)
96     AdtCoordinatorID.value.eq('1')
97     AdtLogin.value.eq('steve')
98     AdtPassword.value.eq('pwdMessirExcalibur2017')
99   }
100  test message{
101    out:TheActor
102    sends to system actAdministrator.outactAdministrator.oeAddCoordinator
103      (AdtCoordinatorID,
104       AdtLogin,
105       AdtPassword)
106  }
107  oracle{
108    constraints{
109      TheActor.inactAdministrator.ieCoordinatorAdded()
110    }
111  }
112 }

113 //-----
114 test step ts05oeLogout order 05{
115   variables{
116     TheActor : actAdministrator
117   }
118   constraints{
119     TheActor = TheSystem.rnactAdministrator->any2(true)
120   }
121   test message{
122     out:TheActor sends to system actAdministrator.outactAdministrator.oeLogout()
123   }
124   oracle{
125     variables{
126       AMessage:ptString
127     }
128     constraints{
129       AMessage = 'You are logged out ! Good Bye ...'
130       TheActor.inactAdministrator.ieMessage(AMessage)
131     }
132   }
133 }

134 //-----
135 test step ts06oeSetClock02 order 06{
136   variables{
137     TheActor:actActivator
138     ACurrentClock:dtDateAndTime
139   }
140   constraints{
141     TheActor=TheSystem.rnactActivator->any2(true)
142     ACurrentClock.date.year.value = 2017
143     ACurrentClock.date.month.value = 11
144     ACurrentClock.date.day.value = 26
145     ACurrentClock.time.hour.value = 10
146     ACurrentClock.time.minute.value = 15
147     ACurrentClock.time.second.value = 00
148   }
149   test message{
150     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
151   }
152   oracle{
153     constraints{

```

```

154     true
155   }
156 }
157 }
158 //-----
159 test step ts07oeAlert1 order 07{
160   variables{
161     TheActor : actComCompany
162     AetHumanKind:etHumanKind
163     AdtDate:dtDate
164     AdtTime:dtTime
165     AdtPhoneNumber:dtPhoneNumber
166     AdtGPSLocation:dtGPSLocation
167     AdtComment:dtComment
168   }
169   constraints{
170     TheActor = TheSystem.rnactComCompany->any2(true)
171     AetHumanKind = witness
172     AdtDate.year.value = 2017
173     AdtDate.month.value = 11
174     AdtDate.day.value = 26
175     AdtTime.hour.value = 10
176     AdtTime.minute.value = 10
177     AdtTime.second.value = 16
178     AdtPhoneNumber.value = '+3524666445252'
179     AdtGPSLocation.latitude.value = 49.627675
180     AdtGPSLocation.longitude.value = 6.159590
181     AdtComment.value = '3 cars involved in an accident.'
182   }
183   test message{
184     out:TheActor
185     sends to system actComCompany.outactComCompany.oeAlert( AetHumanKind,
186                               AdtDate,
187                               AdtTime,
188                               AdtPhoneNumber,
189                               AdtGPSLocation,
190                               AdtComment)
191   }
192   oracle{
193     variables{
194       AdtSMS:dtSMS
195     }
196     constraints{
197       AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
198       TheActor.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
199     }
200   }
201 }
202 //-----
203 test step ts08oeSetClock03 order 08{
204   variables{
205     TheActor:actActivator
206     ACurrentClock:dtDateAndTime
207   }
208   constraints{
209     TheActor=TheSystem.rnactActivator->any2(true)
210     ACurrentClock.date.year.value = 2017
211     ACurrentClock.date.month.value = 11
212     ACurrentClock.date.day.value = 26
213     ACurrentClock.time.hour.value = 10
214     ACurrentClock.time.minute.value = 30
215     ACurrentClock.time.second.value = 00
216   }
217   test message{
218     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
219   }
220   oracle{
221     constraints{
222       true
223     }

```

```

224     }
225   }
226 //-----
227 test step ts09oeSollicitateCrisisHandling order 09{
228   variables{
229     TheActor : actActivator
230   }
231   constraints{
232     TheActor = TheSystem.rnactActivator->any2(true)
233   }
234   test message{
235     out:TheActor sends to system actActivator.outactActivator.oeSollicitateCrisisHandling()
236   }
237   oracle{
238     variables{
239       TheAdministrator:actAdministrator
240       TheCoordinator:actCoordinator
241       AMessageForCrisisHandlers:ptString
242     }
243     constraints{
244       TheAdministrator = TheSystem.rnactAdministrator->any2(true)
245       TheCoordinator = TheSystem.rnactCoordinator->any2(true)
246       AMessageForCrisisHandlers = 'There are alerts pending since more than the defined delay. Please
REACT !'
247
248       TheAdministrator.inactAdministrator.ieMessage(AMessageForCrisisHandlers)
249       TheCoordinator.inactAdministrator.ieMessage(AMessageForCrisisHandlers)
250
251 /* this oracle should be written like this (not currently possible due to grammar limitations:
252
253   oracle{
254     variables{
255       TheAdministrator:actAdministrator
256       AMessageForCrisisHandlers:ptString
257     }
258     constraints{
259       AMessageForCrisisHandlers = 'There are alerts pending since more than the defined delay. Please
REACT !'
260       TheAdministrator = TheSystem.rnactAdministrator->any2(true)
261
262       TheSystem.rnactCoordinator->forAll(TheCoordinator:actCoordinator | TheCoordinator.
actAuthenticated.inactAuthenticated.ieMessage(AMessage)
263
264 */
265   }
266 }
267 }
268 //-----
269 test step ts10oeLogin02 order 10{
270   variables{
271     TheActor : actCoordinator
272     AdtLogin:dtLogin
273     AdtPassword:dtPassword
274   }
275   constraints{
276     TheActor = TheSystem.rnactCoordinator->select(a | a.rnctCoordinator.login.value.eq('steve'))->
any2(true)
277     AdtLogin.value.eq('steve')
278     AdtPassword.value.eq('pwdMessirExcalibur2017')
279   }
280   test message{
281     out:TheActor sends to system actAuthenticated.outactAuthenticated.oeLogin(AdtLogin,AdtPassword)
282   }
283   oracle{
284     variables{
285       AMessage:ptString
286     }
287     constraints{
288       AMessage = 'You are logged ! Welcome ...'
289       TheActor.inactAuthenticated.ieMessage(AMessage)

```

```

290     }
291   }
292 }
293 //-----
294 test step ts11oeGetCrisisSet order 11{
295   variables{
296     TheActor : actCoordinator
297     AetCrisisStatus : etCrisisStatus
298   }
299   constraints{
300     TheActor=TheSystem.rnactCoordinator
301     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
302     ->any2(true)
303     AetCrisisStatus = pending
304   }
305   test message{
306     out:TheActor sends to system actCoordinator.outactCoordinator.oeGetCrisisSet(AetCrisisStatus)
307   }
308   oracle{
309   //TODO - make consistent with test step implementation by adding Prolog code for input messages
310   variables{
311     ActCrisis:ctCrisis
312   }
313   constraints{
314     TheActor.inactCoordinator.ieSendACrisis(ActCrisis)
315   }
316 }
317 }
318 //-----
319 test step ts12oeSetCrisisHandler order 12{
320   variables{
321     TheActor : actCoordinator
322     AdtCrisisID : dtCrisisID
323   }
324   constraints{
325     TheActor=TheSystem.rnactCoordinator
326     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
327     ->any2(true)
328     //and AdtCrisisID.value= '1'
329   }
330   test message{
331     out:TheActor sends to system actCoordinator.outactCoordinator.oeSetCrisisHandler(AdtCrisisID)
332   }
333   oracle{
334   variables{
335     AMessage:ptString
336     AdtPhoneNumber:dtPhoneNumber
337     AdtSMS:dtSMS
338     ActAlert:ctAlert
339
340     TheComCompany: actComCompany
341     TheCoordinator:actCoordinator
342   }
343   constraints{
344     AMessage = 'You are now considered as handling the crisis !'
345     AdtSMS.value = 'The handling of your alert by our services is in progress !'
346     TheComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
347     TheCoordinator.inactCoordinator.ieSendAnAlert(ActAlert)
348     TheActor.inactAuthenticated.ieMessage(AMessage)
349   }
350 }
351 }
352 //-----
353 test step ts13oeSetClock04 order 13{
354   variables{
355     TheActor:actActivator
356     ACurrentClock:dtDateAndTime
357   }
358   constraints{
359     TheActor=TheSystem.rnactActivator->any2(true)

```

```

360     ACurrentClock.date.year.value = 2017
361     ACurrentClock.date.month.value = 11
362     ACurrentClock.date.day.value = 26
363     ACurrentClock.time.hour.value = 10
364     ACurrentClock.time.minute.value = 45
365     ACurrentClock.time.second.value = 00
366 }
367 test message{
368     out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
369 }
370 oracle{
371     constraints{
372         true
373     }
374 }
375 }
376 //-----
377 test step ts14oeValidateAlert order 14{
378     variables{
379         TheActor : actCoordinator
380         AdtAlertID : dtAlertID
381     }
382     constraints{
383         TheActor=TheSystem.rnactCoordinator
384         ->select(a | a.rnctCoordinator.login.value.eq('steve'))
385         ->any2(true)
386         //and AdtAlertID.value= '1'
387     }
388     test message{
389         out:TheActor sends to system actCoordinator.outactCoordinator.oeValidateAlert(AdtAlertID)
390     }
391     oracle{
392         variables{
393             AMessage:ptString
394         }
395         constraints{
396             AMessage = 'The Alert is now declared as valid !'
397             TheActor.actAuthenticated.inactAuthenticated.ieMessage(AMessage)
398         }
399     }
400 }
401 //-----
402 test step ts15oeAlert2 order 15{
403     variables{
404         TheActor : actComCompany
405         AetHumanKind:etHumanKind
406         AdtDate:dtDate
407         AdtTime:dtTime
408         AdtPhoneNumber:dtPhoneNumber
409         AdtGPSLocation:dtGPSLocation
410         AdtComment:dtComment
411     }
412     constraints{
413         TheActor = TheSystem.rnactComCompany->any2(true)
414         AetHumanKind = witness
415         AdtDate.year.value = 2017
416         AdtDate.month.value = 11
417         AdtDate.day.value = 26
418         AdtTime.hour.value = 10
419         AdtTime.minute.value = 20
420         AdtTime.second.value = 00
421         AdtPhoneNumber.value = '+3524666445000'
422         AdtGPSLocation.latitude.value = 49.627095
423         AdtGPSLocation.longitude.value = 6.160251
424         AdtComment.value = 'A car crash just happened.'
425     }
426     test message{
427         out:TheActor
428         sends to system actComCompany.outactComCompany.oeAlert( AetHumanKind,
429                         AdtDate,

```

```

430             AdtTime,
431             AdtPhoneNumber,
432             AdtGPSLocation,
433             AdtComment)
434         }
435     oracle{
436         variables{
437             AdtSMS:dtSMS
438         }
439         constraints{
440             AdtSMS.value = 'Your alert has been registered. We will handle it and keep you informed'
441             TheActor.actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
442         }
443     }
444 }
445 //-----
446 test step ts16oeSetClock05 order 16{
447     variables{
448         TheActor:actActivator
449         ACurrentClock:dtDateAndTime
450     }
451     constraints{
452         TheActor=TheSystem.rnactActivator->any2(true)
453         ACurrentClock.date.year.value = 2017
454         ACurrentClock.date.month.value = 11
455         ACurrentClock.date.day.value = 26
456         ACurrentClock.time.hour.value = 12
457         ACurrentClock.time.minute.value = 45
458         ACurrentClock.time.second.value = 00
459     }
460     test message{
461         out:TheActor sends to system actActivator.outactActivator.oeSetClock(ACurrentClock)
462     }
463     oracle{
464         constraints{
465             true
466         }
467     }
468 }
469 //-----
470 test step ts17oeSetCrisisStatus order 17{
471     variables{
472         TheActor : actCoordinator
473         AdtCrisisID : dtCrisisID
474         AetCrisisStatus : etCrisisStatus
475     }
476     constraints{
477         TheActor=TheSystem.rnactCoordinator
478         ->select(a | a.rnctCoordinator.login.value.eq('steve'))
479         ->any2(true)
480         //and AdtCrisisID.value= '1'
481         //and AetCrisisStatus = solved
482     }
483     test message{
484         out:TheActor sends to system actCoordinator.outactCoordinator.oeSetCrisisStatus(AdtCrisisID,
485         AetCrisisStatus)
486     }
487     oracle{
488         variables{
489             AMessage:ptString
490         }
491         constraints{
492             AMESSAGE = 'The crisis status has been updated !'
493             TheActor.inactAuthenticated.ieMessage(AMESSAGE)
494         }
495     }
496 //-----
497 test step ts18oeReportOnCrisis order 18{
498     variables{

```

```

499     TheActor : actCoordinator
500     AdtCrisisID : dtCrisisID
501     AdtComment : dtComment
502   }
503   constraints{
504     TheActor=TheSystem.rnactCoordinator
505     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
506     ->any2(true)
507     //and AdtCrisisID.value= '1'
508     //and AdtComment.value = '3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
mobilized'
509   }
510   test message{
511     out:TheActor sends to system actCoordinator.outactCoordinator.oeReportOnCrisis(AdtCrisisID,
AdtComment)
512   }
513   oracle{
514     variables{
515       AMessage:ptString
516     }
517     constraints{
518       AMessage = 'The crisis comment has been updated !'
519       TheActor.inactAuthenticated.ieMessage(AMessage)
520     }
521   }
522 }

523 //-----
524 test step ts19oeCloseCrisis order 19{
525   variables{
526     TheActor : actCoordinator
527     AdtCrisisID : dtCrisisID
528   }
529   constraints{
530     TheActor=TheSystem.rnactCoordinator
531     ->select(a | a.rnctCoordinator.login.value.eq('steve'))
532     ->any2(true)
533     //and AdtCrisisID.value= '1'
534   }
535   test message{
536     out:TheActor sends to system actCoordinator.outactCoordinator.oeCloseCrisis(AdtCrisisID)
537   }
538   oracle{
539     variables {
540       AMessage:ptString
541     }
542     constraints{
543       AMessage = 'The crisis is now closed !'
544       TheActor.inactAuthenticated.ieMessage(AMessage)
545     }
546   }
547 }
548 }
549 }
550 }

```

Listing C.54: Messir Spec. file tc-testcase01.msr.

## C.55 File ./src-gen/messir-spec/test/tci-testcase01-instance01.msr

```

1 package lu.uni.lassy.excalibur.examples.icrash.tests.testcase01.instance01 {
2
3 import lu.uni.lassy.messir.libraries.string
4 import lu.uni.lassy.messir.libraries.primitives
5 import lu.uni.lassy.messir.libraries.math
6 import lu.uni.lassy.messir.libraries.calendar
7
8 import icrash.concepts.primarytypes.associations
9 import icrash.concepts.primarytypes.classes
10 import icrash.concepts.primarytypes.datatypes

```

```

11 import lu.uni.lassy.excalibur.examples.icrash.tests.testcase01
12 import icrash.environment
13
14 Test Model {
15 test case instance instance01:testcase01{
16 //-----
17 test step instance tsi01: testcase01.ts01oeCreateSystemAndEnvironment{
18 variables {
19 theCreator: testcase01.ts01oeCreateSystemAndEnvironment.Creator = "theCreator"
20 AqtyComCompanies : testcase01.ts01oeCreateSystemAndEnvironment.AqtyComCompanies="4"
21 }
22 oracle {
23 satisfaction = "true"
24 }
25 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
26 }
27 //-----
28 test step instance tsi02: testcase01.ts02oeSetClock{
29 variables {
30 theClock: testcase01.ts02oeSetClock.TheActor = "theClock"
31 ACurrentClock : testcase01.ts02oeSetClock.ACurrentClock= "2017:11:24 - 03:20:00"
32 }
33 oracle {
34 satisfaction = "true"
35 }
36 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
37 }
38 //-----
39 test step instance tsi03: testcase01.ts03oeLogin{
40 variables {
41 bill: testcase01.ts03oeLogin.TheActor="bill"
42 AdtLogin : testcase01.ts03oeLogin.AdtLogin= "icrashadmin"
43 AdtPassword : testcase01.ts03oeLogin.AdtPassword= "7WXC1359"
44 }
45 oracle {
46 satisfaction = "true"
47 received message {
48 AMesssage : testcase01.ts03oeLogin.AMessage= 'You are logged ! Welcome ...'
49 tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMesssage)
50 }
51 }
52 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
53 }
54 //-----
55 test step instance tsi04: testcase01.ts04oeAddCoordinator{
56 variables {
57 reuse tsi03.bill as testcase01.ts04oeAddCoordinator.TheActor
58 AdtCoordinatorID : testcase01.ts04oeAddCoordinator.AdtCoordinatorID = "1"
59 AdtLogin : testcase01.ts04oeAddCoordinator.AdtLogin= "steve"
60 AdtPassword : testcase01.ts04oeAddCoordinator.AdtPassword = "pwdMessirExcalibur2017"
61 }
62 oracle {
63 satisfaction = "true"
64 received message {
65 tsi03.bill received from system actAdministrator.inactAdministrator.ieCoordinatorAdded()
66 }
67 }
68 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
69 }
70 //-----
71 test step instance tsi05: testcase01.ts05oeLogout{
72 variables {
73 reuse tsi03.bill as testcase01.ts05oeLogout.TheActor
74 }
75 oracle {
76 satisfaction = "true"
77 received message {
78 AMesssage : testcase01.ts05oeLogout.AMessage= 'You are logged out ! Good Bye ...'
79 tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMesssage)
80 }

```

```

81    }
82    test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
83  }
84 //-
85 test step instance tsi06: testcase01.ts06oeSetClock02{
86  variables {
87    reuse tsi02.theClock as testcase01.ts06oeSetClock02.TheActor
88    ACurrentClock : testcase01.ts06oeSetClock02.ACurrentClock= "2017:11:26 - 10:15:00"
89  }
90  oracle {
91    satisfaction = "true"
92  }
93  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
94 }
95 //-
96 test step instance tsi07: testcase01.ts07oeAlert1{
97  variables {
98    tango:testcase01.ts07oeAlert1.TheActor ="tango"
99    AetHumanKind : testcase01.ts07oeAlert1.AetHumanKind = "witness"
100   AdtDate : testcase01.ts07oeAlert1.AdtDate = "2017:11:26"
101   AdtTime : testcase01.ts07oeAlert1.AdtTime = "10:10:16"
102   AdtPhoneNumber : testcase01.ts07oeAlert1.AdtPhoneNumber = "+3524666445252"
103   AdtGPSLocation : testcase01.ts07oeAlert1.AdtGPSLocation = "49.627675:6.159590"
104   AdtComment : testcase01.ts07oeAlert1.AdtComment = "3 cars involved in an accident."
105  }
106 oracle {
107   satisfaction = "true"
108   received message {
109     AdtSMS : testcase01.ts07oeAlert1.AdtSMS= 'Your alert has been registered. We will handle it and
keep you informed'
110     tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
111   }
112 }
113 }
114 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
115 }
116 //
117 test step instance tsi08: testcase01.ts08oeSetClock03{
118  variables {
119    reuse tsi02.theClock as testcase01.ts08oeSetClock03.ACurrentClock
120    ACurrentClock : testcase01.ts08oeSetClock03.ACurrentClock = "2017:11:26 - 10:30:00"
121  }
122  oracle {
123    satisfaction = "true"
124  }
125  test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
126 }
127 //
128 //-
129 test step instance tsi09: testcase01.ts09oeSollicitateCrisisHandling{
130  variables {
131    reuse tsi02.theClock as testcase01.ts09oeSollicitateCrisisHandling.TheActor
132    reuse tsi03.bill as testcase01.ts09oeSollicitateCrisisHandling.TheAdministrator
133  }
134 oracle {
135   satisfaction = "true"
136   received message {
137     steve:testcase01.ts09oeSollicitateCrisisHandling.TheCoordinator ="steve"
138     AMessagForCrisisHandlers : testcase01.ts09oeSollicitateCrisisHandling.
AMessagForCrisisHandlers= 'There are alerts pending since more than the defined delay. Please
REACT !'
139
140     tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(
AMessagForCrisisHandlers)
141     tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(
AMessagForCrisisHandlers)
142   }
143 }
144 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
145 }

```

```

146 //-----
147 test step instance tsi10: testcase01.ts10oeLogin02{
148   variables {
149     reuse tsi09.steve as testcase01.ts10oeLogin02.TheActor
150     AdtLogin : testcase01.ts10oeLogin02.AdtLogin = "steve"
151     AdtPassword : testcase01.ts10oeLogin02.AdtPassword= "pwdMessirExcalibur2017"
152   }
153   oracle {
154     satisfaction = "true"
155     received message {
156       AMesssage : testcase01.ts10oeLogin02.AMessage= 'You are logged ! Welcome ...'
157       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
158     }
159   }
160 }
161 }
162 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
163 }
164 //-----
165 test step instance ts111: testcase01.ts11oeGetCrisisSet{
166   variables {
167     reuse tsi09.steve as testcase01.ts11oeGetCrisisSet.TheActor
168     AetCrisisStatus : testcase01.ts11oeGetCrisisSet.AetCrisisStatus = "pending"
169   }
170   oracle {
171     satisfaction = "true"
172     received message {
173       ActCrisis : testcase01.ts11oeGetCrisisSet.ActCrisis= "crisis with ID 1 details"
174       tsi09.steve received from system actCoordinator.inactCoordinator.ieSendACrisis(ActCrisis)
175     }
176   }
177   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
178 }
179 //-----
180 test step instance ts112: testcase01.ts12oeSetCrisisHandler{
181   variables {
182     reuse tsi09.steve as testcase01.ts12oeSetCrisisHandler.TheActor
183     AdtCrisisID : testcase01.ts12oeSetCrisisHandler.AdtCrisisID = "1"
184
185     reuse tsi07.tango as testcase01.ts12oeSetCrisisHandler.TheComCompany
186
187   }
188   oracle {
189     satisfaction = "true"
190     received message {
191       AMesssage : testcase01.ts12oeSetCrisisHandler.AMessage= 'You are now considered as handling the
192       crisis !'
193       AdtSMS : testcase01.ts12oeSetCrisisHandler.AdtSMS= 'The handling of your alert by our services
194         is in progress !'
195       AdtPhoneNumber : testcase01.ts12oeSetCrisisHandler.AdtPhoneNumber= "+3524666445252"
196
197       tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
198       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
199     }
200   }
201   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
202 }
203 //-----
204 test step instance ts113: testcase01.ts13oeSetClock04{
205   variables {
206     reuse tsi02.theClock as testcase01.ts13oeSetClock04.TheActor
207     ACurrentClock : testcase01.ts13oeSetClock04.ACurrentClock = "2017:11:26 - 10:45:00"
208   }
209   oracle {
210     satisfaction = "true"
211   }
212   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
213 }

```

```

214 test step instance tsi14: testcase01.ts14oeValidateAlert{
215   variables {
216     reuse tsi09.steve as testcase01.ts14oeValidateAlert.TheActor
217     AdtAlertID : testcase01.ts14oeValidateAlert.AdtAlertID = "1"
218   }
219   oracle {
220     satisfaction = "true"
221     received message {
222       AMessage : testcase01.ts14oeValidateAlert.AMessage= 'The Alert is now declared as valid !'
223       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
224     }
225   }
226 }
227 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
228 }
229 //-----
230 test step instance tsi15: testcase01.ts15oeAlert2{
231   variables {
232     reuse tsi07.tango as testcase01.ts15oeAlert2.TheActor
233     AetHumanKind : testcase01.ts15oeAlert2.AetHumanKind ="witness"
234     AdtDate : testcase01.ts15oeAlert2.AdtDate= "2017:11:26"
235     AdtTime : testcase01.ts15oeAlert2.AdtTime= "10:20:00"
236     AdtPhoneNumber : testcase01.ts15oeAlert2.AdtPhoneNumber= "+3524666445000"
237     AdtGPSLocation : testcase01.ts15oeAlert2.AdtGPSLocation= "49.627095:6.160251"
238     AdtComment : testcase01.ts15oeAlert2.AdtComment= "A car crash just happened."
239   }
240   message {
241     tsi07.tango sent to system testcase01.ts15oeAlert2.out : actComCompany.outactComCompany.oeAlert(
242       AetHumanKind,AdtDate,AdtTime,AdtPhoneNumber,AdtGPSLocation,AdtComment)
243   }
244   oracle {
245     satisfaction = "true"
246     received message {
247       AdtSMS : testcase01.ts15oeAlert2.AdtSMS= 'Your alert has been registered. We will handle it and
248         keep you informed'
249       tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
250     }
251   }
252   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
253 }
254 //-----
255 test step instance tsi16: testcase01.ts16oeSetClock05{
256   variables {
257     reuse tsi02.theClock as testcase01.ts16oeSetClock05.TheActor
258     ACurrentClock : testcase01.ts16oeSetClock05.ACurrentClock = "2017:11:26 - 12:45:00"
259   }
260   oracle {
261     satisfaction = "true"
262     received message {
263   }
264   }
265 }
266 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
267 }
268 //-----
269 test step instance tsi17: testcase01.ts17oeSetCrisisStatus{
270   variables {
271     reuse tsi09.steve as testcase01.ts17oeSetCrisisStatus.TheActor
272     AdtCrisisID : testcase01.ts17oeSetCrisisStatus.AdtCrisisID = "1"
273     AetCrisisStatus : testcase01.ts17oeSetCrisisStatus.AetCrisisStatus= "solved"
274   }
275   oracle {
276     satisfaction = "true"
277     received message {
278       AMESSAGE : testcase01.ts17oeSetCrisisStatus.AMESSAGE= "The crisis status has been updated !"
279       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMESSAGE)
280     }
281 }

```

```

282     test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
283   }
284 //-----
285 test step instance tsi18: testcase01.ts18oeReportOnCrisis{
286   variables {
287     reuse tsi09.steve as testcase01.ts18oeReportOnCrisis.TheActor
288     AdtCrisisID : testcase01.ts18oeReportOnCrisis.AdtCrisisID = "1"
289     AdtComment : testcase01.ts18oeReportOnCrisis.AdtComment= "3 victims sent to hospital, 2 cars
      evacuated and 4 rescue unit mobilized"
290   }
291   oracle {
292     satisfaction = "true"
293     received message {
294       AMessage : testcase01.ts18oeReportOnCrisis.AMessage= 'The crisis comment has been updated !'
295       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
296     }
297   }
298 }
299 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
300 }
301 //-----
302 test step instance tsi19: testcase01.ts19oeCloseCrisis{
303   variables {
304     reuse tsi09.steve as testcase01.ts19oeCloseCrisis.TheActor
305     AdtCrisisID : testcase01.ts19oeCloseCrisis.AdtCrisisID = "1"
306   }
307   oracle {
308     satisfaction = "true"
309     received message {
310       AMessage : testcase01.ts19oeCloseCrisis.AMessage= 'The crisis is now closed !'
311       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
312     }
313   }
314 }
315 }
316 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
317 }
318 }
319 }
320 //-----
321 //-----
322 //-----
323 test case instance instance01Part01:testcase01{
324 //
325 test step instance tsi01: testcase01.ts01oeCreateSystemAndEnvironment{
326   variables {
327     theCreator: testcase01.ts01oeCreateSystemAndEnvironment.Creator = "theCreator"
328     AqtyComCompanies : testcase01.ts01oeCreateSystemAndEnvironment.AqtyComCompanies="4"
329   }
330   oracle {
331     satisfaction = "true"
332   }
333   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
334 }
335 //-----
336 test step instance tsi02: testcase01.ts02oeSetClock{
337   variables {
338     theClock: testcase01.ts02oeSetClock.TheActor = "theClock"
339     ACurrentClock : testcase01.ts02oeSetClock.ACurrentClock= "2017:11:24 - 03:20:00"
340   }
341   oracle {
342     satisfaction = "true"
343   }
344   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
345 }
346 //-----
347 test step instance tsi03: testcase01.ts03oeLogin{
348   variables {
349     bill: testcase01.ts03oeLogin.TheActor="bill"
350     AdtLogin : testcase01.ts03oeLogin.AdtLogin= "icrashadmin"

```

```

351     AdtPassword : testcase01.ts03oeLogin.AdtPassword= "7WXC1359"
352   }
353   oracle {
354     satisfaction = "true"
355     received message {
356       AMesssage : testcase01.ts03oeLogin.AMessage= 'You are logged ! Welcome ...'
357       tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
358     }
359   }
360   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
361 }
362 //-----
363 test step instance tsi04: testcase01.ts04oeAddCoordinator{
364   variables {
365     reuse tsi03.bill as testcase01.ts04oeAddCoordinator.TheActor
366     AdtCoordinatorID : testcase01.ts04oeAddCoordinator.AdtCoordinatorID = "1"
367     AdtLogin :testcase01.ts04oeAddCoordinator.AdtLogin= "steve"
368     AdtPassword : testcase01.ts04oeAddCoordinator.AdtPassword = "pwdMessirExcalibur2017"
369   }
370   oracle {
371     satisfaction = "true"
372     received message {
373       tsi03.bill received from system actAdministrator.inactAdministrator.ieCoordinatorAdded()
374     }
375   }
376   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
377 }
378 //-----
379 test step instance tsi05: testcase01.ts05oeLogout{
380   variables {
381     reuse tsi03.bill as testcase01.ts05oeLogout.TheActor
382   }
383   oracle {
384     satisfaction = "true"
385     received message {
386       AMesssage : testcase01.ts05oeLogout.AMessage= 'You are logged out ! Good Bye ...'
387       tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
388     }
389   }
390   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
391 }
392 //-----
393 test step instance tsi06: testcase01.ts06oeSetClock02{
394   variables {
395     reuse tsi02.theClock as testcase01.ts06oeSetClock02.TheActor
396     ACurrentClock : testcase01.ts06oeSetClock02.ACurrentClock= "2017:11:26 - 10:15:00"
397   }
398   oracle {
399     satisfaction = "true"
400   }
401   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
402 }
403 //-----
404 test step instance tsi07: testcase01.ts07oeAlert1{
405   variables {
406     tango:testcase01.ts07oeAlert1.TheActor ="tango"
407     AetHumanKind : testcase01.ts07oeAlert1.AetHumanKind = "witness"
408     AdtDate : testcase01.ts07oeAlert1.AdtDate = "2017:11:26"
409     AdtTime : testcase01.ts07oeAlert1.AdtTime = "10:10:16"
410     AdtPhoneNumber : testcase01.ts07oeAlert1.AdtPhoneNumber = "+3524666445252"
411     AdtGPSLocation : testcase01.ts07oeAlert1.AdtGPSLocation = "49.627675:6.159590"
412     AdtComment : testcase01.ts07oeAlert1.AdtComment = "3 cars involved in an accident."
413   }
414   oracle {
415     satisfaction = "true"
416     received message {
417       AdtSMS : testcase01.ts07oeAlert1.AdtSMS= 'Your alert has been registered. We will handle it and
keep you informed'
418       tsi07.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
419

```

```

420     }
421   }
422   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
423 }
424
425 //-----
426 test step instance tsi08: testcase01.ts08oeSetClock03{
427   variables {
428     reuse tsi02.theClock as testcase01.ts08oeSetClock03.ACURRENTClock
429     ACURRENTClock : testcase01.ts08oeSetClock03.ACURRENTClock = "2017:11:26 - 10:30:00"
430   }
431   oracle {
432     satisfaction = "true"
433   }
434   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
435 }
436 //-----
437 test step instance tsi09: testcase01.ts09oeSollicitateCrisisHandling{
438   variables {
439     reuse tsi02.theClock as testcase01.ts09oeSollicitateCrisisHandling.TheActor
440     reuse tsi03.bill as testcase01.ts09oeSollicitateCrisisHandling.TheAdministrator
441   }
442   oracle {
443     satisfaction = "true"
444     received message {
445       steve:testcase01.ts09oeSollicitateCrisisHandling.TheCoordinator ="steve"
446       AMessagetoCrisisHandlers : testcase01.ts09oeSollicitateCrisisHandling.
447       AMessagetoCrisisHandlers= 'There are alerts pending since more than the defined delay. Please
        REACT !'
448       tsi03.bill received from system actAuthenticated.inactAuthenticated.ieMessage(
449         AMessagetoCrisisHandlers)
450       tsi09.steve received from system actAuthenticated.inactAuthenticated.ieMessage(
451         AMessagetoCrisisHandlers)
452     }
453   }
454 }
455
456 //-----
457 //-----
458 //-
459 test case instance instance01Part02: testcase01{
460
461   test step instance tsi10: testcase01.ts10oeLogin02{
462     variables {
463       steve : testcase01.ts10oeLogin02.TheActor
464       AdtLogin : testcase01.ts10oeLogin02.AdtLogin = "steve"
465       AdtPassword : testcase01.ts10oeLogin02.AdtPassword= "pwdMessirExcalibur2017"
466     }
467     oracle {
468       satisfaction = "true"
469       received message {
470         AMessageto : testcase01.ts10oeLogin02.AMessageto= 'You are logged ! Welcome ...'
471         steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessageto)
472       }
473     }
474   }
475   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
476 }
477 //-
478 test step instance ts11: testcase01.ts11oeGetCrisisSet{
479   variables {
480     reuse tsi10.steve as testcase01.ts11oeGetCrisisSet.TheActor
481     AetCrisisStatus : testcase01.ts11oeGetCrisisSet.AetCrisisStatus = "pending"
482   }
483   oracle {
484     satisfaction = "true"
485     received message {

```

```

486     ActCrisis : testcase01.ts11oeGetCrisisSet.ActCrisis= "crisis with ID 1 details"
487     tsi10.steve received from system actCoordinator.inactCoordinator.ieSendACrisis(ActCrisis)
488   }
489 }
490 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
491 }
492 //-----
493 test step instance tsi12: testcase01.ts12oeSetCrisisHandler{
494   variables {
495     reuse tsi10.steve as testcase01.ts12oeSetCrisisHandler.TheActor
496     AdtCrisisID : testcase01.ts12oeSetCrisisHandler.AdtCrisisID = "1"
497   }
498   oracle {
499     satisfaction = "true"
500     received message {
501       tango : testcase01.ts12oeSetCrisisHandler.TheComCompany
502       AMesssage : testcase01.ts12oeSetCrisisHandler.AMessage= 'You are now considered as handling the
503       crisis !'
504       AdtSMS : testcase01.ts12oeSetCrisisHandler.AdtSMS= 'The handling of your alert by our services
505       is in progress !'
506       AdtPhoneNumber : testcase01.ts12oeSetCrisisHandler.AdtPhoneNumber= "+3524666445252"
507     }
508   }
509 }
510 }
511 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
512 }
513 //-----
514 test step instance tsi13: testcase01.ts13oeSetClock04{
515   variables {
516     theClock : testcase01.ts13oeSetClock04.TheActor
517     ACurrentClock : testcase01.ts13oeSetClock04.ACurrrentClock = "2017:11:26 - 10:45:00"
518   }
519   oracle {
520     satisfaction = "true"
521   }
522 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
523 }
524 //-----
525 test step instance tsi14: testcase01.ts14oeValidateAlert{
526   variables {
527     reuse tsi10.steve as testcase01.ts14oeValidateAlert.TheActor
528     AdtAlertID : testcase01.ts14oeValidateAlert.AdtAlertID = "1"
529   }
530   oracle {
531     satisfaction = "true"
532     received message {
533       AMesssage : testcase01.ts14oeValidateAlert.AMessage= 'The Alert is now declared as valid !'
534       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
535     }
536   }
537 }
538 test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
539 }
540 //-----
541 test step instance tsi15: testcase01.ts15oeAlert2{
542   variables {
543     reuse tsi12.tango as testcase01.ts15oeAlert2.TheActor
544     AetHumanKind : testcase01.ts15oeAlert2.AetHumanKind ="witness"
545     AdtDate : testcase01.ts15oeAlert2.AdtDate= "2017:11:26"
546     AdtTime : testcase01.ts15oeAlert2.AdtTime= "10:20:00"
547     AdtPhoneNumber : testcase01.ts15oeAlert2.AdtPhoneNumber= "+3524666445000"
548     AdtGPSLocation : testcase01.ts15oeAlert2.AdtGPSLocation= "49.627095:6.160251"
549     AdtComment : testcase01.ts15oeAlert2.AdtComment= "A car crash just happened."
550   }
551   message {
552     tsi12.tango sent to system testcase01.ts15oeAlert2.out : actComCompany.outactComCompany.oeAlert(
553     AetHumanKind,AdtDate,AdtTime,AdtPhoneNumber,AdtGPSLocation,AdtComment)

```

```

553
554 }
555 oracle {
556   satisfaction = "true"
557   received message {
558     AdtSMS : testcase01.ts15oeAlert2.AdtSMS= 'Your alert has been registered. We will handle it and
559     keep you informed'
560     tsi12.tango received from system actComCompany.inactComCompany.ieSmsSend(AdtPhoneNumber,AdtSMS)
561   }
562 }
563   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
564 }
565 //-
566 test step instance tsi16: testcase01.ts16oeSetClock05{
567   variables {
568     reuse tsi13.theClock as testcase01.ts16oeSetClock05.TheActor
569     ACurrentClock : testcase01.ts16oeSetClock05.ACurrentClock = "2017:11:26 - 12:45:00"
570   }
571   oracle {
572     satisfaction = "true"
573     received message {
574       }
575     }
576   }
577   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
578 }
579 //-
580 test step instance tsi17: testcase01.ts17oeSetCrisisStatus{
581   variables {
582     reuse tsi10.steve as testcase01.ts17oeSetCrisisStatus.TheActor
583     AdtCrisisID : testcase01.ts17oeSetCrisisStatus.AdtCrisisID = "1"
584     AetCrisisStatus : testcase01.ts17oeSetCrisisStatus.AetCrisisStatus= "solved"
585   }
586   oracle {
587     satisfaction = "true"
588     received message {
589       AMessage : testcase01.ts17oeSetCrisisStatus.AMessage= "The crisis status has been updated !"
590       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
591     }
592   }
593   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
594 }
595 //-
596 test step instance tsi18: testcase01.ts18oeReportOnCrisis{
597   variables {
598     reuse tsi10.steve as testcase01.ts18oeReportOnCrisis.TheActor
599     AdtCrisisID : testcase01.ts18oeReportOnCrisis.AdtCrisisID = "1"
600     AdtComment : testcase01.ts18oeReportOnCrisis.AdtComment= "3 victims sent to hospital, 2 cars
601     evacuated and 4 rescue unit mobilized"
602   }
603   oracle {
604     satisfaction = "true"
605     received message {
606       AMessage : testcase01.ts18oeReportOnCrisis.AMessage= 'The crisis comment has been updated !'
607       tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
608     }
609   }
610   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
611 }
612 //-
613 test step instance tsi19: testcase01.ts19oeCloseCrisis{
614   variables {
615     reuse tsi10.steve as testcase01.ts19oeCloseCrisis.TheActor
616     AdtCrisisID : testcase01.ts19oeCloseCrisis.AdtCrisisID = "1"
617   }
618   oracle {
619     satisfaction = "true"
620     received message {

```

```

621     AMessage : testcase01.ts19oeCloseCrisis.AMessage= 'The crisis is now closed !'
622
623     tsi10.steve received from system actAuthenticated.inactAuthenticated.ieMessage(AMessage)
624
625     }
626   }
627   test results {pre-protocol = "true" pre-functional = "true" post-functional = "true"}
628 }
629
630 }
631 }
632
633 }

```

Listing C.55: Messir Spec. file tci-testcase01-instance01.msr.

## C.56 File [./src-gen/messir-spec/usecases/usecase-suDeployAndRun.msr](#)

```

1 package icrash.usecases.suDeployAndRun {
2   import icrash.concepts.primarytypes.datatypes
3   import icrash.environment
4   import icrash.usecases.suGlobalCrisisHandling
5   import icrash.usecases.ugAdministrateTheSystem
6   import icrash.usecases.subfunctions
7
8   Use Case Model {
9     use case system summary suDeployAndRun() {
10    actor actAdministrator[primary, active]
11    actor actMsrCreator[secondary, active]
12    actor actCoordinator[secondary, active, multiple]
13    actor actActivator[secondary, proactive]
14    actor actComCompany[secondary, active]
15
16    reuse oeCreateSystemAndEnvironment[1..1]
17    reuse ugAdministrateTheSystem[1...*]
18    reuse suGlobalCrisisHandling[1...*]
19    reuse oeSetClock[1...*]
20    reuse oeSollicitateCrisisHandling[0...*]
21    reuse oeAlert[1...*]
22
23    step a: actMsrCreator executes oeCreateSystemAndEnvironment
24    step b: actAdministrator executes ugAdministrateTheSystem
25    step c: actComCompany executes oeAlert
26    step d: actActivator executes oeSetClock
27    step ^e: actActivator executes oeSollicitateCrisisHandling
28    step f: actCoordinator executes suGlobalCrisisHandling
29
30    ordering constraint
31      "step (a) must be always the first step."
32    ordering constraint
33      "step (f) can be executed by different actCoordinator actors."
34    ordering constraint
35      "if (e) then previously (d)."
36  }
37 //-----
38 //-----
39 //-----
40   use case instance uciSimpleAndComplete : suDeployAndRun {
41     actors {
42       theCreator : actMsrCreator
43       theClock : actActivator
44       bill : actAdministrator
45       tango : actComCompany
46       steve : actCoordinator
47     }
48   use case steps {
49   /

```

```

50     theCreator
51     executed instanceof subfunction
52         oeCreateSystemAndEnvironment("4") {}
53 //-
54     theClock
55     executed instanceof subfunction
56         oeSetClock("2017:11:24 - 03:20:00") {}
57 //-
58     bill
59     executed instanceof subfunction
60         oeLogin("icrashadmin","7WXC1359"){
61             ieMessage('You are logged ! Welcome ...') returned to bill
62         }
63 //-
64     bill
65     executed instanceof subfunction
66         oeAddCoordinator("1","steve","pwdMessirExcalibur2017"){
67             ieCoordinatorAddedreturned returned to bill
68         }
69 //-
70     bill
71     executed instanceof subfunction
72         oeLogout{
73             ieMessage('You are logged out ! Good Bye ...') returned to bill
74         }
75 //-
76     theClock
77     executed instanceof subfunction
78         oeSetClock("2017:11:26 - 10:15:00") {}
79 //-
80     tango
81     executed instanceof subfunction
82         oeAlert("witness","2017:11:26","10:10:16","+3524666445252",
83             "49.627675:6.159590","3 cars involved in an accident."){
84             ieSmsSend("+3524666445252","Your alert has been registered. We will handle it and keep you
85             informed") returned to tango
86         }
86 //-
87     theClock
88     executed instanceof subfunction
89         oeSetClock("2017:11:26 - 10:30:00") {}
90 //-
91     theClock
92     executed instanceof subfunction
93         oeSollicitateCrisisHandling{
94             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
95             returned to bill
96             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
97             returned to steve
98         }
99 //-
100    steve
101    executed instanceof subfunction
102        oeLogin("steve","pwdMessirExcalibur2017"){
103            ieMessage('You are logged ! Welcome ...') returned to steve
104        }
105 //-
106    steve
107    executed instanceof subfunction
108        oeGetCrisisSet("pending"){
109            ieSendACrisis("crisis with ID 1 details") returned to steve
110        }
111 //-
112    steve
113    executed instanceof subfunction
114        oeSetCrisisHandler("1"){
115            ieSmsSend("+3524666445252","The handling of your alert by our services is in progress !")
116            returned to tango
117            ieMessage("You are now considered as handling the crisis !")
118            returned to steve

```

```

119      }
120 //-----
121     theClock
122     executed instanceof subfunction
123       oeSetClock("2017:11:26 - 10:45:00"){}
124 //-----
125     steve
126     executed instanceof subfunction
127       oeValidateAlert("1"){
128         ieMessage('The Alert is now declared as valid !')
129         returned to steve
130       }
131 //-----
132     tango
133     executed instanceof subfunction
134       oeAlert("witness","2017:11:26","10:20:00","+3524666445000",
135         "49.627095:6.160251","A car crash just happened."){
136         ieSmsSend("+3524666445000","Your alert has been registered. We will handle it and keep you
informed") returned to tango
137       }
138 //-----
139     theClock
140     executed instanceof subfunction
141       oeSetClock("2017:11:26 - 12:45:00"){}
142 //-----
143     steve
144     executed instanceof subfunction
145       oeSetCrisisStatus("1","solved"){
146         ieMessage('The crisis status has been updated !')
147         returned to steve
148       }
149 //-----
150     steve
151     executed instanceof subfunction
152       oeReportOnCrisis("1","3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
mobilized"){
153         ieMessage('The crisis comment has been updated !')
154         returned to steve
155       }
156 //-----
157     steve
158     executed instanceof subfunction
159       oeCloseCrisis("1"){
160         ieMessage('The crisis is now closed !')
161         returned to steve
162       }
163
164   }
165 }
166 //-----
167 //-----
168 //-----
169 use case instance uciSimpleAndCompletePart01 : suDeployAndRun{
170
171   actors {
172     theCreator : actMsrCreator
173     theClock : actActivator
174     bill : actAdministrator
175     tango : actComCompany
176     steve : actCoordinator
177   }
178   use case steps {
179 //-----
180     theCreator
181     executed instanceof subfunction
182       oeCreateSystemAndEnvironment("4"){}
183 //-----
184     theClock
185     executed instanceof subfunction
186       oeSetClock("2017:11:24 - 03:20:00"){}

```

```

187 //-----
188     bill
189     executed instanceof subfunction
190         oeLogin("icrashadmin","7WXC1359"){
191             ieMessage('You are logged ! Welcome ...') returned to bill
192         }
193 //-----
194     bill
195     executed instanceof subfunction
196         oeAddCoordinator("1","steve","pwdMessirExcalibur2017"){
197             ieCoordinatorAddedreturned returned to bill
198         }
199 //-----
200     bill
201     executed instanceof subfunction
202         oeLogout{
203             ieMessage('You are logged out ! Good Bye ...') returned to bill
204         }
205 //-----
206     theClock
207     executed instanceof subfunction
208         oeSetClock("2017:11:26 - 10:15:00){}
209 //-----
210     tango
211     executed instanceof subfunction
212         oeAlert("witness","2017:11:26","10:10:16","+3524666445252",
213             "49.627675:6.159590","3 cars involved in an accident."){
214             ieSmsSend("+3524666445252","Your alert has been registered. We will handle it and keep you
informed") returned to tango
215         }
216 //-----
217     theClock
218     executed instanceof subfunction
219         oeSetClock("2017:11:26 - 10:30:00){}
220 //-----
221     theClock
222     executed instanceof subfunction
223         oeSollicitateCrisisHandling{
224             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
returned to bill
225             ieMessage("There are alerts pending since more than the defined delay. Please REACT !")
returned to steve
226         }
227     }
228 }
229 }
230 }
231 //-----
232 //-----
233 //-----
234 use case instance uciSimpleAndCompletePart02 : suDeployAndRun{
235     actors {
236         theCreator : actMsrCreator
237         theClock : actActivator
238         bill : actAdministrator
239         tango : actComCompany
240         steve : actCoordinator
241     }
242     use case steps {
243
244 //-----
245         steve
246         executed instanceof subfunction
247             oeLogin("steve","pwdMessirExcalibur2017"){
248                 ieMessage('You are logged ! Welcome ...') returned to steve
249             }
250 //-----
251         steve
252         executed instanceof subfunction
253             oeGetCrisisSet("pending"){
254                 ieSendACrisis("crisis with ID 1 details") returned to steve
255             }

```

```

256 // -----
257     steve
258     executed instanceof subfunction
259         oeSetCrisisHandler("1"){
260             ieSmsSend("+3524666445252","The handling of your alert by our services is in progress !")
261             returned to tango
262             ieMessage("You are now considered as handling the crisis !")
263             returned to steve
264         }
265 // -----
266     theClock
267     executed instanceof subfunction
268         oeSetClock("2017:11:26 - 10:45:00){}
269 // -----
270     steve
271     executed instanceof subfunction
272         oeValidateAlert("1"){
273             ieMessage('The Alert is now declared as valid !')
274             returned to steve
275         }
276 // -----
277     tango
278     executed instanceof subfunction
279         oeAlert("witness","2017:11:26","10:20:00","+3524666445000",
280             "49.627095:6.160251","A car crash just happened.{"
281             ieSmsSend("+3524666445000","Your alert has been registered. We will handle it and keep you
282             informed") returned to tango
283     }
284 // -----
285     theClock
286     executed instanceof subfunction
287         oeSetClock("2017:11:26 - 12:45:00){}
288 // -----
289     steve
290     executed instanceof subfunction
291         oeSetCrisisStatus("1","solved"){
292             ieMessage('The crisis status has been updated !')
293             returned to steve
294     }
295 // -----
296     steve
297     executed instanceof subfunction
298         oeReportOnCrisis("1","3 victims sent to hospital, 2 cars evacuated and 4 rescue unit
299             mobilized"){
300             ieMessage('The crisis comment has been updated !')
301             returned to steve
302     }
303 // -----
304     steve
305     executed instanceof subfunction
306         oeCloseCrisis("1"){
307             ieMessage('The crisis is now closed !')
308             returned to steve
309     }
310 }
311 }
312 }

```

Listing C.56: Messir Spec. file usecase-suDeployAndRun.msr.

## C.57 File ./src-gen/messir-spec/usecases/usecase-suGlobalCrisisHandling.msr

```

1 package icrash.usecases.suGlobalCrisisHandling {
2 import lu.uni.lassy.messir.libraries.primitives
3 import icrash.environment

```

```

4 import icrash.usecases.subfunctions
5 import icrash.usecases.ugSecurelyUseSystem
6 import icrash.usecases.ugManageCrisis
7 import icrash.usecases.ugMonitor
8
9 Use Case Model {
10  use case system summary
11    suGlobalCrisisHandling() {
12      actor actCoordinator[primary,active]
13
14      reuse ugSecurelyUseSystem[1...*]
15      reuse ugMonitor[1...*]
16      reuse ugManageCrisis[1...*]
17
18      step a: actCoordinator
19        executes ugSecurelyUseSystem
20      step b: actCoordinator
21        executes ugMonitor
22      step c: actCoordinator
23        executes ugManageCrisis
24
25      ordering constraint
26        "steps (a) (b) and (c) executions are interleaved
27        (steps (b) and (c) have their protocol constrained by steps of (a))."
28      ordering constraint
29        "steps (a) (b) and (c) can be executed multiple times."
30    }
31  }
32 }
```

Listing C.57: Messir Spec. file usecase-suGlobalCrisisHandling.msr.

**C.58 File**

./src-gen/messir-spec/usecases/usecase-  
ugAdministrateTheSystem.msr

```

1 package icrash.usecases.ugAdministrateTheSystem {
2
3   import icrash.environment
4   import icrash.usecases.ugSecurelyUseSystem
5   import icrash.usecases.subfunctions
6
7   Use Case Model {
8
9     use case system usergoal
10    ugAdministrateTheSystem() {
11      actor actAdministrator[primary,active]
12
13      reuse ugSecurelyUseSystem[1...*]
14      reuse oeAddCoordinator[1...*]
15      reuse oeDeleteCoordinator[0...*]
16
17      step a: actAdministrator
18        executes ugSecurelyUseSystem
19      step b: actAdministrator
20        executes oeAddCoordinator
21      step c: actAdministrator
22        executes oeDeleteCoordinator
23
24      ordering constraint
25        "steps (a) (b) and (c) executions are interleaved
26        (steps (b) and (c) have their protocol constrained
27        by steps of (a))."
28      ordering constraint
29        "steps (a) (b) and (c) can be executed multiple times."
30    }
31  }
32 }
```

Listing C.58: Messir Spec. file usecase-ugAdministrateTheSystem.msr.

**C.59 File**                            **./src-gen/messir-spec/usecases/usecase-ugAverageTypeofCrisis.msr**

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:54:54 CEST 2017
4 */
5
6 package icrash.usecases.ugAverageTypeofCrisis {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment
11
12 import icrash.usecases.ugAdministrateTheSystem
13
14 Use Case Model {
15 use case system usergoal ugAverageTypeofCrisis() {
16 actor actAdministrator[primary, active]
17 actor actDatabase [primary, proactive]
18 actor actSystem[secondary, active]
19
20 reuse oegetStatistic[1...*]
21 reuse ugSecurelyUserSystem[0...*]
22 reuse oegetstatisticTypesOfCrises[0...*]
23 reuse ugAdministrateTheSystem[1...*]
24
25 step a: actSystem
26 executes ugSecurelyUserSystem()
27
28 step b: actSystem
29 executes oegetStatistic()
30
31 step c : actAdministrator
32 executes oegetstatisticTypesOfCrises()
33
34 step d : actAdministrator
35 executes ugAdministrateTheSystem()
36
37 step e : actDatabase
38 executes oegetstatisticTypesOfCrises()
39
40 ordering constraint "at least a"
41 ordering constraint "if b then previously a"
42 ordering constraint "if c then previously b"
43 ordering constraint "if d then previously c"
44
45 }
46 }
47
48 }

```

Listing C.59: Messir Spec. file usecase-ugAverageTypeofCrisis.msr.

**C.60 File**                            **./src-gen/messir-spec/usecases/usecase-ugCrisisInTime.msr**

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:53:28 CEST 2017
4 */
5
6 package icrash.usecases.ugCrisisInTime {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment

```

```

11
12 import icrash.usecases.ugAdministateTheSystem
13
14 Use Case Model {
15   use case system usergoal ugCrisisInTime() {
16     actor actAdministrator[primary, active]
17     actor actDatabase [primary, proactive]
18     actor actSystem[secondary, active]
19
20     reuse oegetStatistic[1..*]
21     reuse ugSercurelyUserSystem[0..*]
22     reuse oegetstatisticCrises[0..*]
23     reuse ugAdministateTheSystem[1..*]
24
25     step a: actSystem
26     executes ugSercurelyUserSystem()
27
28     step b: actSystem
29     executes oegetStatistic()
30
31     step c : actAdministrator
32     executes oegetstatisticCrises()
33
34     step d : actAdministrator
35     executes ugAdministateTheSystem()
36
37     step e : actDatabase
38     executes oegetstatisticCrises()
39
40     ordering constraint "at least a"
41     ordering constraint "if b then previously a"
42     ordering constraint "if c then previously b"
43     ordering constraint "if d then previously c"
44   }
45 }
46
47 }

```

Listing C.60: Messir Spec. file usecase-ugCrisisInTime.msr.

## C.61 File ./src-gen/messir-spec/usecases/usecase-ugLogin.msr

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:29:20 CEST 2017
4 */
5
6 package icrash.usecases.ugLogin {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment
11
12 Use Case Model {
13   use case system usergoal ugLogin() {
14     actor actAuthenticated[primary, active]
15     actor actCaptchaGenerator[secondary, active]
16     actor actCaptchaValidator[secondary, active]
17     actor actMailingService[secondary, active]
18
19     reuse oeLogin[1..1]
20     reuse oeSendCaptcha[1..1]
21     reuse oeSubmitCaptcha[1..1]
22     reuse oeCaptchaInvalid[1..1]
23     reuse oeCaptchaValid[1..1]
24
25     step a: actAuthenticated
26     executes oeLogin
27

```

```

28 step b: actCaptchaGenerator
29 executes oeSendCaptcha
30
31 step c: actAuthenticated
32 executes oeSubmitCaptcha
33
34 step d: actCaptchaValidator
35 executes oeCaptchaInvalid
36
37 step e: actCaptchaValidator
38 executes oeCaptchaValid
39
40 ordering constraint "at least a"
41 ordering constraint "if b then previously a"
42 ordering constraint "if c then previously b"
43 ordering constraint "if d then previously c"
44 ordering constraint "if e then previously c"
45 }
46 }
47
48 }

```

Listing C.61: Messir Spec. file usecase-ugLogin.msr.

## C.62 File ./src-gen/messir-spec/usecases/usecase-ugManageCrisis.msr

```

1 package icrash.usecases.ugManageCrisis {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5
6 Use Case Model {
7
8   use case system usergoal ugManageCrisis() {
9     actor actCoordinator[primary, active]
10
11    reuse oeValidateAlert[0...*]
12    reuse oeSetCrisisStatus[0...*]
13    reuse oeSetCrisisHandler[0...*]
14    reuse oeReportOnCrisis[0...*]
15    reuse oeCloseCrisis[0...*]
16    reuse oeInvalidateAlert[0...*]
17
18    step a: actCoordinator executes oeValidateAlert
19    step b: actCoordinator executes oeSetCrisisStatus
20    step c: actCoordinator executes oeSetCrisisHandler
21    step d: actCoordinator executes oeReportOnCrisis
22    step f: actCoordinator executes oeCloseCrisis
23    step g: actCoordinator executes oeInvalidateAlert
24
25    ordering constraint "managing a crisis is doing one of the indicated use cases."
26
27  }
28
29 }
30 }

```

Listing C.62: Messir Spec. file usecase-ugManageCrisis.msr.

## C.63 File ./src-gen/messir-spec/usecases/usecase-ugMonitor.msr

```

1 package icrash.usecases.ugMonitor {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5

```

```

6 Use Case Model {
7  use case system usergoal ugMonitor() {
8    actor icrash.environment.actCoordinator[primary,active]
9
10   reuse oeGetCrisisSet[0..*]
11   reuse oeGetAlertsSet[0..*]
12
13   step a: icrash.environment.actCoordinator executes oeGetAlertsSet
14   step b: icrash.environment.actCoordinator executes oeGetCrisisSet
15 }
16 }
17 }
```

Listing C.63: Messir Spec. file usecase-ugMonitor.msr.

**C.64 File**

./src-gen/messir-spec/usecases/usecase-  
ugSecurelyUseSystem.msr

```

1 package icrash.usecases.ugSecurelyUseSystem {
2
3 import icrash.environment
4 import icrash.usecases.subfunctions
5
6 Use Case Model {
7
8 use case system usergoal
9 ugSecurelyUseSystem() {
10
11   actor actAuthenticated[primary,active]
12
13   reuse oeLogin[1..1]
14   reuse oeLogout[1..1]
15
16   step a: actAuthenticated
17     executes oeLogin
18   step b: actAuthenticated
19     executes oeLogout
20
21 ordering constraint
22   "step (a) must always precede step (b)."
23 }
24 }
25 }
```

Listing C.64: Messir Spec. file usecase-ugSecurelyUseSystem.msr.

**C.65 File**

./src-gen/messir-spec/usecases/usecase-  
ugUserActivity.msr

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:31:30 CEST 2017
4 */
5
6 package icrash.usecases.ugUserActivity {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment
11
12 import icrash.usecases.ugAdministrateTheSystem
13
14 Use Case Model {
15  use case system usergoal ugUserActivity() {
16    actor actAdministrator[primary, active]
17    actor actDatabase [primary, proactive]
```

```

18 actor actSystem[secondary, active]
19
20 reuse oegetStatistic[1..*]
21 reuse ugSercurelyUserSystem[0..*]
22 reuse oegetstatisticUser[0..*]
23 reuse ugAdministateTheSystem[1..*]
24
25 step a: actSystem
26 executes ugSercurelyUserSystem()
27
28 step b: actSystem
29 executes oegetStatistic()
30
31 step c : actAdministrator
32 executes oegetstatisticUser()
33
34 step d : actAdministrator
35 executes ugAdministateTheSystem()
36
37 step e : actDatabase
38 executes oegetstatisticUser()
39
40 ordering constraint "at least a"
41 ordering constraint "if b then previously a"
42 ordering constraint "if c then previously b"
43 ordering constraint "if d then previously c"
44
45 }
46
47 }
48
49 }

```

Listing C.65: Messir Spec. file usecase-ugUserActivity.msr.

## C.66 File [./src-gen/messir-spec/usecases/usecase-ugVictimSendFamilyNotification.msr](#)

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:36:07 CEST 2017
4 */
5
6 package icrash.usecases.ugVictimSendFamilyNotification {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment
11
12 Use Case Model {
13 use case system usergoal ugVictimSendFamilyNotification() {
14 actor actSystem[primary, active]
15 actor actAuthenticated[secondary, active]
16 actor actCoordinator[secondary, proactive]
17
18 reuse oeCreateAlert[1..*]
19 reuse oeCreateCrisis[1..1]
20 reuse oeUpdateCrisis[0..*]
21
22 step a: actAuthenticated
23 executes oeCreateAlert()
24
25 step b: actCoordinator
26 executes oeCreateAlert()
27
28 step c: actCoordinator
29 executes oeCreateCrisis()
30

```

```

31 step d: actSystem
32 executes oeChooseInformation()
33
34 step e: actCoordinator
35 executes oeUpdateCrisis()
36
37 ordering constraint "if c then previously a or b"
38 ordering constraint "if d then previously a or b"
39 ordering constraint "if e then previously a or b"
40 }
41 }
42
43 }

```

Listing C.66: Messir Spec. file usecase-ugVictimSendFamilyNotification.msr.

## C.67 File [./src-gen/messir-spec/usecases/usecase-ugWitnessSendFamilyNotification.msr](#)

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 11:35:08 CEST 2017
4 */
5
6 package icrash.usecases.ugWitnessSendFamilyNotification {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.usecases.subfunctions
10 import icrash.environment
11
12 Use Case Model {
13 use case system usergoal ugWitnessSendFamilyNotification() {
14 actor actSystem[primary, active]
15 actor actAuthenticated[secondary, active]
16 actor actCoordinator[secondary, proactive]
17
18 reuse oeCreateAlert[1...*]
19 reuse oeCreateCrisis[1..1]
20 reuse oeUpdateCrisis[0...*]
21
22 step a: actAuthenticated
23 executes oeCreateAlert()
24
25 step b: actCoordinator
26 executes oeCreateAlert()
27
28 step c: actCoordinator
29 executes oeCreateCrisis()
30
31 step d: actSystem
32 executes oeChooseInformation()
33
34 step e: actCoordinator
35 executes oeUpdateCrisis()
36
37 ordering constraint "if c then previously a or b"
38 ordering constraint "if d then previously a or b"
39 ordering constraint "if e then previously a or b"
40 }
41 }
42
43 }

```

Listing C.67: Messir Spec. file usecase-ugWitnessSendFamilyNotification.msr.

## C.68 File . ./src-gen/messir-spec/usecases/usecaseinstance-uciugLogin.msr

```

1 /*
2 * @author michm
3 * @date Mon Mar 27 13:56:35 CEST 2017
4 */
5
6 package usecases.uciugLogin {
7
8 import lu.uni.lassy.messir.libraries.primitives
9 import icrash.environment
10 import icrash.usecases.subfunctions
11 import icrash.usecases.ugLogin
12
13 Use Case Model {
14   use case instance uciugLoginSuccess : ugLogin{
15     actors {
16       MKremer : actAuthenticated
17     }
18     use case steps {
19       MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124") {
20         ieMessage("You are now logged in!") returned to MKremer
21       }
22     }
23   }
24 }
25 use case instance uciugLoginFailure : ugLogin{
26   actors {
27     MKremer : actAuthenticated
28   }
29   use case steps {
30     MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124") {
31       ieMessage("Wrong user name or password. Try again.") returned to MKremer
32     }
33   }
34 }
35 }
36 use case instance uciugLoginCaptchaSuccess : ugLogin{
37   actors {
38     MKremer : actAuthenticated
39     CaptchaGenerator : actCaptchaGenerator
40     CaptchaValidator : actCaptchaValidator
41   }
42   use case steps {
43     MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124") {
44       ieGenerateCaptcha() returned to CaptchaGenerator
45     }
46     CaptchaGenerator executed instanceof subfunction oeSendCaptcha("Captcha test") {
47       ieConfirmCaptcha("Captcha test") returned to MKremer
48     }
49     MKremer executed instanceof subfunction oeSubmitCaptcha("Captcha user response") {
50       ieVerifyCaptcha("Captcha user response") returned to CaptchaValidator
51     }
52     CaptchaValidator executed instanceof subfunction oeCaptchaValid("Captcha id"){
53       ieMessage("You are now logged in!") returned to MKremer
54     }
55   }
56 }
57 use case instance uciugLoginCaptchaFailure : ugLogin{
58   actors {
59     MKremer : actAuthenticated
60     CaptchaGenerator : actCaptchaGenerator
61     CaptchaValidator : actCaptchaValidator
62   }
63   use case steps {
64     MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124") {
65       ieGenerateCaptcha() returned to CaptchaGenerator
66     }

```

```

67  CaptchaGenerator executed instanceof subfunction oeSendCaptcha("Captcha test") {
68    ieConfirmCaptcha("Captcha test") returned to MKremer
69  }
70  MKremer executed instanceof subfunction oeSubmitCaptcha("Captcha user response") {
71    ieVerifyCaptcha("Captcha user response") returned to CaptchaValidator
72  }
73  CaptchaValidator executed instanceof subfunction oeCaptchaInvalid("Captcha id"){
74    ieMessage("Your submitted captcha response is invalid. Try again.") returned to MKremer
75  }
76
77  }
78  }
79  use case instance uciugLoginCaptchaToleranceExceeded : ugLogin{
80  actors {
81    MKremer : actAuthenticated
82    CaptchaGenerator : actCaptchaGenerator
83    CaptchaValidator : actCaptchaValidator
84    GMail : actMailingService
85  }
86  use case steps {
87    MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124") {
88      ieGenerateCaptcha() returned to CaptchaGenerator
89    }
90    CaptchaGenerator executed instanceof subfunction oeSendCaptcha("Captcha test") {
91      ieConfirmCaptcha("Captcha test") returned to MKremer
92    }
93    MKremer executed instanceof subfunction oeSubmitCaptcha("Captcha user response") {
94      ieVerifyCaptcha("Captcha user response") returned to CaptchaValidator
95    }
96    CaptchaValidator executed instanceof subfunction oeCaptchaInvalid("Captcha id"){
97      ieSendMail("michel.kremer.003@student.uni.lu", "Your account has been locked", "Notification
98        and unblocking instructions (a bit too long to write here...)" returned to GMail
99      ieMessage("Your user name will be blocked for logging in. Please contact an administrator.")
100     returned to MKremer
101   }
102 }
103 use case instance uciugLoginRejected : ugLogin{
104  actors {
105    MKremer : actAuthenticated
106  }
107  use case steps {
108    MKremer executed instanceof subfunction oeLogin("mkremer003", "Raichu124"){
109      ieMessage("The requested user is blocked from logging in") returned to MKremer
110    }
111  }
112 }
113 }
114 }
115 }
116 }
```

Listing C.68: Messir Spec. file usecaseinstance-uciugLogin.msr.

## C.69 File [./src-gen/messir-spec/usecases/usecaseinstance-ugAverageTypeofCrisis-uciugStatisticAvergeTypeofCrisis.msr](#)

```

1 package usecases.uciugAverageTypeofCrisis {
2   import icrash.usecases.ugAverageTypeofCrisis
3   import icrash.environment
4   import icrash.usecases.subfunctions
5
6   Use Case Model {
7
8     use case instance uciugStatisticAverageTypeofCrisis : ugAverageTypeofCrisis{
9       actors {
10         User : actAdministrator
```

```

11     Database : actDatabase
12 }
13 use case steps {
14     User executed instanceof subfunction oeGetStatistic{
15         ieCallTypeWithTimeAverage() returned to Database
16     }
17     Database executed instanceof subfunction oeSendStatistic("For the average time for the different
18         type of crises"){
19         ieShowStatisticTimeAverage() returned to User
20     }
21 }
22 }
23 }
24 }
```

Listing C.69: Messir Spec. file usecaseinstance-ugAverageTypeofCrisis-uciugStatisticAvergeTypeofCrisis.msr.

## C.70 File ./src-gen/messir-spec/usecases/usecaseinstance-ugCrisisInTime-uciugStatisticCrisisInTime.msr

```

1 package usecases.uciugCrisisInTime {
2     import icrash.usecases.ugCrisisInTime
3     import icrash.environment
4     import icrash.usecases.subfunctions
5
6     Use Case Model {
7
8         use case instance uciugStatisticCrisisInTime : ugCrisisInTime{
9             actors {
10                 User : actAdministrator
11                 Database : actDatabase
12             }
13             use case steps {
14                 User executed instanceof subfunction oeGetStatistic{
15                     ieCallTimeAndCrisisNumber() returned to Database
16                 }
17                 Database executed instanceof subfunction oeSendStatistic("For the number of crises in time for
18                     the different type of crisis"){
19                     ieShowStatisticCrisis() returned to User
20                 }
21             }
22         }
23     }
24 }
```

Listing C.70: Messir Spec. file usecaseinstance-ugCrisisInTime-uciugStatisticCrisisInTime.msr.

## C.71 File ./src-gen/messir-spec/usecases/usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr

```

1 package usecases.uciugSecurelyUseSystem {
2     import icrash.usecases.ugSecurelyUseSystem
3     import icrash.usecases.ugSecurelyUseSystem
4     import icrash.concepts.primarytypes.datatypes
5     import icrash.environment
6     import icrash.usecases.suGlobalCrisisHandling
7     import icrash.usecases.ugAdministrateTheSystem
8     import icrash.usecases.subfunctions
9
10    Use Case Model {
11
12    /**
13        use case instance uciugSecurelyUseSystem : ugSecurelyUseSystem {
```

```

14   actors {
15     bill:actAuthenticated
16   }
17   use case steps {
18 //-----
19   bill
20   executed instanceof subfunction
21     oeLogin("icrashadmin","7WXC1359"){
22       ieMessage('You are logged ! Welcome ...') returned to bill
23     }
24 //-----
25   bill
26   executed instanceof subfunction
27     oeLogout{
28       ieMessage('You are logged out ! Good Bye ...') returned to bill
29     }
30   }
31 }
32 }
33 }

```

Listing C.71: Messir Spec. file usecaseinstance-ugSecurelyUseSystem-uciugSecurelyUseSystem.msr.

## C.72 File [./src-gen/messir-spec/usecases/usecaseinstance-ugUserActivity-uciugUserActivity.msr](#)

```

1 package usecases.uciugUserActivity {
2   import icrash.usecases.ugUserActivity
3   import icrash.environment
4   import icrash.usecases.subfunctions
5
6   Use Case Model {
7
8     use case instance uciugUserActivity : ugUserActivity{
9       actors {
10         User : actAdministrator
11         Database : actDatabase
12
13       }
14     use case steps {
15       User executed instanceof subfunction oegetStatistic{
16         ieCallUserActivity() returned to Database
17       }
18       Database executed instanceof subfunction oeSendStatistic("Statistic for the user activity"){
19         ieShowStatisticUser() returned to User
20       }
21     }
22   }
23 }
24 }

```

Listing C.72: Messir Spec. file usecaseinstance-ugUserActivity-uciugUserActivity.msr.

## C.73 File [./src-gen/messir-spec/usecases/usecaseinstance-ugVictimSendFamilyNotification-uciugVictimSendFamilyNotification.msr](#)

```

1 package usecases.uciugVictimSendFamilyNotification {
2   import icrash.usecases.ugVictimSendFamilyNotification
3   import icrash.environment
4   import icrash.usecases.subfunctions
5
6   Use Case Model {
7
8     use case instance uciugVictimSendFamilyNotification : ugVictimSendFamilyNotification{
9       actors {
10         User : actAuthenticated
11       }
12     }
13   }
14 }

```

#### C.74. FILE /.../USECASEINSTANCE-UGWITNESSSENDFAMILYNOTIFICATION-UCIUGWITNESSSENDFAMI

```
11     Coordinator : actCoordinator
12     System : actSystem
13 }
14 use case steps {
15     User executed instanceof subfunction oeCreateAlert("Chose if an alert will be sent to the family
16         ")
17 }
18 Coordinator executed instanceof subfunction oeCreateAlert() {
19 }
20 Coordinator executed instanceof subfunction oeCreateCrisis() {
21 }
22 Coordinator executed instanceof subfunction oeUpdateCrisis() {
23 }
24 System executed instanceof subfunction oeSendNotification() {
25 }
26 }
27 }
28 }
29 }
30 }
31 }
32 }
33 }
```

Listing C.73: Messir Spec. file  
usecaseinstance-ugVictimSendFamilyNotification-uciugVictimSendFamilyNotification.msr.

#### C.74 File ./src-gen/messir-spec/usecases/usecaseinstance-ugWitnessSendFamilyNotification-uciugWitnessSendFamilyNotification.ms

```
1 package usecases.uciugWitnessSendFamilyNotification {
2   import icrash.usecases.ugWitnessSendFamilyNotification
3   import icrash.environment
4   import icrash.usecases.subfunctions
5
6   Use Case Model {
7
8     use case instance uciugWitnessSendFamilyNotification : ugWitnessSendFamilyNotification{
9       actors {
10         User : actAuthenticated
11         Coordinator : actCoordinator
12         System : actSystem
13
14       }
15       use case steps {
16         User executed instanceof subfunction oeCreateAlert("Add name and surname of the victim") {
17
18       }
19       Coordinator executed instanceof subfunction oeCreateAlert() {
20
21     }
22       Coordinator executed instanceof subfunction oeCreateCrisis() {
23
24     }
25       Coordinator executed instanceof subfunction oeUpdateCrisis() {
26
27     }
28       System executed instanceof subfunction oeSendNotification() {
29
30     }
31   }
32 }
33 }
```

Listing C.74: Messir Spec. file  
usecaseinstance-ugWitnessSendFamilyNotification-uciugWitnessSendFamilyNotification.msr.



## Appendix D

# Listing of the Prolog Files Referenced in the Operation Model Specification

### D.1

#### File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactActivatorSetClock.pl

```
1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactActivator,
7    oeSetClock,
8    [preProtocol,Self,
9     AcurrentClock
10    ],
11    []):-!
12/* Pre Protocol:*/
13/* PreP01 */
14 msrVar(ctState,TheSystem),
15 msrVar(ptBoolean,AvpStarted),
16
17 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
18
19 msrNav([Self],[rnActor,rnSystem,vpStarted],[AvpStarted]),
20 AvpStarted = [ptBoolean,true],
21
22 msrNav([TheSystem],
23     [clock,lt,[AcurrentClock]],
24     [[ptBoolean,true]]))
25 .
26
27msrop(outactActivator,
28    oeSetClock,
29    [preFunctional,Self,
30     AcurrentClock
31    ],
32    []):-!
33/* Pre Functional:*/
34/* PreF01 */
35true.
36
37msrop(outactActivator,
38    oeSetClock,
39    [post,Self,
40     AcurrentClock
41    ],
42    []):-!
```

```

44 msrVar(ctState,TheSystem),
45
46 /* Post Functional:*/
47
48 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
49
50 /* PostF01 */
51 msrNav([TheSystem],
52     [msmAtPost,clock],
53     [AcurrentClock]),
54
55 /* Post Protocol:*/
56 /* PostP01 */
57 true
58 .

```

Listing D.1: Prolog file outactActivator-oeSetClock.pl.

## D.2 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactActivator-oeSollicitateCrisisHandling.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6
7msrop(outactActivator,
8    oeSollicitateCrisisHandling,
9    [preProtocol,Self
10   ],
11   []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
15
16 msrVarCol(ctCrisis,_,ColctCrisisToHandle),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23/* PreP02 */
24 msrNav([TheSystem],
25     [rnctCrisis,msrSelect,
26      handlingDelayPassed,[]]
27   ],
28   ColctCrisisToHandle),
29
30 msrNav(ColctCrisisToHandle,
31     [msrSize,geq,[[ptInteger,1]]],
32     [[ptBoolean,true]]),
33.
34
35msrop(outactActivator,
36    oeSollicitateCrisisHandling,
37    [preFunctional,Self
38   ],
39   []):-!
40/* Pre Functional:*/
41/* PreF01 */
42true.
43
44msrop(outactActivator,
45    oeSollicitateCrisisHandling,
46    [post,Self
47   ],

```

```

48      []):-  

49  

50 msrVar(ctState,TheSystem),  

51 msrVar(dtComment,AMessageForCrisisHandlers),  

52 msrVar(dtDateAndTime, TheClock),  

53 msrVarCol(ctCrisis,_,ColctCrisisToAllocateIfPossible),  

54  

55/* Post Functional:*/  

56 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

57  

58 /* PostF01 */  

59 msrNav([TheSystem],  

60     [rnctCrisis,msrSelect,  

61      maxHandlingDelayPassed, []  

62    ],  

63    ColctCrisisToAllocateIfPossible),  

64  

65msrNav(ColctCrisisToAllocateIfPossible,  

66     [msrForAll,isAllocatedIfPossible,[],  

67     [[ptBoolean,true]]],  

68  

69 /* PostF02 */  

70 msrNav([TheSystem],  

71     [rnctCrisis,msrSelect,  

72      handlingDelayPassed, []  

73    ],  

74    ColctCrisisToHandle),  

75  

76 msrNav(ColctCrisisToHandle,  

77     [msrColSubtract,[ColctCrisisToAllocateIfPossible]  

78   ],  

79    ColctCrisisToRemind),  

80  

81 (msrNav(ColctCrisisToRemind,  

82     [msrSize,geq,[[ptInteger,1]]],  

83     [[ptBoolean,true]])  

84 -> (msrNav([AMessageForCrisisHandlers],  

85     [value],  

86     [[ptString,'There are alerts pending since more than the defined delay. Please REACT !']] ),  

87  

88 msrNav([TheSystem],  

89     [rnactAdministrator,rnInterfaceIN,  

90      ieMessage, [AMessageForCrisisHandlers]  

91    ],  

92    [[ptBoolean,true]]),  

93  

94 msrNav([TheSystem],  

95     [rnactCoordinator,msrForAll,rnInterfaceIN,  

96      ieMessage, [AMessageForCrisisHandlers]  

97    ],  

98    [[ptBoolean,true]]))  

99 )  

100 ; true  

101 ),  

102  

103/* Post Protocol:*/  

104/* PostP01 */  

105 msrNav([TheSystem],  

106     [clock],  

107     [TheClock]),  

108  

109 msrNav([TheSystem],  

110     [msmAtPost,vpLastReminder],  

111     [TheClock])  

112 .

```

Listing D.2: Prolog file outactActivator-oeSollicitateCrisisHandling.pl.

### D.3 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdm oeAddCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%-----%
6msrop(outactAdministrator,
7    oeAddCoordinator,
8    [preProtocol,Self,
9     AdtCoordinatorID,
10    AdtLogin,
11    AdtPassword
12    ],
13    []):-!
14/* Pre Protocol:*/
15 msrVar(ctState,TheSystem),
16 msrVar(actAdministrator,TheActor),
17 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
18 msrNav([Self],[rnActor],[TheActor]),
19 .
20/* PreP01 */
21 msrNav([TheSystem],
22     [vpStarted],
23     [[ptBoolean,true]]),
24 .
25/* PreP02 */
26 msrNav([TheActor],
27     [rnctAuthenticated,vpIsLogged],
28     [[ptBoolean,true]]),
29 .
30 .
31 .
32msrop(outactAdministrator,
33    oeAddCoordinator,
34    [preFunctional,Self,
35     AdtCoordinatorID,
36     AdtLogin,
37     AdtPassword
38    ],
39    []):-!
40/* Pre Functional:*/
41 msrVar(ctState,TheSystem),
42 msrVar(actAdministrator,TheActor),
43 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
44 msrNav([Self],[rnActor],[TheActor]),
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCoordinator,
48      msrSelect,id,eq,[AdtCoordinatorID]],
49     ColctCoordinators),
50 msrNav(ColctCoordinators,
51     [msrIsEmpty],
52     [[ptBoolean,true]]),
53 .
54 .
55msrop(outactAdministrator,
56    oeAddCoordinator,
57    [post,Self,
58     AdtCoordinatorID,
59     AdtLogin,
60     AdtPassword
61    ],
62    []):-!
63 .
64/* Post Functional:*/
65 msrVar(ctState,TheSystem),
66 msrVar(actAdministrator,TheActor),

```

```

67 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
68 msrNav([Self],[rnActor],[TheActor]),
69
70 msrVar(actCoordinator,TheactCoordinator),
71 msrVar(ctCoordinator,ThectCoordinator),
72
73 /* PostF01 */
74 msrNav([TheactCoordinator],
75     [init,[]],
76     [[ptBoolean,true]]),
77
78 /* PostF02 */
79 msrNav([ThectCoordinator],
80     [init,[AdtCoordinatorID,AdtLogin,AdtPassword]],
81     [[ptBoolean,true]]),
82
83 /* PostF03 */
84 msrNav([TheactCoordinator],
85     [msmAtPost,rnctCoordinator],
86     [ThectCoordinator]),
87
88 /* PostF04 */
89 msrNav([ThectCoordinator],
90     [msmAtPost,rnactAuthenticated],
91     [TheactCoordinator]),
92
93 /* PostF05 */
94 msrNav([TheActor],
95     [rnInterfaceIN,
96     ieCoordinatorAdded,[]],
97     [[ptBoolean,true]]),
98
99 /* Post Protocol:*/
100 /* PostP01 */
101 true
102 .

```

Listing D.3: Prolog file outactAdministrator-oeAddCoordinator.pl.

## D.4 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdministrator-oeDeleteCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactAdministrator,
7    oeDeleteCoordinator,
8    [preProtocol,Self,
9     AdtCoordinatorID
10    ],
11    []):-
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actAdministrator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]]))
26.

```

```

27
28msrop(outactAdministrator,
29    oeDeleteCoordinator,
30    [preFunctional,Self,
31     AdtCoordinatorID
32    ],
33    []):-!
34/* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actAdministrator,TheActor),
37 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
38 msrNav([Self],[rnActor],[TheActor]),
39
40/* PreF01 */
41 msrNav([TheSystem],
42     [rnctCoordinator,
43      msrSelect,id,eq,[AdtCoordinatorID]],
44     ColctCoordinators),
45
46 msrNav(ColctCoordinators,
47     [msrSize,eq,[[ptInteger,1]]],
48     [[ptBoolean,true]]).
49
50msrop(outactAdministrator,
51    oeDeleteCoordinator,
52    [post,Self,
53     AdtCoordinatorID
54    ],
55    []):-!
56
57/* Post Functional:*/
58 msrVar(ctState,TheSystem),
59 msrVar(actAdministrator,TheActor),
60 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
61 msrNav([Self],[rnActor],[TheActor]),
62
63/* PostF01 */
64 msrNav([TheSystem],
65     [rnctCoordinator,
66      msrSelect,id,eq,[AdtCoordinatorID]],
67     [ThectCoordinator]),
68
69 msrNav([ThectCoordinator],
70     [rnactCoordinator,msrForAll,msrIsKilled],
71     [[ptBoolean,true]]),
72
73 msrNav([ThectCoordinator],
74     [msrIsKilled],
75     [[ptBoolean,true]]),
76
77 /* PostF02 */
78 msrNav([TheActor],
79     [rnInterfaceIN,
80      ieCoordinatorDeleted,[]]
81    ],
82    [[ptBoolean,true]]),
83
84 /* Post Protocol:*/
85/* PostP01 */
86 true
87 .

```

Listing D.4: Prolog file outactAdministrator-oeDeleteCoordinator.pl.

## D.5 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAdministrator-oeLogin.pl

%%%%%%%%%%%%%

```

2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%
6msrop(outactAuthenticated,
7    oeLogin,
8    [preProtocol,Self,
9     AdtLogin,
10    AdtPassword
11    ],
12    []):-.
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actAuthenticated,TheactAuthenticated),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheactAuthenticated]),
18
19 /* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheactAuthenticated],
25     [rnctAuthenticated,vpisLogged],
26     [[ptBoolean,false]])
27 .
28
29msrop(outactAuthenticated,
30    oeLogin,
31    [preFunctional,Self,
32     AdtLogin,
33     AdtPassword
34     ],
35    []):-.
36/* Pre Functional:*/
37/* PreF01 */
38true
39.
40
41msrop(outactAuthenticated,
42    oeLogin,
43    [post,Self,
44     AdtLogin,
45     AdtPassword
46     ],
47    []):-.
48
49 msrVar(ctState,TheSystem),
50 msrVar(actAuthenticated,TheactAuthenticated),
51
52 msrVar(ptString,AptStringMessageForTheactAuthenticated),
53 msrVar(ptString,AptStringMessageForTheactAdministrator),
54
55/* Post Functional:*/
56
57 msrNav([Self],[rnActor],[TheactAuthenticated]),
58 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
59
60/* PostF01 */
61
62 ( (msrNav([TheactAuthenticated],
63            [rnctAuthenticated,pwd],
64            [AdtPassword]),
65   msrNav([TheactAuthenticated],
66            [rnctAuthenticated,login],
67            [AdtLogin])
68 )
69 -> ( msrNav([AptStringMessageForTheactAuthenticated],
70              [eq,[[ptString,'You are logged ! Welcome ...']]],
71              [[ptBoolean,true]]),

```

```

72     msrNav([TheactAuthenticated],
73         [rnInterfaceIN,
74          ieMessage, [AptStringMessageForTheactAuthenticated]],
75          [[ptBoolean,true]])
76    )
77 ; ( msrNav([AptStringMessageForTheactAuthenticated],
78         [eq,[[ptString,'Wrong identification information ! Please try again ...']]],,
79         [[ptBoolean,true]]),
80     msrNav([TheactAuthenticated],
81         [rnInterfaceIN,
82          ieMessage, [AptStringMessageForTheactAuthenticated]],
83          [[ptBoolean,true]]),
84
85     msrNav([AptStringMessageForTheactAdministrator],
86         [eq,[[ptString,'Intrusion tentative !']]],,
87         [[ptBoolean,true]]),
88     msrNav([TheSystem],
89         [rnactAdministrator,rnInterfaceIN,
90          ieMessage, [AptStringMessageForTheactAdministrator]],
91          [[ptBoolean,true]])
92    )
93 ),
94
95 /* Post Protocol:*/
96/* PostP01 */
97 ( (msrNav([TheactAuthenticated],
98     [rnctAuthenticated,pwd],
99     [AdtPassword]),
100 msrNav([TheactAuthenticated],
101     [rnctAuthenticated,login],
102     [AdtLogin])
103 )
104 -> (msrNav([TheactAuthenticated],
105     [rnctAuthenticated,msmAtPost,vpIsLogged],
106     [[ptBoolean,true]])
107   )
108 ; true
109 )
110 .

```

Listing D.5: Prolog file outactAuthenticated-oeLogin.pl.

## D.6 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactAuthenticated-oeLogout.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactAuthenticated,
7    oeLogout,
8    [preProtocol,Self
9     ],
10    []):- 
11/* Pre Protocol:*/
12 msrVar(ctState,TheSystem),
13 msrVar(actAuthenticated,TheActor),
14 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
15 msrNav([Self],[rnActor],[TheActor]),
16
17/* PreP01 */
18 msrNav([TheSystem],
19     [vpStarted],
20     [[ptBoolean,true]]),
21
22 msrNav([TheActor],
23     [rnctAuthenticated,vpIsLogged],

```

```

24     [[ptBoolean,true]]) )
25 .
26
27msrop(outactAuthenticated,
28     oeLogout,
29     [preFunctional,Self
30     ],
31     []):- 
32/* Pre Functional:*/
33/* PreF01 */
34true
35.
36
37msrop(outactAuthenticated,
38     oeLogout,
39     [post,Self
40     ],
41     []):- 
42
43 msrVar(ctState,TheSystem),
44 msrVar(actAuthenticated,TheactAuthenticated),
45
46 msrVar(ptString,AptStringMessageForTheactAuthenticated),
47
48/* Post Functional:*/
49 msrNav([Self],[rnActor],[TheactAuthenticated]),
50 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
51
52/* PostF01 */
53 msrNav([AptStringMessageForTheactAuthenticated],
54     [eq,[[ptString,'You are logged out ! Good Bye ...']]], 
55     [[ptBoolean,true]]),
56 msrNav([TheactAuthenticated],
57     [rnInterfaceIN,
58      ieMessage,[AptStringMessageForTheactAuthenticated]],
59     [[ptBoolean,true]]),
60
61 /* Post Protocol:*/
62/* PostP01 */
63msrNav([TheactAuthenticated],
64     [rnctAuthenticated,msmAtPost,vpIsLogged],
65     [[ptBoolean,false]])
66.

```

Listing D.6: Prolog file outactAuthenticated-oeLogout.pl.

## D.7 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactComCoeAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6nico(A):-
7 trace,
8 write('here'),
9 write('\n').
10
11msrop(outactComCompany,
12     oeAlert,
13     [preProtocol,Self,
14      AetHumanKind,
15      AdtDate,
16      AdtTime,
17      AdtPhoneNumber,
18      AdtGPSLocation,
19      AdtComment

```

```

20      ],
21      []):-  

22 /* Pre Protocol:-/  

23 msrVar(ctState,TheSystem),  

24 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

25 /* PreP01 */  

26 msrNav([TheSystem],  

27     [vpStarted],  

28     [[ptBoolean,true]]))  

29 .  

30  

31 msrop(outactComCompany,  

32     oeAlert,  

33     [preFunctional,Self,  

34     AetHumanKind,  

35     AdtDate,  

36     AdtTime,  

37     AdtPhoneNumber,  

38     AdtGPSLocation,  

39     AdtComment  

40     ],  

41     []):-  

42 /* Pre Functional:-/  

43 /* PreF01 */  

44 msrVar(ctState,TheSystem),  

45 msrNav([Self],  

46     [msmAtPre,rnActor,rnSystem],  

47     [TheSystem]),  

48  

49 ( msrNav([TheSystem],[clock,date,gt,[AdtDate]],[[ptBoolean,true]]))  

50 ; (msrNav([TheSystem],[clock,date,eq,[AdtDate]],[[ptBoolean,true]]))  

51 , msrNav([TheSystem],[clock,time,gt,[AdtTime]],[[ptBoolean,true]]))  

52 )  

53 )  

54 .  

55  

56 msrop(outactComCompany,  

57     oeAlert,  

58     [post,Self,  

59     AetHumanKind,  

60     AdtDate,  

61     AdtTime,  

62     AdtPhoneNumber,  

63     AdtGPSLocation,  

64     AdtComment  

65     ],  

66     []):-  

67  

68 msrVar(ctState,TheSystem),  

69 msrVar(ctHuman,ActHuman),  

70 msrVar(actComCompany,TheactComCompany),  

71 msrVar(ctAlert,ActAlert),  

72 msrVar(dtDateAndTime,AAlertInstant),  

73 msrVar(etAlertStatus,AetAlertStatus),  

74% msrVar(ctAlert,ActAlertNearBy),  

75 msrVar(ctCrisis,ActCrisis),  

76 msrVar(dtCrisisID,AdtCrisisID),  

77% msrVar(etCrisisType,AetCrisisType),  

78 msrVar(etCrisisStatus,AetCrisisStatus),  

79 msrVar(dtDateAndTime,ACrisisInstant),  

80 msrVar(dtComment,ACrisisdtComment),  

81% msrVar(ptString,AptStringMessage),  

82 msrVar(dtSMS,AdtSMS),  

83 msrVar(dtAlertID,AdtAlertID),  

84  

85% msrVar(ptInteger,TheNextptIntegerValue),  

86% msrVar(ptInteger,UpdatedNextptIntegerValue),  

87% msrVar(inactComCompany,TheComCompanyIN),  

88% msrVar(dtComment,TheCommentStored),  

89% msrVar(dtString,TheCommentStoreddtString),

```

```

90
91/* Post Functional:*/
92
93 msrNav([Self], [rnActor], [TheactComCompany]),
94 msrNav([Self], [rnActor, rnSystem], [TheSystem]),
95
96/* PostF01 */
97 msrNav([TheSystem],
98     [nextValueForAlertID],
99     [PrenextValueForAlertID]),
100 msrNav([PrenextValueForAlertID],
101     [add, [[dtInteger, [[value, [ptInteger, 1]]], []]], [PostnextValueForAlertID]),
102     [PostnextValueForAlertID]),
103 msrNav([TheSystem],
104     [msmAtPost, nextValueForAlertID],
105     [PostnextValueForAlertID]),
106
107 /* PostF02 */
108 msrNav([AAlerInstant], [date], [AdtDate]),
109 msrNav([AAlerInstant], [time], [AdtTime]),
110
111 msrNav([AetAlertStatus],
112     [],  
     [[etAlertStatus,pending]]),
113
114 msrNav([TheSystem],
115     [nextValueForAlertID,
116     todTimeString, [], eq, [AdtAlertID]],
117     [[ptBoolean,true]])  
,
118
119 msrNav([ActAlert],
120     [init, [AdtAlertID,
121         AetAlertStatus,
122         AdtGPSLocation,
123         AAlerInstant,
124         AdtComment]],  
     [[ptBoolean,true]])  
,
125
126 /* PostF03 */
127
128 msrNav([TheSystem],
129     [rnctAlert,  
      msrSelect,location,isNearTo,[AdtGPSLocation]],
130     ColctAlertsNearBy),
131
132 ( (msrNav(ColctAlertsNearBy,  
133     [msrIsEmpty],  
134     [[ptBoolean,true]])  
135     )
136 -> (
137     msrNav([TheSystem],
138         [nextValueForCrisisID],
139         [PrenextValueForCrisisID]),
140         msrNav([PrenextValueForCrisisID],
141             [add, [[dtInteger, [[value, [ptInteger, 1]]], []]], [PostnextValueForCrisisID]),
142             [PostnextValueForCrisisID]),
143             msrNav([TheSystem],
144                 [msmAtPost, nextValueForCrisisID],
145                 [PostnextValueForCrisisID]),
146
147 msrNav([TheSystem],
148     [nextValueForCrisisID,
149     todTimeString, [], eq, [AdtCrisisID]],
150     [[ptBoolean,true]])  
,
151
152 msrNav([AdtCrisisType],[],[[etCrisisType,small]]),
153 msrNav([AetCrisisStatus],[],[[etCrisisStatus,pending]]),
154 msrNav([ACrisisInstant],[],[AAlerInstant]),
155 msrNav([ACrisisdtComment],
156     [value],
157     [[ptString, 'no reporting yet defined']])),
158
159

```

```

160   msrNav([ActCrisis],[init,[AdtCrisisID,
161             AdtCrisisType,
162             AetCrisisStatus,
163             AdtGPSLocation,
164             ACrisisInstant,
165             ACrisisdtComment]],,
166             [[ptBoolean,true]]),
167
168   )
169 ; (
170   msrNav(ColctAlertsNearBy,
171             [rnTheCrisis,msrAny,msrTrue],
172             [ActCrisis])
173   )
174 ),
175
176 /* PostF04 */
177
178 msrNav([ActAlert],
179         [msmAtPost,rnTheCrisis],
180         [ActCrisis]),
181
182 /* PostF05 */
183
184 msrNav([TheSystem],
185         [rnctHuman,
186           msrSelect,id,eq,[AdtPhoneNumber]],
187         HumanColl),
188
189 msrNav(HumanColl,
190         [msrSelect,kind,etEq,[AetHumanKind]],
191         HumanCol2),
192
193 (msrNav(HumanCol2,[msrIsEmpty],[[ptBoolean,true]]))
194 -> (msrNav([ActHuman],
195             [init,[AdtPhoneNumber,AetHumanKind]],
196             [[ptBoolean,true]]),
197   msrNav([ActHuman],
198             [msmAtPost,rnactComCompany],
199             [TheactComCompany])
200   )
201 ; msrNav(HumanCol2,
202             [msrAny],
203             [ActHuman])
204 ),
205
206msrNav([ActHuman],
207         [rnSignaled,msrIncluding,[ActAlert]],
208         ColAlerts),
209
210msrNav([ActHuman],
211         [msmAtPost,rnSignaled],
212         ColAlerts),
213
214/* PostF06 */
215msrNav([AdtSMS],
216         [value],
217         [[ptString,'Your alert has been registered. We will handle it and keep you informed']])),
218msrNav([TheactComCompany],
219         [rnInterfaceIN,
220           ieSmsSend,[AdtPhoneNumber,
221                     AdtSMS]],[[ptBoolean,true]]),
222
223/*
224
225 */
226
227 /* Post Protocol:*/
228 /* PostP01 */
229 true

```

230 .

Listing D.7: Prolog file outactComCompany-oeAlert.pl.

## D.8 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoord oeCloseCrisis.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeCloseCrisis,
8    [preProtocol,Self,
9     AdtCrisisID
10    ],
11   []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17 .
18/* PreP01 */
19 msrNav([TheSystem],
20        [vpStarted],
21        [[ptBoolean,true]]),
22 .
23/* PreP02 */
24 msrNav([TheActor],
25        [rnctAuthenticated,vpIsLogged],
26        [[ptBoolean,true]]),
27 .
28
29msrop(outactCoordinator,
30    oeCloseCrisis,
31    [preFunctional,Self,
32     AdtCrisisID
33    ],
34   []):-!
35/* Pre Functional:*/
36 msrVar(ctState,TheSystem),
37 msrVar(actCoordinator,TheActor),
38 .
39 msrVar(dtCrisisID,AdtCrisisID),
40 .
41 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
42 msrNav([Self],[rnActor],[TheActor]),
43 .
44/* PreF01 */
45 msrNav([TheSystem],
46        [rnctCrisis,
47         msrSelect,
48         id,eq,[AdtCrisisID]
49       ],
50       ColCrisis),
51 .
52 msrNav(ColCrisis,
53        [msrSize,eq,[[ptInteger,1]]],
54        [[ptBoolean,true]]),
55 .
56
57msrop(outactCoordinator,
58    oeCloseCrisis,
59    [post,Self,
60     AdtCrisisID
61    ],

```

```

62      []):-  

63  

64 /* Post Functional: */  

65 msrVar(ctState,TheSystem),  

66 msrVar(actCoordinator,TheActor),  

67  

68 msrVar(ctCrisis,TheCrisis),  

69 msrVar(dtCrisisID,AdtCrisisID),  

70  

71 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

72 msrNav([Self],[rnActor],[TheActor]),  

73  

74 /* PostF01 */  

75 msrNav([TheSystem],  

76     [rnctCrisis,  

77      msrSelect,  

78      id,eq,[AdtCrisisID]],  

79     [TheCrisis]),  

80  

81 msrNav([TheCrisis],  

82     [msmAtPost,status],  

83     [[etCrisisStatus,closed]]),  

84  

85 /* PostF02 */  

86 msrNav([TheCrisis],  

87     [msmAtPost,rnHandler],  

88     []),  

89  

90 /* PostF03 */  

91 msrNav([TheCrisis],  

92     [rnAlerts,msrForAll,msrIsKilled],  

93     [[ptBoolean,true]]),  

94  

95 /* PostF04 */  

96 msrNav([TheActor],  

97     [rnInterfaceIN,  

98      ieMessage,[[ptString,'The crisis is now closed !']]  

99    ],  

100   [[ptBoolean,true]]),  

101  

102 /* Post Protocol: */  

103 /* PostP01 */  

104 true  

105 .

```

Listing D.8: Prolog file outactCoordinator-oeCloseCrisis.pl.

## D.9 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeGetAlertsSet.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5-----  

6msrop(outactCoordinator,  

7    oeGetAlertsSet,  

8    [preProtocol,Self,  

9     AetAlertStatus  

10    ],  

11    []):-  

12/* Pre Protocol: */  

13 msrVar(ctState,TheSystem),  

14 msrVar(actCoordinator,TheActor),  

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

16 msrNav([Self],[rnActor],[TheActor]),  

17  

18/* PreP01 */

```

```

19 msrNav([TheSystem],
20   [vpStarted],
21   [[ptBoolean,true]]),
22 .
23 msrNav([TheActor],
24   [rnctAuthenticated,vpIsLogged],
25   [[ptBoolean,true]])
26 .
27
28 msrop(outactCoordinator,
29   oeGetAlertsSet,
30   [preFunctional,Self,
31   AetAlertStatus
32   ],
33   []):-!
34 /* Pre Functional:*/
35 /* PreF01 */
36 true
37 .
38
39 msrop(outactCoordinator,
40   oeGetAlertsSet,
41   [post,Self,
42   AetAlertStatus
43   ],
44   []):-!
45
46 /* Post Functional:*/
47 msrVar(ctState,TheSystem),
48 msrVar(actCoordinator,TheActor),
49 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
50 msrNav([Self],[rnActor],[TheActor]),
51
52 /* PostF01 */
53 msrNav([TheSystem],
54   [rnctAlert,
55   msrSelect,
56   status,etEq,[AetAlertStatus]],
57   ColAlertSet),
58
59 msrNav(ColAlertSet,
60   [msrForAll,isSentToCoordinator,[TheActor]],
61   [[ptBoolean,true]]),
62
63 /* Post Protocol:*/
64 /* PostP01 */
65 true
66 .

```

Listing D.9: Prolog file outactCoordinator-oeGetAlertsSet.pl.

## D.10 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeGetCrisisSet.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7   oeGetCrisisSet,
8   [preProtocol,Self,
9   AetCrisisStatus
10  ],
11  []):-!
12/* Pre Protocol:*/
13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),

```

```

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]])
26.
27
28msrop(outactCoordinator,
29 oeGetCrisisSet,
30 [preFunctional,Self,
31 AetCrisisStatus
32 ],
33 []):-!
34/* Pre Functional:*/
35/* PreF01 */
36true
37.
38
39msrop(outactCoordinator,
40 oeGetCrisisSet,
41 [post,Self,
42 AetCrisisStatus
43 ],
44 []):-!
45
46/* Post Functional:*/
47 msrVar(ctState,TheSystem),
48 msrVar(actCoordinator,TheActor),
49 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
50 msrNav([Self],[rnActor],[TheActor]),
51
52/* PostF01 */
53 msrNav([TheSystem],
54     [rnctCrisis,
55      msrSelect,
56      status,etEq,[AetCrisisStatus]],
57     ColCrisisSet),
58
59 msrNav(ColCrisisSet,
60     [msrForAll,isSentToCoordinator,[TheActor]],
61     [[ptBoolean,true]]),
62
63 /* Post Protocol:*/
64/* PostP01 */
65 true
66 .

```

Listing D.10: Prolog file outactCoordinator-oeGetCrisisSet.pl.

## D.11 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeInvalidateAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeInvalidateAlert,
8    [preProtocol,Self,
9     AdtAlertID
10    ],

```

```

11  []):-  

12 /* Pre Protocol:*/  

13 msrVar(ctState,TheSystem),  

14 msrVar(actCoordinator,TheActor),  

15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

16 msrNav([Self],[rnActor],[TheActor]),  

17  

18 /* PreP01 */  

19 msrNav([TheSystem],  

20     [vpStarted],  

21     [[ptBoolean,true]]),  

22  

23 /* PreP02 */  

24 msrNav([TheActor],  

25     [rnctAuthenticated,vpIsLogged],  

26     [[ptBoolean,true]]))  

27.  

28  

29 msrop(outactCoordinator,  

30     oeInvalidateAlert,  

31     [preFunctional,Self,  

32      AdtAlertID  

33      ],  

34      []):-  

35 /* Pre Functional:*/  

36 msrVar(ctState,TheSystem),  

37 msrVar(actCoordinator,TheActor),  

38  

39 msrVar(dtAlertID,AdtAlertID),  

40  

41 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

42 msrNav([Self],[rnActor],[TheActor]),  

43  

44 /* PreF01 */  

45 msrNav([TheSystem],  

46     [rnctAlert,  

47      msrSelect,  

48      id,eq,[AdtAlertID]  

49      ],  

50      ColAlert),  

51  

52 msrNav(ColAlert,  

53     [msrSize,eq,[[ptInteger,1]]],  

54     [[ptBoolean,true]]))  

55 .  

56  

57 msrop(outactCoordinator,  

58     oeInvalidateAlert,  

59     [post,Self,  

60      AdtAlertID  

61      ],  

62      []):-  

63  

64 /* Post Functional:*/  

65 msrVar(ctState,TheSystem),  

66 msrVar(actCoordinator,TheActor),  

67  

68 msrVar(ctAlert,TheAlert),  

69 msrVar(dtAlertID,AdtAlertID),  

70  

71 msrNav([Self],[rnActor,rnSystem],[TheSystem]),  

72 msrNav([Self],[rnActor],[TheActor]),  

73  

74 /* PostF01 */  

75 msrNav([TheSystem],  

76     [rnctAlert,  

77      msrSelect,  

78      id,eq,[AdtAlertID]],  

79      [TheAlert]),  

80

```

```

81 msrNav([TheAlert],
82     [msmAtPost,status],
83     [[etAlertStatus,invalid]]),
84
85 /* PostF02 */
86 msrNav([TheActor],
87     [rnInterfaceIN,
88     ieMessage,[[ptString,'The alert is now declared as invalid !']],
89     ],
90     [[ptBoolean,true]]),
91
92 /* Post Protocol:*/
93 /* PostP01 */
94 true
95 .

```

Listing D.11: Prolog file outactCoordinator-oeInvalidateAlert.pl.

## D.12 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeReportOnCrisis.pl

```

1%-----%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%-----%
5-----%
6msrop(outactCoordinator,
7    oeReportOnCrisis,
8    [preProtocol,Self,
9     AdtCrisisID,
10    AdtComment
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actCoordinator,TheActor),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19/* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpIsLogged],
26     [[ptBoolean,true]]),
27.
28
29msrop(outactCoordinator,
30    oeReportOnCrisis,
31    [preFunctional,Self,
32     AdtCrisisID,
33     AdtComment
34     ],
35    []):-!
36/* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,

```

```

48     msrSelect,
49     id,eq,[AdtCrisisID]
50   ],
51   ColCrisis),
52
53 msrNav(ColCrisis,
54   [msrSize,eq,[[ptInteger,1]]],
55   [[ptBoolean,true]])
56 .
57
58msrop(outactCoordinator,
59   oeReportOnCrisis,
60   [post,Self,
61   AdtCrisisID,
62   AdtComment
63   ],
64   []):-!
65
66/* Post Functional:*/
67 msrVar(ctState,TheSystem),
68 msrVar(actCoordinator,TheActor),
69
70 msrVar(ctCrisis,TheCrisis),
71 msrVar(dtCrisisID,AdtCrisisID),
72 msrVar(dtComment,AdtComment),
73
74 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
75 msrNav([Self],[rnActor],[TheActor]),
76
77/* PostF01 */
78 msrNav([TheSystem],
79   [rnctCrisis,
80    msrSelect,
81    id,eq,[AdtCrisisID]],
82   [TheCrisis]),
83
84 msrNav([TheCrisis],
85   [msmAtPost,comment],
86   [AdtComment]),
87
88 msrNav([TheActor],
89   [rnInterfaceIN,
90   ieMessage,[[ptString,'The crisis comment has been updated !']]
91   ],
92   [[ptBoolean,true]]),
93
94/* Post Protocol:*/
95/* PostP01 */
96 true
97 .

```

Listing D.12: Prolog file outactCoordinator-oeReportOnCrisis.pl.

## D.13 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisHandler.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7   oeSetCrisisHandler,
8   [preProtocol,Self,
9   AdtCrisisID
10  ],
11  []):-!
12/* Pre Protocol:*/

```

```

13 msrVar(ctState,TheSystem),
14 msrVar(actCoordinator,TheActor),
15 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
16 msrNav([Self],[rnActor],[TheActor]),
17
18 /* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpIsLogged],
25     [[ptBoolean,true]]))
26.
27
28msrop(outactCoordinator,
29 oeSetCrisisHandler,
30 [preFunctional,Self,
31 AdtCrisisID
32 ],
33 []):-!
34 /* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actCoordinator,TheActor),
37
38 msrVar(dtCrisisID,AdtCrisisID),
39
40 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
41 msrNav([Self],[rnActor],[TheActor]),
42
43 /* PreF01 */
44 msrNav([TheSystem],
45     [rnctCrisis,
46      msrSelect,
47      id,eq,[AdtCrisisID]
48 ],
49     ColCrisis),
50
51 msrNav(ColCrisis,
52     [msrSize,eq,[[ptInteger,1]]],
53     [[ptBoolean,true]]))
54 .
55
56msrop(outactCoordinator,
57 oeSetCrisisHandler,
58 [post,Self,
59 AdtCrisisID
60 ],
61 []):-!
62
63 /* Post Functional:*/
64 msrVar(ctState,TheSystem),
65 msrVar(actCoordinator,TheActor),
66 msrVar(ctCoordinator,TheCoordinator),
67 msrVar(ctCoordinator,TheCurrentHandler),
68
69 msrVar(ctCrisis,TheCrisis),
70 msrVar(dtCrisisID,AdtCrisisID),
71
72 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
73 msrNav([Self],[rnActor],[TheActor]),
74
75 /* PostF01 */
76 msrNav([TheSystem],
77     [rnctCrisis,
78      msrSelect,
79      id,eq,[AdtCrisisID]],
80     [TheCrisis]),
81
82 msrNav([TheCrisis],

```

```

83     [msmAtPost, status],
84     [[etCrisisStatus, handled]]),
85
86 msrNav([TheActor],
87     [rnctCoordinator],
88     [TheCoordinator]),
89 msrNav([TheCrisis],
90     [msmAtPost, rnHandler],
91     [TheCoordinator]),
92
93 msrNav([TheActor],
94     [rnInterfaceIN,
95      ieMessage, [[ptString, 'You are now considered as handling the crisis !']]],
96      ],
97      [[ptBoolean,true]]),
98
99 /* PostF02 */
100 msrNav([TheCrisis],
101     [rnAlerts, msrForAll, isSentToCoordinator, [TheActor]],
102     [[ptBoolean,true]]),
103
104 /* PostF03 */
105 ( msrNav([TheCrisis],
106     [rnHandler, msrSize, eq, [[ptInteger, 1]]],
107     [[ptBoolean,true]]))
108 -> (msrNav([TheCrisis],
109     [rnHandler],
110     [TheCurrentHandler]),
111     msrNav([TheCurrentHandler],
112     [rnactCoordinator, rnInterfaceIN,
113      ieMessage, [[ptString, 'One of the crisis you were handling is now handled by one of your
114      colleagues!']]],
115      [[ptBoolean,true]]])
116 )
117 ; true
118 ),
119
120 /* PostF04 */
121 msrNav([TheCrisis],
122     [rnAlerts, rnSignaler, msrForAll, isAcknowledged, []],
123     [[ptBoolean,true]]),
124
125 /* Post Protocol:*/
126 /* PostP01 */
127 true
128 .

```

Listing D.13: Prolog file outactCoordinator-oeSetCrisisHandler.pl.

## D.14 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisStatus.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeSetCrisisStatus,
8    [preProtocol, Self,
9     AdtCrisisID,
10    AetCrisisStatus
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState, TheSystem),
15 msrVar(actCoordinator, TheActor),

```

```

16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19/* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpIsLogged],
26     [[ptBoolean,true]]))
27.
28
29msrop(outactCoordinator,
30 oeSetCrisisStatus,
31 [preFunctional,Self,
32 AdtCrisisID,
33 AetCrisisStatus
34 ],
35 []):-!
36/* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,
48      msrSelect,
49      id,eq,[AdtCrisisID]
50 ],
51 ColCrisis),
52
53 msrNav(ColCrisis,
54     [msrSize,eq,[[ptInteger,1]]],
55     [[ptBoolean,true]]))
56 .
57
58msrop(outactCoordinator,
59 oeSetCrisisStatus,
60 [post,Self,
61 AdtCrisisID,
62 AetCrisisStatus
63 ],
64 []):-!
65
66/* Post Functional:*/
67 msrVar(ctState,TheSystem),
68 msrVar(actCoordinator,TheActor),
69
70 msrVar(ctCrisis,TheCrisis),
71 msrVar(dtCrisisID,AdtCrisisID),
72 msrVar(etCrisisStatus,AetCrisisStatus),
73
74 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
75 msrNav([Self],[rnActor],[TheActor]),
76
77/* PostF01 */
78 msrNav([TheSystem],
79     [rnctCrisis,
80      msrSelect,
81      id,eq,[AdtCrisisID]],
82     [TheCrisis]),
83
84 msrNav([TheCrisis],
85     [msmAtPost,status],

```

```

86     [AetCrisisStatus]),
87
88 msrNav([TheActor],
89     [rnInterfaceIN,
90     ieMessage,[[ptString,'The crisis status has been updated !']])
91 ],
92 [[ptBoolean,true]]),
93
94 /* Post Protocol:*/
95 /* PostP01 */
96 true
97 .

```

Listing D.14: Prolog file outactCoordinator-oeSetCrisisStatus.pl.

## D.15 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeSetCrisisType.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeSetCrisisType,
8    [preProtocol,Self,
9     AdtCrisisID,
10    AetCrisisType
11    ],
12    []):-!
13/* Pre Protocol:*/
14 msrVar(ctState,TheSystem),
15 msrVar(actCoordinator,TheActor),
16 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
17 msrNav([Self],[rnActor],[TheActor]),
18
19/* PreP01 */
20 msrNav([TheSystem],
21     [vpStarted],
22     [[ptBoolean,true]]),
23
24 msrNav([TheActor],
25     [rnctAuthenticated,vpiIsLogged],
26     [[ptBoolean,true]]))
27.
28
29msrop(outactCoordinator,
30    oeSetCrisisType,
31    [preFunctional,Self,
32     AdtCrisisID,
33     AetCrisisType
34     ],
35    []):-!
36/* Pre Functional:*/
37 msrVar(ctState,TheSystem),
38 msrVar(actCoordinator,TheActor),
39
40 msrVar(dtCrisisID,AdtCrisisID),
41
42 msrNav([Self],[rnActor,rnSystem],[TheSystem]),
43 msrNav([Self],[rnActor],[TheActor]),
44
45/* PreF01 */
46 msrNav([TheSystem],
47     [rnctCrisis,
48      msrSelect,
49      id,eq,[AdtCrisisID]
50     ],

```

```

51     ColCrisis),
52
53 msrNav(ColCrisis,
54     [msrSize, eq, [[ptInteger, 1]]], 
55     [[ptBoolean, true]])
56 .
57
58 msrop(outactCoordinator,
59     oeSetCrisisType,
60     [post, Self,
61      AdtCrisisID,
62      AetCrisisType
63     ],
64     []):-!
65
66 /* Post Functional:*/
67 msrVar(ctState, TheSystem),
68 msrVar(actCoordinator, TheActor),
69
70 msrVar(ctCrisis, TheCrisis),
71 msrVar(dtCrisisID, AdtCrisisID),
72 msrVar(etCrisisType, AetCrisisType),
73
74 msrNav([Self], [rnActor, rnSystem], [TheSystem]),
75 msrNav([Self], [rnActor], [TheActor]),
76
77 /* PostF01 */
78 msrNav([TheSystem],
79     [rnctCrisis,
80      msrSelect,
81      id, eq, [AdtCrisisID]],
82     [TheCrisis]),
83
84 msrNav([TheCrisis],
85     [msmAtPost, type],
86     [AetCrisisType]),
87
88 msrNav([TheActor],
89     [rnInterfaceIN,
90      ieMessage, [[ptString, 'The crisis type has been updated !']]
91     ],
92     [[ptBoolean, true]]),
93
94 /* Post Protocol:*/
95 /* PostP01 */
96 true
97 .

```

Listing D.15: Prolog file outactCoordinator-oeSetCrisisType.pl.

## D.16 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactCoordinator-oeValidateAlert.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5-----
6msrop(outactCoordinator,
7    oeValidateAlert,
8    [preProtocol, Self,
9     AdtAlertID
10    ],
11    []):-!
12/* Pre Protocol:*/
13 msrVar(ctState, TheSystem),
14 msrVar(actCoordinator, TheActor),
15 msrNav([Self], [rnActor, rnSystem], [TheSystem]),

```

```

16 msrNav([Self], [rnActor], [TheActor]),
17
18/* PreP01 */
19 msrNav([TheSystem],
20     [vpStarted],
21     [[ptBoolean,true]]),
22
23 msrNav([TheActor],
24     [rnctAuthenticated,vpiIsLogged],
25     [[ptBoolean,true]])
26.
27
28msrop(outactCoordinator,
29    oeValidateAlert,
30    [prefunctional,Self,
31     AdtAlertID
32     ],
33     []):-!
34/* Pre Functional:*/
35 msrVar(ctState,TheSystem),
36 msrVar(actCoordinator,TheActor),
37
38 msrVar(dtAlertID,AdtAlertID),
39
40 msrNav([Self], [rnActor,rnSystem],[TheSystem]),
41 msrNav([Self], [rnActor], [TheActor]),
42
43/* PreF01 */
44 msrNav([TheSystem],
45     [rnctAlert,
46      msrSelect,
47      id,eq,[AdtAlertID]
48      ],
49     ColAlerts),
50
51 msrNav(ColAlerts,
52     [msrSize,eq,[[ptInteger,1]]],
53     [[ptBoolean,true]]))
54 .
55
56msrop(outactCoordinator,
57    oeValidateAlert,
58    [post,Self,
59     AdtAlertID
60     ],
61     []):-!
62
63/* Post Functional:*/
64 msrVar(ctState,TheSystem),
65 msrVar(actCoordinator,TheActor),
66
67 msrVar(ctAlert,TheAlert),
68 msrVar(dtAlertID,AdtAlertID),
69
70 msrNav([Self], [rnActor,rnSystem],[TheSystem]),
71 msrNav([Self], [rnActor], [TheActor]),
72
73/* PostF01 */
74 msrNav([TheSystem],
75     [rnctAlert,
76      msrSelect,
77      id,eq,[AdtAlertID]],
78     [TheAlert]),
79
80 msrNav([TheAlert],
81     [msmAtPost,status],
82     [[etAlertStatus,valid]]),
83
84 msrNav([TheActor],
85     [rnInterfaceIN,

```

```

86     ieMessage, [[ptString, 'The Alert is now declared as valid !']])
87     ],
88     [[ptBoolean,true])),
89
90 /* Post Protocol:*/
91/* PostP01 */
92true
93 .

```

Listing D.16: Prolog file outactCoordinator-oeValidateAlert.pl.

## D.17 File ./src-gen/prolog-ref-spec/Operations/Environment/OUT/outactMsrCreator-oeCreateSystemAndEnvironment.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5/*
6*****
7MSRCreatorActor
8*****
9
10/** createSystemAndEnvironment ***/
11
12msrop(outactMsrCreator,
13    oeCreateSystemAndEnvironment,
14    [preFunctional,_Self,_AqtyComCompanies],
15    []):-!
16true.
17
18msrop(outactMsrCreator,
19    oeCreateSystemAndEnvironment,
20    [preProtocol,_Self,_AqtyComCompanies],
21    []):-!
22true.
23
24msrop(outactMsrCreator,
25    oeCreateSystemAndEnvironment,
26    [post,_Self,AqtyComCompanies],
27    []):-!
28
29 msrVar(ctState,TheSystem),
30 msrVar(actMsrCreator,AactMsrCreator),
31 msrVar(actAdministrator,AactAdministrator),
32
33 msrVar(dtInteger, AnextValueForAlertID),
34 msrVar(dtInteger, AnextValueForCrisisID),
35 msrVar(dtDateAndTime, Aclock),
36 msrVar(dtSecond, AcrisisReminderPeriod),
37 msrVar(dtSecond, AmaxCrisisReminderPeriod),
38 msrVar(ptBoolean, AvpStarted),
39
40 /* PostF01 -- MUST ALWAYS BE MADE FIRST -- */
41 msrNav([AnextValueForAlertID],
42     [value,eq,[[ptInteger,1]]],
43     [[ptBoolean,true])),
44
45 msrNav([AnextValueForCrisisID],
46     [value,eq,[[ptInteger,1]]],
47     [[ptBoolean,true])),
48
49msrNav([Aclock],
50     [date,year,value],
51     [[ptInteger,1970]]),
52msrNav([Aclock],
53     [date,month,value],
54     [[ptInteger,01]]),

```

```

55msrNav ([Aclock],
56    [date,day,value],
57    [[ptInteger,01]]),
58
59msrNav ([Aclock],
60    [time,hour,value],
61    [[ptInteger,00]]),
62msrNav ([Aclock],
63    [time,minute,value],
64    [[ptInteger,00]]),
65msrNav ([Aclock],
66    [time,second,value],
67    [[ptInteger,00]]),
68
69 msrNav ([AcrisisReminderPeriod],
70    [value,eq,[[ptInteger,300]]],
71    [[ptBoolean,true]]),
72
73 msrNav ([AmaxCrisisReminderPeriod],
74    [value,eq,[[ptInteger,1200]]],
75    [[ptBoolean,true]]),
76
77 msrNav ([AvpStarted],
78    [],
79    [[ptBoolean,true]]),
80
81 msrNav ([TheSystem],
82    [init, [AnextValueForAlertID,
83        AnextValueForCrisisID,
84        Aclock,
85        AcrisisReminderPeriod,
86        AmaxCrisisReminderPeriod,
87        Aclock,
88        AvpStarted]
89    ],
90    [[ptBoolean,true]]),
91
92/* PostF02*/
93 msrNav ([AactMsrCreator],
94    [init, []],
95    [[ptBoolean,true]]),
96
97 /* PostF03 */
98 msrVarCol(actComCompany,AqtyComCompanies,AactComCompanyCol),
99
100 msrNav (AactComCompanyCol,
101    [msrForAll,init,[]],
102    [[ptBoolean,true]]),
103
104 /* PostF04*/
105 msrNav ([AactAdministrator],
106    [init, []],
107    [[ptBoolean,true]]),
108
109 /* PostF05*/
110 msrVar(actActivator,AactActivator),
111 msrNav ([AactActivator],
112    [init, []],
113    [[ptBoolean,true]]),
114
115/* PostF06 */
116 msrVar(ctAdministrator,ActAdministrator),
117 msrVar(dtLogin,AdtLogin),
118 msrVar(dtPassword,AdtPassword),
119
120 msrNav ([AdtLogin],
121    [value,eq,[[ptString,'icrashadmin']]],
122    [[ptBoolean,true]]),
123
124 msrNav ([AdtPassword],

```

```

125      [value,eq,[[ptString,'7WXC1359']]],  

126      [[ptBoolean,true]]),  

127  

128 msrNav([ActAdministrator],  

129     [init,[AdtLogin,AdtPassword]],  

130     [[ptBoolean,true]]),  

131  

132 /* PostF07 */  

133 msrNav([ActAdministrator],  

134     [msmAtPost,rnactAuthenticated],  

135     [AactAdministrator]),  

136  

137 /* Post Protocol:*/  

138 /* PostP01 */  

139 true  

140 .

```

Listing D.17: Prolog file outactMsrCreator-oeCreateSystemAndEnvironment.pl.

## D.18 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctAdministrator-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5  

6msrop(ctAdministrator,init,[Self,  

7          Alogin,  

8          Apwd],  

9          Result):-  

10 (  

11msrVar(ctAdministrator,Self),  

12  

13/* Post F01 */  

14msrNav([Self],[login],[Alogin]),  

15msrNav([Self],[pwd],[Apwd]),  

16msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),  

17  

18/* Post F02 */  

19 msrNav([Self],[msrIsNew],[Self])  

20)  

21-> Result = [ptBoolean,true]  

22; Result = [ptBoolean,false]  

23.

```

Listing D.18: Prolog file PrimaryTypesClasses-ctAdministrator-init.pl.

## D.19 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctAlert-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */  

3:- multifile msrop/4.  

4%%%%%%%%%%%%%%%
5  

6msrop(ctAlert,init,[Self,  

7          Aid,  

8          Astatus,  

9          Alocation,  

10         Ainstant,  

11         Acomment],  

12         Result):-  

13  

14/* Post F01 */  

15 (

```

```

16msrVar(ctAlert,Self) ,
17
18msrNav([Self],[id],[Aid]),
19msrNav([Self],[status],[Astatus]),
20msrNav([Self],[location],[Alocation]),
21msrNav([Self],[instant],[Ainstant]),
22msrNav([Self],[comment],[Acomment]),
23
24/* Post F02 */
25 msrNav([Self],[msrIsNew], [Self])
26)
27-> Result = [ptBoolean,true]
28; Result = [ptBoolean,false]
29.

```

Listing D.19: Prolog file PrimaryTypesClasses-ctAlert-init.pl.

## D.20 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctAlert,isSentToCoordinator,[Self,AactCoordinator],
7      Result):-
8
9/* Post F01 */
10(
11 msrNav([AactCoordinator],
12        [rnInterfaceIN,ieSendAnAlert,[Self] ],
13        [[ptBoolean,true]])
14)
15-> Result = [ptBoolean,true]
16; Result = [ptBoolean,false]
17.

```

Listing D.20: Prolog file PrimaryTypesClasses-ctAlert-isSentToCoordinator.pl.

## D.21 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctAuthenticated-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctAuthenticated,init,[Self,
7          Alogin,
8          Apwd],
9      Result):-
10
11/* Post F01 */
12(
13msrVar(ctAuthenticated,Self),
14
15msrNav([Self],[login],[Alogin]),
16msrNav([Self],[pwd],[Apwd]),
17msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),
18
19/* Post F02 */
20 msrNav([Self],[msrIsNew], [Self])
21)
22-> Result = [ptBoolean,true]
23; Result = [ptBoolean,false]

```

24.

Listing D.21: Prolog file PrimaryTypesClasses-ctAuthenticated-init.pl.

## D.22 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCoordinator-init.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6msrop(ctCoordinator,init,[Self,
7      Aid,
8      Alogin,
9      Apwd],
10     Result):-
11
12/* Post F01 */
13(
14msrVar(ctCoordinator,Self),
15
16msrNav([Self],[id],[Aid]),
17msrNav([Self],[login],[Alogin]),
18msrNav([Self],[pwd],[Apwd]),
19msrNav([Self],[vpIsLogged],[[ptBoolean,false]]),
20
21/* Post F02 */
22 msrNav([Self],[msrIsNew],[Self])
23)
24-> Result = [ptBoolean,true]
25; Result = [ptBoolean,false]
26.

```

Listing D.22: Prolog file PrimaryTypesClasses-ctCoordinator-init.pl.

## D.23 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6msrop(ctCrisis,handlingDelayPassed,[Self],
7     Result):-
8
9/* Post F01 */
10(
11 msrVar(ctState,TheSystem),
12 msrVar(dtInteger,CurrentClockSecondsQty),
13 msrVar(dtInteger,LastReminderSecondsQty),
14 msrVar(dtSecond,CrisisReminderPeriod),
15
16 msrNav([Self],[rnSystem],[TheSystem]),
17
18 msrNav([Self],
19      [status],
20      [[etCrisisStatus,pending]]),
21
22 msrNav([TheSystem],
23      [clock,toSecondsQty,[],],
24      [CurrentClockSecondsQty]),
25
26 msrNav([TheSystem],
27      [vpLastReminder,toSecondsQty,[]],

```

```

28     [LastReminderSecondsQty]),
29
30 msrNav([TheSystem],
31     [crisisReminderPeriod],
32     [CrisisReminderPeriod]),
33
34 msrNav([CurrentClockSecondsQty],
35     [sub, [LastReminderSecondsQty],
36         gt, [CrisisReminderPeriod]
37     ],
38     [[ptBoolean,true]])
39
40)
41-> Result = [ptBoolean,true]
42; Result = [ptBoolean,false]
43.

```

Listing D.23: Prolog file PrimaryTypesClasses-ctCrisis-handlingDelayPassed.pl.

## D.24 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,init,[Self,
7    Aid,
8    Atype,
9    Astatus,
10   Alocation,
11   Ainstant,
12   Acomment],
13   Result):-!
14
15/* Post F01 */
16(
17msrVar(ctCrisis,Self),
18
19msrNav([Self], [id], [Aid]),
20msrNav([Self], [type], [Atype]),
21msrNav([Self], [status], [Astatus]),
22msrNav([Self], [location], [Alocation]),
23msrNav([Self], [instant], [Ainstant]),
24msrNav([Self], [comment], [Acomment]),
25
26/* Post F02 */
27 msrNav([Self], [msrIsNew], [Self])
28)
29-> Result = [ptBoolean,true]
30; Result = [ptBoolean,false]
31.

```

Listing D.24: Prolog file PrimaryTypesClasses-ctCrisis-init.pl.

## D.25 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,isAllocatedIfPossible,[Self],
7   Result):-

```

```

8(
9 msrVar(ctState,TheSystem),
10 msrNav([Self],[rnSystem],[TheSystem]),
11
12 msrVar(actCoordinator,TheCoordinatorActor),
13 msrVar(ctCoordinator,TheCoordinator),
14 msrVar(ptString,TheMessage),
15 msrVar(ptString,TheCrisisIDptString),
16
17 (
18 /* Post F01 */
19 msrNav([Self],
20 [maxHandlingDelayPassed,[]],
21 [[ptBoolean,true]]),
22
23 ( msrNav([TheSystem],
24 [rnactCoordinator,msrIsEmpty],
25 [[ptBoolean,false]])
26 -> (
27 /* Post F02 */
28 msrNav([TheSystem],
29 [rnactCoordinator,msrAny,msrTrue],
30 [TheCoordinatorActor]),
31
32 msrNav([TheCoordinatorActor],
33 [rnctCoordinator],
34 [TheCoordinator]),
35
36 msrNav([Self],
37 [msmAtPost,rnHandler],
38 [TheCoordinator]),
39
40 msrNav([Self],
41 [msmAtPost,status],
42 [[etCrisisStatus,handled]]),
43
44 msrNav([Self],
45 [id,value],
46 [TheCrisisIDptString]),
47
48 msrNav([[ptString,'You are now considered as handling the crisis having ID: ']],
49 [ptStringConcat,[TheCrisisIDptString]],
50 [TheMessage]),
51
52 msrNav([TheCoordinatorActor],
53 [rnInterfaceIN,
54 ieMessage,[TheMessage]
55 ],
56 [[ptBoolean,true]])
57 )
58 ; /* Post F03 */
59 msrNav([TheSystem],
60 [rnactAdministrator,msrForAll,rnInterfaceIN,
61 ieMessage,[[ptString,'Please add new coordinators to handle pending crisis !']]],
62 [[ptBoolean,true]])
63 )
64 )
65 )
66)
67-> Result = [ptBoolean,true]
68; Result = [ptBoolean,false]
69.

```

Listing D.25: Prolog file PrimaryTypesClasses-ctCrisis-isAllocatedIfPossible.pl.

## D.26 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClass-ctCrisis-isSentToCoordinator.pl

%%%%%%%%%%%%%

```

2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,isSentToCoordinator,[Self,AactCoordinator],
7      Result):-_
8
9/* Post F01 */
10(
11 msrNav([AactCoordinator],
12         [rnInterfaceIN,ieSendACrisis,[Self]],[[ptBoolean,true]])
13
14)
15-> Result = [ptBoolean,true]
16; Result = [ptBoolean,false]
17.

```

Listing D.26: Prolog file PrimaryTypesClasses-ctCrisis-isSentToCoordinator.pl.

## D.27 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctCrisis,maxHandlingDelayPassed,[Self],
7      Result):-_
8
9/* Post F01 */
10(
11 msrVar(ctState,TheSystem),
12 msrVar(dtInteger,CurrentClockSecondsQty),
13 msrVar(dtInteger,CrisisInstantSecondsQty),
14 msrVar(dtSecond,MaxCrisisReminderPeriod),
15
16 msrNav([Self], [rnSystem], [TheSystem]),
17
18 msrNav([Self],
19         [status],
20         [[etCrisisStatus,pending]]),
21
22 msrNav([TheSystem],
23         [clock,toSecondsQty,[]],
24         [CurrentClockSecondsQty]),
25
26 msrNav([Self],
27         [instant,toSecondsQty,[]],
28         [CrisisInstantSecondsQty]),
29
30 msrNav([TheSystem],
31         [maxCrisisReminderPeriod],
32         [MaxCrisisReminderPeriod]),
33
34 msrNav([CurrentClockSecondsQty],
35         [sub,[CrisisInstantSecondsQty],
36          gt, [MaxCrisisReminderPeriod]
37          ],
38         [[ptBoolean,true]]))
39
40)
41-> Result = [ptBoolean,true]
42; Result = [ptBoolean,false]
43.

```

Listing D.27: Prolog file PrimaryTypesClasses-ctCrisis-maxHandlingDelayPassed.pl.

## D.28 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctHuman-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctHuman,init,[Self,
7          Aid,
8          Akind],
9      Result):-!
10
11/* Post F01 */
12(
13msrVar(ctHuman,Self),
14
15msrNav([Self],[id],[Aid]),
16msrNav([Self],[kind],[Akind]),
17
18/* Post F02 */
19 msrNav([Self],[msrIsNew],[Self])
20)
21-> Result = [ptBoolean,true]
22; Result = [ptBoolean,false]
23.
```

Listing D.28: Prolog file PrimaryTypesClasses-ctHuman-init.pl.

## D.29 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctHuman-isAcknowledged.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(ctHuman,isAcknowledged,[Self],Result):-
7
8/* Post F01 */
9(msrVar(dtPhoneNumber,AdtPhoneNumber),
10 msrVar(dtSMS,AdtSMS),
11
12 msrNav([Self],
13         [id,eq,[AdtPhoneNumber]],
14         [[ptBoolean,true]]),
15 msrNav([AdtSMS],
16         [value,eq,[[ptString,'The handling of your alert by our services is in progress !']]],
17         [[ptBoolean,true]]),
18 msrNav([Self],
19         [rnactComCompany,rnInterfaceIN,ieSmsSend,[AdtPhoneNumber,AdtSMS]],
20         [[ptBoolean,true]]),
21)
22-> Result = [ptBoolean,true]
23; Result = [ptBoolean,false]
24.
```

Listing D.29: Prolog file PrimaryTypesClasses-ctHuman-isAcknowledged.pl.

## D.30 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses-ctState-init.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
```

```

4%%%%%%%%%%%%%
5
6msrop(ctState,init,[Self,
7      AnextValueForAlertID,
8      AnextValueForCrisisID,
9      Aclock,
10     AcrisisReminderPeriod,
11     AmaxCrisisReminderPeriod,
12     AvpLastReminder,
13     AvpStarted],
14   Result):-
15
16 /* Post F01 */
17(
18 msrVar(ctState,Self),
19
20 msrNav([Self],[nextValueForAlertID],[AnextValueForAlertID]),
21 msrNav([Self],[nextValueForCrisisID],[AnextValueForCrisisID]),
22 msrNav([Self],[clock],[Aclock]),
23 msrNav([Self],[crisisReminderPeriod],[AcrisisReminderPeriod]),
24 msrNav([Self],[maxCrisisReminderPeriod],[AmaxCrisisReminderPeriod]),
25 msrNav([Self],[vpLastReminder],[AvpLastReminder]),
26 msrNav([Self],[vpStarted],[AvpStarted]),
27
28 msrNav([Self],[msrIsNew],[Self])
29)
30-> Result = [ptBoolean,true]
31; Result = [ptBoolean,false]
32.

```

Listing D.30: Prolog file PrimaryTypesClasses-ctState-init.pl.

## D.31 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDataty... dtAlertID-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(dtAlertID,is,[AdtValue],Result):-
7% msd01
8msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]],
12   [[ptBoolean,true]]),
13   msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,20]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20TheResult = Result
21.
22
23/*
24| ?- X = [dtAlertID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
25msrNav([X],[is,[],[Result]).
26
27X = [dtAlertID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
28Result = [ptBoolean,true] ?
29
30yes
31
32| ?- X = [dtAlertID,[],[[dtString,[[value,[ptString,'012345678901234567890123456789']]]],[]]],,
33msrNav([X],[is,[],[Result]).
```

```

34
35X = [dtAlertID, [], [[dtString, [[value, [ptString, '012345678901234567890123456789']]]], []]],,
36Result = [ptBoolean, false] ?
37
38yes
39*/

```

Listing D.31: Prolog file PrimaryTypesDatatypes-dtAlertID-is.pl.

### D.32 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtComment-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%% dtComment
6
7msd01
8msrop(dtComment,is,[AdtValue],Result):-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11 (
12   (
13     (
14       MaxLength = [ptInteger,160],
15       msrNav([AdtValue],
16               [value,length,[],leg,[MaxLength]],
17               [[ptBoolean,true]])
18     )
19     -> TheResult = [ptBoolean,true]
20     ; TheResult = [ptBoolean,false]
21   )
22),
23 Result = TheResult
24.
25
26/*
27| ?- X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg ! Please help ...']]],[[]]]],[],[Result]].
28msrNav([X],[is,[],[Result]]).
29X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg ! Please help ...']]],[[]]]],[],[Result] = [ptBoolean,true] ?
30Result = [ptBoolean,true] ?
31yes
32
33| ?- X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg when I was running with my dog
34      to go to the skate park because my friends called me on my mobile phone and told me that a skate
35      star was doing triple back flips.']]],[[]]]],[],[Result]].
36msrNav([X],[is,[],[Result]]).
37X = [dtComment,[],[[dtString,[[value,[ptString,'I broke my leg when I was running with my dog to go
38      to the skate park because my friends called me on my mobile phone and told me that a skate star
      was doing triple back flips.']]],[[]]]],[],[Result] = [ptBoolean,false] ?
39yes
38*/

```

Listing D.32: Prolog file PrimaryTypesDatatypes-dtComment-is.pl.

### D.33 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtCoordinatorID-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(dtCoordinatorID,is,[AdtValue],Result):-

```

```

7% msd01
8 msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]]),
12   [[ptBoolean,true]]),
13 msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,5]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20 TheResult = Result
21.

```

Listing D.33: Prolog file PrimaryTypesDatatypes-dtCoordinatorID-is.pl.

## D.34 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtCrisisID-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6msrop(dtCrisisID,is,[AdtValue],Result):-
7% msd01
8 msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,length,[],gt,[[ptInteger,0]]]),
12   [[ptBoolean,true]]),
13 msrNav([AdtValue],
14   [value,length,[],leq,[[ptInteger,10]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20 TheResult = Result
21.
22/*
23| ?- X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
24msrNav([X],[is,[],[Result]]).
25X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789']]]],[]]],,
26Result = [ptBoolean,true] ?
27yes
28
29| ?- X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789a']]]],[]]],,
30msrNav([X],[is,[],[Result]]).
31X = [dtCrisisID,[],[[dtString,[[value,[ptString,'0123456789a']]]],[]]],,
32Result = [ptBoolean,false] ?
33yes
34*/

```

Listing D.34: Prolog file PrimaryTypesDatatypes-dtCrisisID-is.pl.

## D.35 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtGPSLocation-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5

```

```

6%% dtPhoneNumber
7
8% msd01
9msrop(dtGPSLocation, is, [AdtValue], Result) :-
10msrVar(ptBoolean, TheResult),
11(
12(
13    msrNav([AdtValue],
14        [latitude, is, []],
15        [[ptBoolean, true]]),
16    msrNav([AdtValue],
17        [longitude, is, []],
18        [[ptBoolean, true]])
19)
20 -> TheResult = [ptBoolean, true]
21 ; TheResult = [ptBoolean, false]
22),
23
24 Result = TheResult
25.

```

Listing D.35: Prolog file PrimaryTypesDatatypes-dtGPSLocation-is.pl.

### D.36 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% dtGPSLocation
7
8msrop(dtGPSLocation, isNearTo, [Self, AdtValue], Result) :-
9msrVar(ptBoolean, TheResult),
10msrVar(dtReal, EarthRadius),
11msrVar(dtReal, MaxDistance),
12
13msrVar(dtLatitude, ComparedLatitude),
14msrVar(dtLongitude, ComparedLongitude),
15
16msrVar(dtReal, R1), msrVar(dtReal, R1a),
17msrVar(dtReal, R2), msrVar(dtReal, R2a),
18
19(
20(
21(
22    % msd01
23    msrNav([EarthRadius], [value], [[ptReal, 6371]]),
24    msrNav([MaxDistance], [value], [[ptReal, 100]]),
25
26    msrNav([AdtValue], [latitude], [ComparedLatitude]),
27    msrNav([AdtValue], [longitude], [ComparedLongitude]),
28
29    msrNav([Self], [latitude, sin, [], [R1a]]),
30    msrNav([AdtValue], [latitude, sin, [], mul, [R1a]], [R1]),
31
32    msrNav([Self], [latitude, cos, [], [R2a]]),
33    msrNav([AdtValue], [latitude, cos, [], mul, [R2a]], [R2]),
34
35    msrNav([AdtValue], [longitude], [ComparedLongitude]),
36    msrNav([Self], [longitude, sub, [ComparedLongitude], cos, [], mul, [R2],
37        add, [R1],
38        acos, [],
39        mul, [EarthRadius],
40        sub, [MaxDistance],
41        value, leq, [[ptReal, 0]]],
42        [[ptBoolean, true]])

```

```

43      )
44      -> TheResult = [ptBoolean,true]
45      ; TheResult = [ptBoolean,false]
46  )
47),
48 Result = TheResult
49.

```

Listing D.36: Prolog file PrimaryTypesDatatypes-dtGPSLocation-isNearTo.pl.

### D.37 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLatitude-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% msd01
7msrop(dtLatitude,is,[AdtValue],Result):-%
8msrVar(ptBoolean,TheResult),
9(
10 ( msrNav([AdtValue],
11   [value,ged,[[ptReal,-90.0]]],
12   [[ptBoolean,true]]),
13  msrNav([AdtValue],
14   [value,leq,[[ptReal,+90.0]]],
15   [[ptBoolean,true]])
16 )
17 -> (TheResult = [ptBoolean,true])
18 ; (TheResult = [ptBoolean,false])
19),
20Result = TheResult
21.

```

Listing D.37: Prolog file PrimaryTypesDatatypes-dtLatitude-is.pl.

### D.38 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLogin-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5% dtComment
6
7%msd01
8msrop(dtLogin,is,[AdtValue],Result):-%
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11 (
12  (
13    (
14      MaxLength = [ptInteger,20],
15      msrNav([AdtValue],
16        [value,length,[],leq,[MaxLength]],
17        [[ptBoolean,true]]))
18  )
19  -> TheResult = [ptBoolean,true]
20  ; TheResult = [ptBoolean,false]
21 )
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567']]],[[]]]],
```

```

27msrNav([X],[is,[],[Result]).
28X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567']]]],[],[],[],],
29Result = [ptBoolean,true] ?
30yes
31
32| ?- X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567a']]]],[],[],[],],
33msrNav([X],[is,[],[Result]).
34X = [dtLogin,[],[[dtString,[[value,[ptString,'01234567a']]]],[],[],[],],
35Result = [ptBoolean,false] ?
36yes
37*/

```

Listing D.38: Prolog file PrimaryTypesDatatypes-dtLogin-is.pl.

### D.39 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtLongitude-is.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5
6%% dtPhoneNumber
7
8% msd01
9msrop(dtLongitude,is,[AdtValue],Result):-%
10msrVar(ptBoolean,TheResult),
11(
12 ( msrNav([AdtValue],
13   [value,geq,[[ptReal,-180.0]]],
14   [[ptBoolean,true]]),
15 msrNav([AdtValue],
16   [value,leq,[[ptReal,+180.0]]],
17   [[ptBoolean,true]]))
18 )
19 -> (TheResult = [ptBoolean,true])
20 ; (TheResult = [ptBoolean,false])
21),
22
23 Result = TheResult
24.

```

Listing D.39: Prolog file PrimaryTypesDatatypes-dtLongitude-is.pl.

### D.40 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtPassword-is.pl

```

1%%%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%%%
5%% dtComment
6
7%msd01
8msrop(dtPassword,is,[AdtValue],Result):-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MinLength),
11 (
12 (
13   (
14     MinLength = [ptInteger,6],
15     msrNav([AdtValue],
16       [value,length,[],geq,[MinLength]],
17       [[ptBoolean,true]]))
18   )
19   -> TheResult = [ptBoolean,true]

```

```

20      ; TheResult = [ptBoolean, false]
21  )
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtPassword, [], [[dtString, [[value, [ptString, '012345']]]], []]], 
27msrNav([X], [is, []], [Result]).
28X = [dtPassword, [], [[dtString, [[value, [ptString, '012345']]]], []]], 
29Result = [ptBoolean, true] ?
30yes
31
32| ?- X = [dtPassword, [], [[dtString, [[value, [ptString, '01234']]]], []]], 
33msrNav([X], [is, []], [Result]).
34X = [dtPassword, [], [[dtString, [[value, [ptString, '01234']]]], []]], 
35Result = [ptBoolean, false] ?
36yes
37*/

```

Listing D.40: Prolog file PrimaryTypesDatatypes-dtPassword-is.pl.

## D.41 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesDatatypes-dtPhoneNumber-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% dtPhoneNumber
7
8% msd01
9msrop(dtPhoneNumber,is,[AdtValue],Result):-
10msrVar(ptBoolean,TheResult),
11(
12  ( msrNav([AdtValue],
13    [value,length,[],gt,[[ptInteger,4]]],
14    [[ptBoolean,true]]),
15  msrNav([AdtValue],
16    [value,length,[],leq,[[ptInteger,30]]],
17    [[ptBoolean,true]])
18 )
19
20 -> TheResult = [ptBoolean,true]
21 ; TheResult = [ptBoolean,false]
22),
23 Result = TheResult
24.
25/*
26| ?- X = [dtPhoneNumber, [], [[dtString, [[value, [ptString, '(+352) 46 66 44 60 00']]]], []]], 
27msrNav([X], [is, []], [Result]).
28X = [dtPhoneNumber, [], [[dtString, [[value, [ptString, '(+352) 46 66 44 60 00']]]], []]], 
29Result = [ptBoolean,true] ?
30
31yes
32
33yes
34*/

```

Listing D.41: Prolog file PrimaryTypesDatatypes-dtPhoneNumber-is.pl.

## D.42 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassesAndAlertStatus-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */

```

```

3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etAlertStatus
7
8% msd01
9msrop(etAlertStatus,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[pending, valid, invalid])
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.
```

Listing D.42: Prolog file PrimaryTypesDatatypes-etAlertStatus-is.pl.

#### D.43 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassifications/etCrisisStatus-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etCrisisStatus
7
8% msd01
9msrop(etCrisisStatus,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[pending, handled, solved, closed])
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.
```

Listing D.43: Prolog file PrimaryTypesDatatypes-etCrisisStatus-is.pl.

#### D.44 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClassifications/etCrisisType-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6% etCrisisType
7
8% msd01
9msrop(etCrisisType,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12 (
13 member(AdtValue,[small, medium, huge]))
14 )
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
```

19.

Listing D.44: Prolog file PrimaryTypesDatatypes-etCrisisType-is.pl.

## D.45 File ./src-gen/prolog-ref-spec/Operations/Concepts/PrimaryTypesClasses etHumanKind-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5
6%% etHumanKind
7
8% msd01
9msrop(etHumanKind,is,[AdtValue],Result) :-
10msrVar(ptBoolean,TheResult),
11(
12(
13    member(AdtValue,[witness,victim,anonymous])
14)
15 -> TheResult = [ptBoolean,true]
16 ; TheResult = [ptBoolean,false]
17),
18 Result = TheResult
19.

```

Listing D.45: Prolog file PrimaryTypesDatatypes-etHumanKind-is.pl.

## D.46 File ./src-gen/prolog-ref-spec/Operations/Concepts/SecondaryTypesDatatypesdtSMS-is.pl

```

1%%%%%%%%%%%%%
2/* DISCONTIGUOUS PREDICATES */
3:- multifile msrop/4.
4%%%%%%%%%%%%%
5%% dtComment
6
7%msd01
8msrop(dtSMS,is,[AdtValue],Result) :-
9 msrVar(ptBoolean,TheResult),
10 msrVar(ptInteger,MaxLength),
11(
12(
13(
14    MaxLength = [ptInteger,160],
15    msrNav([AdtValue],
16        [value,length,[],leq,[MaxLength]],
17        [[ptBoolean,true]]))
18)
19 -> TheResult = [ptBoolean,true]
20 ; TheResult = [ptBoolean,false]
21)
22),
23 Result = TheResult
24.

```

Listing D.46: Prolog file SecondaryTypesDatatypes-dtSMS-is.pl.



# Glossary

<b><i>abstract actor</i></b> an actor that is not . . . . .	22
<b><i>actor</i></b> An actor is a person, organization, or external system that plays a role in one or more interactions with the system . . . . .	18
<b><i>direct actor</i></b> an actor that interacts directly with the system. It thus belongs to the environment.	22
<b><i>indirect actor</i></b> an actor that interacts indirectly with the system through a direct actor. It thus belongs the domain but not to the environment. . . . .	22
<b><i>system operation</i></b> a functionality of the system that can be triggered by a message sent by an actor belonging to the environment. . . . .	18



# Bibliography

- [1] Guelfi, N.: Messir: A Scientific Method for the Software Engineer. to be published (2017)
- [2] Armour, F., Miller, G.: Advanced Use Case Modeling: Software Systems. Addison-Wesley (2001)
- [3] ISO/IEC: ISO/IEC 25010 - Systems and software engineering - Systems and software Quality Requirements and Evaluation (SQuaRE) - System and software quality models. (2011) ISO/IEC 13211-1.