HuGaDB v1 vs v2 vs v3 vs v4 — what each "version" means in this project

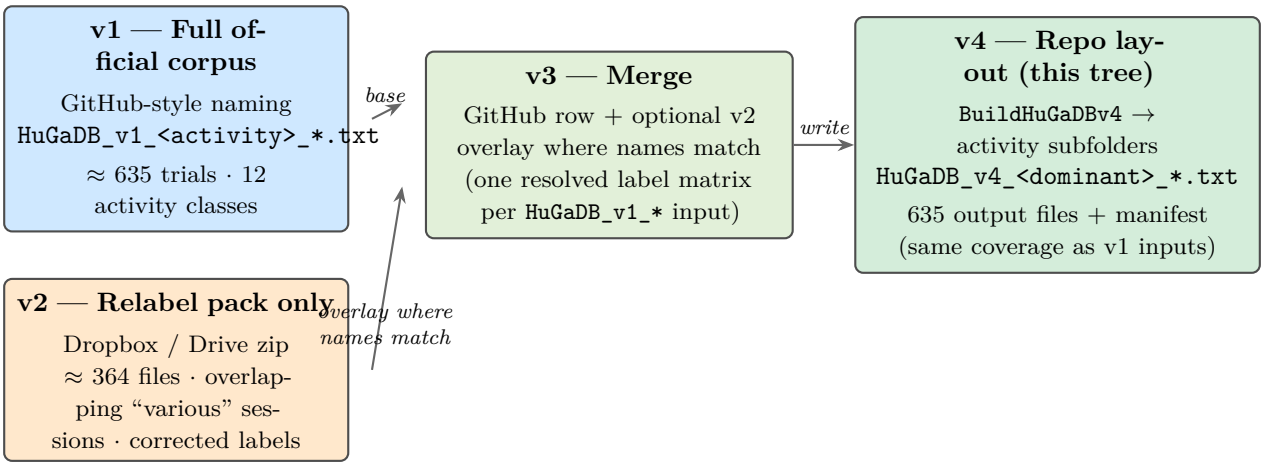

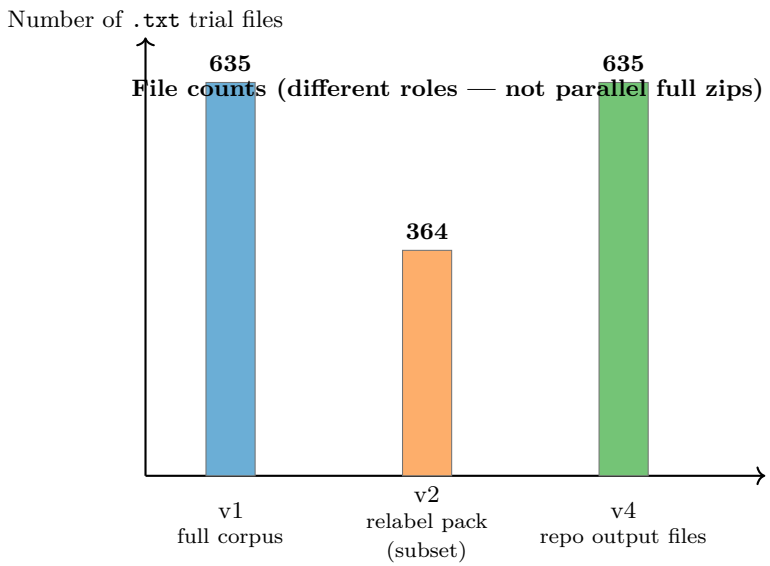



v1. The reference release: every trial described in the paper, including single-activity files and long multi-activity "various" sessions. Filenames use the v1 activity token; dense labels are in the last column.

v2. Not a second full dataset: a smaller pack of re-annotated overlapping sessions (often still named `...various...` in the official zip) with improved labels for sit/stand-type segments. `BuildHuGaDBv4` uses it only where a file matches a GitHub "various" trial.

v3. The *merge* step: for each GitHub file, keep v1 labels or overlay v2 relabels when the v2 matrix matches; record provenance in the manifest.

v4. The *layout* step for this repo: one output file per GitHub input, activity subfolders, `HuGaDB_v4_*` names from dominant motion, plus `hugadb_v4_manifest.json` for single- vs multi-activity protocol and provenance.

Sources: `data/HuGaDB/README_HuGaDB_v3.md` · `data/HuGaDB/README_HuGaDB_v4.md` · `hugadb_v4_build_summary.json`