


Supplementary Figure 7 | Native benchmark sensitivity and execution scope

Independent gate fractions, family-size sensitivity and model-stage costs are audited separately.

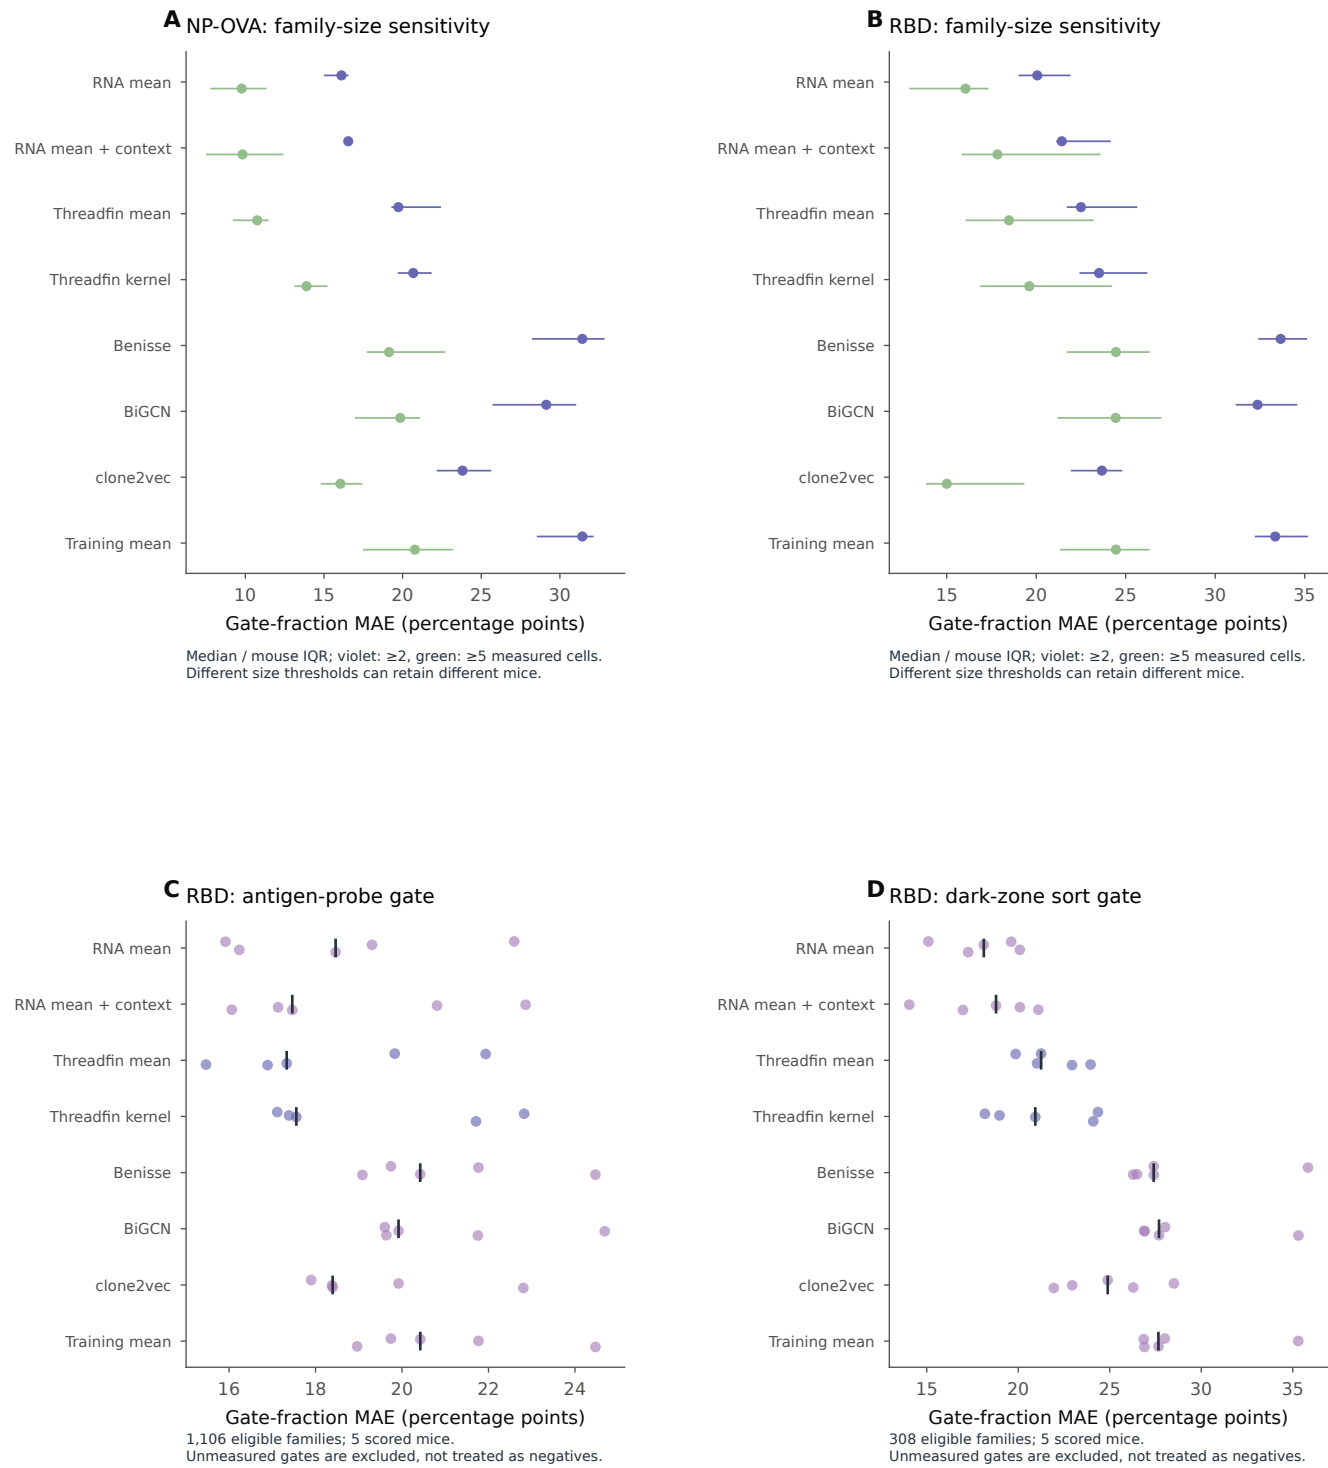

E Measured execution uses the published model stages

Model / stage	NP-OVA seconds	RBD seconds	Resource scope
Benisse · R	586.0	15,172.1	CPU 2 threads; model stage
BiGCN · graph_and_training	3,856.5	22,915.7	CPU 2 threads; model stage
clone2vec · clone2vec	179.3	218.0	CPU 2 threads; model stage
Threadfin_mean · Threadfin_mean	0.9	3.4	CPU 2 threads; model stage
Threadfin_kernel · Threadfin_kernel	1.1	5.6	CPU 2 threads; model stage

Counts/IDs, dependency versions, peak RSS and failed attempts are in the audit tables. PCA preprocessing and downstream readout are outside these timings. Benisse additionally needs its pretrained encoder; BiGCN consumes that encoding. These timings are not an end-to-end package speed ranking.