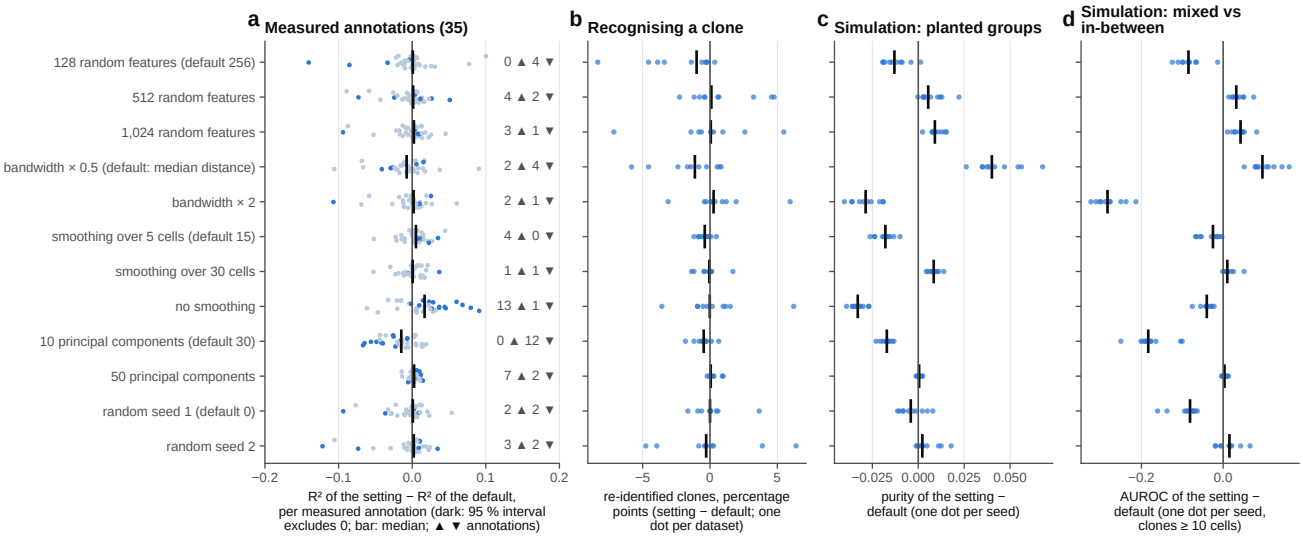
a
Measured annotations (35)
b
Recognising a clone
c
Simulation: planted groups
d
Simulation: mixed vs in-between
128 random features (default 256)
512 random features
1,024 random features
bandwidth × 0.5 (default: median distance)
bandwidth × 2
smoothing over 5 cells (default 15)
smoothing over 30 cells
no smoothing
10 principal components (default 30)
50 principal components
random seed 1 (default 0)
random seed 2
0 ▲ 4 ▼
4 ▲ 2 ▼
3 ▲ 1 ▼
2 ▲ 4 ▼
2 ▲ 1 ▼
4 ▲ 0 ▼
1 ▲ 1 ▼
13 ▲ 1 ▼
0 ▲ 12 ▼
7 ▲ 2 ▼
2 ▲ 2 ▼
3 ▲ 2 ▼
−0.2
−0.1
0.0
0.1
0.2
R² of the setting − R² of the default, per measured annotation (dark: 95 % interval excludes 0; bar: median; ▲ ▼ annotations)
−5
0
5
re-identified clones, percentage points (setting − default; one dot per dataset)
−0.025
0.000
0.025
0.050
purity of the setting − default (one dot per seed)
−0.2
0.0
AUROC of the setting − default (one dot per seed, clones ≥ 10 cells)