

Errata

Page 111:

Third Paragraph: Then we subtract the smallest number, i.e., the lower bound, from the largest number, i.e., the upper bound.

Page 181:

Table 4-5


	Avg. dis. to other data	Avg. dis. to splinter data (d)	Differences between two columns
a	$(3+6) \div 2 = 4.5$	4	$3.5 - 4 = -0.5$
b	$(3+2) \div 2 = 2.5$	7	$2.5 - 7 = -4.5$
c	$(6+2) \div 2 = 4$	6	$4 - 6 = -2$

Page 182:

Fourth paragraph: We do not write the rest; the same process applies, and the algorithm performs these steps iteratively until all data points are analyzed as separate points (each data point is a cluster itself) or a threshold is reached, which means the algorithm will stop.

Page 202:

The purity computing equation should be as follows:

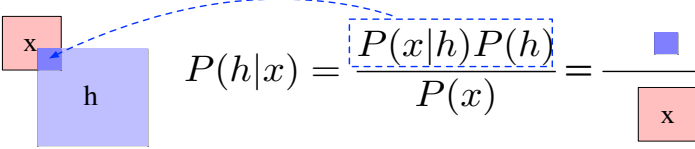

$$P(h|x) = \frac{P(x|h)P(h)}{P(x)} = \frac{\text{blue square}}{\text{red square}}$$

$$Purity = \frac{16 + 8 + 6}{66} = 0.45$$

Page 452:

Figure 9-1

Page 1072:

$$Kappa = \frac{P_o - P_e}{1 - P_e} = \frac{0.9 - 0.355}{1 - 0.355} = \frac{0.545}{0.645} = 0.844$$