

Nama : Rhainy Aulia

NPM : 232310034

1. Menyalakan Laragon
2. menjalankan my-api-gateway dengan “node server”
3. Membuat Folder melalui CMD

```
PS C:\Users\LEN> cd C:\Users\LEN\Documents\MICROSERVICES
PS C:\Users\LEN\Documents\MICROSERVICES> mkdir auth-services

Directory: C:\Users\LEN\Documents\MICROSERVICES

Mode                LastWriteTime         Length Name
----                -
d-----           5/6/2026   8:11 PM             auth-services

PS C:\Users\LEN\Documents\MICROSERVICES> cd auth-services


C:\Users\LEN\Documents\MICROSERVICES\auth-services> npm init -y
Wrote to C:\Users\LEN\Documents\MICROSERVICES\auth-services\package.json:

{
  "name": "auth-services",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "keywords": [],
  "author": "",
  "license": "ISC",
  "type": "commonjs"
}
```

4. Install Dependency

```
C:\Users\LEN\Documents\MICROSERVICES\auth-services> npm install express passport passport-google-auth20 express-session
added 189 packages, and audited 110 packages in 11s
38 packages are looking for funding
run 'npm fund' for details
found 0 vulnerabilities
C:\Users\LEN\Documents\MICROSERVICES\auth-services>
```

5. Membuat Struktur Folder

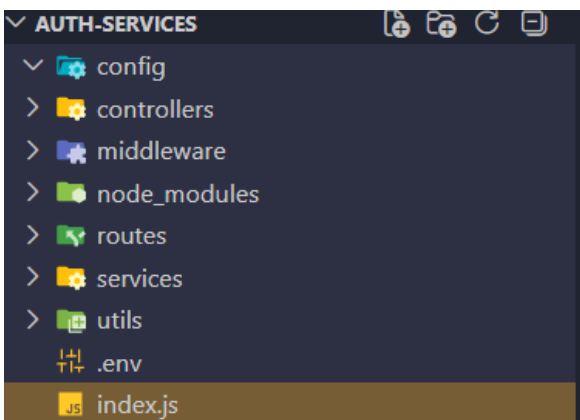

6. Mengisi .env

```
1 PORT=3003
2 NODE_ENV=development
3
4 GOOGLE_CLIENT_ID=
5 GOOGLE_CLIENT_SECRET=
6 GOOGLE_CALLBACK_URL=http://localhost:3003/auth/google/callback
7
8 JWT_SECRET=1bik_b3st
9 JWT_EXPIRE=7d
10
11 SESSION_SECRET=t1_1bik_b3st
12
13 USER_SERVICE_URL=http://localhost:3002
```

7. Setup Google OAuth

- a. daftar ke <https://console.cloud.google.com>
- b. create project
- c. Pilih APIs & Services → Credentials → Create Credentials → OAuth Client ID
- d. Isi form yang memang diminta, terutama bagian Authorized Javascript Origins & Authorized redirect URI

8. Memasukkan GOOGLE_CLIENT_ID & GOOGLE_CLIENT_SECRET dari JSON yang didapat setelah proses sebelumnya selesai ke .env
9. Membuat file jwt.js (utils), passport.js (config), auth.js (middleware), dan authRoutes.js (routes) yang berfungsi untuk autentikasi Google, pengelolaan JWT, proteksi endpoint, serta routing pada Auth Service.
10. Mengisis Server Utama [index.js](#)
11. Melakukan testing dengan menjalankan “node [index.js](#)” di cmd

```
C:\Users\LEN\Documents\MICROSERVICES\auth-services> node index.js
o injected env (9) from .env // tip: % custom filepath { path: '/custom/path/.env' }
Server running on port 3003
```

12. Buka <http://localhost:3003/auth/google> di browser lalu login dengan akun google yang dipakai untuk akun <https://console.cloud.google.com>, jika berhasil akan muncul JSON yang berisi Token

- Value : Bearer [TOKEN]

