SAR Statistics

For paring

On 11/01/10

CPU 0 for paring

Legend: User — System — Waiting I/O — Steal — Nice — Idle
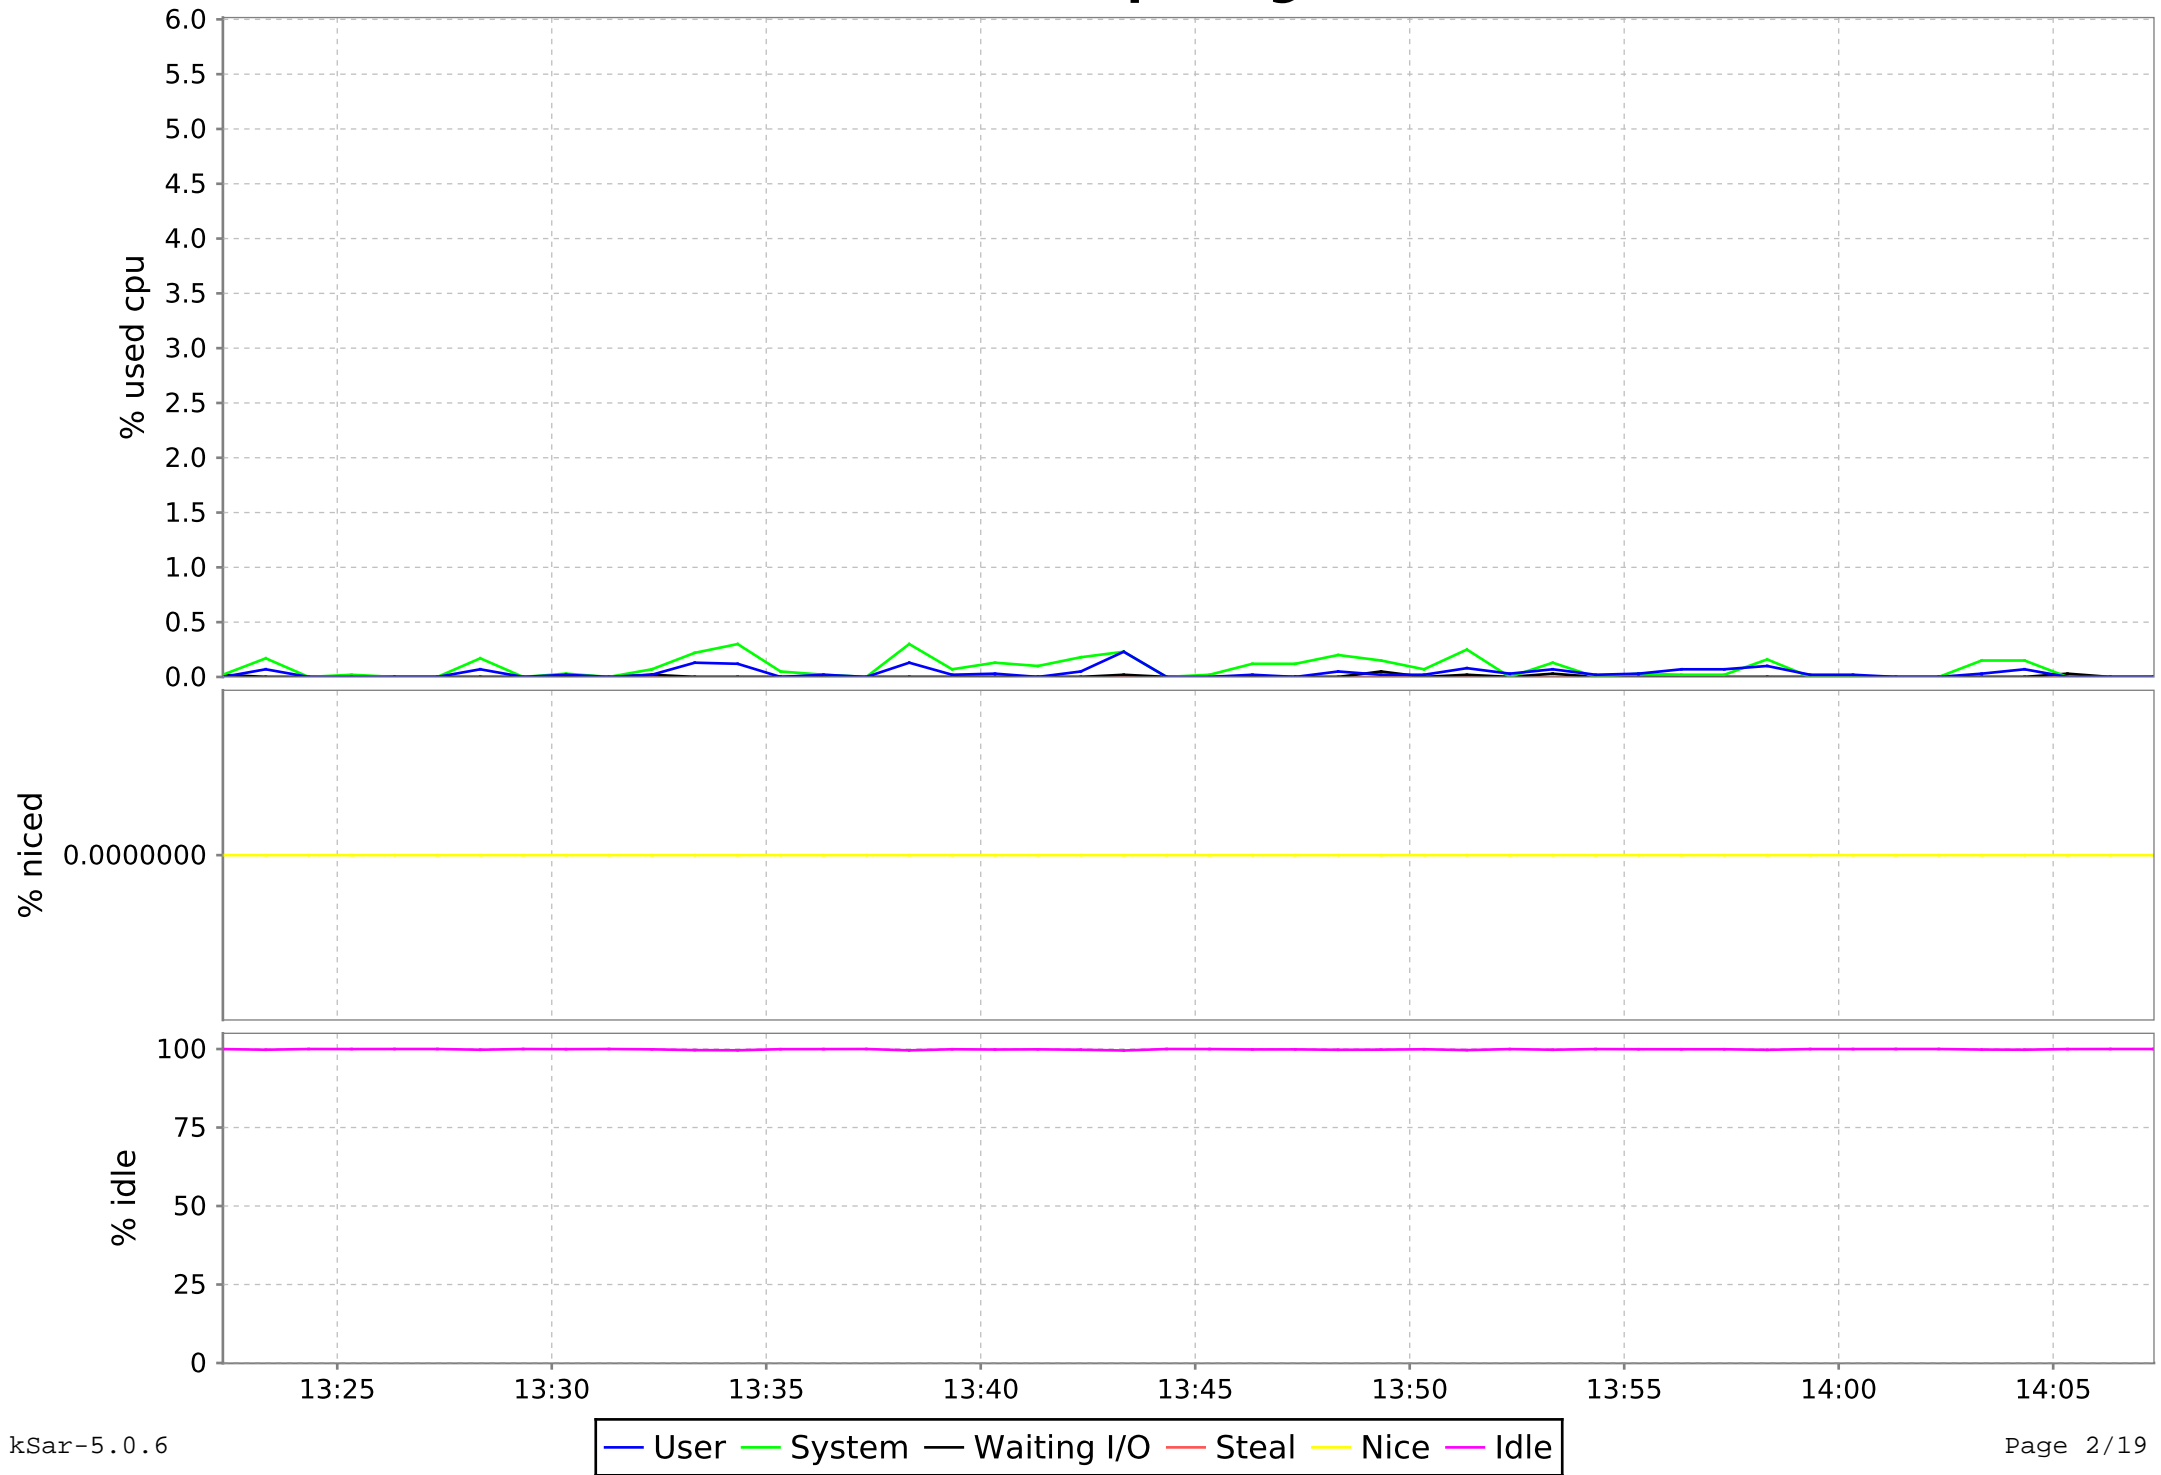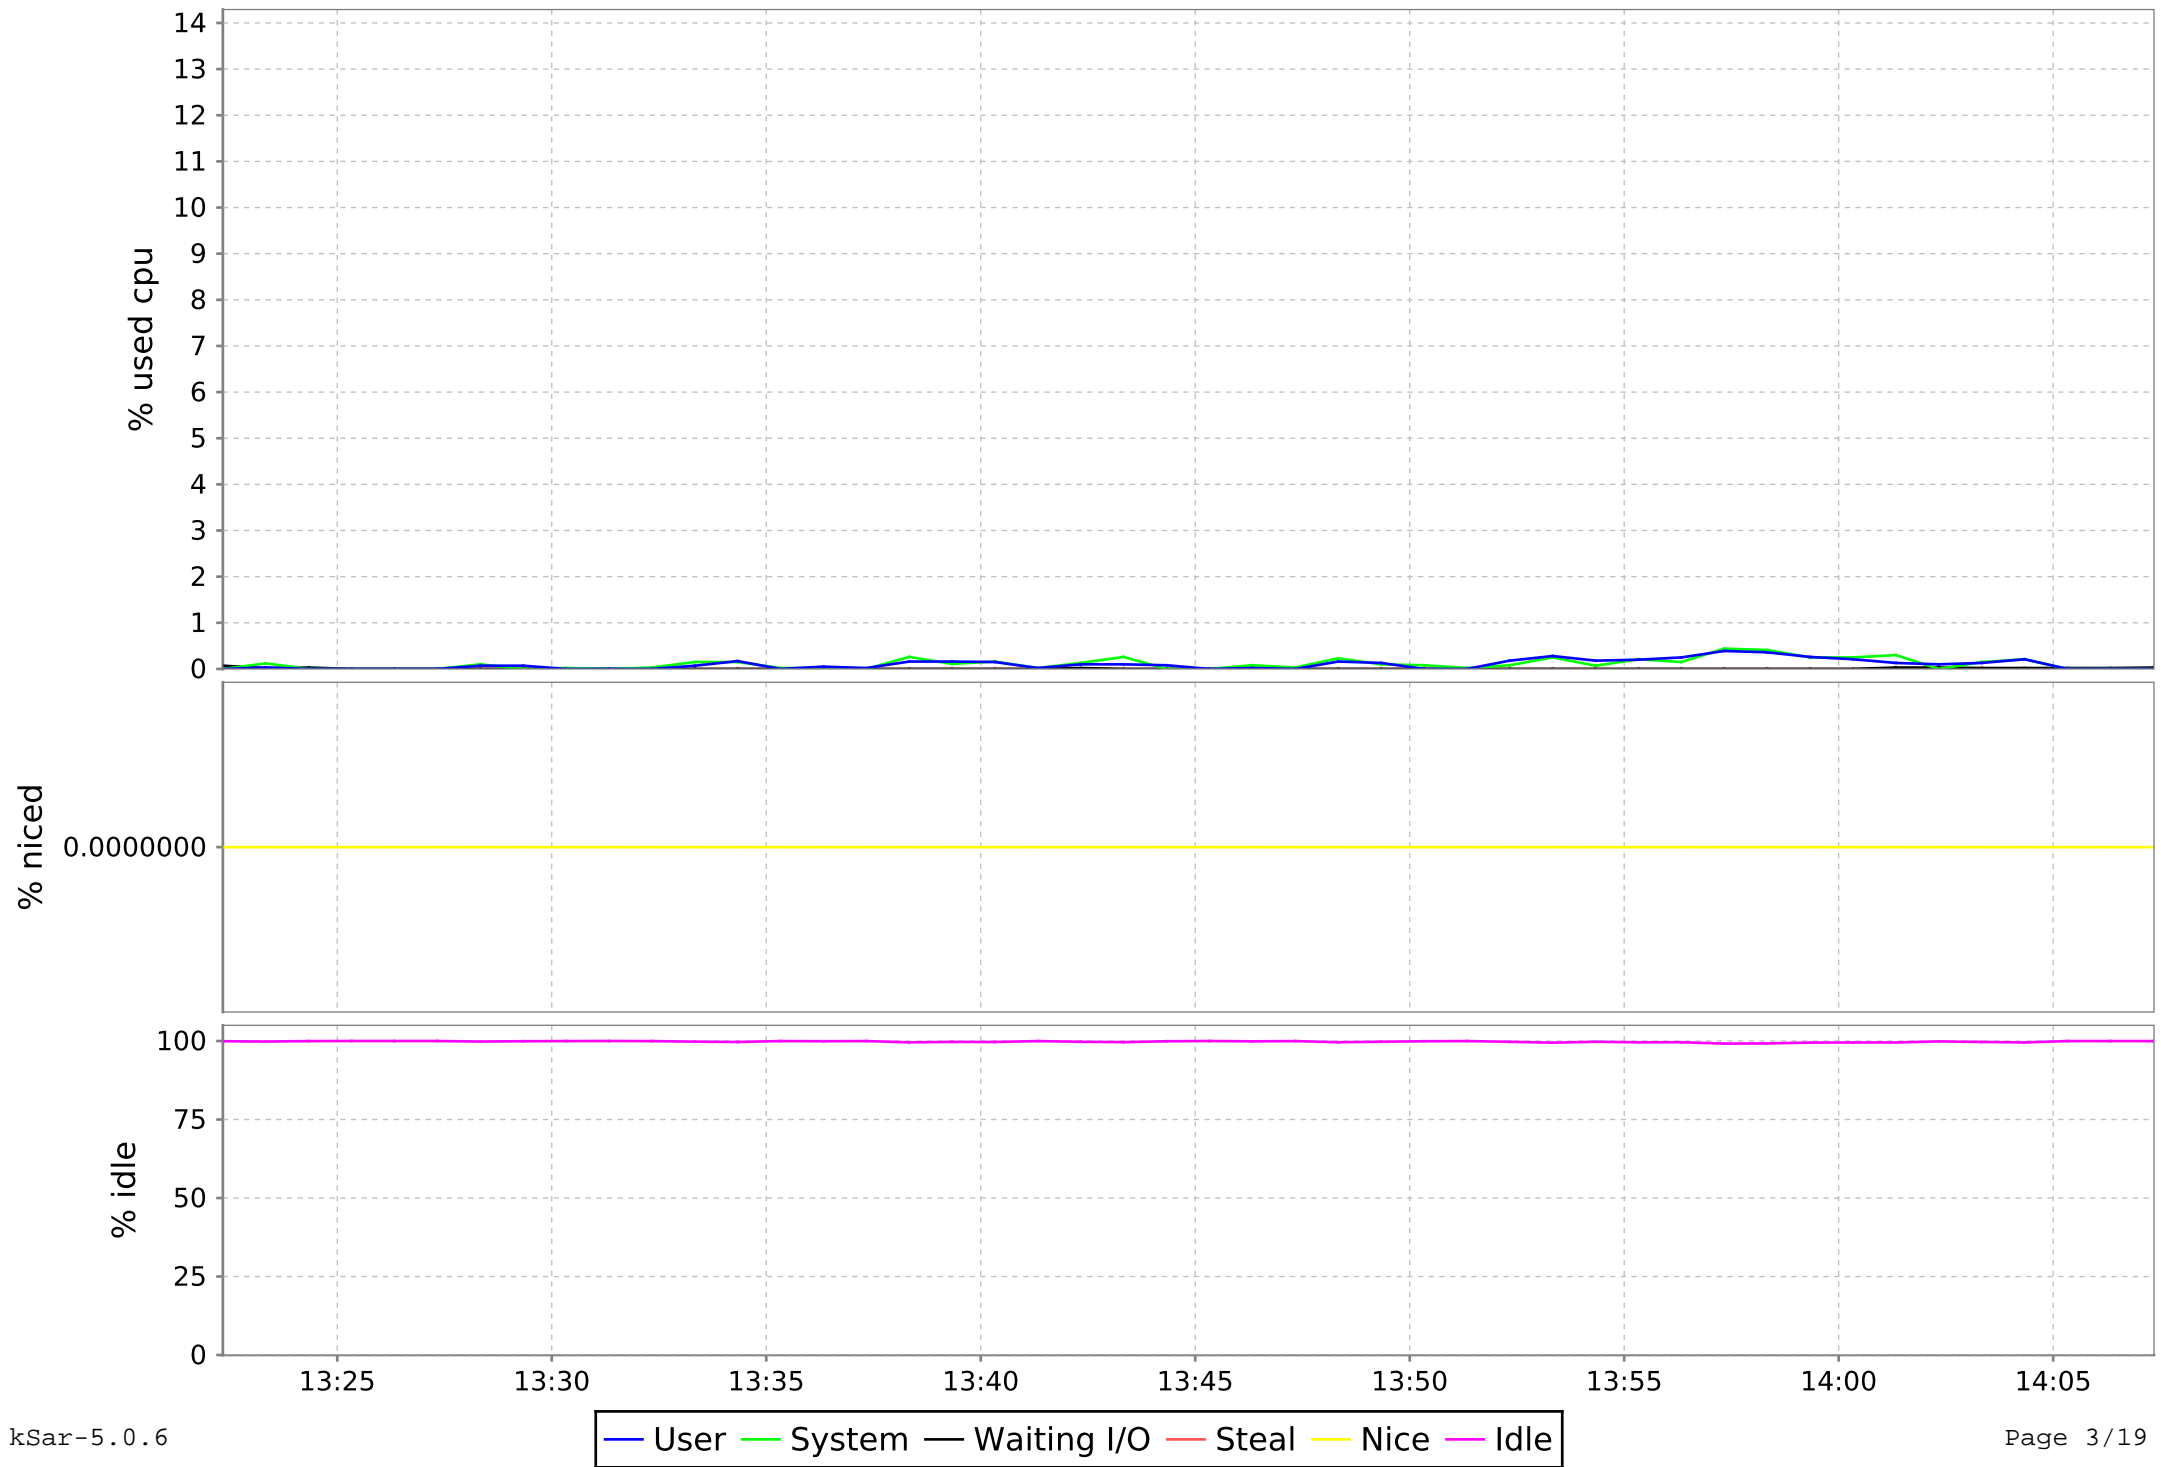
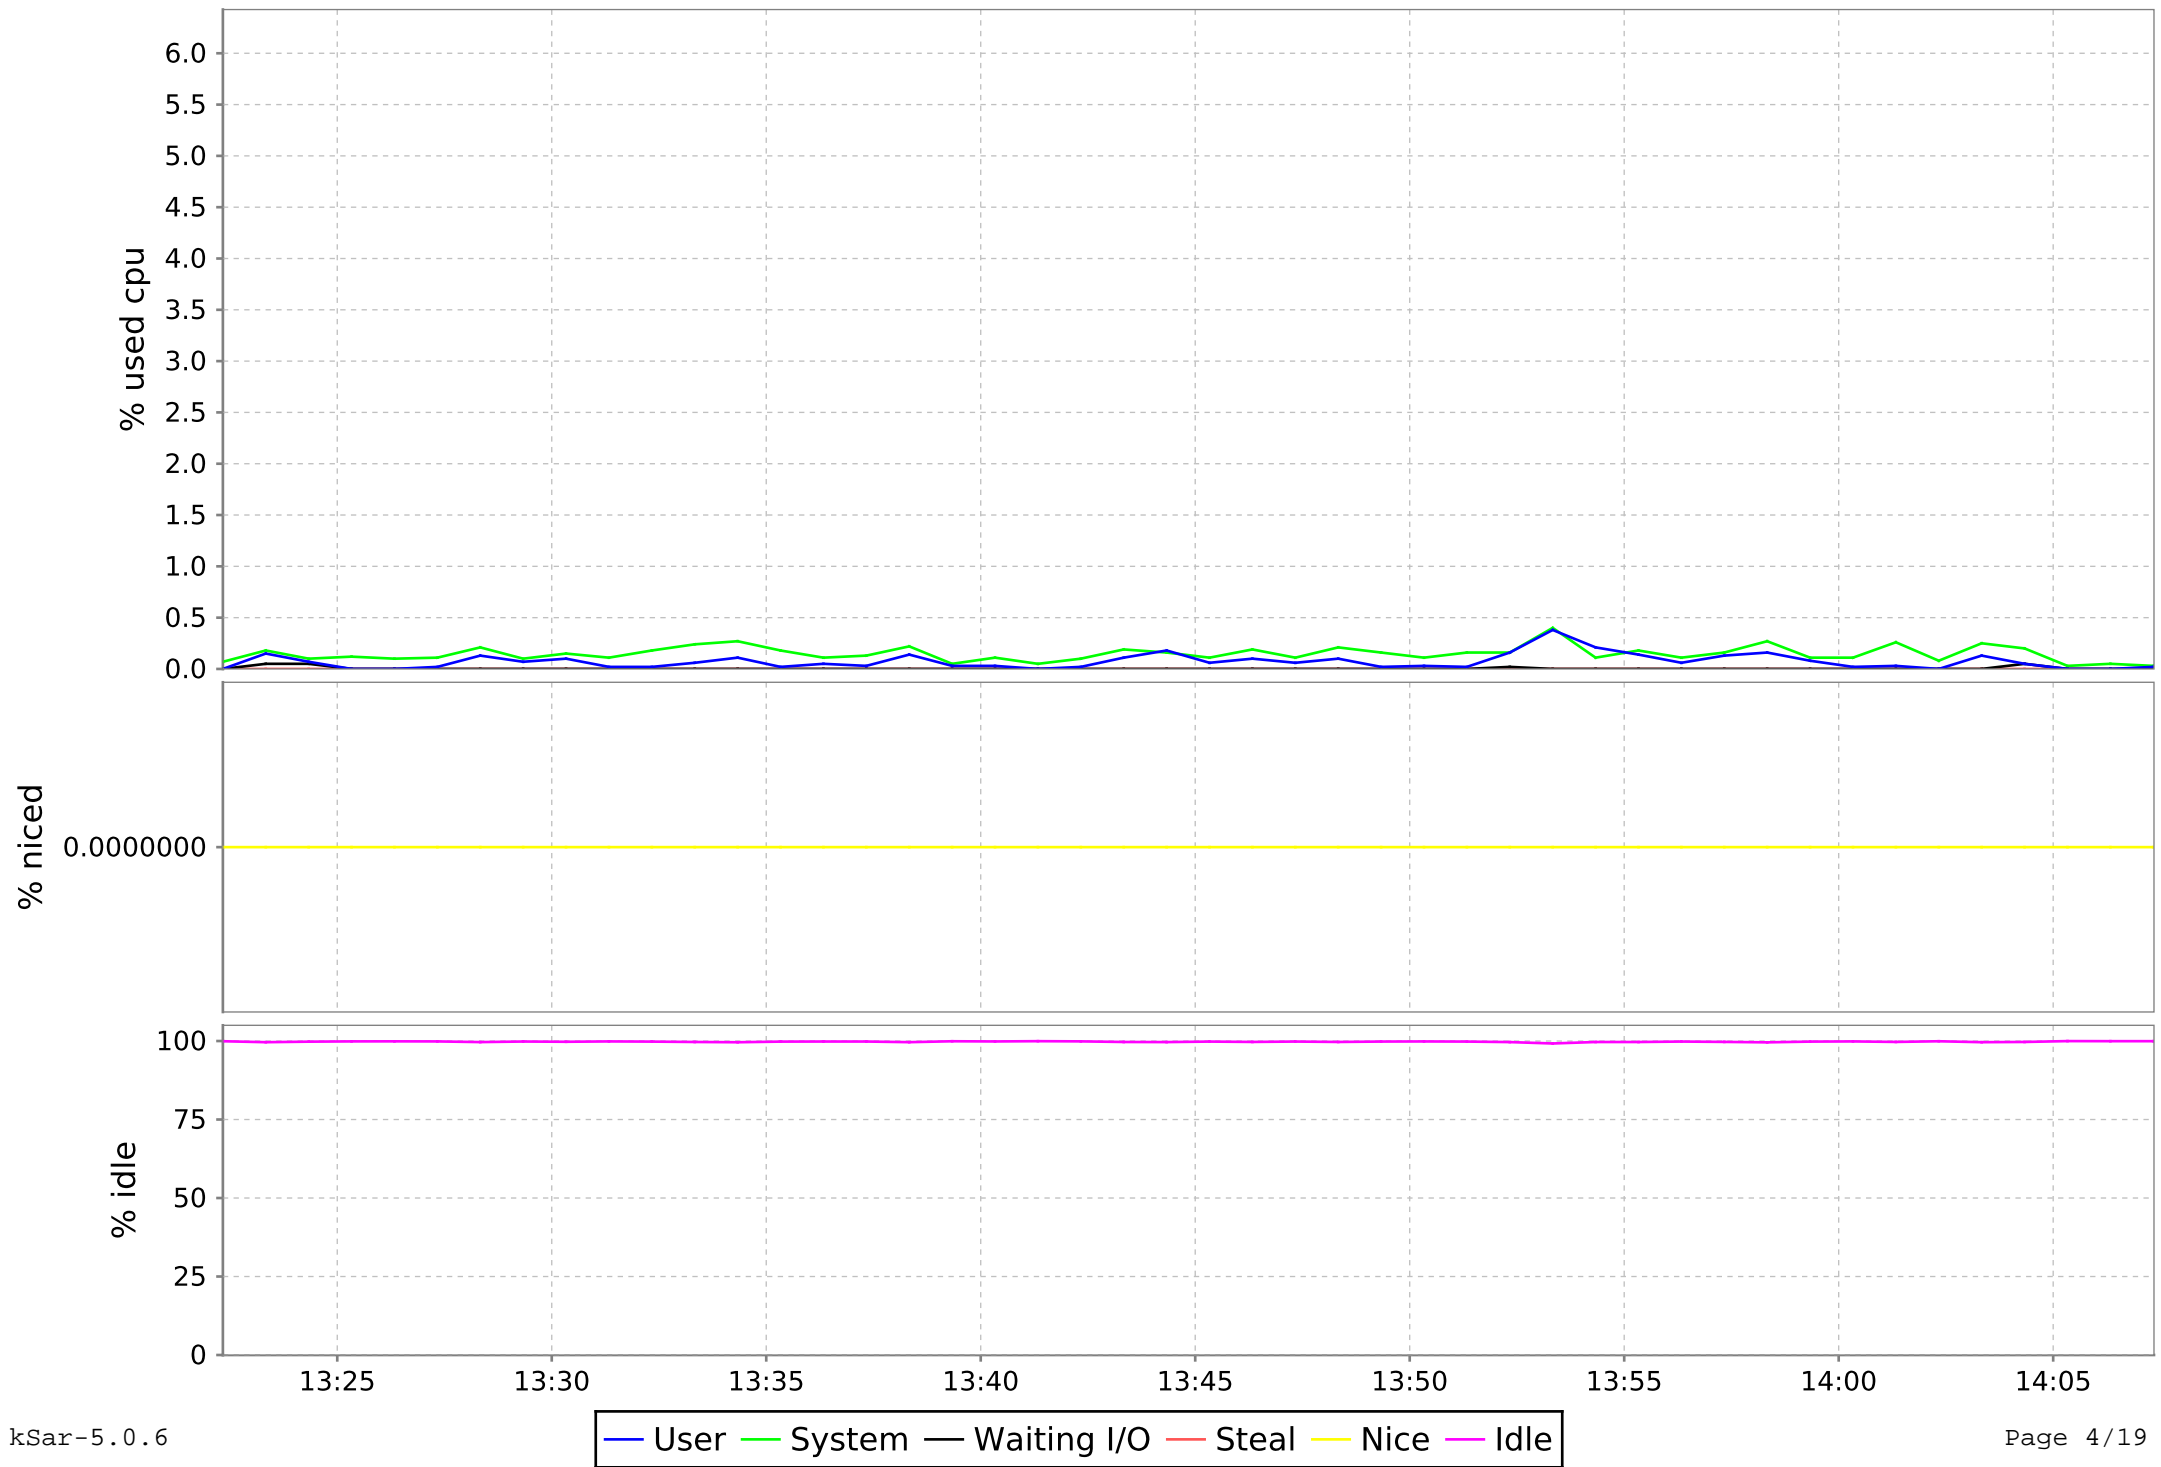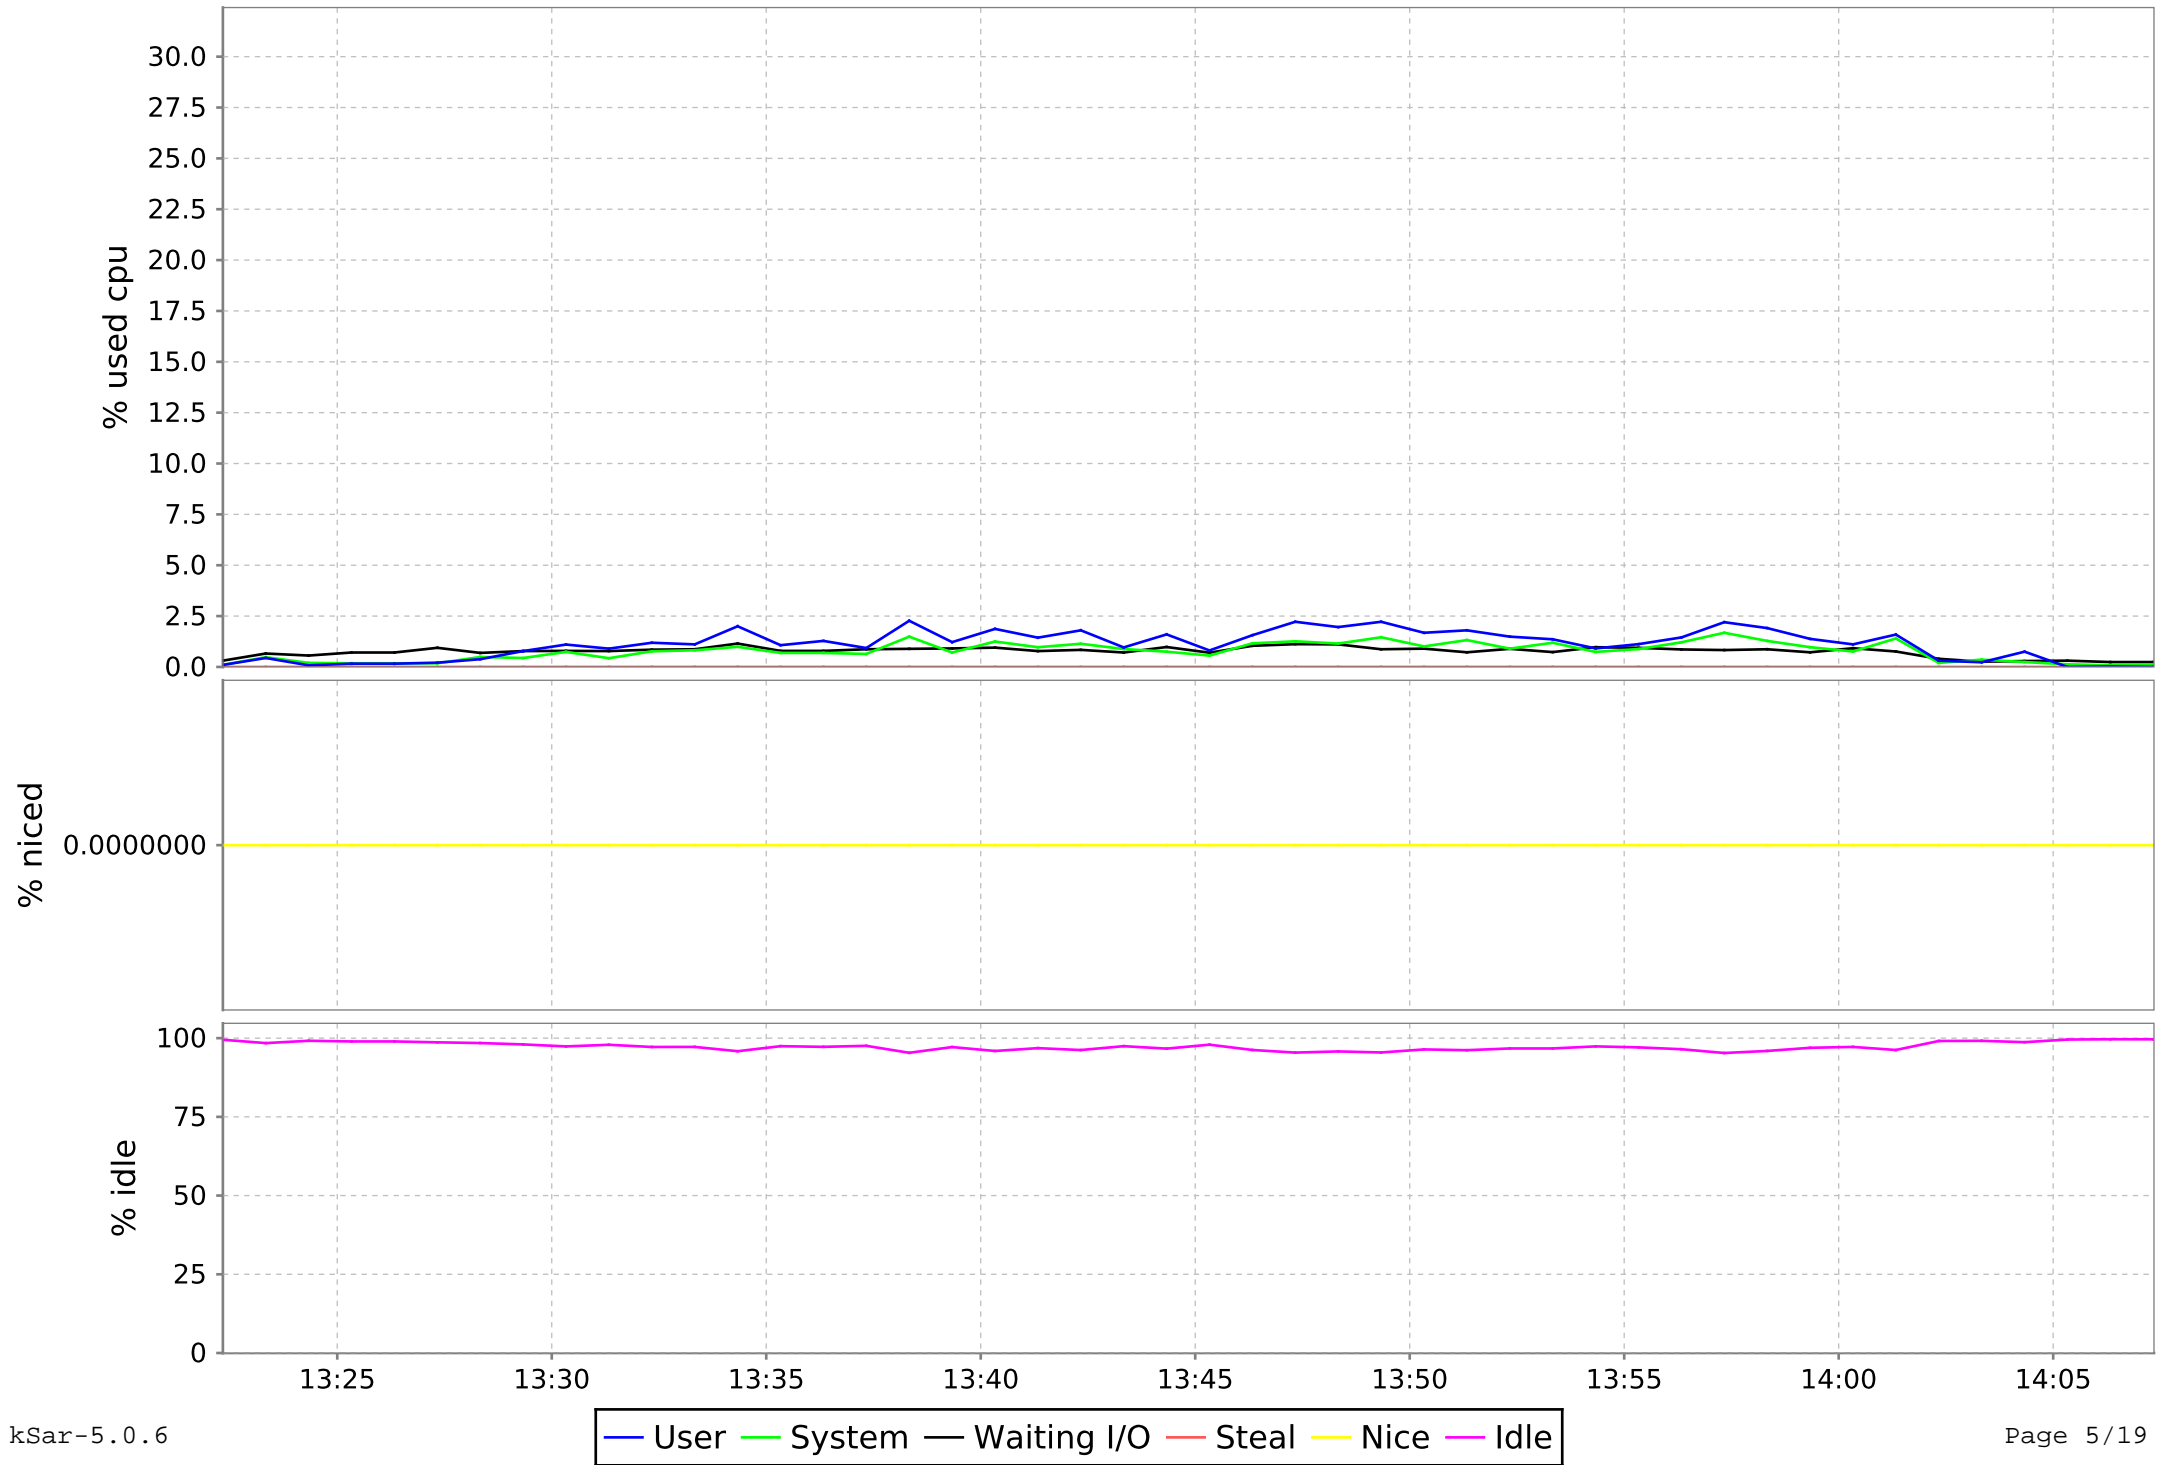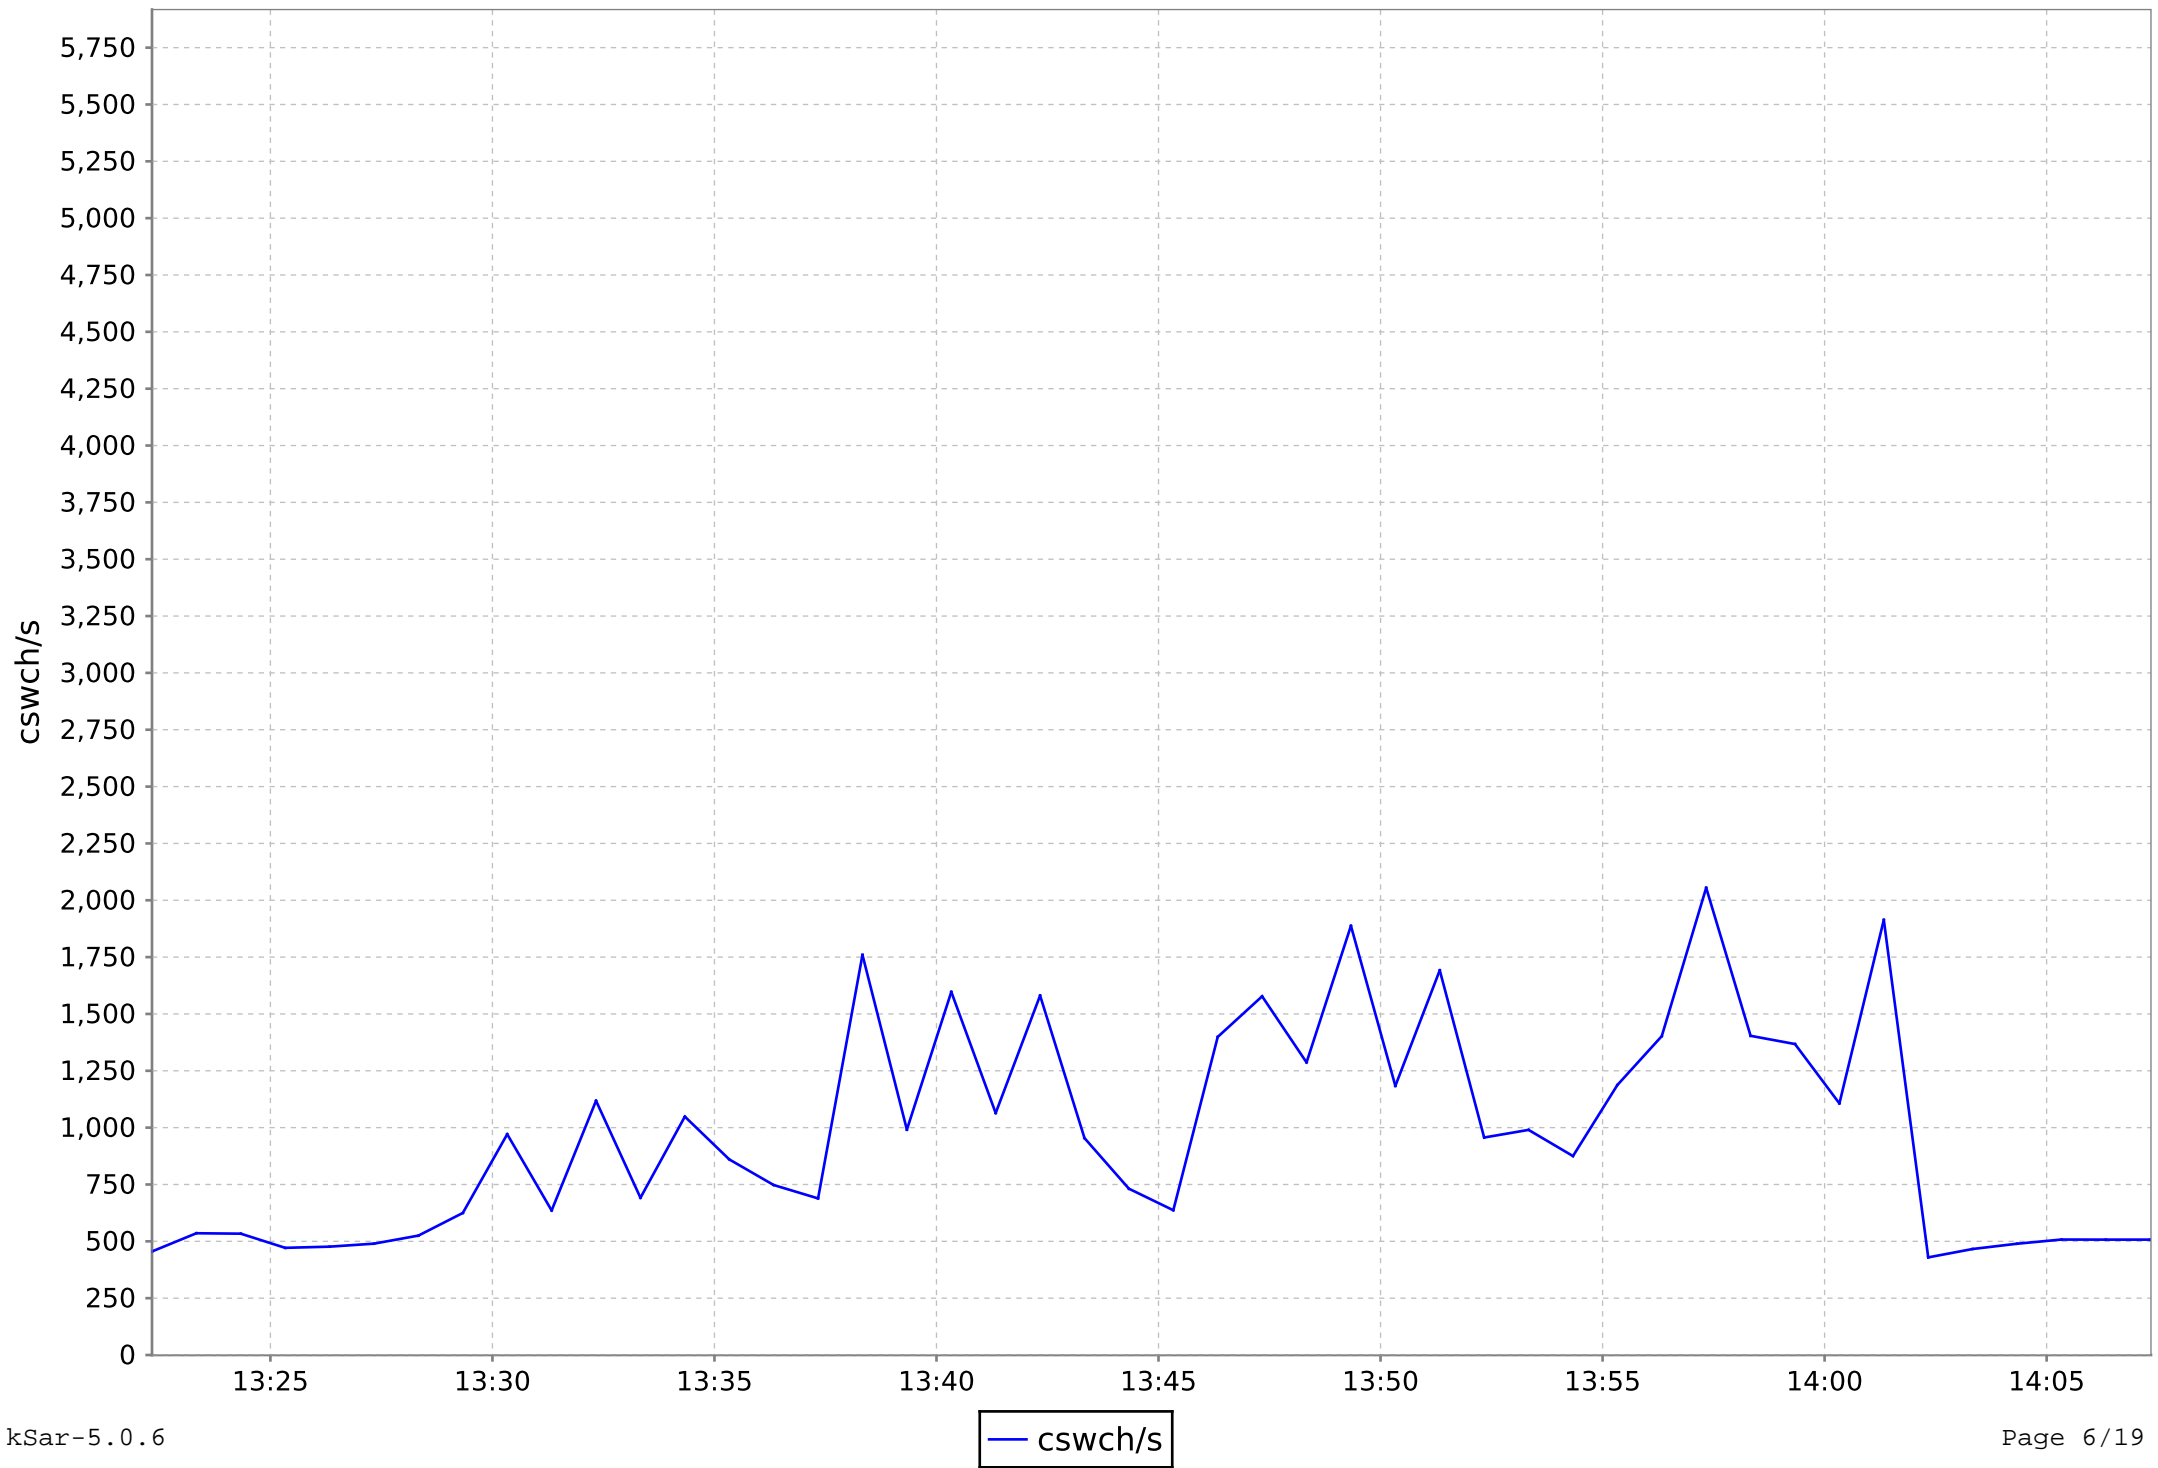# CPU 1 for paring

CPU 2 for paring

CPU 3 for paring

Contexts for paring
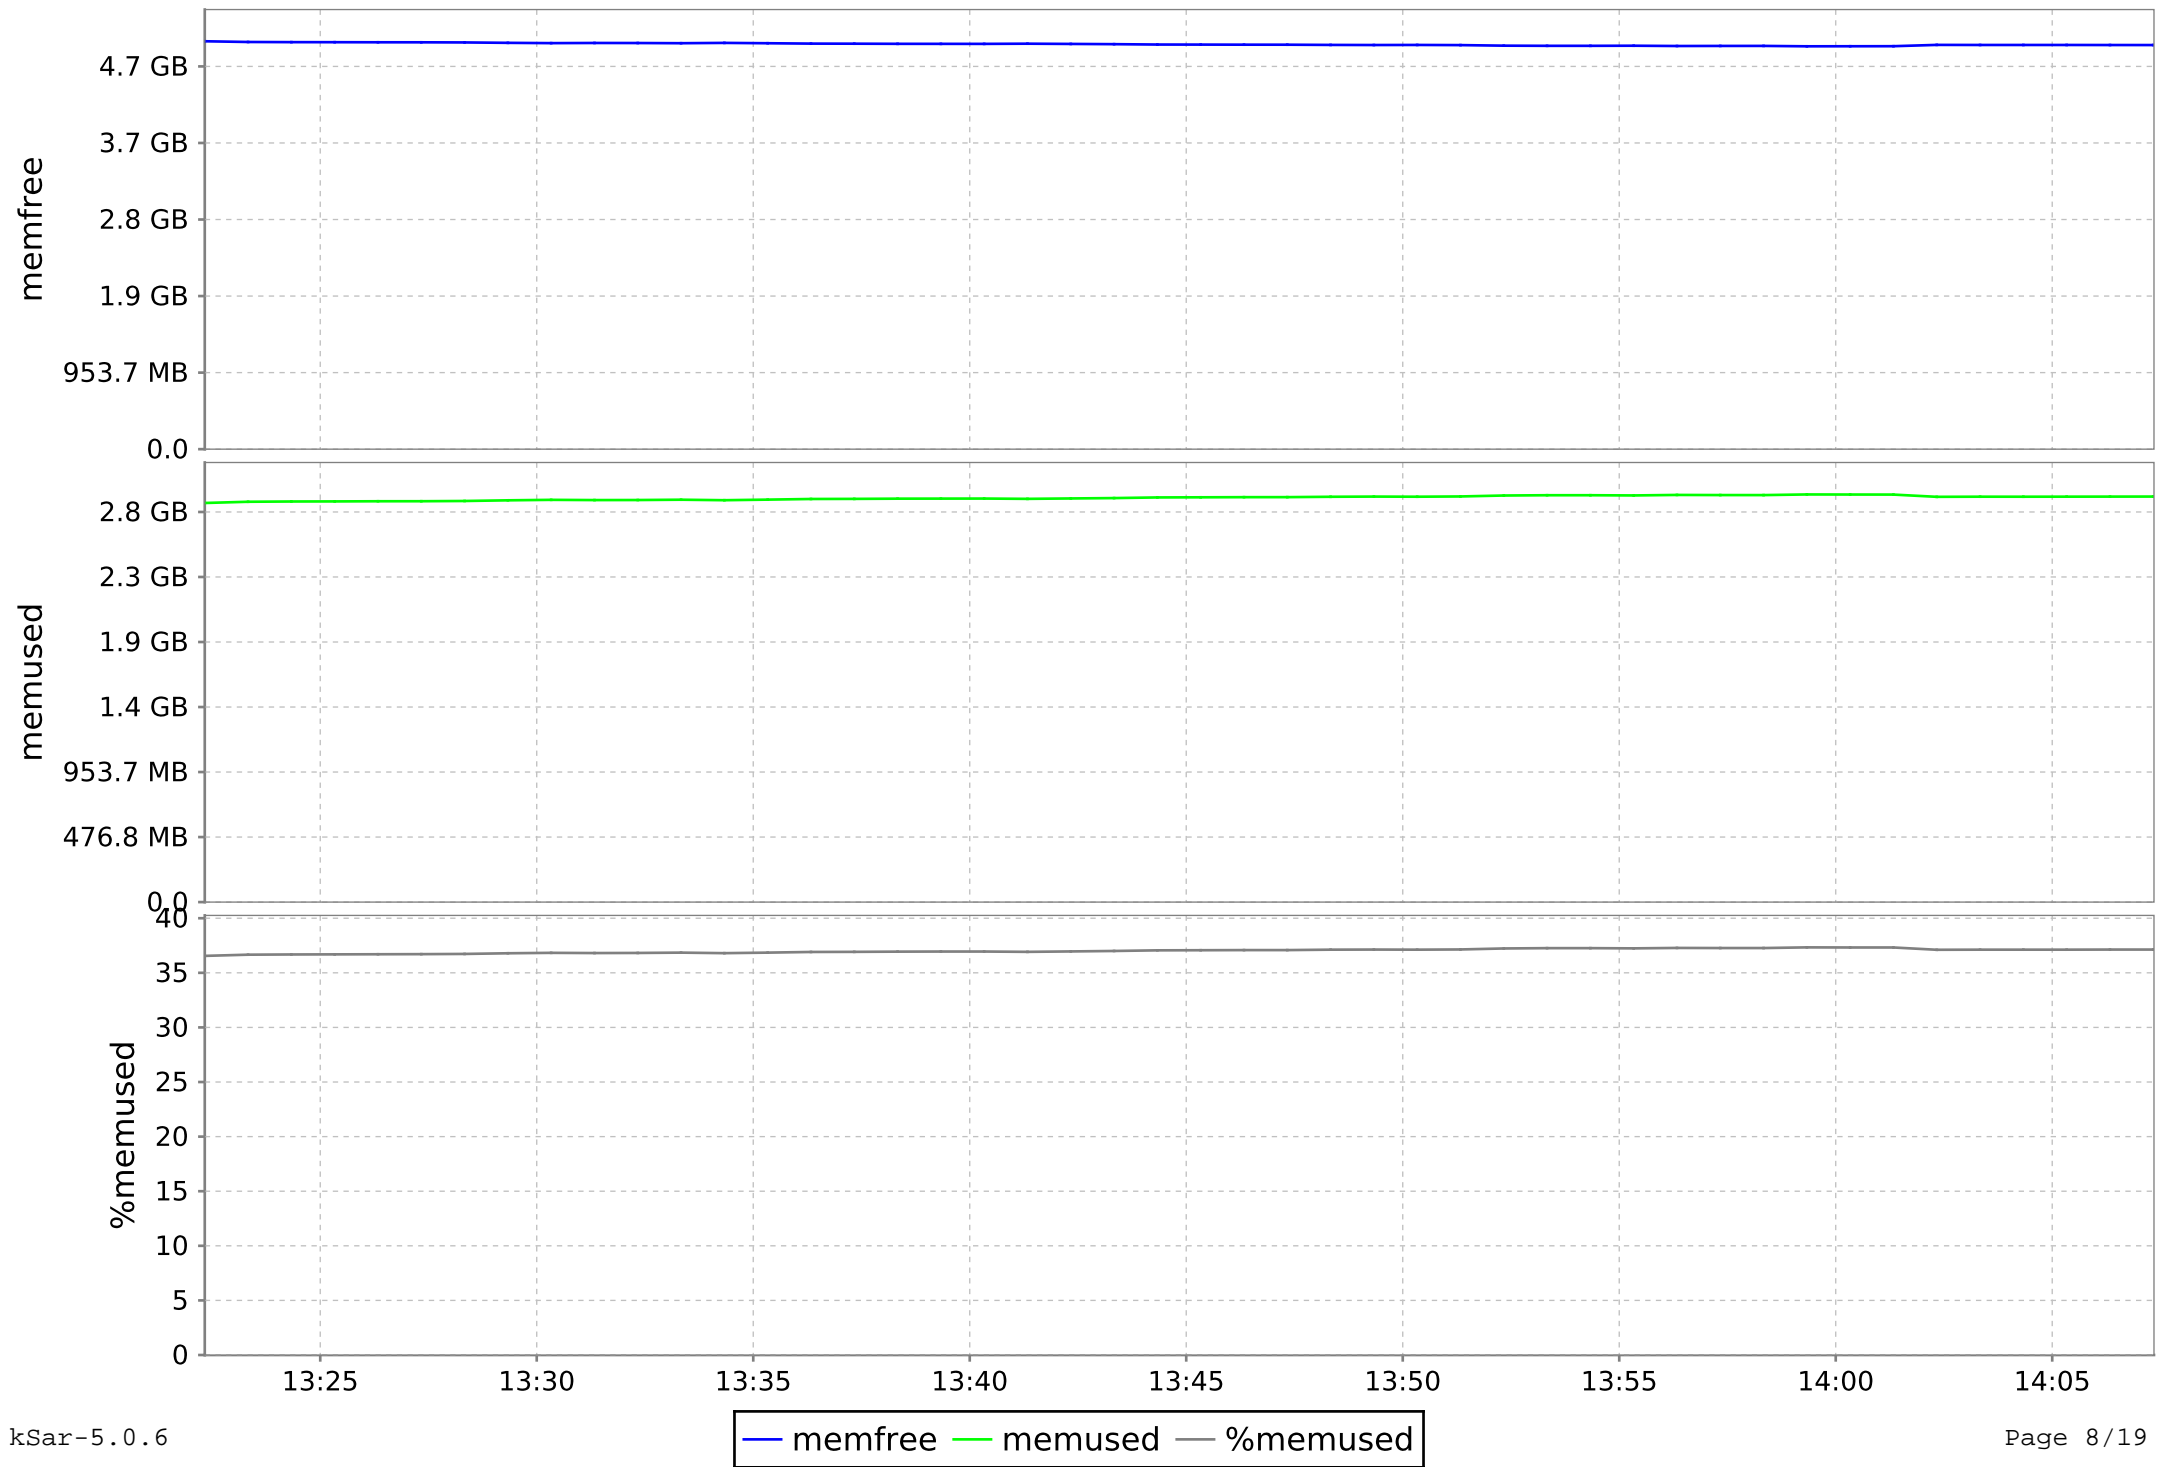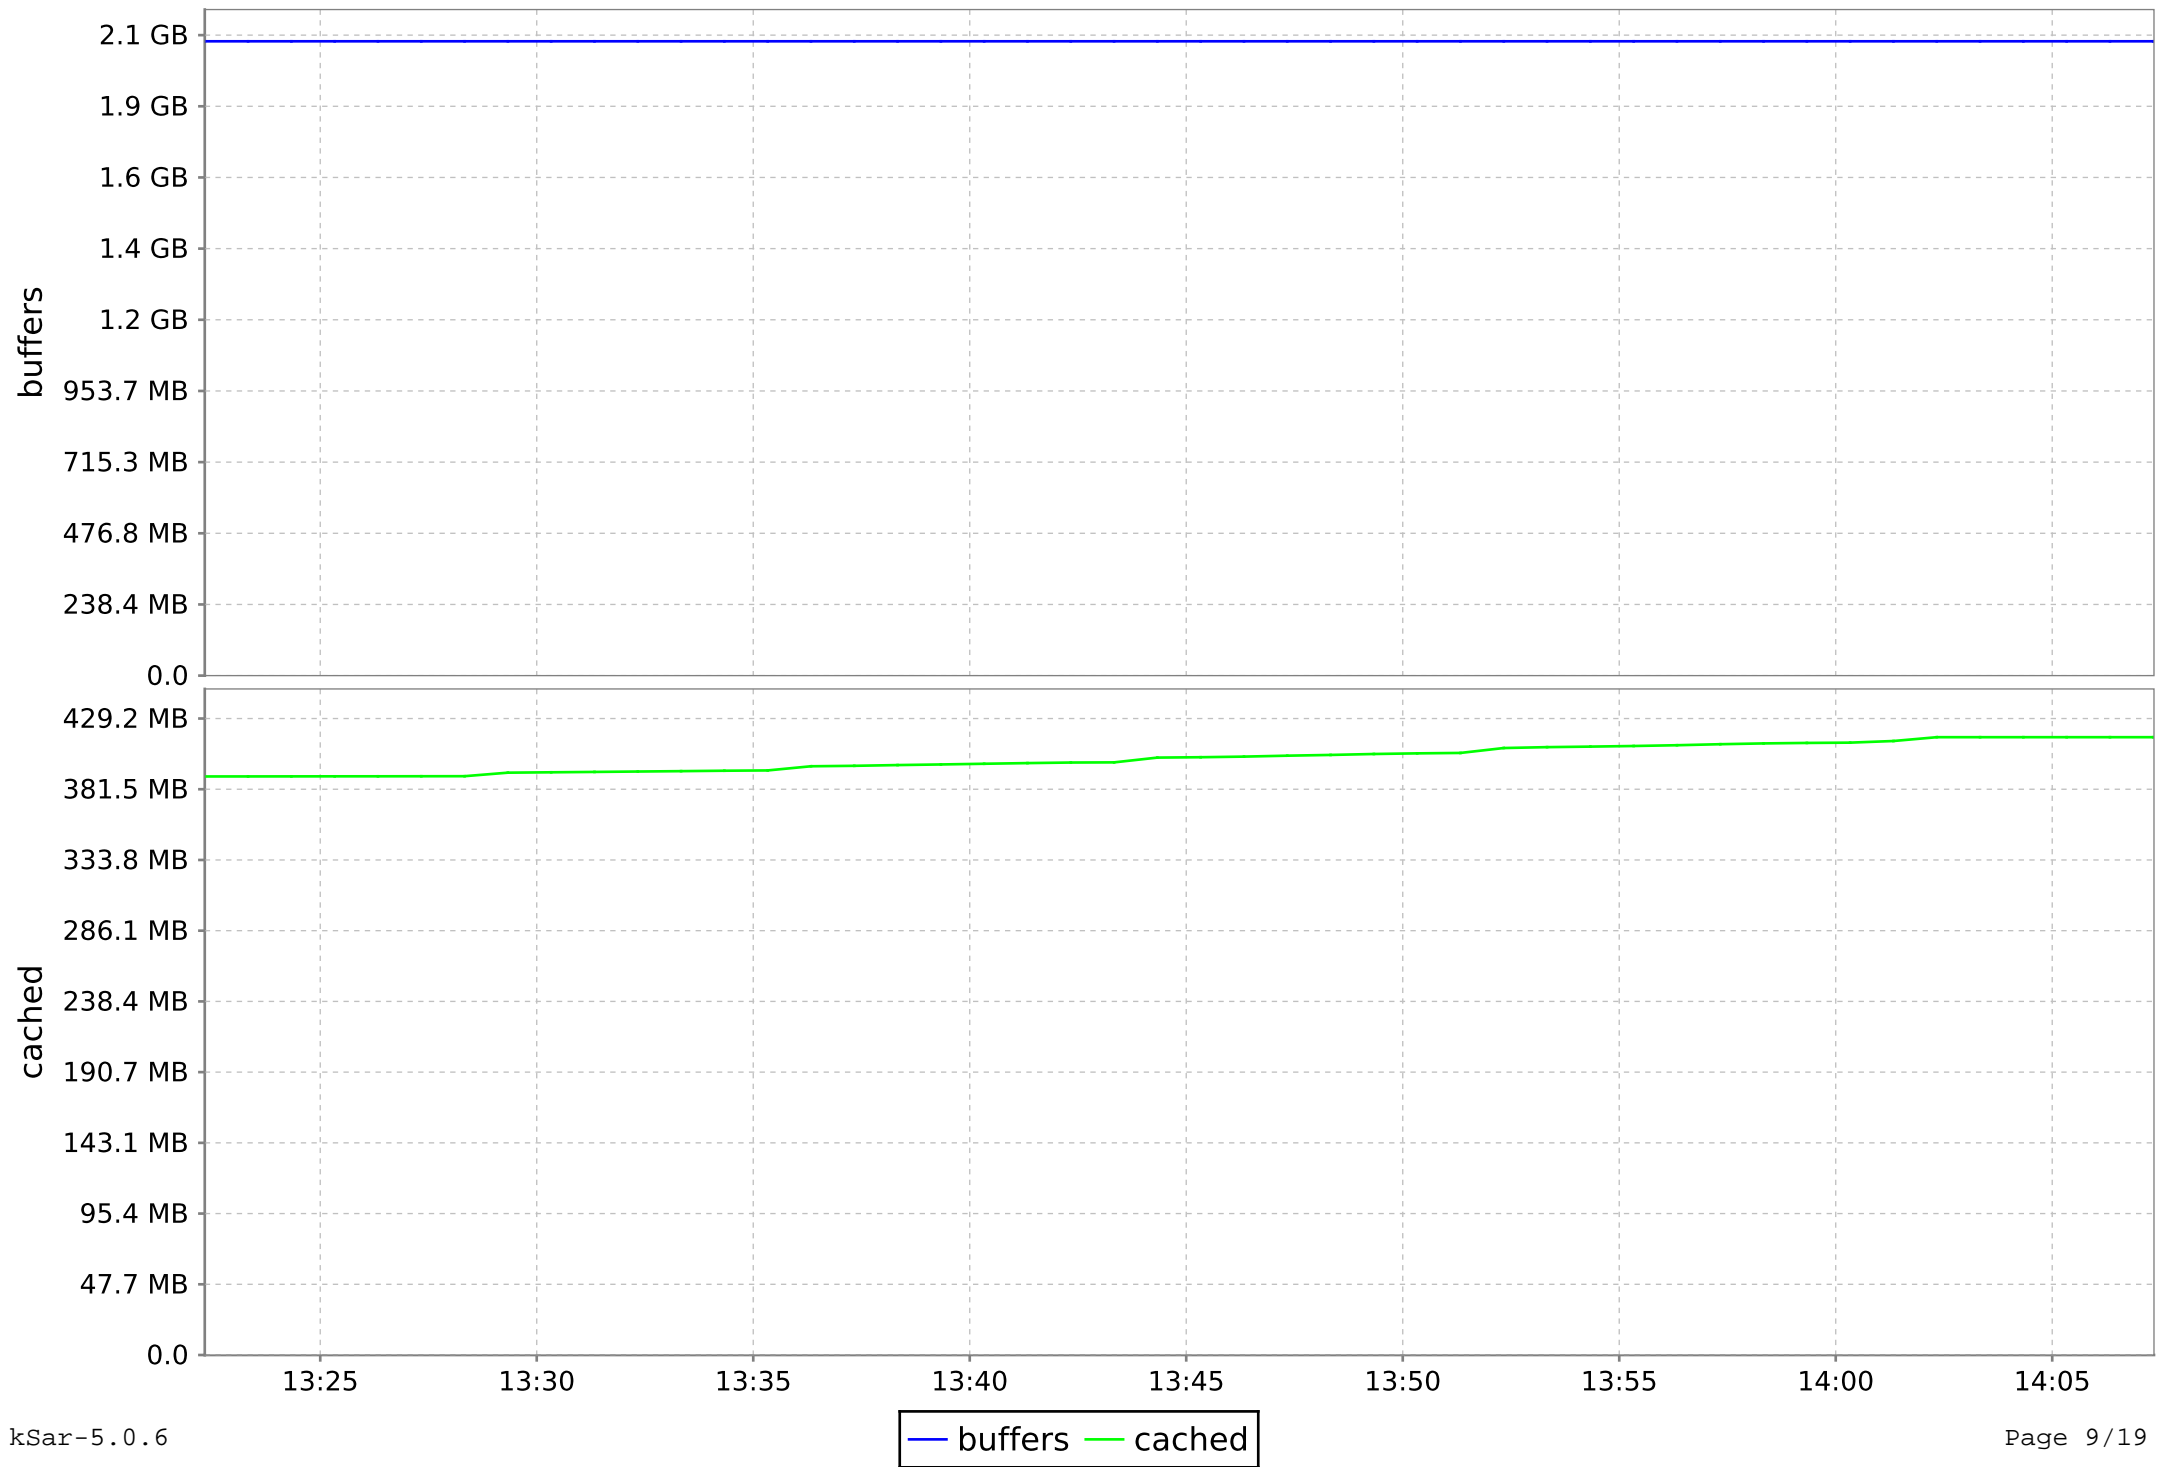
cswch/s

I/O for paring

Legend: Transfer/s — Block read/s — Block write/s — Write/s — Read/s

Memory Usage for paring

Legend: memfree   memused   %memused
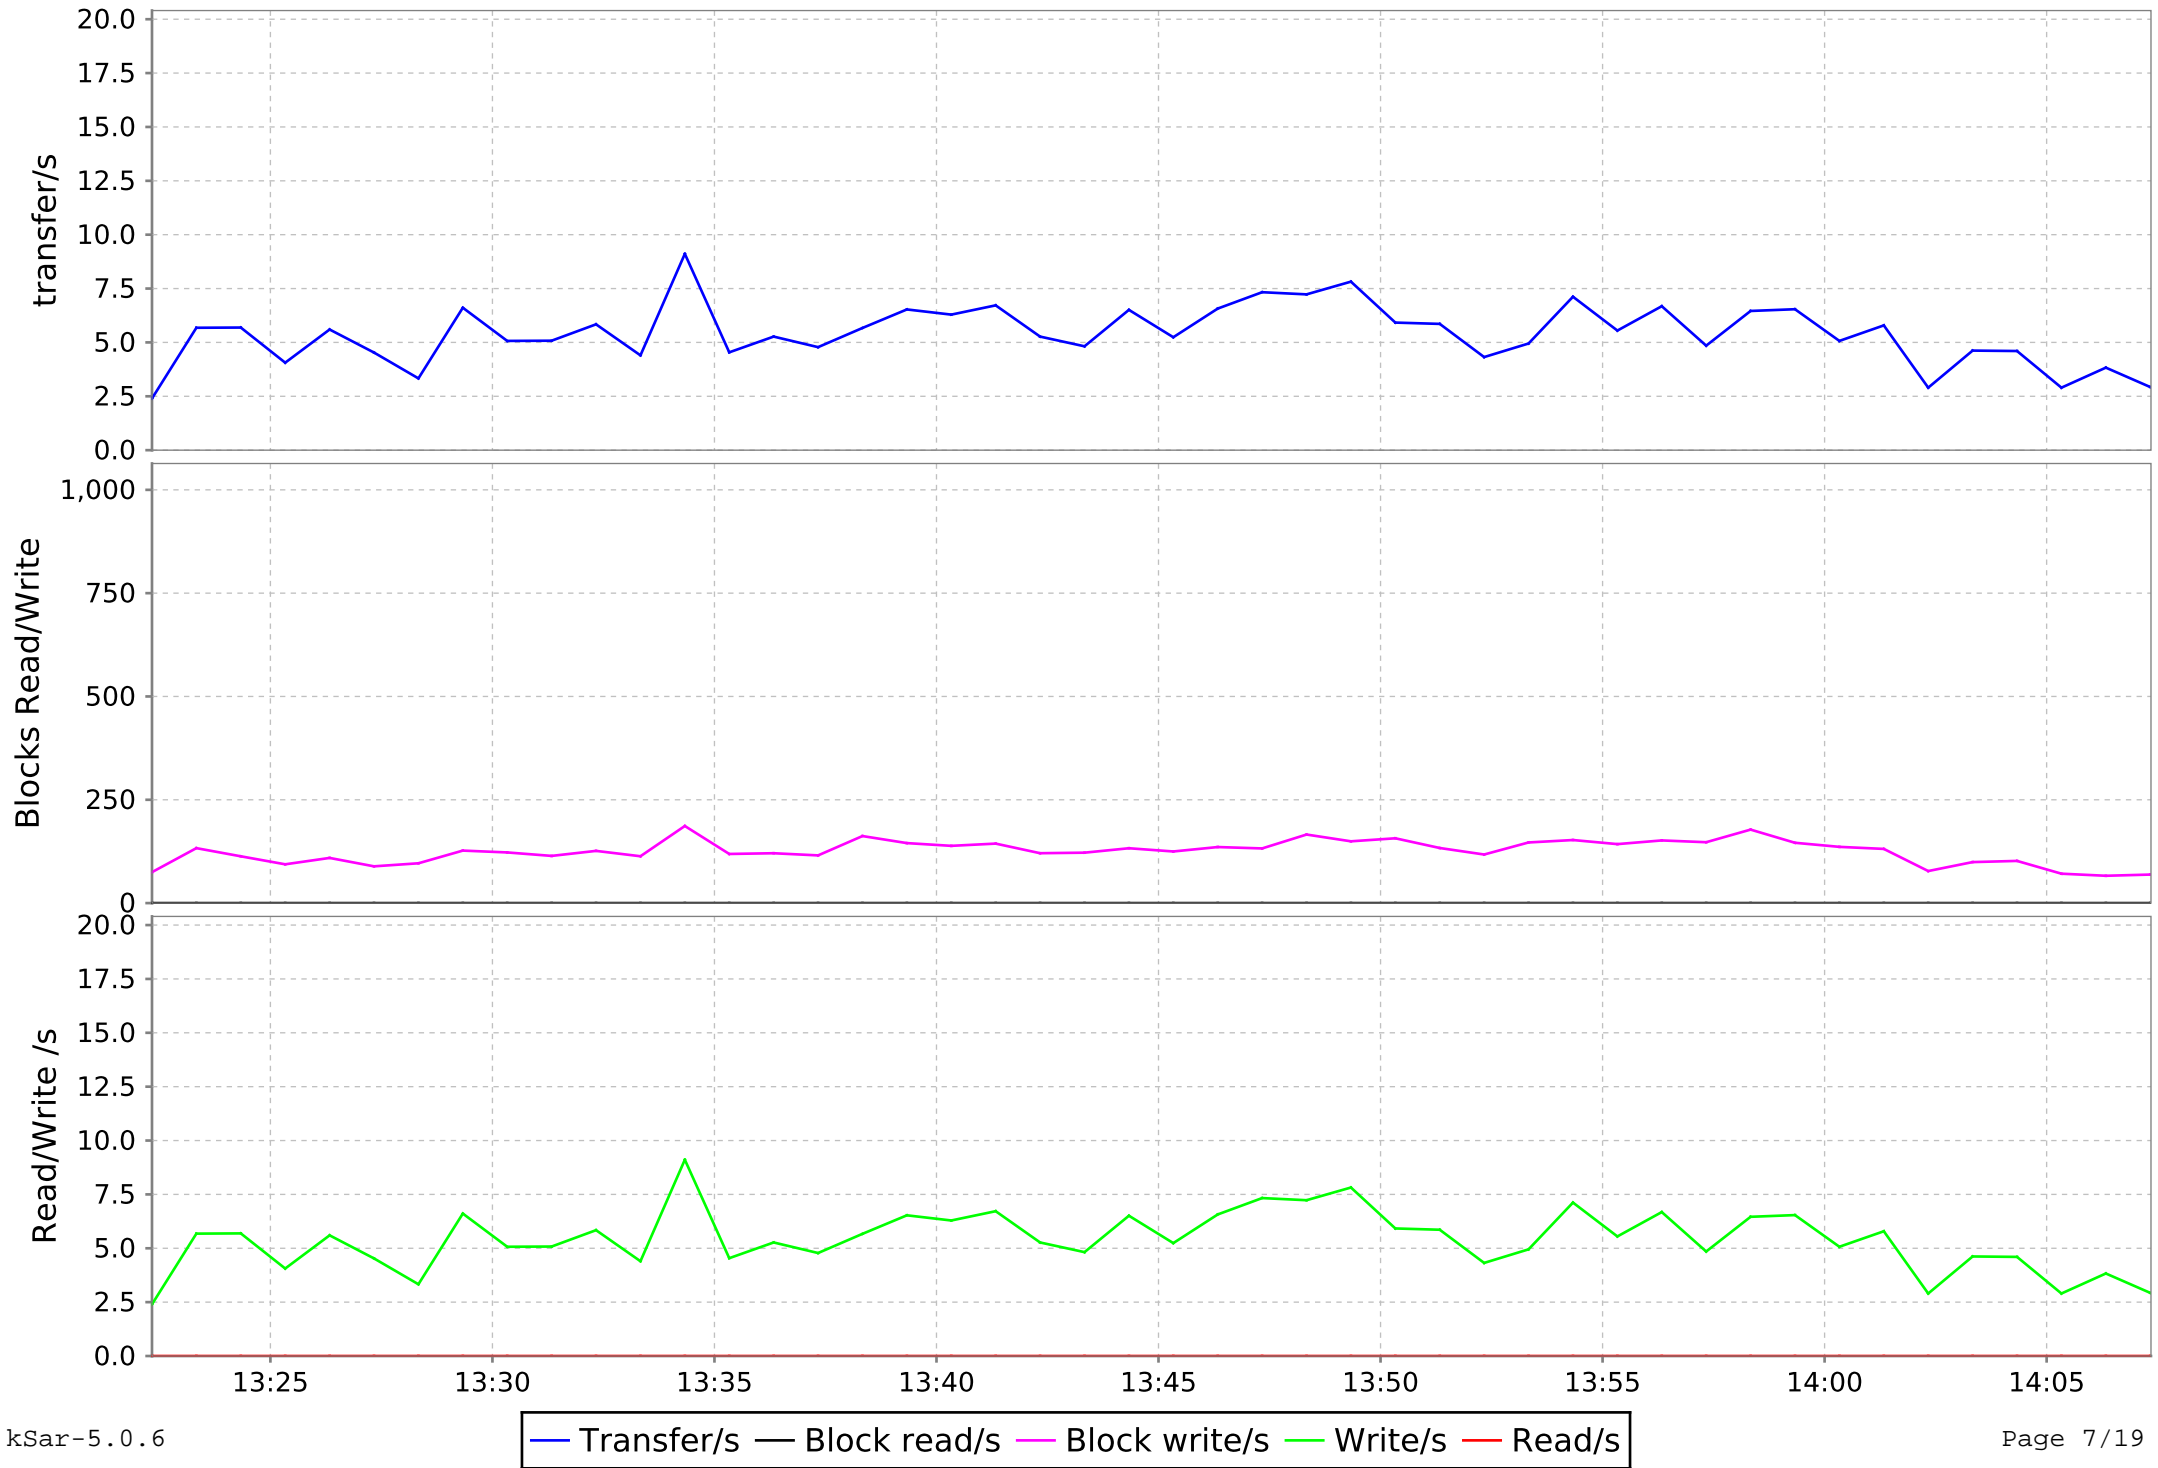
Memory Misc for paring

Swap usage for paring

kbswpfree — kbswpused — %swpused — kbswpcad

Load for paring

Legend: runq-sz   plist-sz   load 1mn   load 5mn   load 15mn
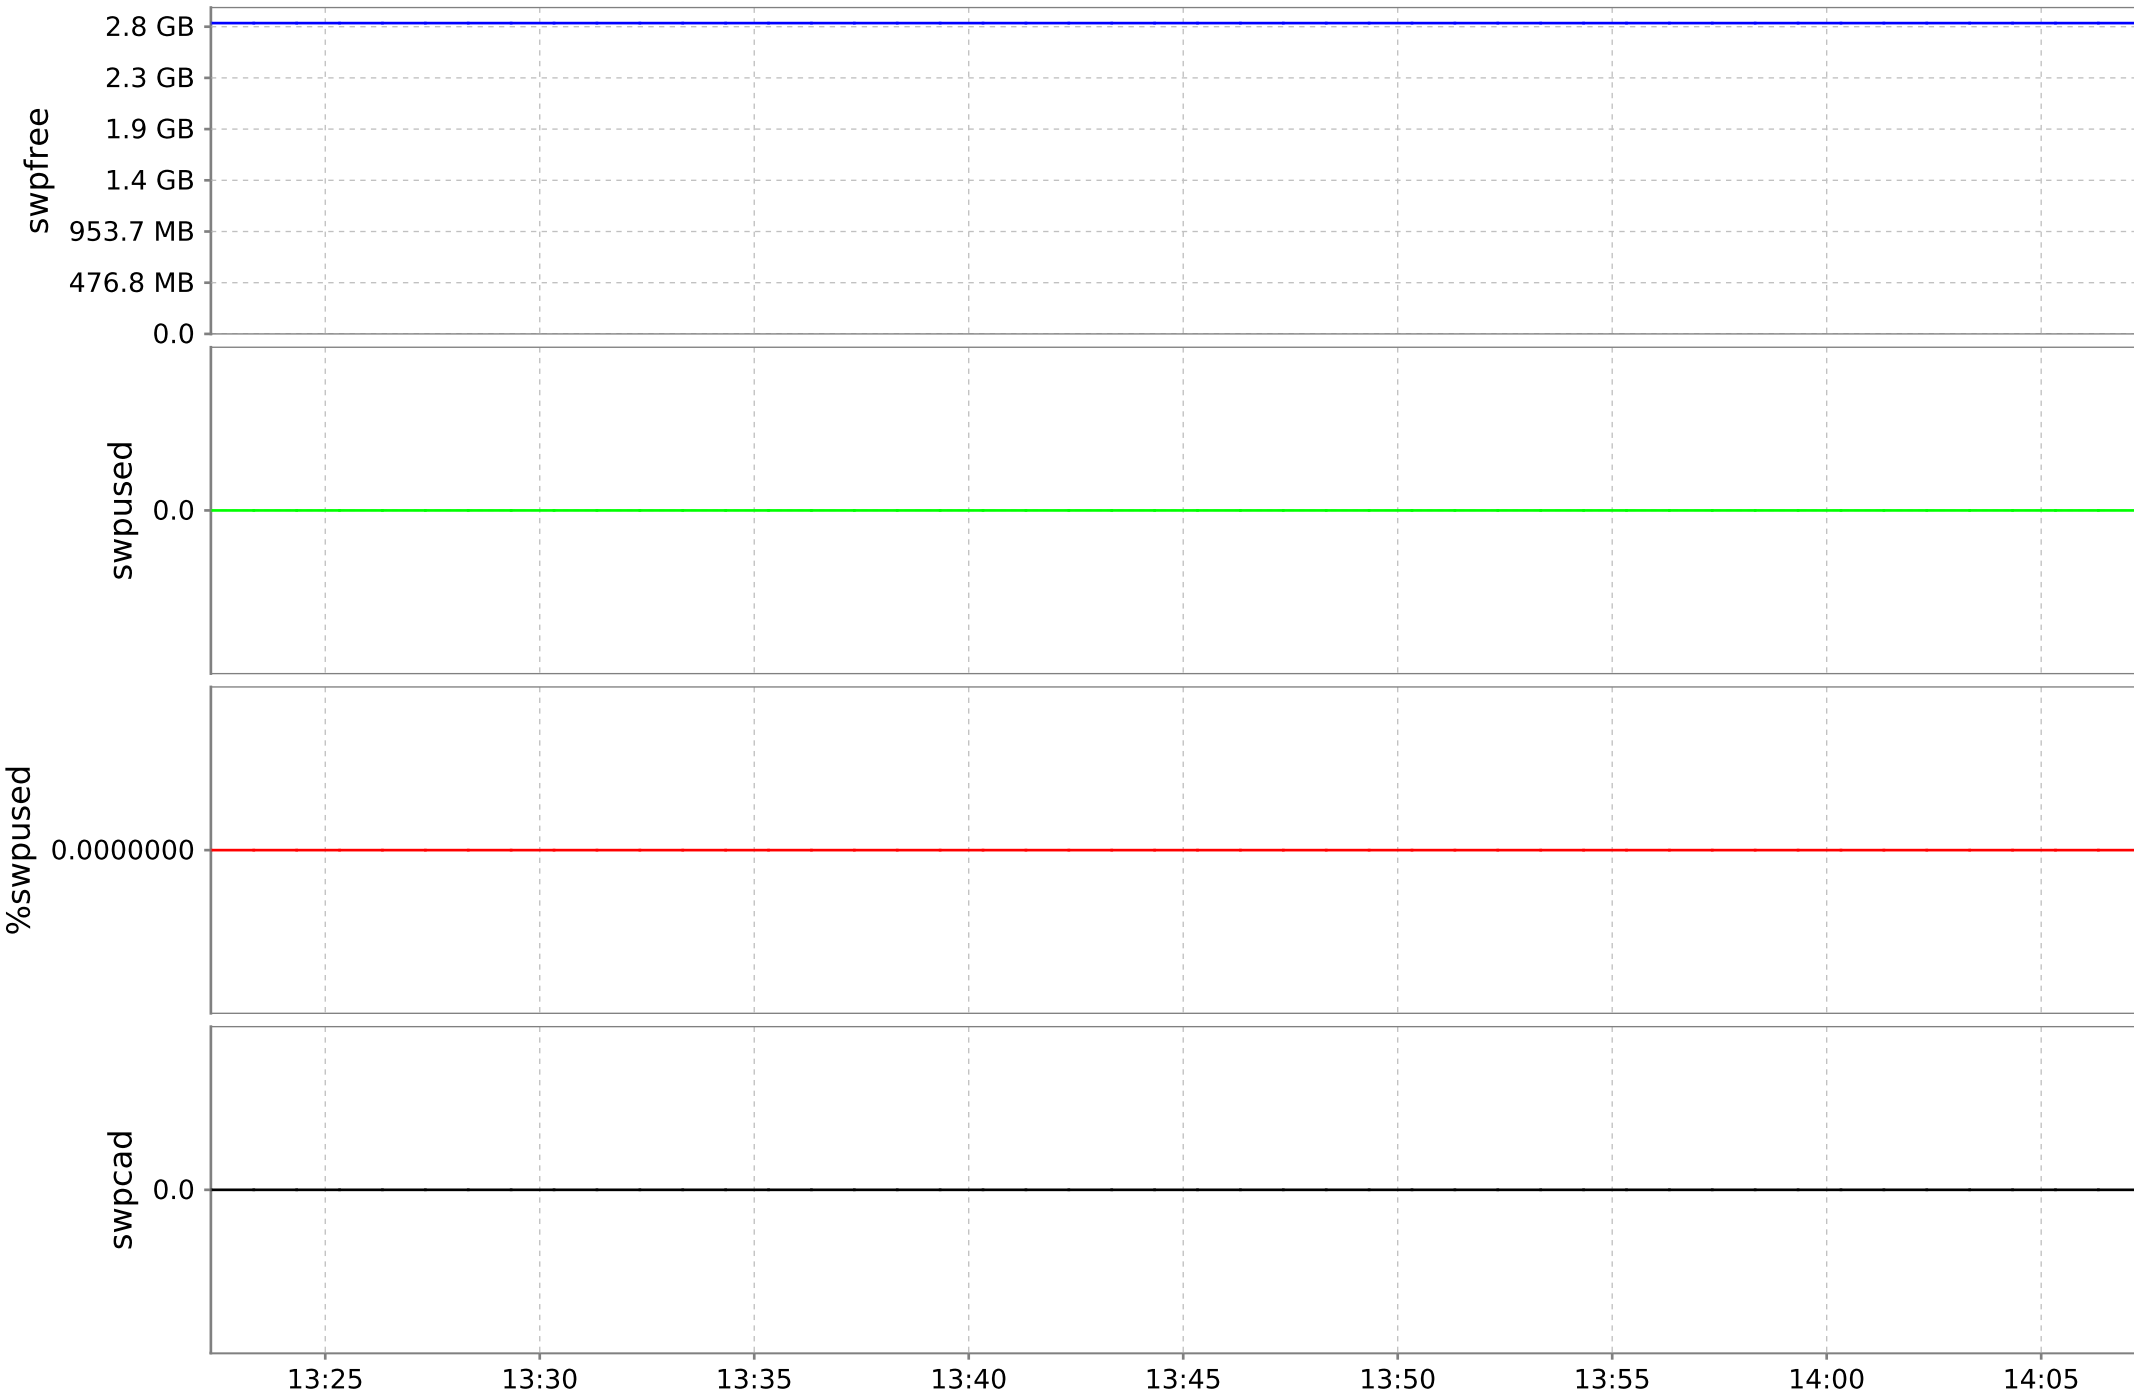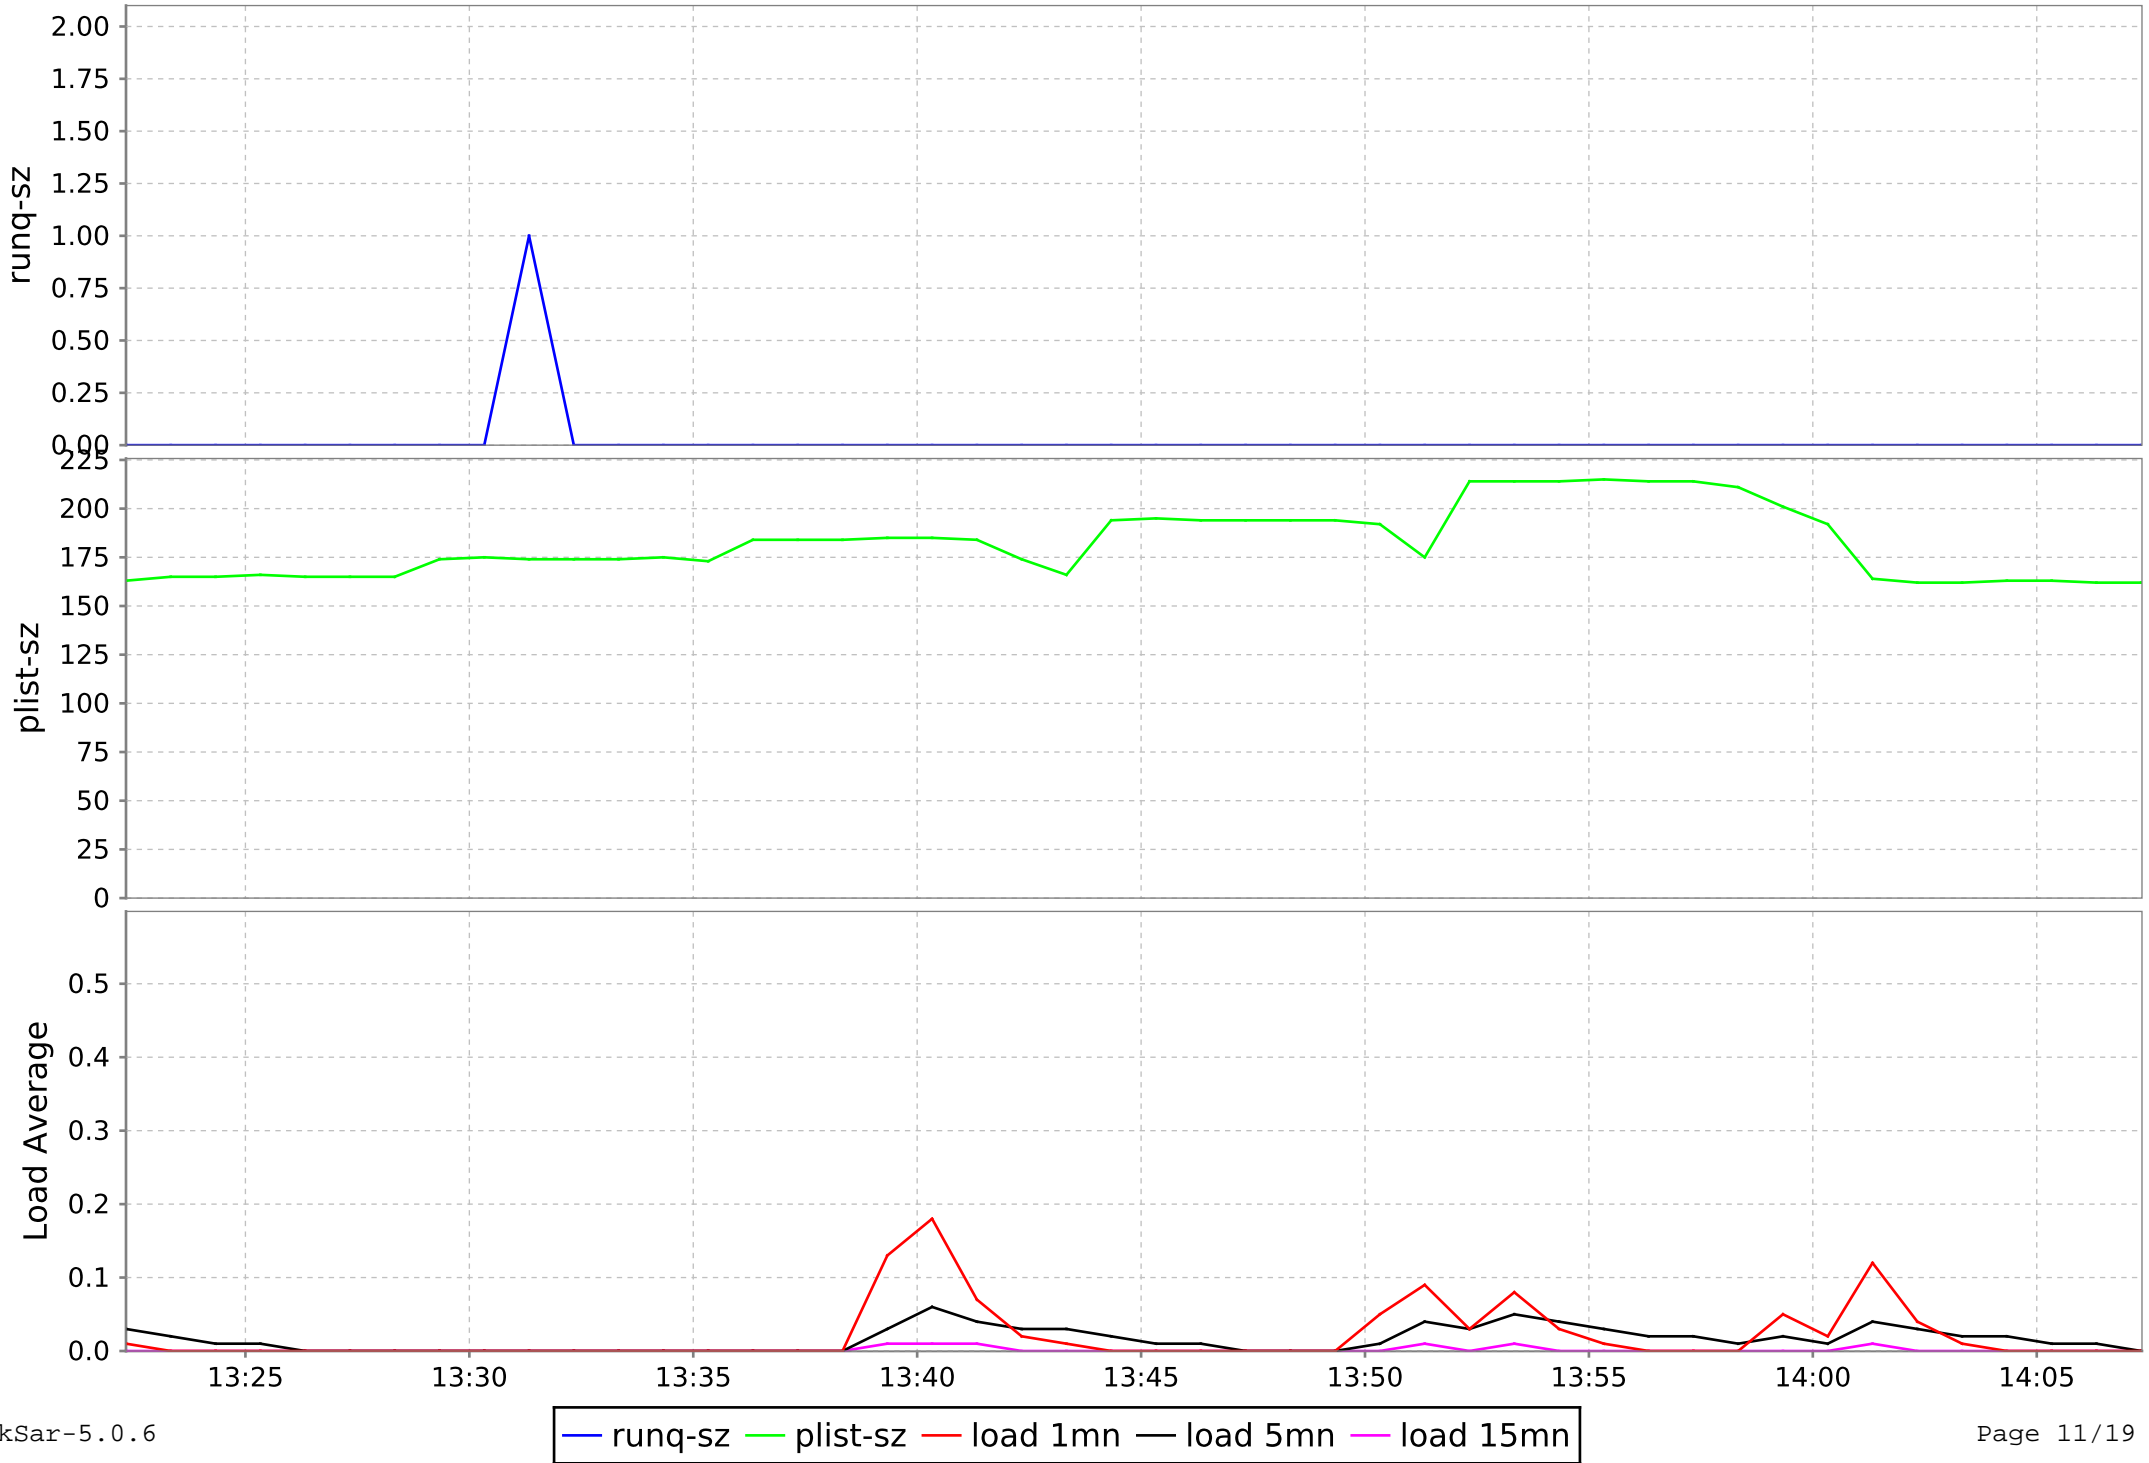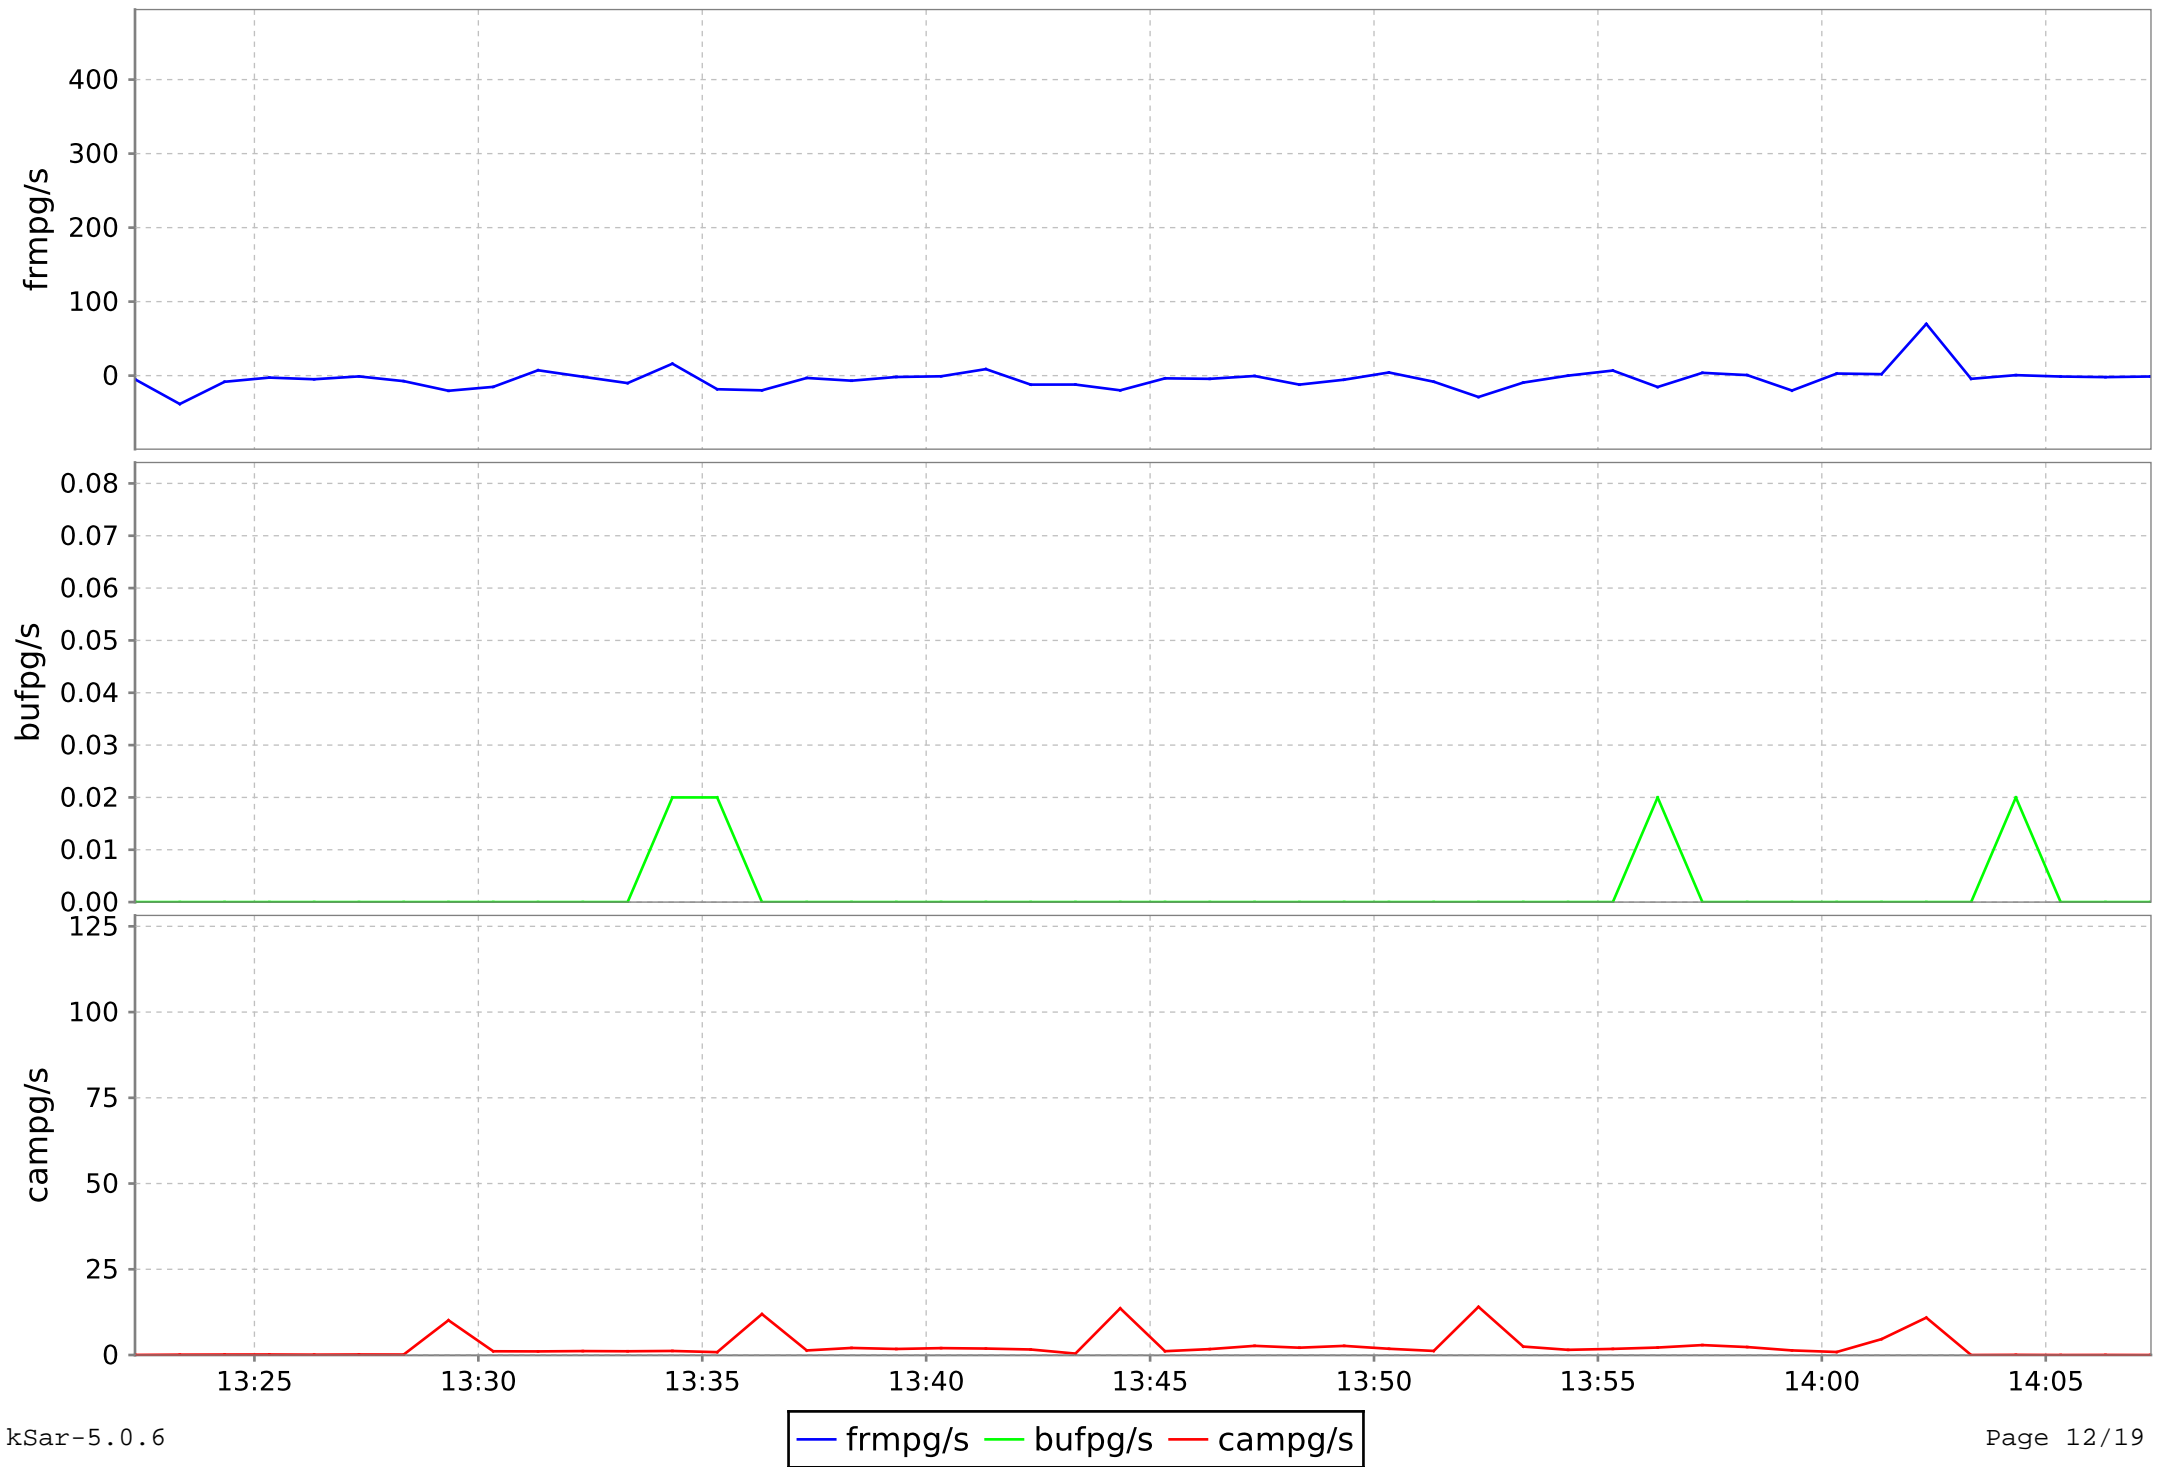
Page for paring

Paging Activity for paring

Legend: pgpgin/s — pgpgout/s — fault/s — majflt/s
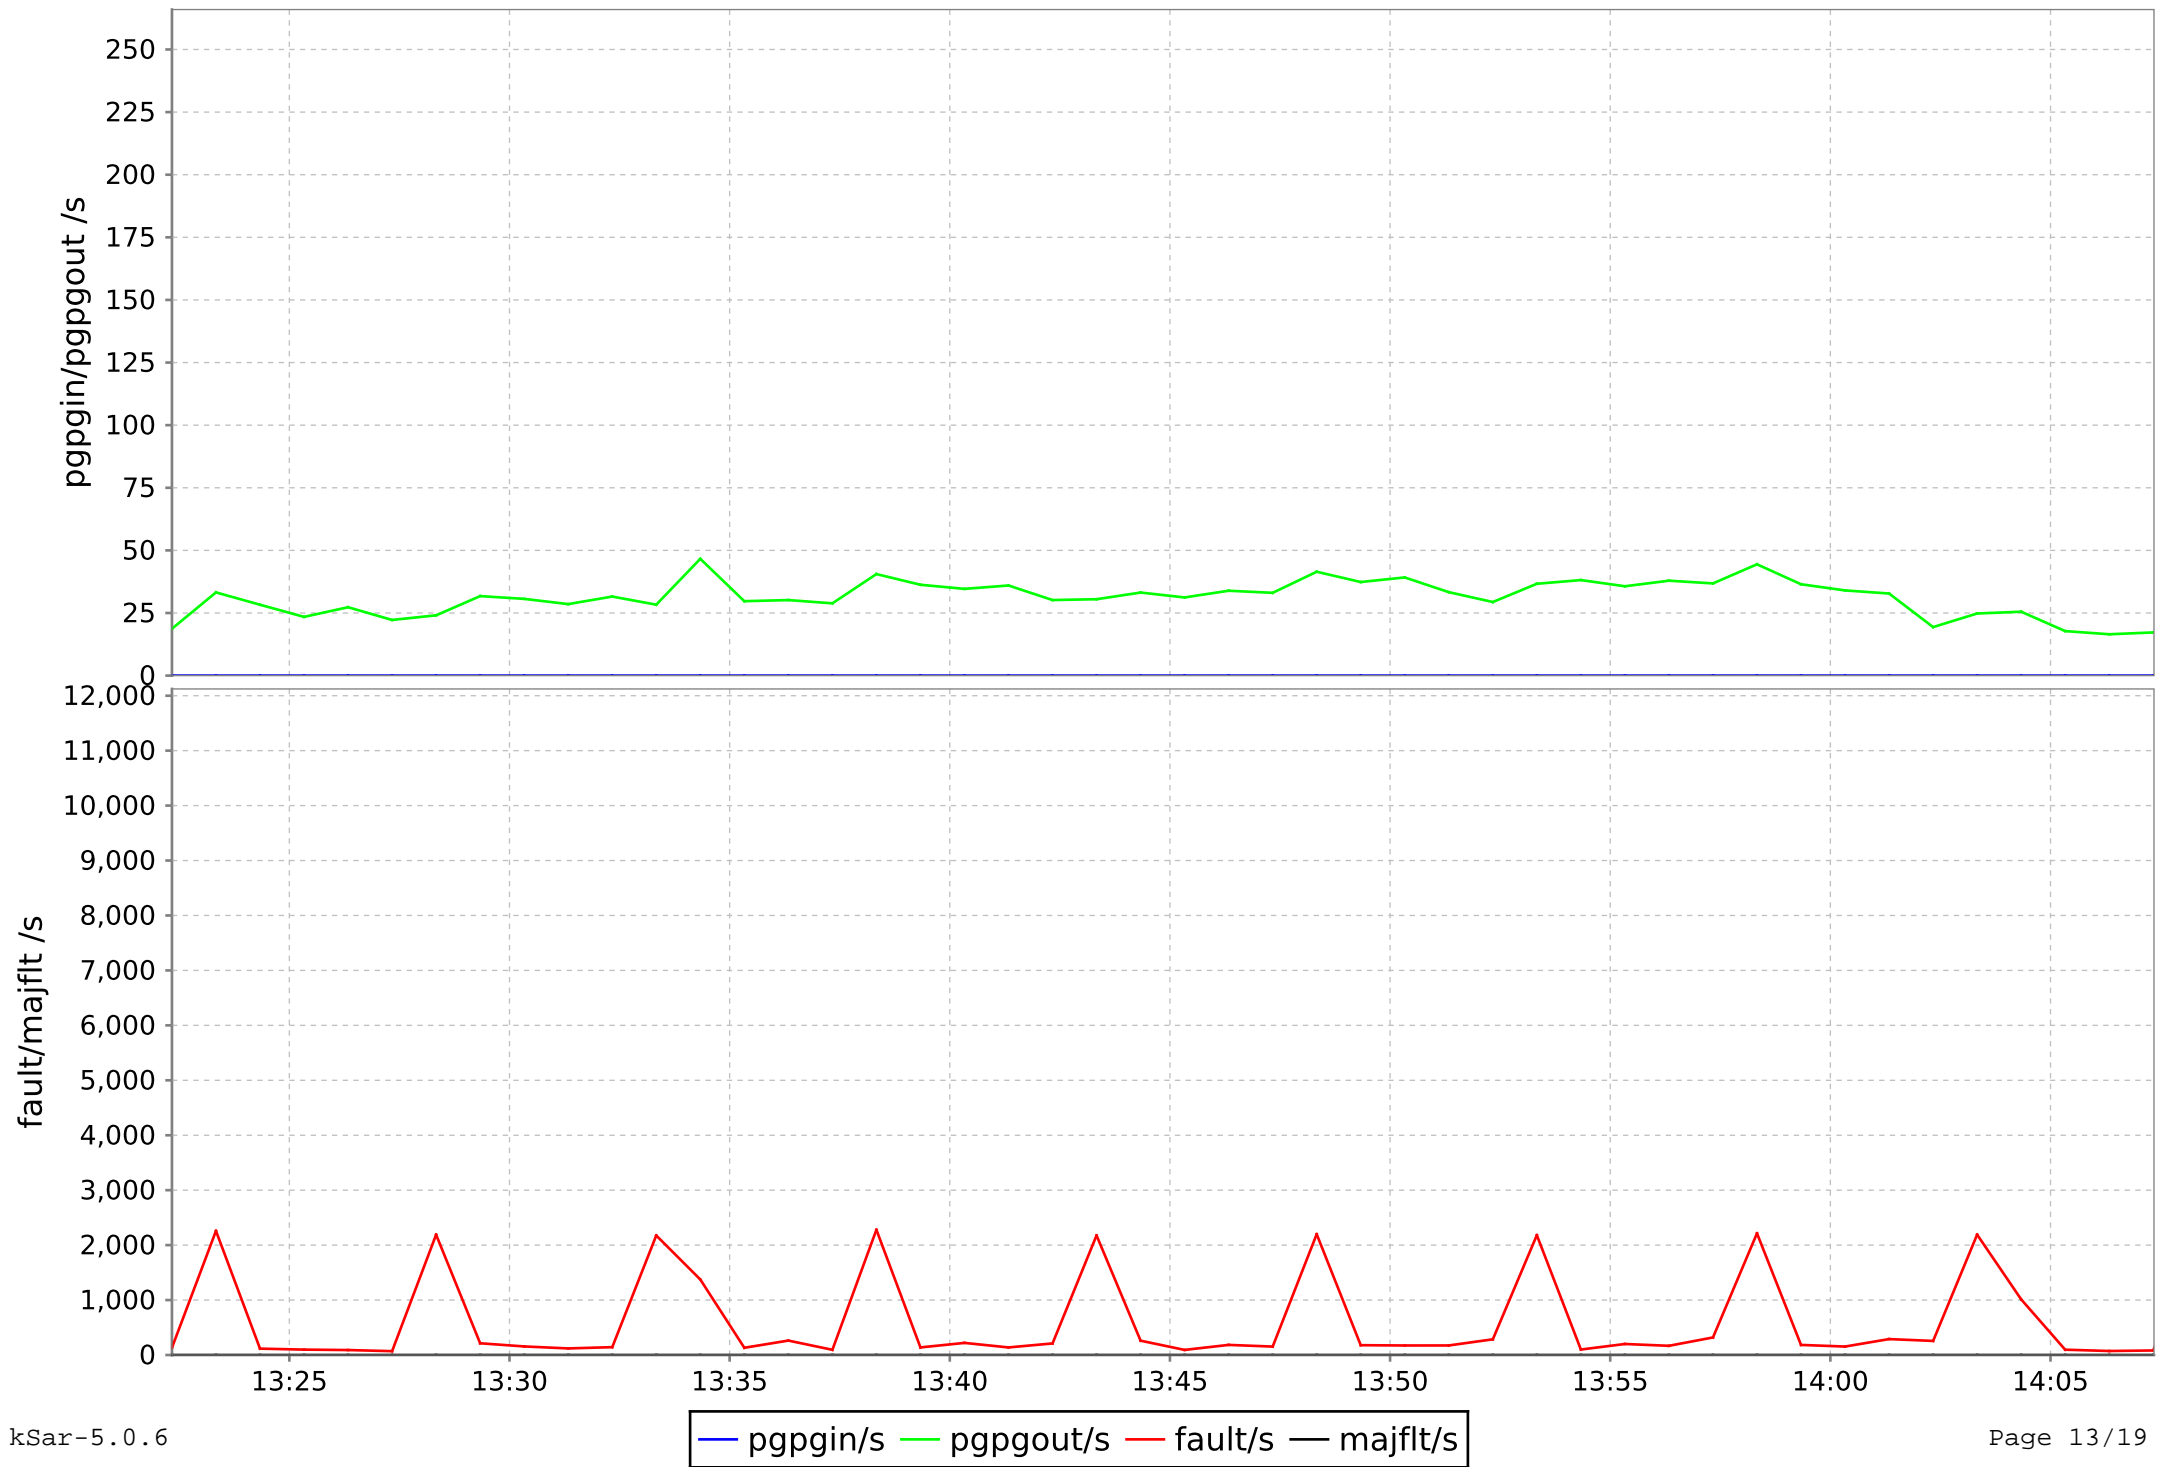
Processes for paring

Sockets for paring

totsck — ip-frag — tcpsck — udpsck — rawsck
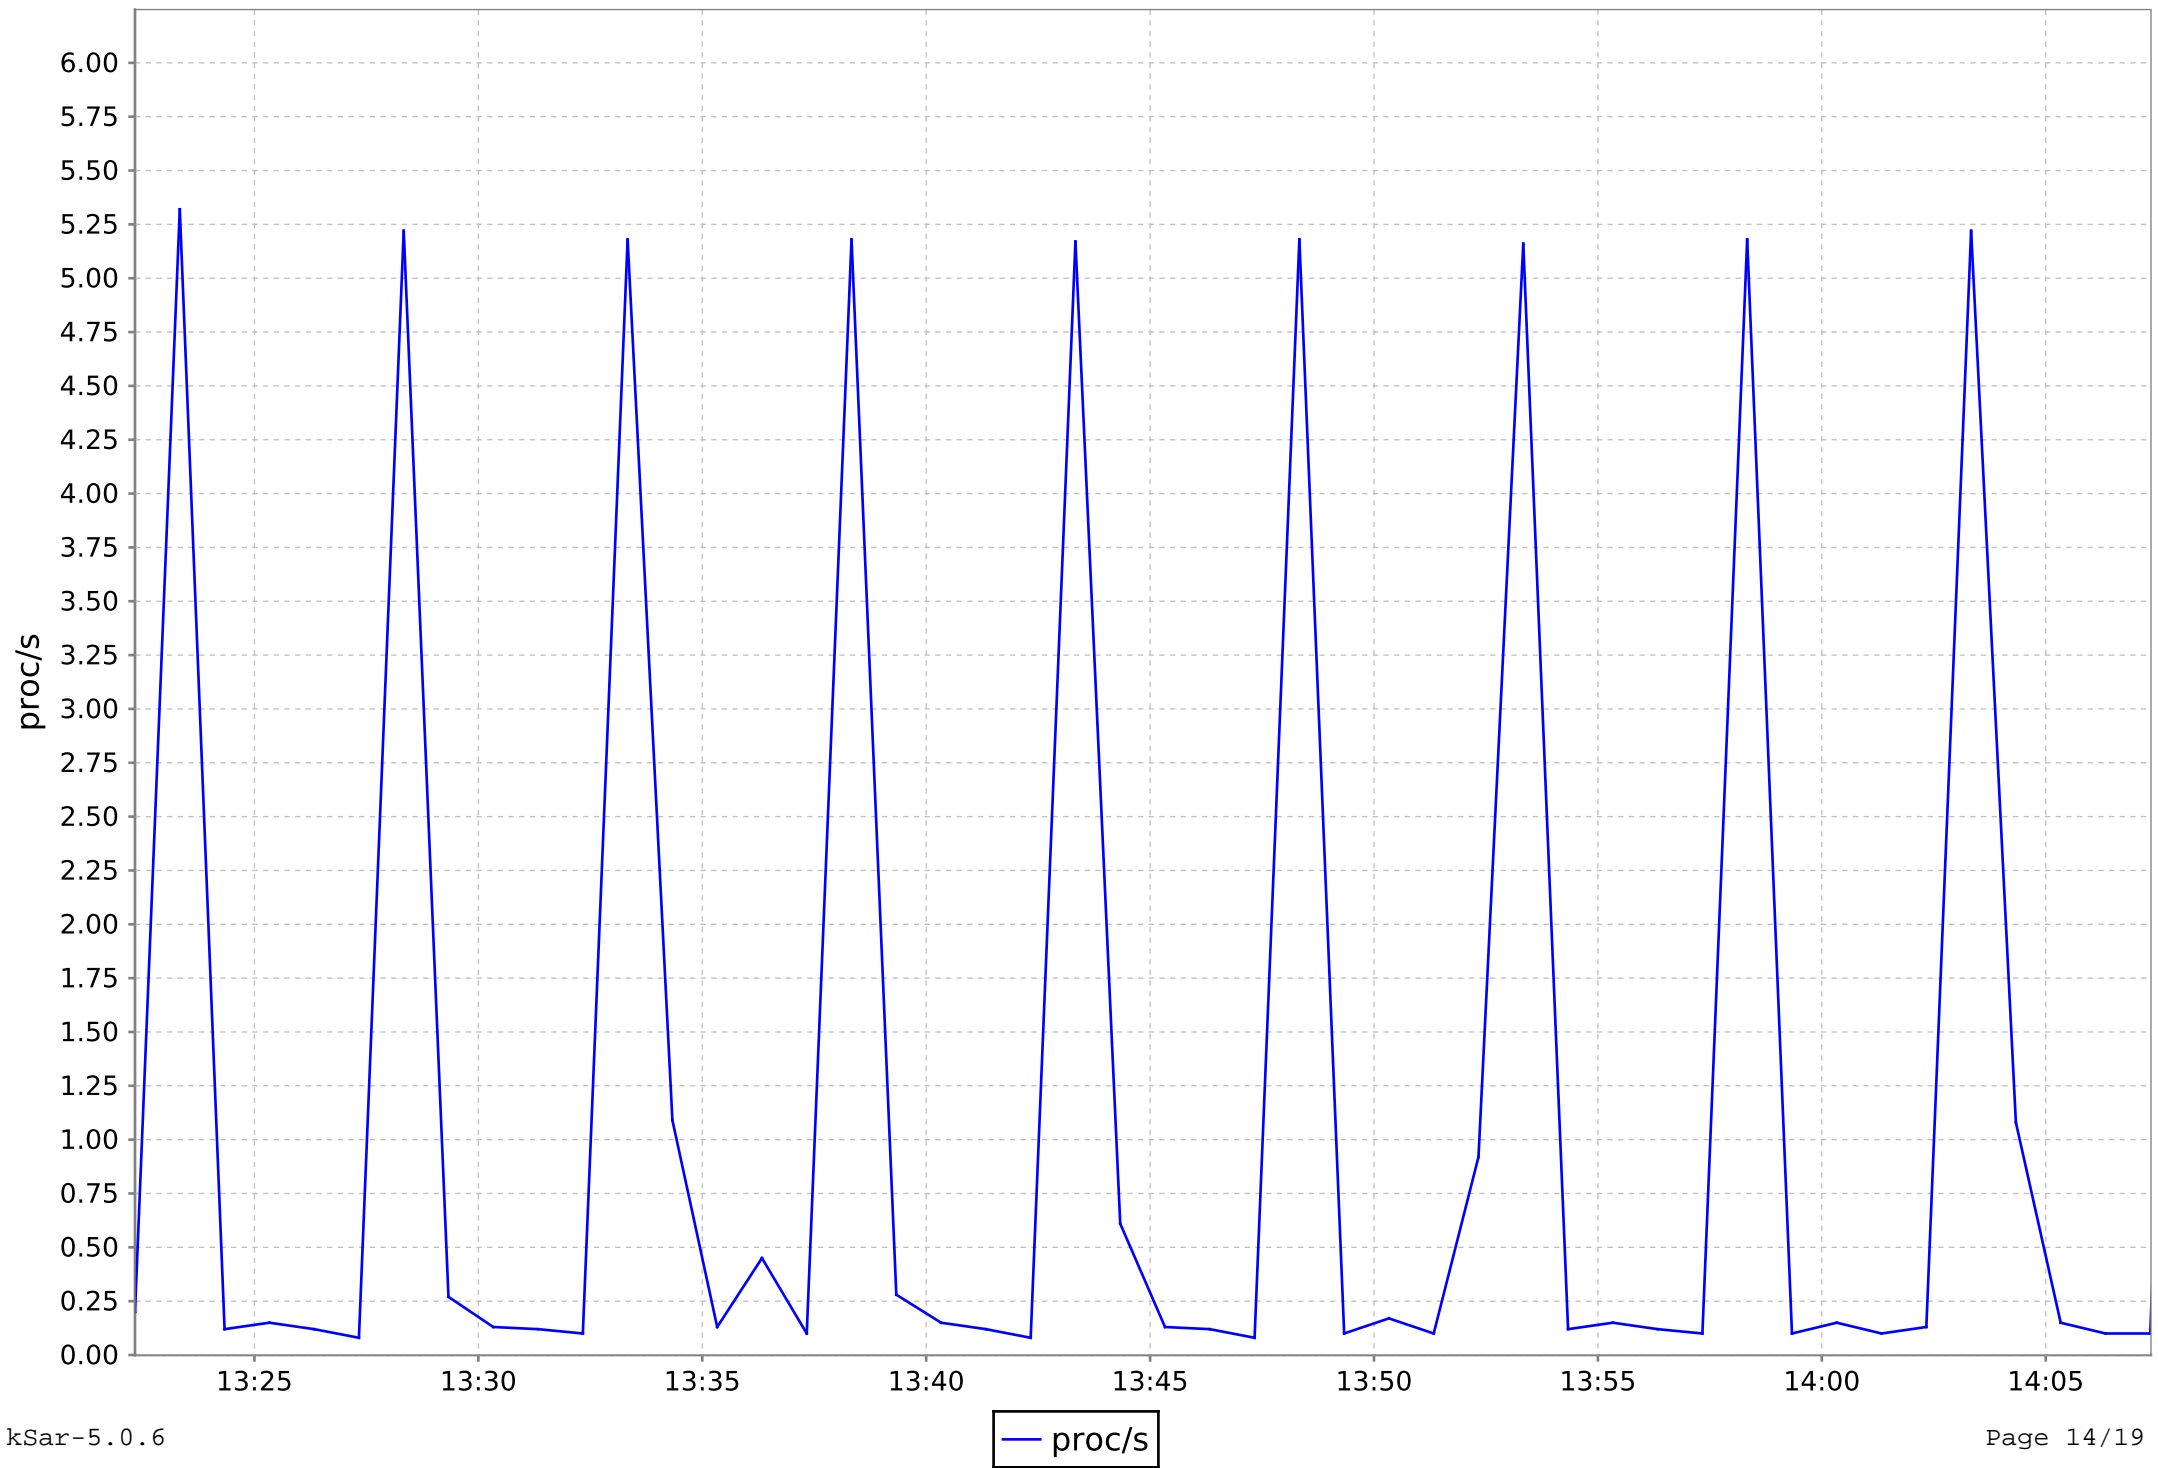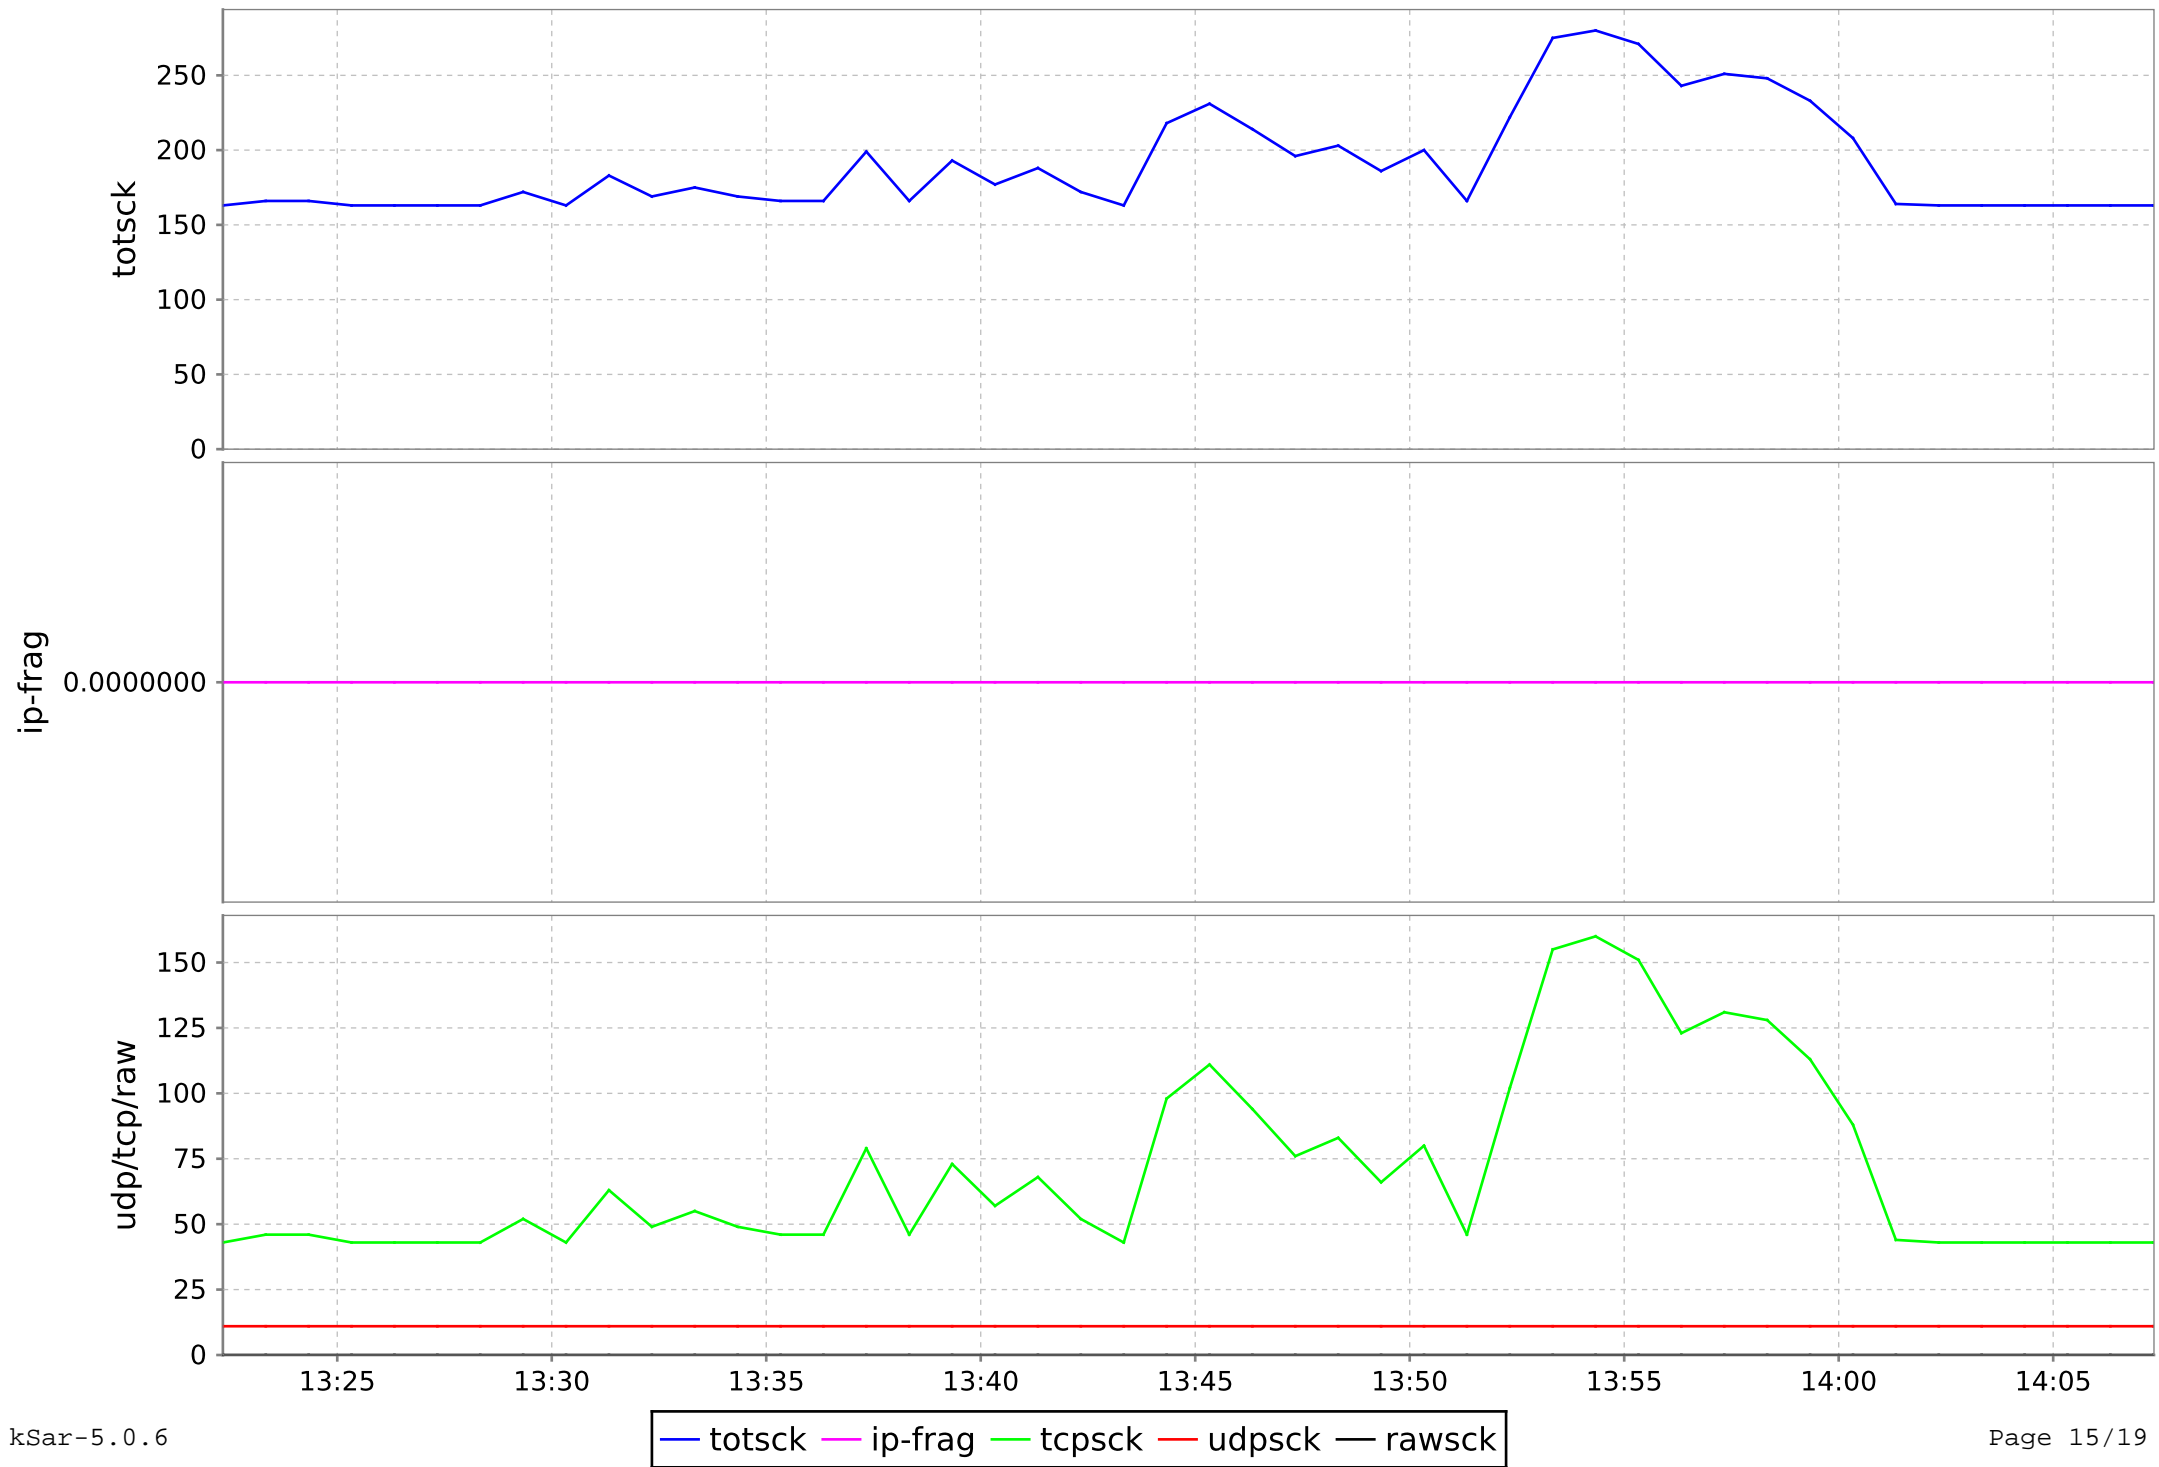
Swapping for paring

pswpin/s — pswpout/s
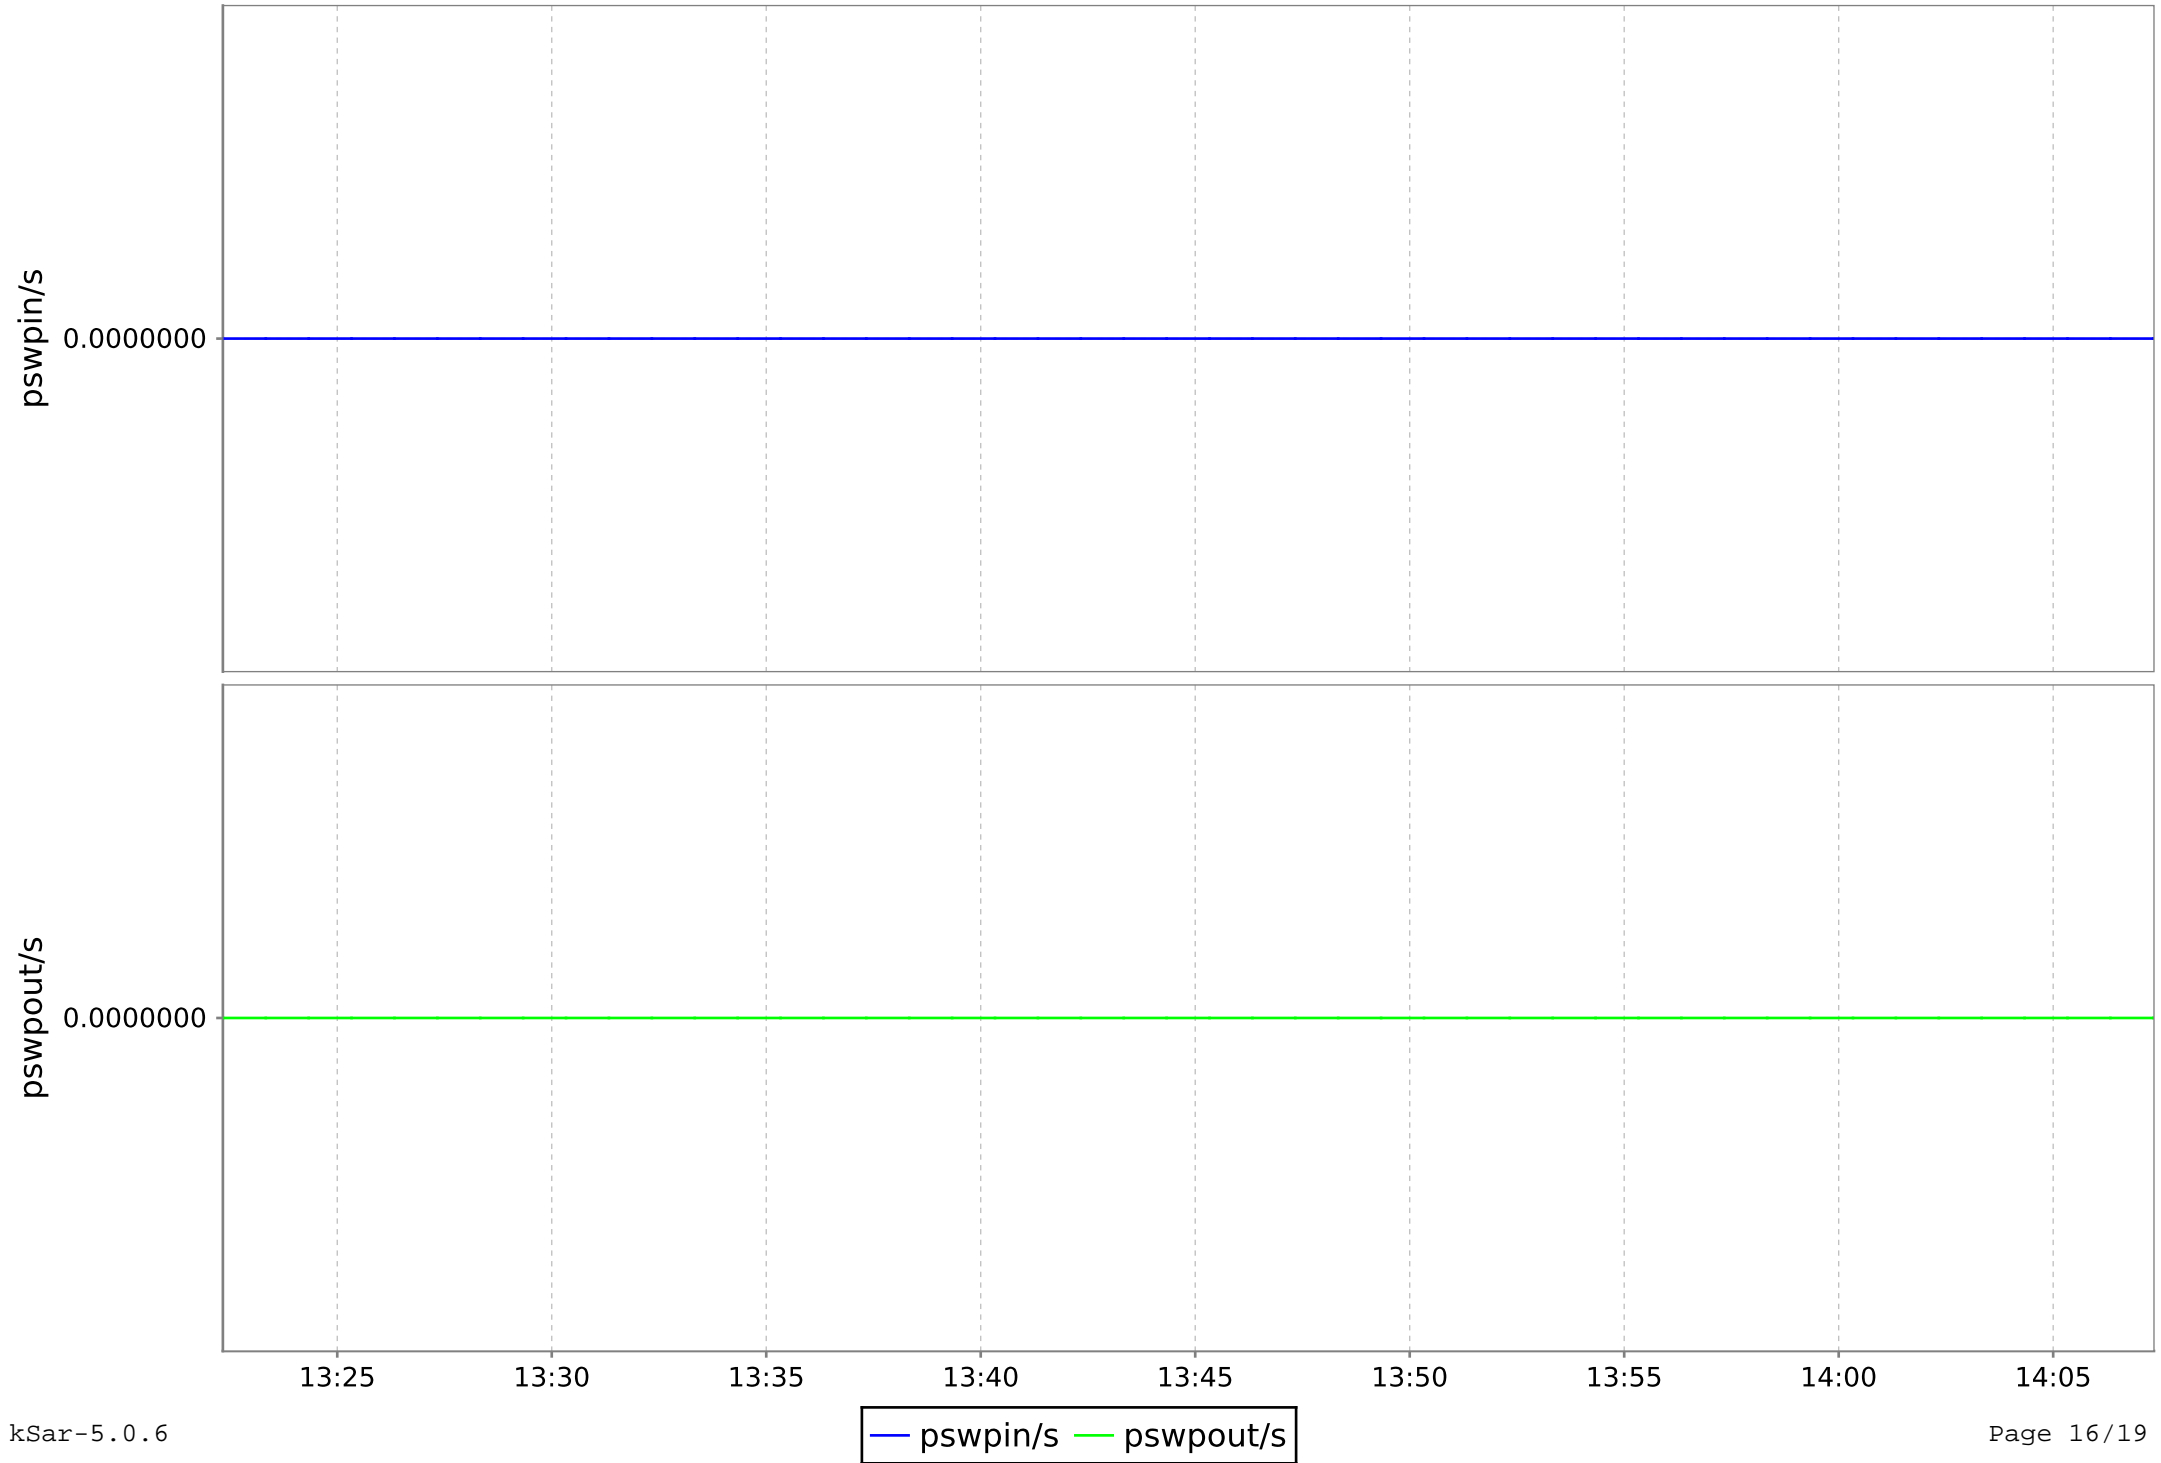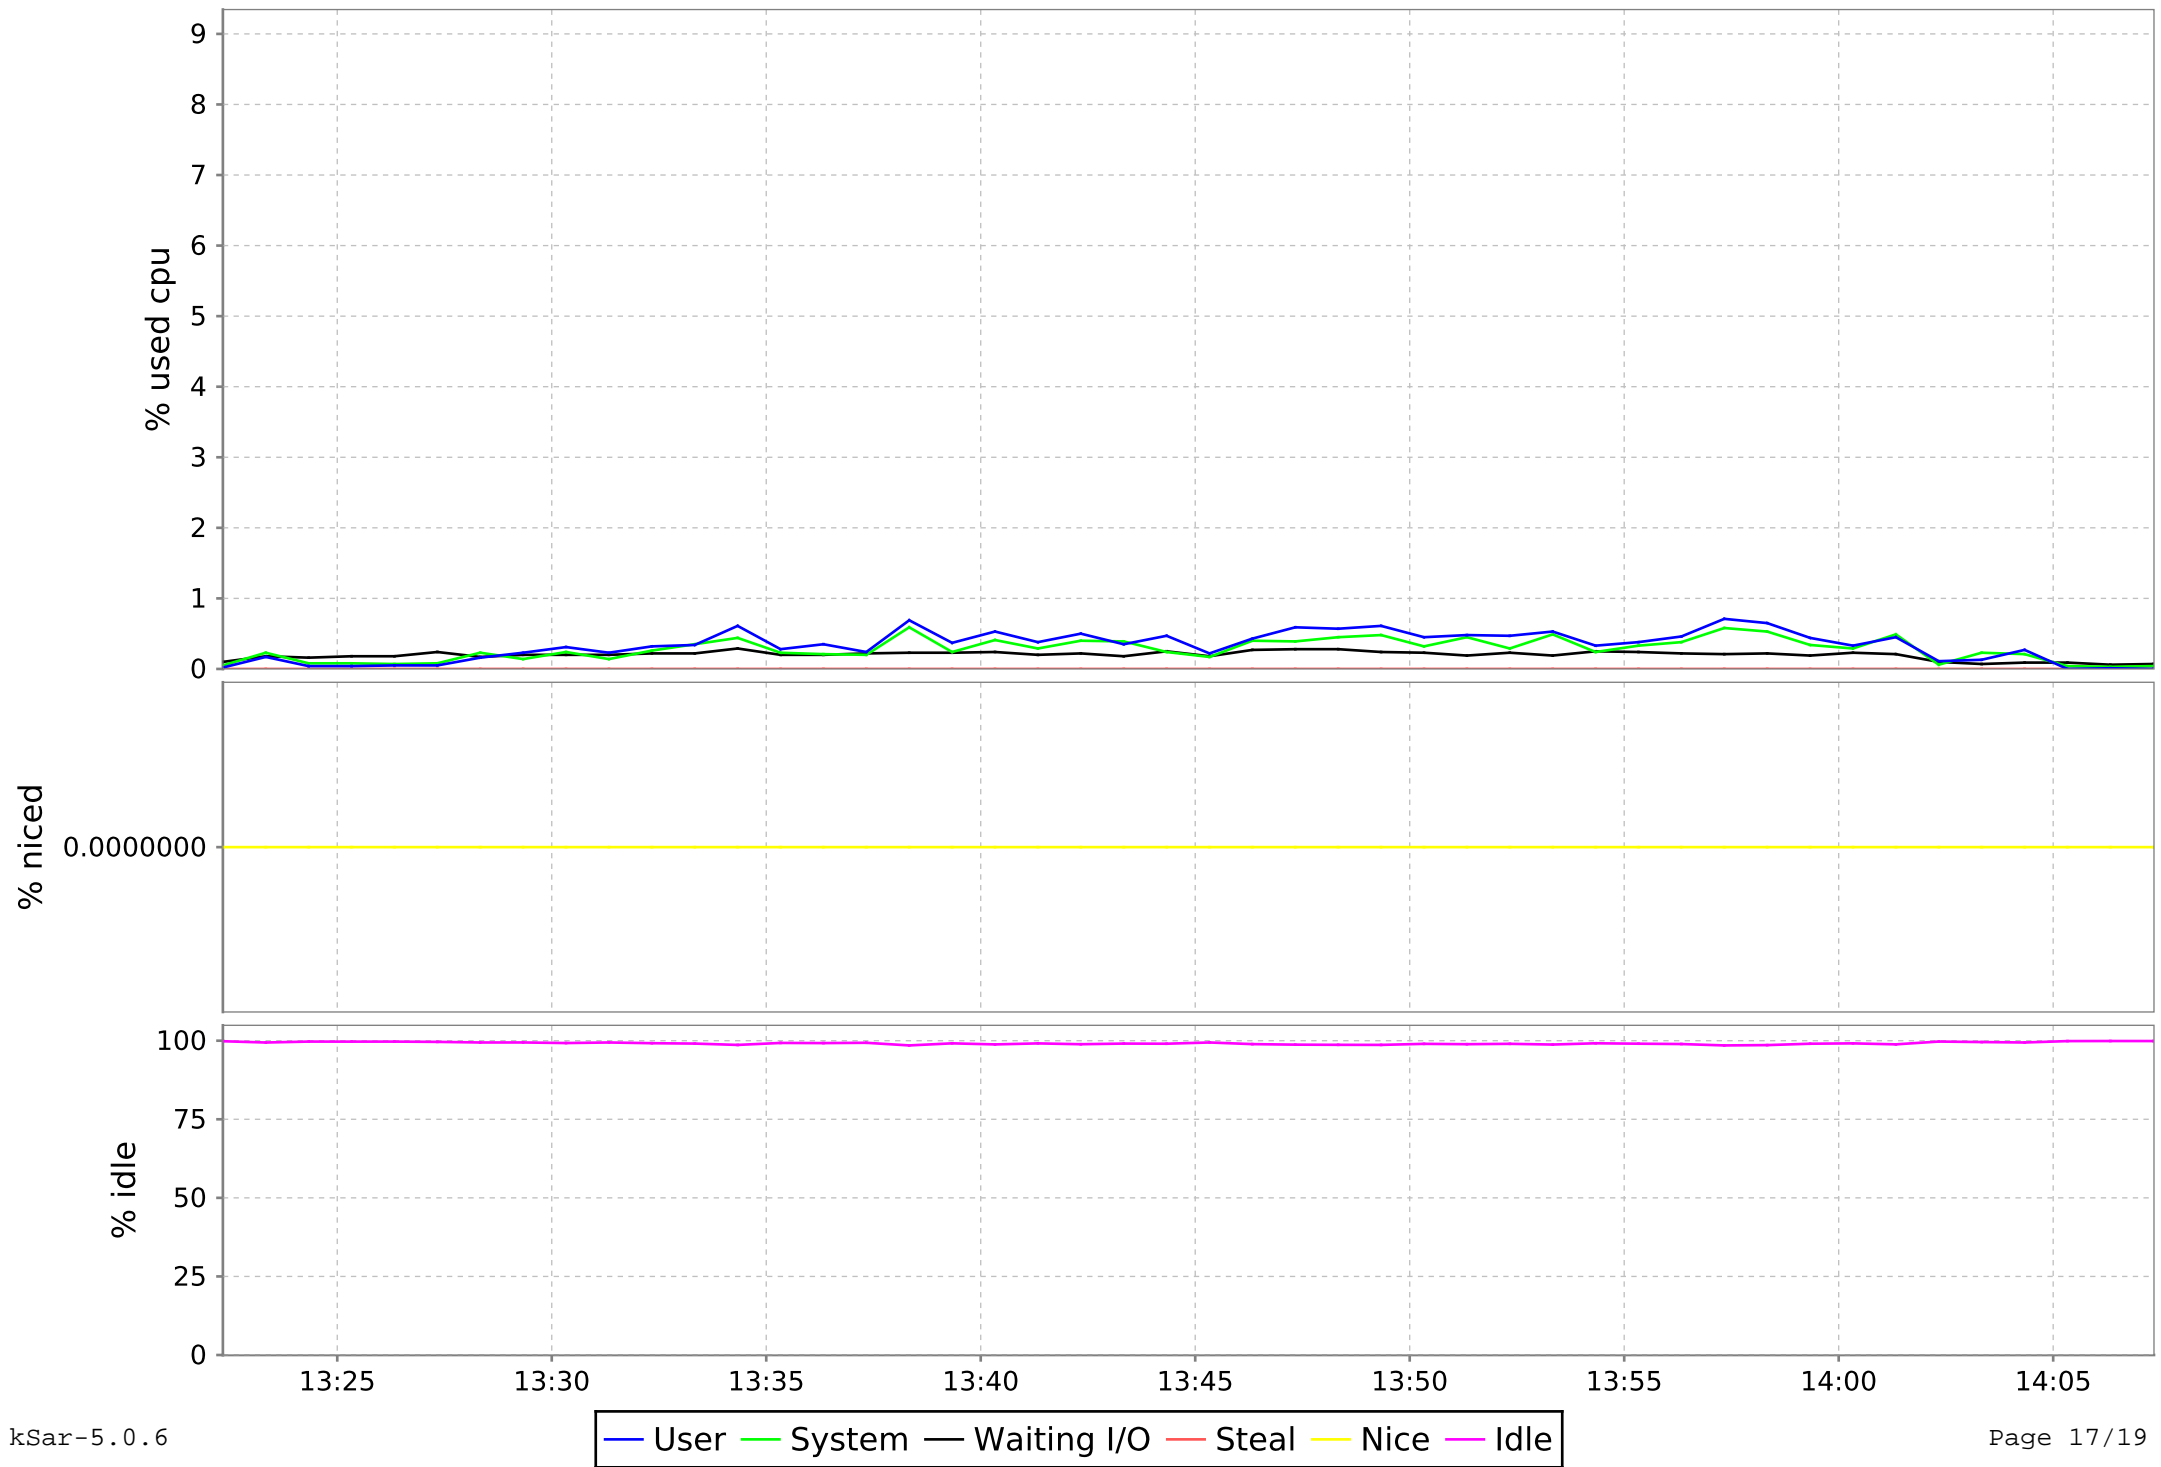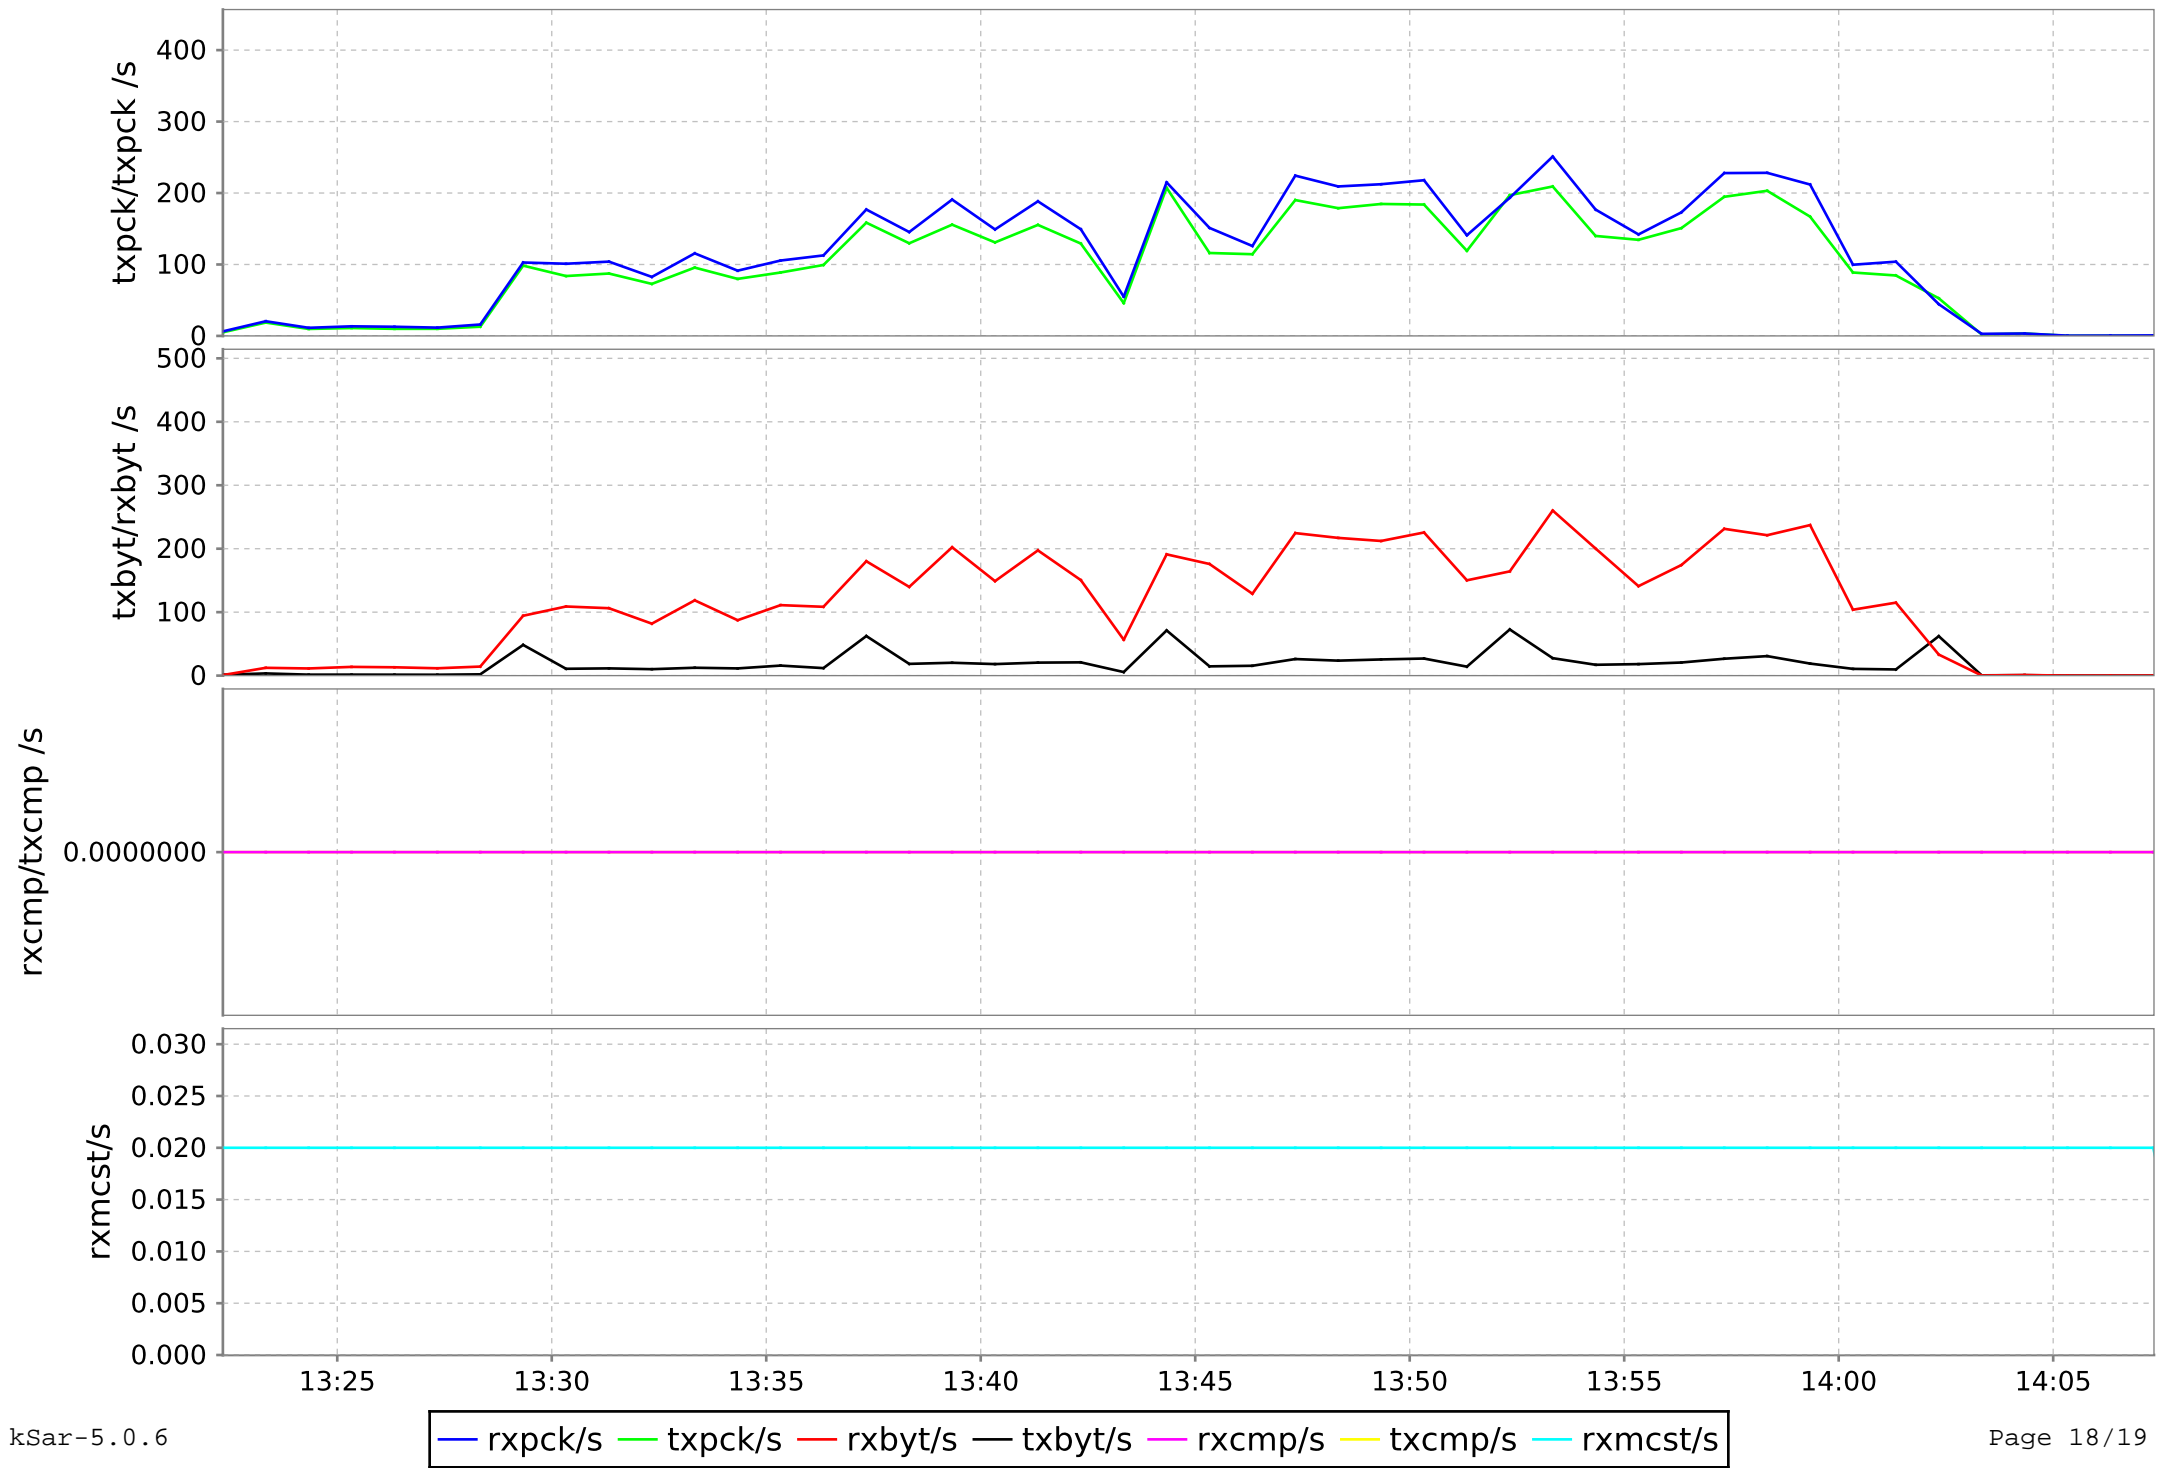
CPU all for paring

Interface traffic eth0 for paring

Interface errors eth0 for paring

Legend: rxerr/s · txerr/s · rxdrop/s · txdrop/s · coll/s · txcarr/s · rxfram/s · rxfifo/s · txfifo/s