


# ***Mitchell Chiew***

*Portfolio for Springer Nature*

mitchell.l.chiew@gmail.com  
07881043283  
Cambridge, UK

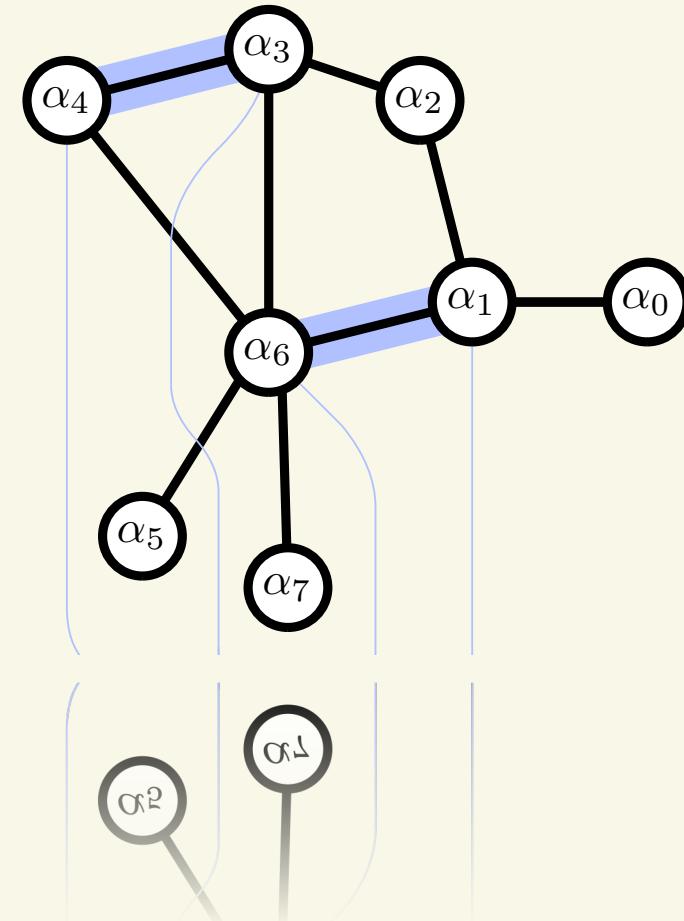

I am an Australian student of theoretical physics and have just finished a PhD at the University of Cambridge. This portfolio contains samples of my artwork which have appeared in my academic writing.

Illustration has been integral to my learning process since childhood, and I have incorporated visual reasoning into my scientific writing and collaborative projects.

Through academia, I have developed my scientific art style combining digital and hand-drawn works, with the goal of clearly and creatively communicating science.

<i>Samples from theoretical physics</i> . . . . .	3
<i>Detail-oriented design</i> . . . . .	3
<i>Illustrating the impact of new research</i> . . . . .	4
<i>Vivid imagery from sketches</i> . . . . .	5
<i>My design process</i> . . . . .	6
<i>Reaching broader audiences</i> . . . . .	7
<i>Poster gallery</i> . . . . .	8–11
<i>Other samples</i> . . . . .	12–14

# Samples from theoretical physics

Detail-oriented design

2024


PhD thesis

Inkscape and Ipe

Visual summary in the literature review of my thesis concerning techniques to translate fermionic problems onto quantum computers.


The image is the first visual representation of the equivalence between three different well-known techniques.

## Fermion–qubit mappings: examples from the literature

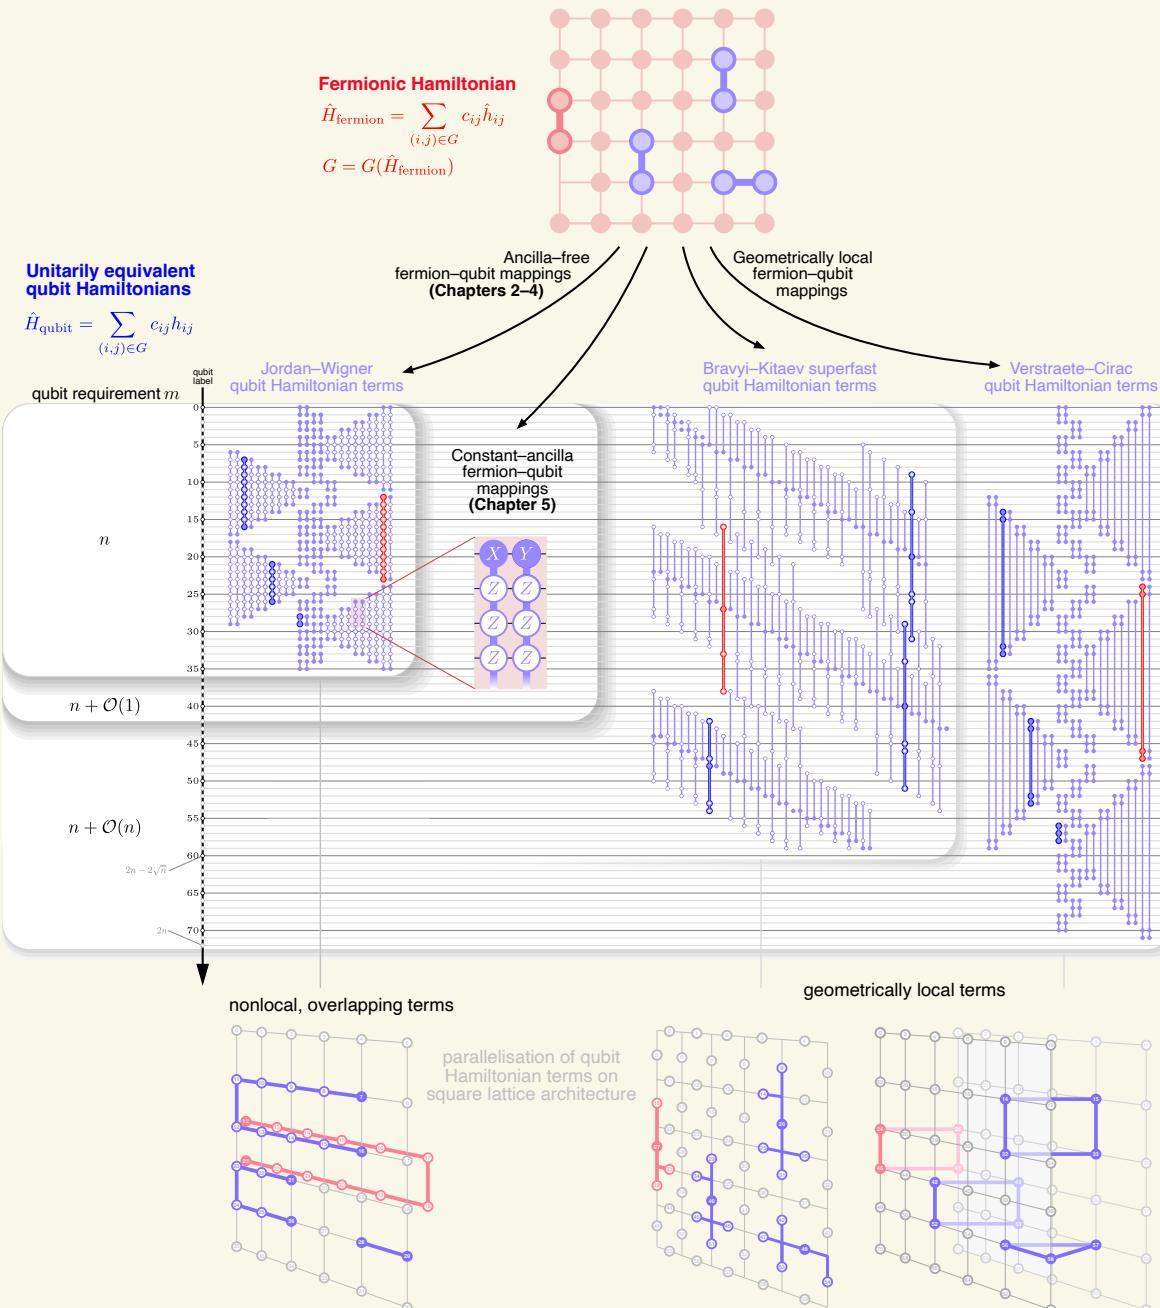


# Fermion–qubit mapping types

according to the literature

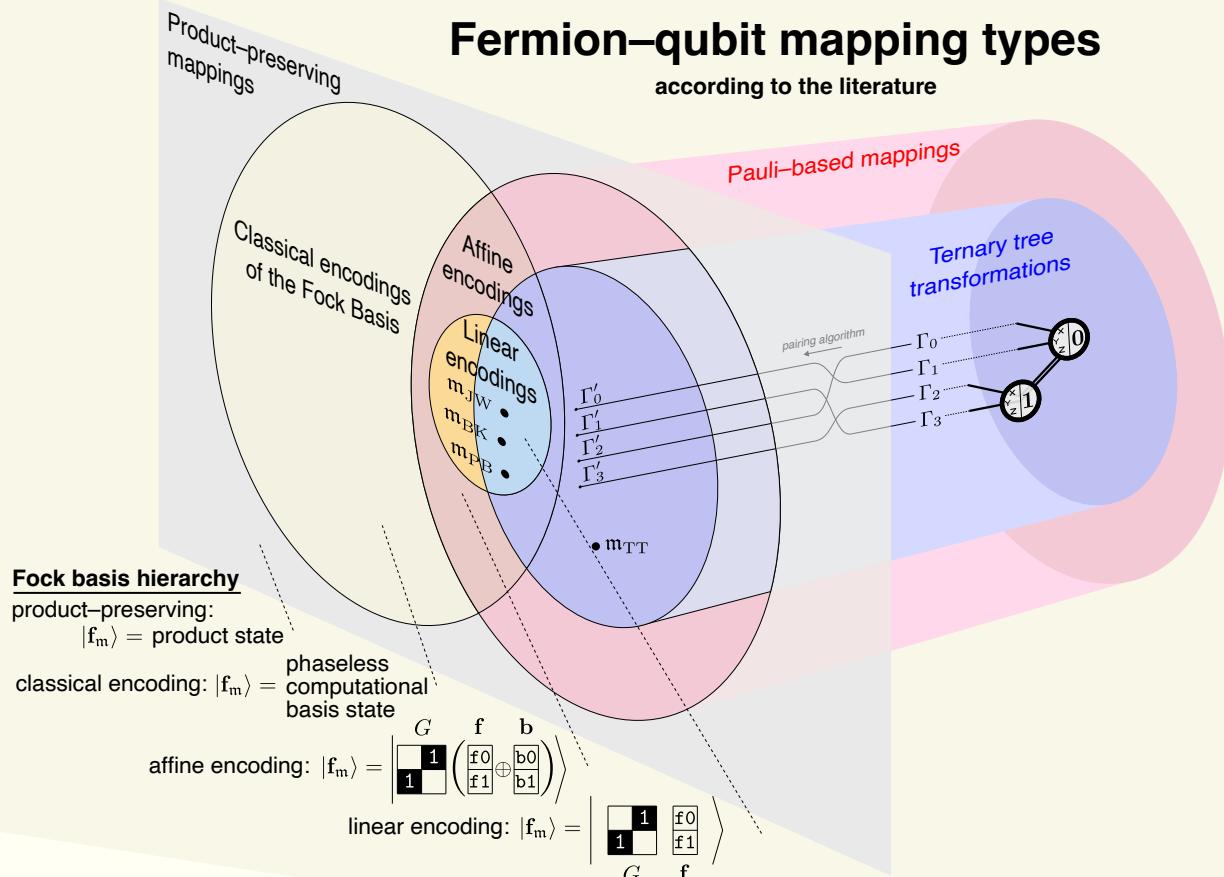

# Fermion–qubit mapping classification

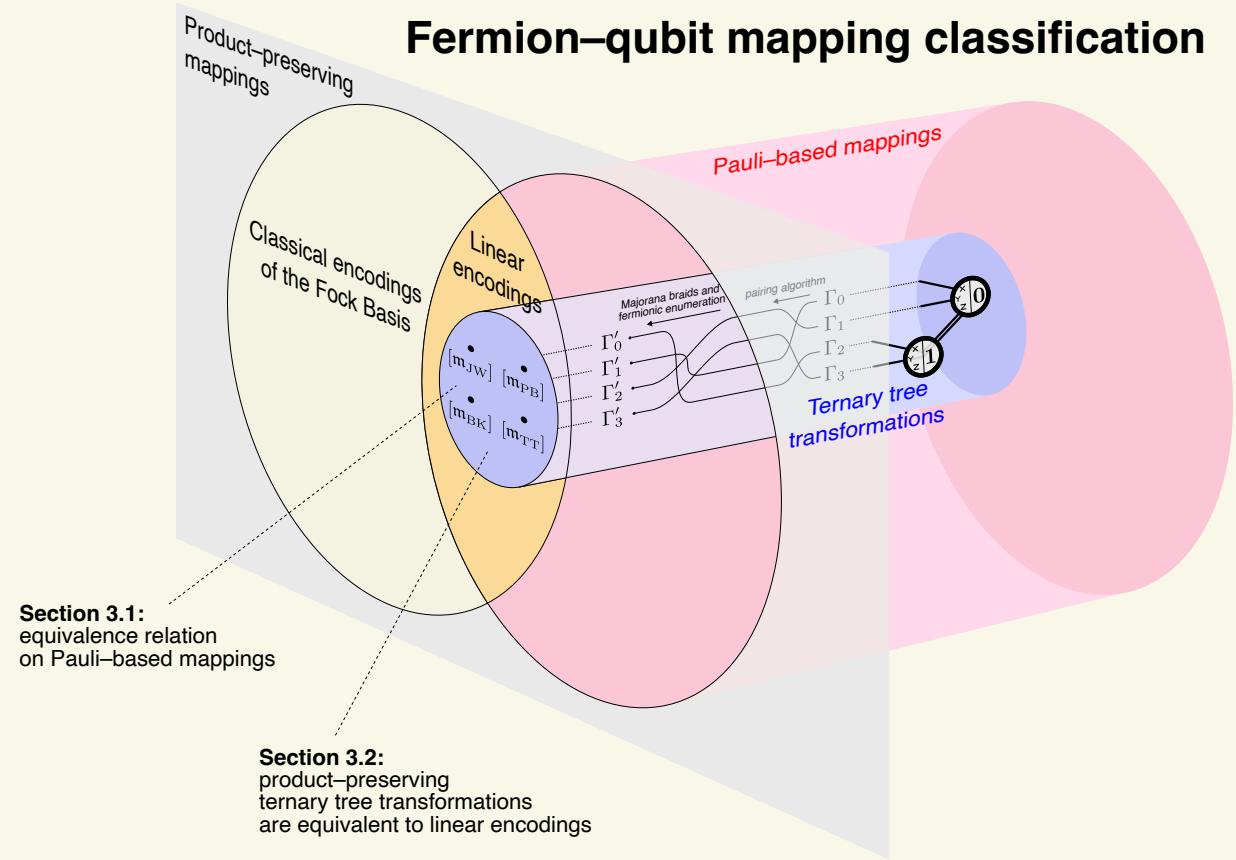

## Illustrating the impact of new research

2024

PhD thesis

Inkscape and Ipe





The left figure represents the literature before the work in my PhD. I chose the 3D Venn diagram format to display overlapping concepts and redundancies in their description. The right figure depicts the simplification of these different concepts, and acts as a visual table of contents for my paper.

Vivid imagery from sketches  
2024  
[preprint](#)

Top left, top right (sketches): hand-drawn  
Bottom left, bottom right (final): Ipe

I created these diagrams to illustrate technical concepts in an upcoming preprint in the field of quantum computing, for which I am the lead author. Ternary tree graphs are the mathematical backbone of a popular strategy to encode fundamental particles in quantum computers.



A technical detail that the images highlight are the many distinct paths through the tree, which is a level of detail missing from other illustrations in the literature.

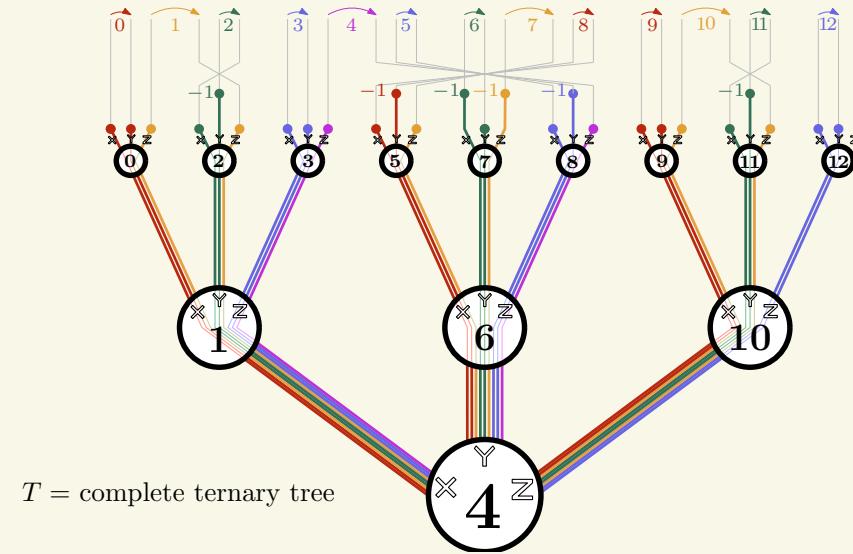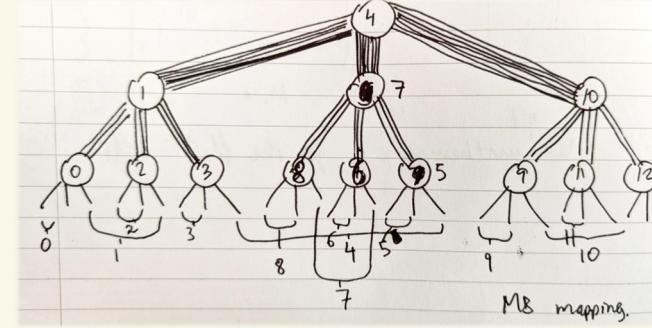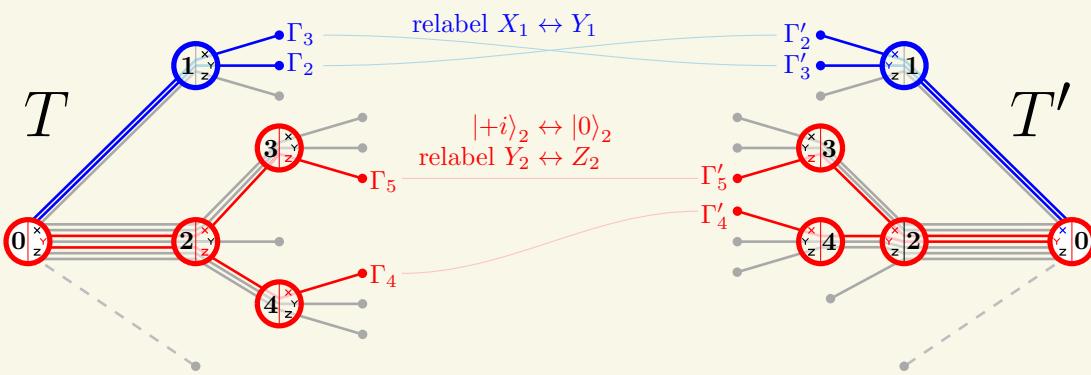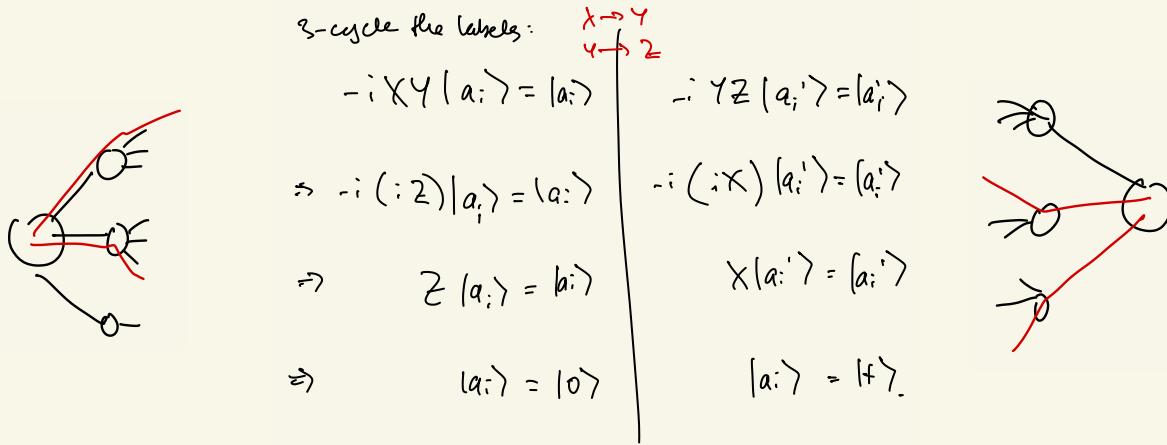

# My design process

Scientific imagery is part of my learning process, and I render my understanding through illustration. Through constant refinement of accuracy and style, I converge to a final product that tells the entire story as simply as possible.

## Sketches and roughs

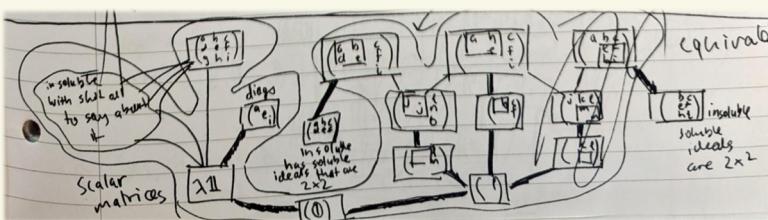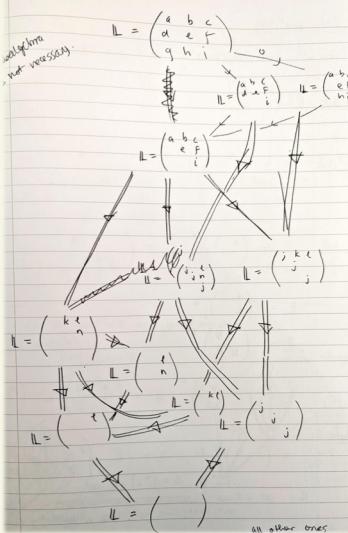


2020

personal notes


Left, bottom (sketches): hand-drawn,  
Right (annotated sketch): Ipe

Notes I took while attending a virtual lecture course in pure mathematics during the lockdowns in winter 2020.

## Refinement

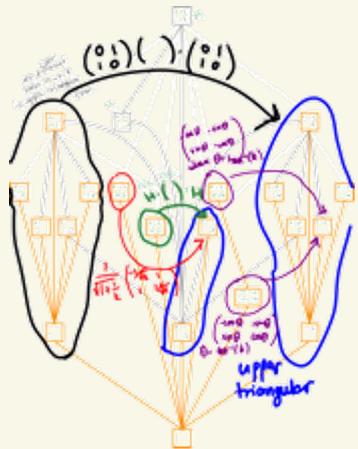

## Scientific accuracy and style

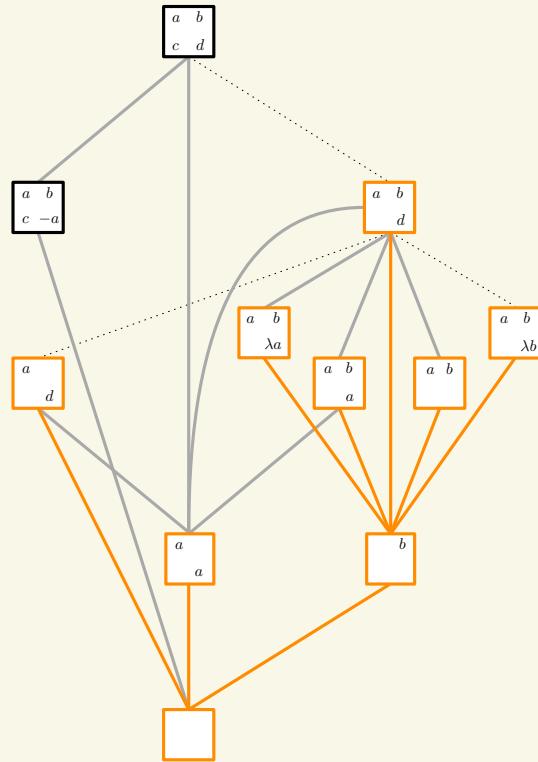


2020

personal notes

Ipe

This image was the result of repeatedly refining and simplifying my rough notes.

## Final product

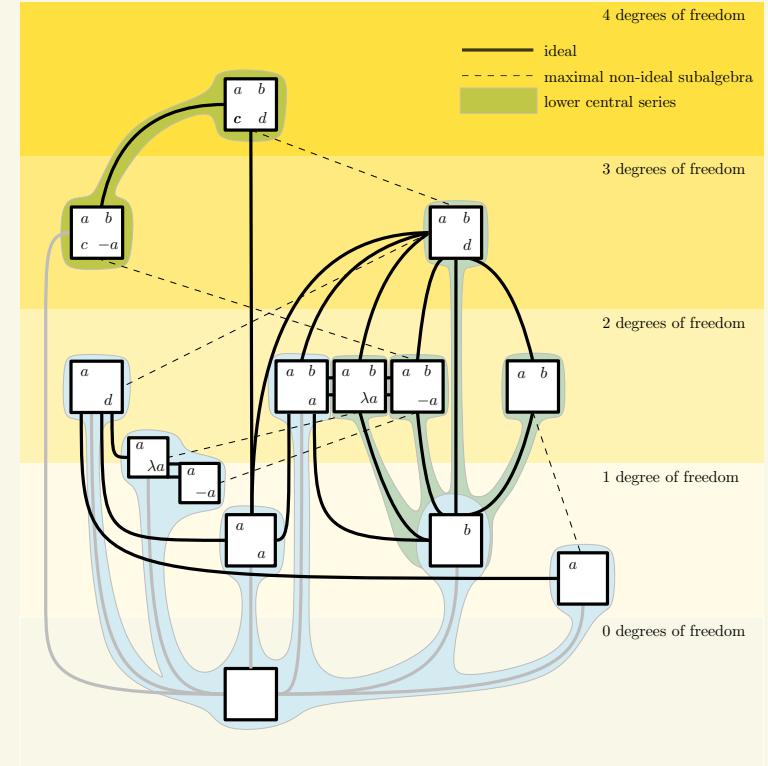

2020

personal notes

Ipe

The stylised final product depicts all two-dimensional Lie algebras and uses the colour gradient to distinguish different categories.

# Reaching broader audiences

Hand-drawn slides with no equations


2024

public lecture in Cambridge

Hand-drawn and Powerpoint

These slides come from a presentation about my PhD work which I gave to a general audience. In preparing this work I made a commitment to draw by hand and omit any equations to create a friendly and engaging aesthetic.



## THE ELECTRONIC STRUCTURE PROBLEM

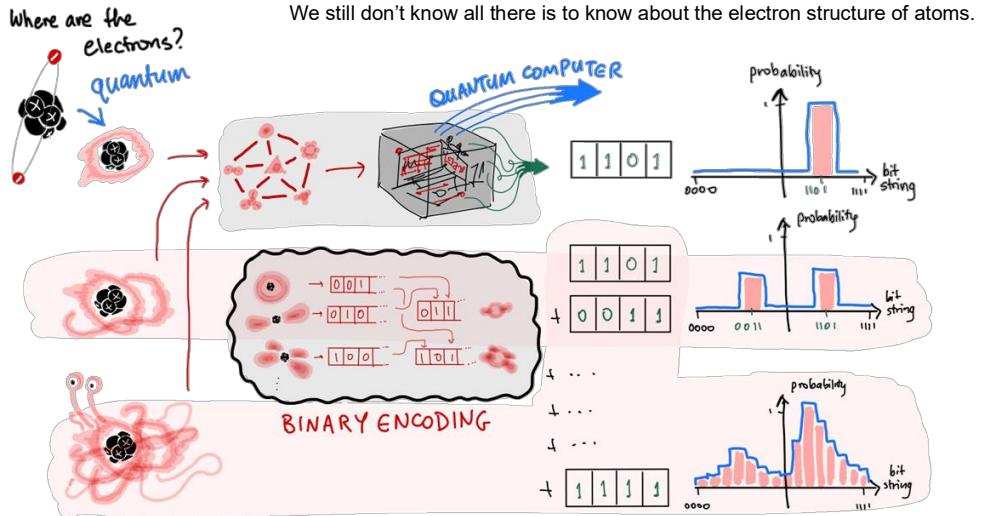

## QUANTUM COMPUTERS


Bits are either "on" (1) or "off" (0). Algorithms operate on bits by changing their value

Qubits are a mixture of "up" (1) and "down" (0). Quantum algorithms rotate qubits. When we look at qubits, all we see are 1s and 0s!

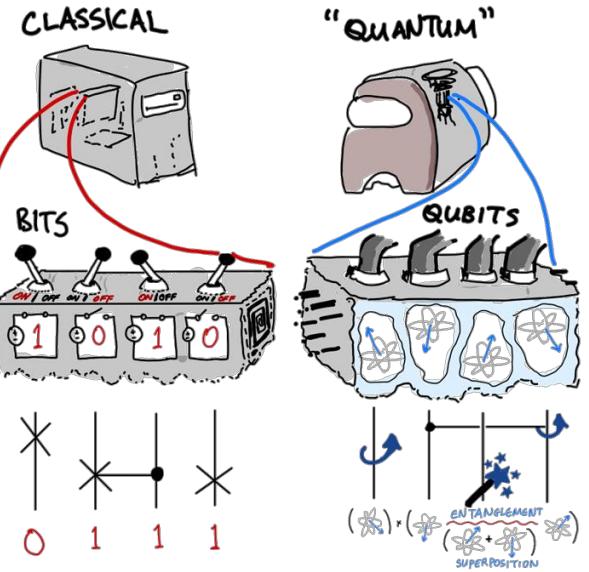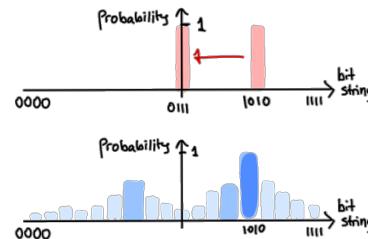

## IMPROVING QUANTUM ALGORITHMS

Representations of electrons on quantum computers are equivalent, so... choose the best one.

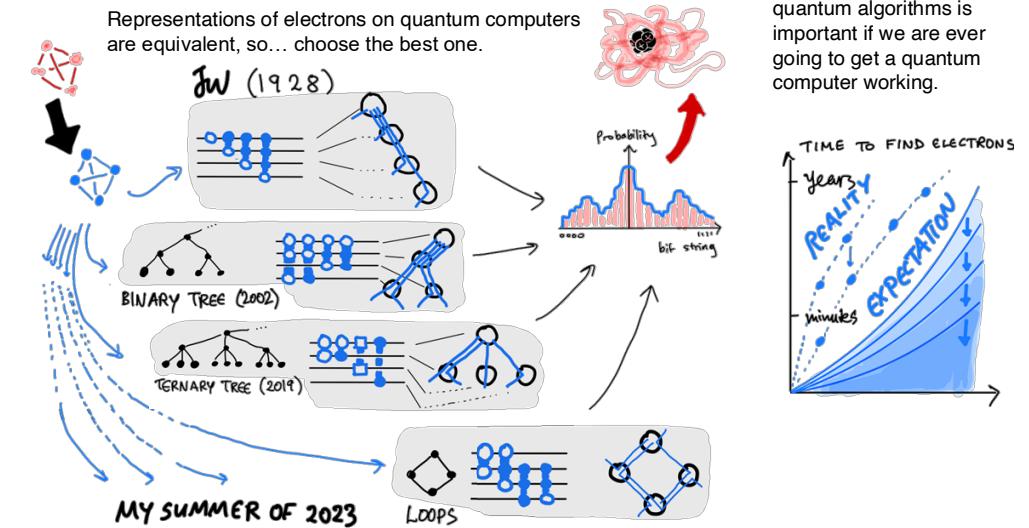

Any improvement to quantum algorithms is important if we are ever going to get a quantum computer working.

# Poster gallery

Posters are an exciting opportunity for me to collate existing bodies of illustrations and refine my research to tell a single clear story while working to a tight deadline.

More than once, creating a poster has cleared a roadblock in my research, allowing me to progress to the next stage of a problem or wrap up a project entirely.

Presenting posters at multiple conferences per year has challenged me to improve my digital illustration skillset and continue to find new ways of incorporating my artistic style into my work.

Pages 8–11 contain examples of my posters and their design process.

## Masters poster 2018

*presented at the Gordon Research Conference  
for Quantum Science in Easton, Massachusetts*

*lpe, Inkscape and Powerpoint*

My first attempt at creating a scientific poster tells the story of the value  $E$ , a user-specified parameter for a quantum algorithm. The choice of  $E$  (top-left) affects the rest of the algorithm, which the poster visually anchors using the colour red.




**Graph comparison via nonlinear quantum computing**

Mitchell Chiew<sup>1</sup>, Kooper de Lacy<sup>1,2</sup>, Chao-hua Yu<sup>1,3</sup>, Samuel Marsh<sup>1</sup>, Jingbo B Wang<sup>1</sup>

<sup>1</sup> Department of Physics, University of Western Australia, Perth, WA 6009 Australia  
<sup>2</sup> Department of Mathematics, University of Western Australia, Perth, WA 6009 Australia  
<sup>3</sup> State Key Laboratory of Networking and Switching Technology, Beijing University of Posts and Telecommunications, Beijing, 100876 China

**Graph comparison**

- The task of identifying topological similarities between two graphs
- Maximum edge overlap is a useful measure of graph similarity, but complexity is  $\mathcal{O}(n!)$

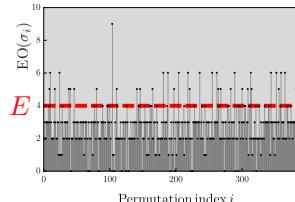

**Nonlinear quantum computing**


- Physical systems exhibiting nonlinear QM: Bose-Einstein condensates, optics
- The Gross-Pitaevskii equation:  $i \partial_t |\psi\rangle = (H + K)|\psi\rangle$ ,  $\langle x|K|\psi\rangle = g|\langle x|\psi\rangle|^2\langle x|\psi\rangle$
- Nonlinear quantum search:

[1] D. S. Abrams and S. Lloyd, "Nonlinear quantum mechanics implies polynomial-time solution for NP-complete and #P problems," *Phys. Rev. Lett.*, 1998.

[2] A. M. Childs and J. Young, "Optimal state discrimination and unstructured search in nonlinear quantum mechanics," *Phys. Rev. A*, 2016.

[3] K. de Lacy, L. Noakes, J. Twamley and J. B. Wang, "Non-linear quantum search," *Quantum Inf. Process.*, in press, 2018.


**Graph adjacency matrices**

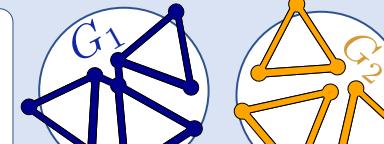

**Linear quantum circuit**

Produces a probe qubit in the state  $|\psi\rangle = \left(1 - \frac{m}{n!}\right)|0\rangle + \frac{m}{n!}|1\rangle$ , one of  $n! + 1$  possible states.

$m = \text{number of permutations with edge overlap greater than } E$ .

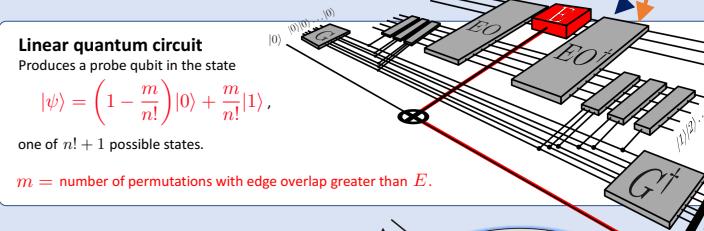

**Representing all permutations**

Linear quantum circuit generates the state  $\frac{1}{\sqrt{n!}} \sum_{\sigma \in S_n} |\sigma\rangle |0\rangle$  and marks permutations by producing  $\frac{1}{\sqrt{n!}} \left( \sum_{EO(\sigma) \leq E} |\sigma\rangle |0\rangle + \sum_{EO(\sigma) > E} |\sigma\rangle |1\rangle \right)$ .

**Algorithm for graph comparison**

```

INPUT: Graphs  $G_1, G_2$  with  $n$  vertices.
set edge overlap threshold  $E$  and  $s = n!$ .
for  $i = 1, 2, \dots, \mathcal{O}(\log(n))$  do
    use Main Procedure to determine if
         $m = 0$  or  $m > 0$ .
        if  $m > 0$  then
            increase:  $E \rightarrow E + E_{\max}/2^i$ .
        else if  $m = 0$  then
            decrease:  $E \rightarrow E - E_{\max}/2^i$ ,
            set  $s = n!$ .
        end if
    end for
return  $E$ 
OUTPUT:  $E = \text{maximum edge overlap.}$ 

```

**Worst-case complexity:**

- $\mathcal{O}(n^3 \log^3(n) \log(n))$  fundamental quantum gates
- $\mathcal{O}(\frac{1}{g} n^2 \log^3(n) \log(n))$  nonlinear evolution time

**Nonlinear evolution in our algorithm**

**Main Procedure:** determine if  $m = 0$  or  $m > 0$ .

- Perform the Sub-Procedure and measure the result. Repeat this  $\mathcal{O}(\log \log(n))$  times
- If any measurements result in  $|1\rangle$ , then  $m > 0$
- Otherwise, halve  $s$  and repeat.
- If  $s = 1$ , then  $m = 0$

**Sub-Procedure:**

- Generate  $|\psi\rangle$
- Run nonlinear evolution for time  $\mathcal{O}(\frac{1}{g} \log(n!))$
- Prepare qubit for measurement in the Main Procedure

**Conclusion**

Our quantum algorithm finds the **maximum edge overlap** of two graphs, each with at most  $n$  vertices. The algorithm takes only polynomial time in  $n$ . Combined with new linear quantum protocols, our results demonstrate the power of nonlinear quantum search techniques.

Measure after evolution to learn about the value of  $m$ .  
Repeat a total of  $\mathcal{O}(\log \log(n))$  times to determine if  $m = 0$  or  $m > 0$ .

## PhD poster

2023

*presented at the conference Quantum Information Processing in Ghent, Belgium*

Ipe and Inkscape

The design principle of the posters for my PhD work is to visually distinguish electrons (red) from the qubits, the information-carrying particles of quantum computers (blue).

This poster collates several disparate strands of my research under one banner. From conception to final product, I produced it in one working day.

# Speedups for near- and long-term Hamiltonian simulation via fermionic labelling


Mitchell Chiew<sup>1</sup>, Sergii Strelchuk<sup>1</sup>

arxiv.org/abs/2110.12792 + upcoming

<sup>1</sup> Department of Applied Mathematics and Theoretical Physics, Centre for Mathematical Sciences, University of Cambridge  
Cambridge CB30WA, United Kingdom



In this work we interrogate the assumed superiority of the Bravyi-Kitaev mapping over the Jordan-Wigner transform. The cornerstone of our approach is the freedom to label the fermionic modes in any order. Our analysis allows us to computationally explore the space of all fermionic labellings, searching for the optimal fermion-qubit mapping to minimise any given cost function.

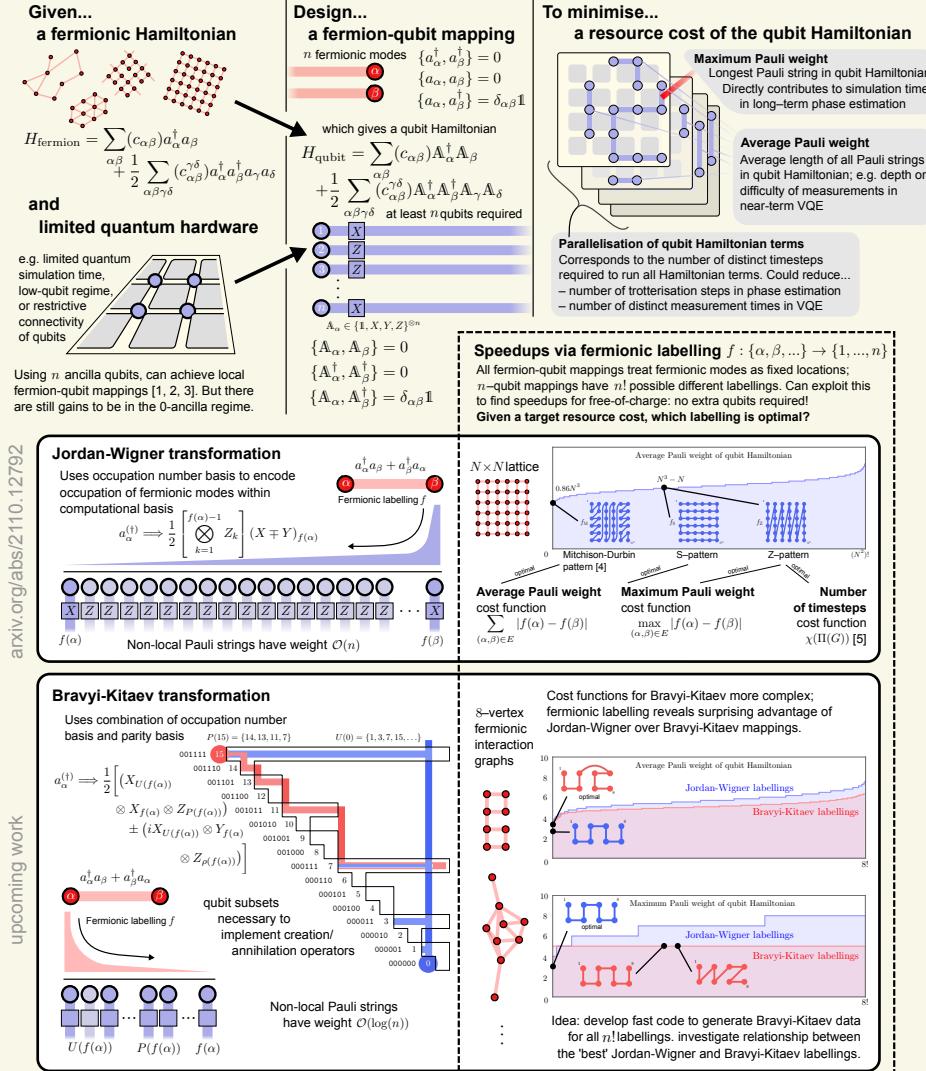


## PhD poster before and after 2024

*Presented at the conference  
Quantum Information Processing  
in Taipei, Taiwan*

*Left (sketch): hand-drawn  
Right (final): Ipe and Inkscape*

For this example, I wanted to visually anchor the idea that there are many equally valid ways to map electronic behaviour onto quantum computers. This manifests in the central, circular piece of the poster, defining and cataloguing the many ways to perform this mapping.

The red arrow shows the motivating application of converting electronic systems into information on a quantum computer.

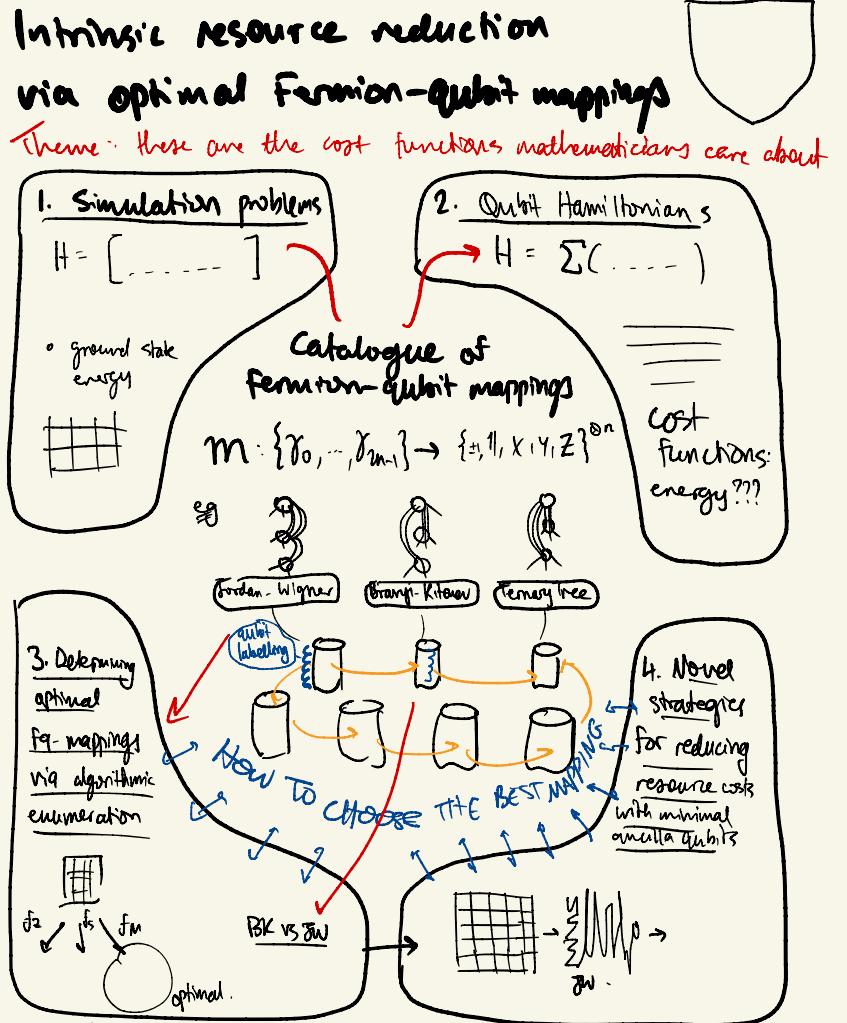

## Universal catalogue of ancilla-free fermion-qubit mappings

Mitchell Chiew<sup>1</sup>, Sergii Strelichuk<sup>1</sup>

<sup>1</sup> Department of Applied Mathematics and Theoretical Physics, Centre for Mathematical Sciences, University of Cambridge, Cambridge CB30WA, United Kingdom



arXiv:2110.12792 + upcoming  
10.22331/q-2023-10-18-1145

### Fermionic quantum simulation

A judicious choice of fermion-qubit mapping can drastically reduce the resource costs of simulation algorithms. There are many options.

$$H_{\text{fermion}} = \sum_{i,j=0}^{n-1} (c_{ij}) a_i^\dagger a_j + \frac{1}{2} \sum_{i,j,k,l} (c_{ijkl}^k) a_i^\dagger a_j^\dagger a_k a_l$$

$\{a_i^\dagger, a_j\} = 0, \{a_i^\dagger, a_j^\dagger\} = \delta_{ij}$

Hamiltonians of interest incur much quantum simulation cost through the hopping terms.

### Resource cost of simulation algorithms

By defining the physical cost of a quantum simulation algorithm, we can search for a fermion-qubit mapping that produces the most resource-efficient quantum circuit.

$$H_{\text{qubit}} = \sum_{i,j=0}^{n-1} (c_{ij}) A_i^\dagger A_j + \frac{1}{2} \sum_{i,j,k,l} (c_{ijkl}^k) A_i^\dagger A_j^\dagger A_k A_l$$

Costs can include total gate count, physical space, or clock time of the algorithm.

Restrictions can include limited quantum simulation time, or a low qubit count and connectivity.

Ancilla qubits allow local fermion-qubit mappings. But there are still gains to be made in the ancilla-free regime.


### Ancilla-free fermion-qubit mappings

Represent the  $n$ -mode fermionic algebra via anticommuting Pauli strings on  $n$  qubits:

$$\begin{aligned} m: & \{\gamma_0, \dots, \gamma_{n-1}\} \rightarrow \{\Gamma_0, \dots, \Gamma_{2n-1}\} \subset \mathcal{P}_n \\ \Gamma_i & \in \{\mathbb{I}, X, Y, Z\}^{\otimes n} \end{aligned}$$

### Catalogue of ancilla-free fermion-qubit mappings

Three symmetries relate physically identical classes of mapping:

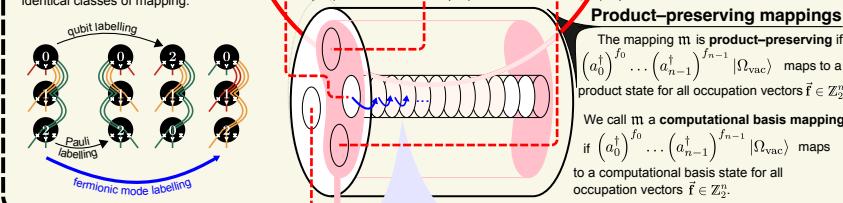

Representation of the fermionic creation and annihilation operators:

$$m: a_i \mapsto A_i := \frac{1}{2} (\Gamma_{2i} + i\Gamma_{2i+1})$$

Ancilla-free fermion-qubit mappings

### Invertible binary matrices and computational basis mappings

Computational basis mappings act on fermionic occupation states as invertible binary matrices:

$$m: (a_0^\dagger)^{f_0} \dots (a_{n-1}^\dagger)^{f_{n-1}} |\Omega_{\text{vac}}\rangle \mapsto |M_m f\rangle$$


e.g. the Jordan-Wigner transformation acts as the identity matrix  $M_{\text{JW}} = \mathbb{I}^{\otimes n}$

### The balanced Jordan-Wigner transformation [4]

is not a computational basis mapping, and thus has no invertible binary matrix representation.

### Optimal mapping classes and fermionic labellings

Given a fermionic Hamiltonian, different mappings produce different quantum simulation circuits. Comparison of the Pauli weights of Hamiltonian terms is straightforward via invertible binary matrix formulae; can optimise for either (a) mapping type, or (b) fermionic labelling.

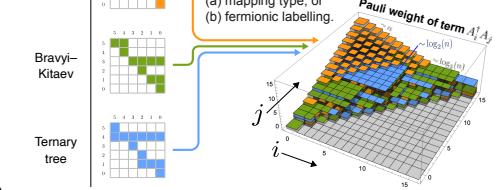


[1] "Über das Paulische Äquivalenzverbot", Jordan and Wigner (1928)

[3] "Optimal fermion-to-qubit mapping via ternary trees...", Jiang et al. (2020)

[2] "Fermionic quantum computation", Bravyi and Kitaev (2003)

[4] "Bonsai Algorithm: Grow Your Own Fermion-to-Qubit Mappings", Miller et al. (2023)

# Other samples

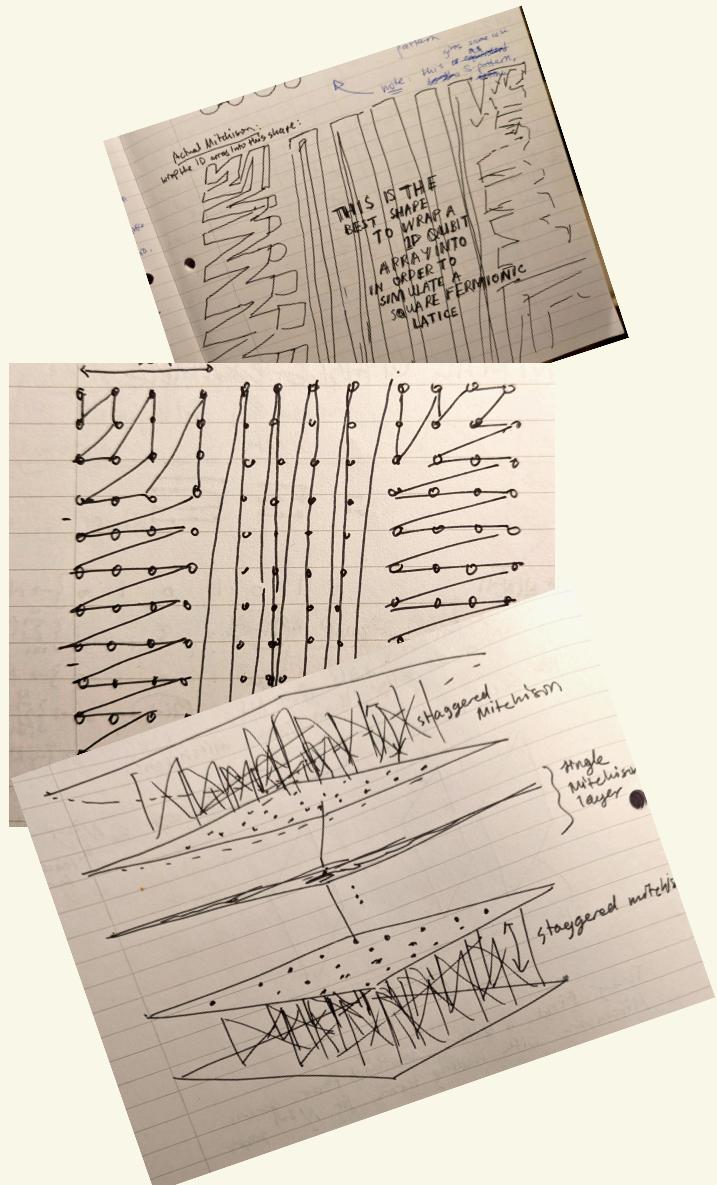

**The Mitchison–Durbin pattern**  
2020–2021  
appears in [Discovering optimal fermion-qubit mappings through algorithmic enumeration](#)

Left: (sketches): hand-drawn, chalk on blackboard  
Centre and right (final): Ipe

The first project in my PhD involved studying this pattern for labelling the vertices in a square lattice. The centre image depicts a vivid visual example, while the right image gives the explicit formula for all vertex labels.

