

Bayesian multi-level modelling for predicting single and double feature visual search

Anna E. Hughes^a, Anna Nowakowska^b, Alasdair D. F. Clarke¹

^a*Department of Psychology, University of Essex, Colchester, CO4 3SQ, UK*

^b*School of Psychology, University of Aberdeen, Aberdeen, AB24 3FX, UK*

Abstract

Performance in visual search tasks is frequently summarised by “search slopes” - the additional cost in reaction time for each additional distractor. While search tasks with a shallow search slopes are termed efficient (pop-out, parallel, feature), there is no clear dichotomy between efficient and inefficient (serial, conjunction) search. Indeed, a range of search slopes are observed in empirical data. The Target Contrast Signal (TCS) Theory is a rare example of quantitative model that attempts to predict search slopes for efficient visual search. One study using the TCS framework has shown that the search slope in a double-feature search (where the target differs in both colour and shape from the distractors) can be estimated from the slopes of the associated single-feature searches. This estimation is done using a contrast combination model, and a collinear contrast integration model was shown to outperform other options. In our work, we extend TCS to a Bayesian multi-level framework. We investigate modelling using normal and shifted-lognormal distributions, and show that the latter allows for a better fit to previously published data. We propose running a new fully within-subjects experiment to attempt to replicate the key original findings, with some changes to help distinguish between theories.

Keywords: Visual search, Efficient search, Parallel processing

1. Introduction

Visual search, where participants are asked to find a target within a cluttered scene, has been extensively studied within psychology. Several models have been developed that can generate testable predictions about how different types of distractors and targets affect search efficiency. One of the key distinctions in the field

6 has been between efficient (also referred to as parallel or pop-out) and inefficient
7 (serial) search. These are often studied in the context of the regression slope be-
8 tween the number of distractors and mean reaction time, which has been termed
9 the *search slope*. When the search slope is shallow (usually positive, but occasion-
10 ally negative e.g. (Rangelov et al., 2017)), the search is called efficient or parallel,
11 and the addition of more non-target distractors has little impact on an observers
12 difficulty in finding a target. When the slope is steeper, each additional distrac-
13 tor has a noticeable impact on increasing difficulty, and the search is described
14 as inefficient or serial. However, the distinction between these types of search is
15 often less clear in real experimental data, with a range of different search slopes
16 being seen for different types of targets and distractors (Duncan and Humphreys,
17 1989; Cave and Wolfe, 1990; Wolfe, 1998; Liesefeld et al., 2016). Recent work
18 has also attempted to model the variation in search slopes at the boundary between
19 inefficient and efficient search (Liesefeld et al., 2016).

20 In the current study, we are interested in what has traditionally been termed
21 efficient or parallel search, and the factors that affect search slope in these condi-
22 tions. Recent work has suggested that for efficient search, there is a logarithmic
23 relationship between distractor set size and reaction time, and that this relation-
24 ship can be modified by target-distractor similarity (Buetti et al., 2016), providing
25 evidence that search behaviour in parallel search is more complex than has pre-
26 viously been assumed. This observation has formed the basis of the ‘Target Con-
27 trast Signal (TCS) Theory’ (Lleras et al., 2020), which aims to provide a means
28 of predicting observer search slopes for new search arrays by quantifying target-
29 distractor differences. For example, by measuring search slopes for conditions in
30 which the distractors differ from the target along a *single feature* (e.g. colour *or*
31 shape), it has been shown that you can predict search times for arrays in which
32 the target differs from the distractors along two features (e.g., colour *and* shape)
33 which we refer to here as *double feature* search (Buetti et al., 2019) (but simi-
34 lar paradigms have been known by other names e.g. ‘redundant feature search’
35 (Krummenacher and Müller, 2012; Mordkoff and Yantis, 1991)). Here, we aim
36 to replicate and extend this work both theoretically and empirically, to test the
37 generalisability of the TCS model, and to suggest ways in which the TCS model
38 could be modified to generate better predictions.

39 1.1. Previous Work

40 Many different forms of visual search models have been proposed. One well
41 developed class of models are the saliency models, which aim to predict eye move-
42 ments during scene viewing, including visual search. They rest on the assump-

tion that fixations are directed to objects or locations that are most dissimilar to the background or other objects in the visual display (Itti and Koch, 2000; Itti et al., 1998; Koch and Ullman, 1987). While the original saliency model was able to predict fixation allocation in a visual search task above chance (Parkhurst et al., 2002), further research demonstrated that a comparable level of performance could be achieved using a simple central fixation bias heuristic (Tatler, 2007). The saliency models have since been extended and improved (see for example Zhang et al. (2008)): however, the main issue with this family of models remains their limited usability in complex real-life search arrays (Tatler et al., 2011; Koehler et al., 2014), and even in abstract laboratory search arrays (Kotseruba et al., 2020). In addition, in most instances of visual search, the target is clearly defined (i.e. the goal is to find a specific object) and inspecting the most salient areas of the display may in these cases be inefficient. Finally, by focusing on eye movements, these models do not necessarily provide a theoretical framework for the cognitive processes underlying visual search.

Perhaps the most established class of models of visual search are based around Feature Integration Theory (Treisman and Gelade, 1980), which has been modified and extended by Wolfe and colleagues in the Guided Search Model (Wolfe et al., 1989; Wolfe, 2014). These theories have been developed using data from visual search tasks with discrete sets of abstract items. These models combine top-down influences (how closely an item resembles the observer's goal) with bottom-up image properties. For example, if one's goal (top-down processing) is to find a red horizontal bar, all the red and horizontal items in a visual search display will be given greater weight than distractors (e.g. vertical and blue items) in the model. The salience of a given object in the display (how distinctive it is from the surrounding objects) also activates bottom-up processing. For instance, a blue item among red items is ranked higher than red among orange items. In such cases, a salient item can capture attention even without resembling the target. Combining bottom-up and top-down sources of activation generates an activation map which generates a prediction of the order in which stimuli are processed in visual search. Other extensions to these models have been proposed, such as the Dimension Weighting Account, in which saliency weightings are assigned to different target 'dimensions' (e.g. colour or shape), helping to explain results where varying the target dimension within blocks of trials leads to longer reaction times than where the dimension remains consistent within a block (Krummenacher and Müller, 2012). Thus, these models aim to produce a representation of the visual properties of the distractors at each location in the visual field. However, these are predominantly qualitative models, and thus it is difficult to use them to make

specific quantitative predictions.

TCS falls under a class of models that take a different approach, in that they focus solely on representing the difference between targets and distractors. For example, in work on eye movement patterns, it has been proposed that performance in inefficient (serial) visual search is mostly determined by the size of the ‘functional viewing field’, whose size varies as a function of target-distractor similarity (Hulleman and Olivers, 2017). Similarly, work on attention has proposed the notion of ‘relative features’, where attention is tuned to feature relationships i.e. the appearance of the target relative to distractors in the environment (Becker et al., 2014; Becker, 2010). TCS also has features in common with other models that propose parallel identification of all items in a scene, with diffusion based mechanisms for identifying targets from distractors (Moran et al., 2013, 2016). However, TCS (Lleras et al., 2020) aims to provide a unifying framework that can make quantitative behavioural predictions for visual search based on this general assumption. As such, it is an attractive candidate model for a formal registered replication.

A key assumption of the TCS model is that behaviour is determined by comparing the target template (held in memory) with every element present in the scene in parallel. This allows the visual system to reject peripheral non-targets quickly; the speed at which items are evaluated is determined by how different the item is from the template through an evidence accumulation process (formally, the slope of the logarithmic function is assumed to be inversely proportional to the overall magnitude of the contrast signal between the target and distractor). The model thus focuses on an initial, efficient processing stage of search; if sufficient evidence is not accumulated during this process, the model posits that a second stage is entered, requiring a sequence of eye movements to search for the target in a serial manner. TCS has been successful in predicting a number of empirical results, including search performance in heterogeneous scenes based on parameters estimated in homogeneous scenes, both with artificial stimuli (Buetti et al., 2016; Lleras et al., 2019) and with real-world objects visualised on a computer display (Wang et al., 2017). Table 1 provides an overview of studies investigating the TCS framework to date.

The original version of the TCS model is essentially a (natural) log-linear model in the number of distractors. The full model contains a variable L , which represents the number of different types of distractors present in the display. However, in our paper, we will follow Buetti et al. (2019) and only consider the specific case of $L = 1$, of a target among a homogeneous set of distractors. In this case, the TCS model can be represented in the following way:

$$\hat{RT} = a + D \log(N_T + 1) \quad (1)$$

119 The intercept, a , corresponds to search arrays in which only the target is
 120 present and there are no distractors. N_T is the total number of distractors.

121 1.2. Rationale for proposed work

122 While many aspects of the TCS framework have been tested, with extremely
 123 promising results, there remains a great deal of scope for verification of some of
 124 the key findings to date, and extensions of aspects of the model. In all implementa-
 125 tions of TCS so far, predictions of search efficiency (e.g. in heterogeneous scenes)
 126 have been made on the average of a group of participants, using data from a dif-
 127 ferent group performing a different task (e.g. searching in homogeneous scenes).
 128 Thus, we know that TCS can replicate group-level averages between subjects in
 129 search well, but we do not know to what extent it is also able to make predictions
 130 at the individual level. This is particularly important given that conclusions based
 131 on aggregate data can be different from those that take individual differences into
 132 account; in one study where participants searched for a target in an array of ran-
 133 domly oriented line segments, aggregating the data suggested that participants
 134 were using a stochastic search model (Nowakowska et al., 2017). However, when
 135 considering each participant individually, it became clear that there was a high
 136 level of heterogeneity in responses, with some participants performing close to
 137 optimally, and others actually performing worse than chance (Nowakowska et al.,
 138 2017). Similarly striking variability has also been reported in other search studies
 139 (Irons and Leber, 2016, 2018; Clarke et al., 2022a).

140 Taking search time distributions into account is also important for constrain-
 141 ing theories of visual search (Wolfe et al., 2010; Liesefeld and Müller, 2020): for
 142 example, they have been used to help distinguish between models that make sim-
 143 ilar predictions at the level of average reaction times (Moran et al., 2016, 2017).
 144 Including subject and trial level data into our implementation of the TCS will
 145 therefore further aid model development and assumption testing.

146 We also extend the TCS model into a Bayesian framework, where we begin
 147 with existing 'prior' beliefs that are updated with data to give 'posterior' beliefs
 148 that can be used for inference (McElreath, 2020). We think this has a number
 149 of advantages over frequentist approaches. Perhaps most importantly, Bayesian
 150 models are highly flexible. We demonstrate how we are able to specify a model
 151 that is able to more accurately represent the distribution of responses (for exam-
 152 ple, by specifying a response distribution that avoids predicting negative reaction

Reference	Overview
Buetti et al. (2016)	For efficient search with a specific target, there is a logarithmic relationship between distractor set size and reaction time. The steepness of this relationship is modulated by distractor-target similarity, with steeper slopes for more similar distractors.
Wang et al. (2017)	Data from homogeneous search arrays can be used to predict search reaction times in heterogeneous displays containing images of real-world objects, using an equation assuming parallel, unlimited capacity, exhaustive processing, and independence of inter-item processing.
Madison et al. (2018)	Logarithmic efficiency in efficient search cannot be explained by crowding in peripheral vision.
Ng et al. (2018)	Logarithmic efficiency in efficient search cannot be explained by eye movements.
Lleras et al. (2019)	Validation of previous results showing data from homogeneous search arrays can be used to predict reaction times in heterogeneous displays. Distractor-distractor interactions can also facilitate processing when nearby items are similar to each other.
Buetti et al. (2019)	Data from search arrays where the distractors are distinguished from the target by one feature can be used to predict search reaction times in displays with compound stimuli, defined by two features. Reaction times can be predicted using a collinear contrast integration model, which assumes that the overall target-distractor contrast is the sum of the contrasts from the two feature vectors separately.
Lleras et al. (2020)	Full proposal of the Target Contrast Signal Theory, proposing that the initial stage of processing computes a difference signal between each item in the scene and the target template, using this to determine which items in the scene are unlikely to be the target.
Ng et al. (2020)	Attention works in a two stage process, first discarding target-dissimilar distractors in a distributed, parallel way. Focused spatial attention then visits target-similar items at random.
Xu et al. (2021)	Extension of Buetti et al. (2019) to new features (shape and texture), which combine according to a Euclidean metric (orthogonal contrast integration model).

Table 1: An overview of work on the Target Contrast Signal Theory. The key paper for our replication is highlighted.

times) with a relatively complex model structure, that can be fit to a relatively small amount of pilot data: something that would be challenging within a frequentist framework. We also believe that Bayesian models offer very intuitive methods for model testing and comparison and straightforward interpretation of results, and we hope that this manuscript can act as a demonstration of these benefits, showing how they can be applied to real scientific questions beyond the simplified examples often found in textbooks or tutorials.

In the current manuscript, we focus on replicating and extending findings from Buetti et al. (2019). In their study, participants searched for a target in a scene of homogeneous distractors (see Figure 1). First, parallel search efficiency (measured by the logarithmic search slope) was estimated for cases where the distractors varied from the target in one dimension: either colour (e.g. a cyan target being searched for in either yellow, blue or orange distractors) or shape (e.g. a semicircle target in either circle, diamond or triangle distractors). New participants then searched for the same targets in displays where the distractors were compounds, differing from the target in both colour and shape (e.g. searching for a cyan semicircle in either blue circles, orange diamonds or yellow triangles). The logarithmic search slopes in the initial experiments were then used to predict the logarithmic slopes and reaction times using a number of models. The authors found that the best model was a ‘collinear contrast integration model’ where the distinctiveness scores were summed along each attribute in the unidimensional experiments, creating an overall contrast score that was used for compound stimuli predictions. In our registered replication, we will attempt to verify the conclusions of Buetti et al. (2019), that the collinear contrast integration model does indeed offer the best characterisation of contrast signal combinations in visual search within the TCS framework.

We begin by verifying the analysis of Buetti et al. (2019). We then describe our proposed replication study, showing with pilot data how we are able to extend their model of how multi-dimensional contrasts are calculated, both by incorporating a multi-level design to predict within-subjects effects and by utilising a Bayesian generalised linear model framework to better represent the distribution of responses (e.g. avoiding predicting negative reaction times, accounting for uncertainty in model predictions).

2. The Target Contrast Model

We first describe the original Target Contrast Model, as presented in Buetti et al. (2019) and verify that we can successfully replicate the original analysis



Figure 1: Example stimuli from Buetti et al. (2019) Top left: Expt 1A. Here, the target is a blue semicircle within a set of homogeneous (yellow semicircle) distractors. Top right: Expt 1B. The target is a grey semicircle in circular grey distractors. Bottom left: Expt 2A. The target is a blue semicircle in orange diamond distractors. Bottom middle: Expt 2B. The target is a blue semicircle in dark blue triangle distractors. Bottom right: Expt 2C. The target is a blue semicircle in yellow circular distractors.

189 (both using frequentist modelling and Bayesian modelling; see *Supplementary*
190 *Materials - Computational Verification*).

191 2.1. TCS modelling overview

192 In Experiment 1a of Buetti et al. (2019), participants searched for a cyan
193 semicircle target among blue, yellow or orange semicircular distractors i.e. they
194 searched for a target that differed from the distractors by a *single feature* (colour).
195 The experiment was then repeated (1b) using a different single feature (shape,
196 with participants searching for the semicircular target within triangle, circle or di-
197 amond distractors). In Experiments 2a, 2b and 2c, participants again searched for
198 a cyan semicircle, but this time, the distractors differed in both shape and colour.
199 We will refer to these conditions as *double features*. Note, unlike in standard con-
200 junction searches, in this paradigm, the distractors are all identical with respect to
201 these features (i.e. orange triangles). Examples of all these stimuli are shown in
202 Figure 1. Buetti et al. (2019) also carried out a replication of their basic results
203 using slightly different target and distractor stimuli (Experiments 3 and 4).

204 The *Target Signal Contrast* theory is built around a linear model for predicting
 205 mean reaction times from the logarithm of the number of distractors (see Equation
 206 1). In particular, the TCS theory allows us to predict the value of the logarithmic
 207 slope, $D_{c,s}$, in this condition based on the corresponding D_i in the single feature
 208 search experiments.

209 2.1.1. Calculating the intercept, a , and the logarithmic slope parameter, D_i

210 Experiments 1a and 1b and 3a and 3b were used to calculate the logarithmic
 211 slope parameter D_i . In all experiments, the number of distractors varied, allowing
 212 the data to be used to fit a log-linear model for reaction times, where reaction
 213 times increase logarithmically with N_T , the number of distractors (see Equation
 214 1). In the original model the error distribution was assumed to be normal. Thus
 215 the results of Experiments 1 and 3 were used to calculate D_i , for each type of
 216 distractor. When colour varied, we will refer to D_c , for $c = 1, 2, 3$. Similarly for
 217 shape we will denote this (D_s), and the compound features are denoted as ($D_{c,s}$).

218 Fitting the model specified in Equation 1 to the data, we obtain the values for
 219 D_c and D_s given in Table 2. As can be seen, the more similar the distractors are to
 220 the target, the steeper the slope parameter is.

feature	D_c	feature	D_s
blue	76.8	triangle	141.1
yellow	16.0	diamond	77.2
orange	9.8	circle	62.1

Table 2: A table of D_i values for Experiment 1a and 1b. See *Supplementary Materials - Computational Verification* for full values for all experiments.

221 2.1.2. Estimating $D_{c,s}$, the logarithmic slope parameter for compound features

222 In the context of the current experiments, the core idea of TCS theory is that
 223 we can estimate the (natural) logarithmic slope parameter for a double feature
 224 visual search from the slopes parameters in the two independent single feature
 225 searches i.e., $D_{c,s} = f(D_c, D_s)$. Buetti et al. (2019) tested three different models
 226 for predicting D for compound colour-shape stimuli. The best feature guidance
 227 model (Equation 2) suggests that when the target and lures differ in two dimen-
 228 sions, participants will choose to attend to whichever feature dimension is the
 229 most discriminable (i.e. has the smallest D value):

$$D_{c,s} = \min(D_c, D_s) \quad (2)$$

230 The orthogonal contrast combination model instead suggests that independent
 231 feature dimensions comprise a multidimensional space, where an object can be
 232 described by the overall vector in this space, and thus $D_{c,s}$ can be represented as:

$$D_{c,s} = \frac{1}{\sqrt{(\frac{1}{D_c})^2 + (\frac{1}{D_s})^2}} \quad (3)$$

233 Finally, the collinear contrast integration model also assumes independence of
 234 feature dimensions, but assumes that while the visual features create a multidimensional space, the contrast between them is unidimensional. As D is assumed
 235 to be inversely proportional to contrast, the equation can be written as follows:
 236

$$\frac{1}{D_{c,s}} = \frac{1}{D_c} + \frac{1}{D_s} \quad (4)$$

237 Buetti et al. (2019) found that with their dataset, the collinear contrast inte-
 238 gration model was best able to predict $D_{c,s}$ from D_c and D_s , with $R^2 = 0.915$.
 239 We verified we were able to replicate this result using the dataset available on
 240 OSF (<https://osf.io/f3m24/>)¹ and using the exclusion criteria originally applied;
 241 see Figure 2 (left panel) and *Supplementary Materials - Computational Verification*
 242 for details. We show that we are able to do this using both the frequentist
 243 modelling approaches used in the original paper, and using Bayesian modelling.

244 2.1.3. Estimating a , the intercept parameter for compound features

245 As a is the intercept of the model, it represents how long observers take to find
 246 a target when $N_T = 0$, i.e., there are no distractors. As such, it should be inde-
 247 pendent of both shape and colour, and can be thought of as the role of non-search
 248 processes (such as motivation, motor preparation etc.) that influence reaction time.
 249 In Buetti et al. (2019), a was calculated for each sub-experiment. Here, we follow
 250 that method in order to replicate their results exactly.

251 2.1.4. Estimating mean reaction times

252 Finally, we can use Equation 1 to predict mean reaction times. As can be
 253 seen in Figure 2 (centre panel), these predictions are essentially identical to the
 254 empirical RT results: $R^2 = 0.93\%$.

¹downloaded on 28th August 2020



Figure 2: (left) The collinear method for calculating D offers a good prediction. (centre) Using the TCS to predict reaction times. (right) Each dot now represents a randomly sampled reaction time from an observer. Note that there is greater spread in the data points here, due to the fact that there will be trial-to-trial variability due to target position, inter-item distances, observer differences and so on.

2.1.5. Discussion

While TCS theory offers a good prediction of search slopes and corresponding mean reaction times for double feature search, there are two related limitations. Firstly, it is unable to account for individual differences between observers, only the changes to the sample average. Secondly, it cannot account for the distribution of reaction times over multiple trials. Figure 2 (right panel) shows clearly that these factors generate high levels of variability within the individual trial-level data. To address these issues, we propose adapting TCS to make use of multi-level modelling techniques. Multi-level models allow us to take into account the hierarchical structure of the data (i.e. that each participant completes multiple trials) in a way that does not require averaging, meaning that we are able to model participant variability as well as group-level effects (Gelman and Hill, 2006).

2.2. A multi-level TCS

Switching from a linear regression model to a multi-level model will allow us to compute D for each participant, while simultaneously estimating the trial-to-trial variance. We also switch from a frequentist to Bayesian framework, as this allows us to naturally account for the uncertainty in the model's predictions. However, switching from linear regression to a multi-level model raises the problem of which distribution to use for modelling reaction times. Using a normal distribution is unlikely to be satisfactory, as it is unable to account for the skew

frequently seen in reaction time distributions, and also allows the possibility of negative reaction times. We can account for both of these problems by using a log-normal distribution. We will also test whether a slightly more complex extension of this model, the shifted lognormal model (which allows the distribution to be offset to the right i.e. mimicking the patterns seen in reaction time data, where valid responses begin at around 100ms) offers any improvement in model fit. Note that a Wald, or inverse Gaussian distribution, would also be a reasonable distribution choice for this data given that TCS is based on a diffusion process e.g. (Moran et al., 2013), and this distribution has been argued to be psychologically more plausible (e.g. Kieffaber et al. (2006), though see Matzke and Wagenmakers (2009)): we chose not to use this distribution as it often leads to computational issues, which would make it harder for others to reproduce or build on our approach later.

3. Hypotheses

We plan an experiment to test the extent to which the original results in Buetti et al. (2019) replicate and generalise, using our new modelling approach.

3.1. *Proposed Modifications to Experimental Design*

In order to better test the above, and increase sensitivity, we propose to make the following changes to the experiment described in Buetti et al. (2019):

1. **Within-subjects design.** This modification should give us greater power to detect differences between different models, as well as allowing us to investigate how individual differences in the single-feature task might explain differences in the double-feature task.
2. **Increase target-distractor similarity.** If the distractors are a very different colour from the target, they may not distinguish well between different contrast models. We will therefore run a version of the experiment where the target is a red semicircle, with distractors being either orange, purple or pink.

3.2. *Registered Hypotheses*

1. **Shifted lognormal model.** We hypothesise that a shifted lognormal model will give the best fit to our single-feature data, when compared to a lognormal and a normal model.

- 310 **2. Log-linear effect of N_T .** We will test the TCS model assumption that N_T
311 has a log-linear effect by testing models with and without the log of this
312 term. We expect that this will confirm the results previously seen in papers
313 testing TCS i.e. that the log-linear approach will be best.
314
- 315 **3. Contrast model comparisons.** We will test the hypothesis proposed by
316 (Buetti et al., 2019): specifically, that the *collinear contrast integration*
317 *model* outperforms the *best feature guidance*, and *orthogonal contrast com-*
318 *bination models* for the calculation of D , by calculating and comparing the
319 mean absolute prediction error for each model.
320
- 321 **4. Reaction time predictions.** We will further test the hypothesis proposed by
322 (Buetti et al., 2019) by testing which model gives the best prediction at the
323 trial-by-trial RT level.

324 We will test each of these hypotheses by calculating the marginal likelihood
325 of the relevant models, and then calculating the posterior probabilities. This will
326 give us a probability for each model that represents the likelihood that the model
327 gives the best prediction. We will consider there to be evidence for one model over
328 the others if a given model has a probability above 90%. We will consider there
329 to be strong evidence for one model over the others if that model has a posterior
330 probability above 99%. This approach is most appropriate for our model: other
331 measures of model fit, such as AIC, require an assumption of flat priors (which is
332 not valid for multi-level models) and are based on point estimates (which is not
333 valid for Bayesian models) (McElreath, 2020).

334 3.3. *Planned Explorations*

335 We plan to investigate the effect of individual differences in this paradigm:
336 to what extent performance in the single-feature task can predict performance in
337 the double-feature task for a given individual (Buetti et al. (2019) were not able
338 to investigate this due to the between-subjects design of their study). We plan to
339 do this by specifying a more complex random effects structure for the model, that
340 allows for individual differences across different slopes for different features. This
341 allows us to then study the random effect correlation structure. However, given
342 these models can be challenging to fit, we will do this in an exploratory manner
343 after carrying out our formally registered analysis.

344 One of the benefits of using a multi-level modelling approach is that it is rel-
345 atively easy to extend to incorporate other factors that may contribute to reaction

346 times, such as eccentricity and inter-item distance, which may help to explain
347 behaviour further. To demonstrate this, we will also run exploratory analyses in-
348 cluding a factor for which ring the target is in to assess whether this improves
349 model fit or affects any of the conclusions that can be drawn from the model.

350 3.4. Pilot Experiment

351 Full details of a pilot experiment with $n = 4$ participants (960 trials each) using
352 our proposed analyses can be found in *Supplementary Materials - Pilot Analysis*.
353 This suggests that even with a small sample, we can convincingly demonstrate
354 H1 and H2. However, more data will be required to discriminate between the
355 models, particularly for H4. Given that our methods are within-subject, we have
356 reduced the number of trials per condition compared to Buetti et al. (2019) (12
357 in our pilot study, 20 in our proposed, compared to 40 in theirs). It is therefore
358 possible that the increased noise in our estimated D single-feature parameters will
359 make it more difficult to predict double-feature D s accurately. However, we think
360 this is unlikely to be the case as we can see that even in a small amount of pilot
361 data, we can verify H3, with the collinear model having the lowest mean absolute
362 prediction error.

363 4. General Methods

364 4.1. Sample Size: Participants and Trials

365 We plan to test 40 participants during the experiment. Our pilot experiment
366 shows that H1 and H2 are easily demonstrated with 10 times less data, and Buetti
367 et al. (2019) used 20 participants per experiment. Our sample size will therefore be
368 in line with previous work testing H3 and H4. Ethical approval for the study was
369 granted by the University of Aberdeen (application number PEC/4677/2021/2).

370 Our pilot study above suggests that just 12 trials per condition may be suffi-
371 cient to fit our models. To be conservative, we propose using 20 in our experiment.
372 We have demonstrated that using just half the data (20/40 trials per condition)
373 from Buetti et al. (2019) makes no difference to our computational verification
374 (see *Supplementary Materials - Computational Verification*).

375 Finally, we have carried out a simulation experiment to estimate the confi-
376 dence intervals on the mean when sampling from a log-normal distribution. We
377 defined our distribution to have a mean-log of 6.135 and a standard deviation of
378 0.32. These values were loosely based on the distributions of reaction times in
379 Buetti et al. (2019). The results are shown in Figure 3. Based on these simula-
380 tions, we find that a sample of $n = 20$ leads to a 95% confidence interval that is



Figure 3: (left) The dark line shows the distribution we sampled from. The blue lines show distributions fitted to different samples of 20 data points. (right) Plot showing how the distribution of sample means vary with n . Shaded regions indicate the 50%, 80% and 95% confidence intervals.

381 approximately 1.4 times larger than $n = 40$. We feel this is a suitable compromise
 382 given we will be collecting our data within-subjects.

383 4.2. Stimuli

384 The targets and distractors are randomly assigned to the display based on an
 385 invisible grid. Within each quadrant of the screen, there are three 'spokes' each
 386 with four possible target positions (starting from the centre of the screen and mov-
 387 ing outwards), creating 36 different target positions in total, in three concentric
 388 circles. A small amount of jitter is added to each possible position to make the
 389 target locations less predictable.

390 **Distractor and target types:** we will replicate the distractor types used in
 391 Buetti et al. (2019), apart from that we will change one distractor colour (from
 392 blue to pink) to allow us to discriminate better between different models of the
 393 data (see above). There are six single-feature conditions (purple, orange and pink
 394 distractors and triangle, circle and diamond distractors) and nine double-feature
 395 conditions (all possible pairings of the single-feature conditions). The target is al-
 396 ways a red semicircle, except in the trials where the distractors are single-feature
 397 shapes (triangles, circles and diamonds) in which case the target is a white semi-
 398 circle.

399 **Set sizes:** we will run all the distractor set sizes used in Buetti et al. (2019) (1,
 400 4, 9, 19 and 31). We will also run target-only 'zero distractor' trials (60 in total,
 401 with 12 being the white semicircle target and the remainder the red semicircle
 402 target).

403 The experiments were programmed in PsychoPy and Pavlovia (Peirce et al.,
404 2019). Stimuli were pre-made to generate search array images with 1920×1080
405 resolution.

406 4.3. Procedure

407 Participants will complete the experiment in the laboratory, sitting at a view-
408 ing distance of 45cm from the screen (viewing distance will be fixed by using a
409 chin rest). They will view a fixation cross before viewing a search array: they
410 will press the space bar to continue to the trial. Participants will be told to search
411 for the target among distractors (either a red semicircle or a white semicircle, de-
412 pending on the block) and report if the semicircle target points to the left or right,
413 by pressing either the left or right button on a button box (Cedrus RB-540). They
414 will first complete 16 practice trials where they will receive feedback immediately
415 after completing each trial. In the real experimental trials, participants will receive
416 feedback on their average accuracy and reaction time after each block of 320 tri-
417 als. Participants will complete 5 blocks of trials (1600 trials overall i.e. 320 trials
418 in each of 5 experiments, consisting of 5 set sizes x 3 distractor conditions x 20 re-
419 peats + 20 zero distractor trials). The trials where the distractors are single-feature
420 shapes (i.e. the target is a white semicircle - Experiment 1b in Buetti et al. (2019))
421 will all appear in one block (which will appear at a randomly selected position
422 within the experiment). All other trials (where the target is red semicircle) will
423 be fully randomised i.e. all different conditions will be completely intermixed.
424 This approach will be taken as TCS requires the participant to have a well-defined
425 target template in mind in order to compare this to the stimuli in the display. Thus,
426 participants will be cued to search for the relevant target at the beginning of each
427 block.

428 In both the practice and experimental trials, the search display will always
429 remain on screen until a response is made, or until 5 seconds had passed.

430 4.4. Data Pre-processing

431 Only participants who complete the full experiment will be considered candi-
432 dates for inclusion in the data analysis. We will apply the same inclusion criteria
433 as the original paper: participants will only be included if their search accuracy
434 is over 90% and their average response time is not smaller or larger than two
435 standard deviations from the group average response time.

436 For participants included in the analysis, we will apply the data cleaning used
437 in the pilot data analysis i.e. *removing incorrect trials* and removing the top and
438 bottom 1% of their data.

439 4.5. Analysis Plan

440 All analysis will be carried out using R (v4.2.0), brms (v2.17.0) and rStan
441 (v2.26.11) As discussed above, we will use mixed-effect models with either nor-
442 mal, lognormal or shifted lognormal distributions.

443 Please see the analysis of our pilot data for a full implementation of our anal-
444 ysis pipeline, including all code (available on Github at https://github.com/scienceanna/TCS_Bayesian).
445

446 5. Results

447 All 40 participants had accuracy over 90% (minimum 93.1%). One participant
448 had an average response time (1100ms) over two standard deviations from the
449 group average response time (781ms) and was removed. Incorrect trials were
450 then removed, and the data was trimmed (only including response times between
451 the 1% and 99% quantiles) leaving us with 39 participants completing a total of
452 59,587 trials.

453 All Bayesian models were fit to the new data using exactly the same proce-
454 dure² as the pilot data presented in the Stage One review process. We checked
455 for convergence of our models by visually inspecting the chains as well as ver-
456 ifying that the \hat{R} was close to 1 for all parameters of all the fitted models (see
457 Supplementary Material for full model fit information).

458 5.1. Hypothesis 1: Shifted-lognormal model

459 Our first hypothesis concerns which distribution best fits the single feature
460 response time data. We fit multi-level models with a i) normal, ii) lognormal, and
461 iii) shifted-lognormal distribution. The models all used the same model formula
462 that estimated search slopes in terms of $\log N_i$ for each feature. Maximal random
463 effect structures were used.

464 After each of these models had been fit to the data, leave-one-out (LOO) model
465 comparison was used to calculate posterior probabilities for each. The results of
466 this procedure allocated $\sim 100\%$ of the weight to the shifted-lognormal model, so
467 we can conclude that it is the best distribution (out of the three we tested³) to use

²The only departure was an increase in iterations from 5000 to 80000 for the model predicting reaction times, based on advice given in the Stan forums, to enable the bridge sampling process to work properly.

³See discussion for Wald, Weibull, etc.

468 for modelling response times in this paradigm. This model is shown in Figure 2.2
 469 of the supplementary materials.

470 5.2. Hypothesis 2: log-linear effect of N_T

471 We then used the same methods to verify that using $\log N_T$ for the search slope
 472 does indeed give a better fit to the data than simply using N_T . The results are again
 473 conclusive with $\sim 100\%$ of the model weight being assigned to the model that is
 474 log-linear in N_T .

475 5.3. Hypothesis 3: Contrast Model Comparison

476 Now that we have confirmed that the shifted-lognormal multilevel model (with
 477 a log-linear effect of N_T) is indeed the best fit to the data we will extract the search
 478 slopes for each feature. These are summarised in Table 3. We can see that we have
 479 successfully obtained a range of values for both D_c and D_s . As with Buetti et al.
 480 (2019) we find that the values for D_s are larger than D_c (see Table 2), meaning
 481 that search slopes for colour features are shallower than shape.

feature	D_c	95%HDCI	feature	D_s	95%HDCI
orange	0.156	[0.139 , 0.173]	triangle	0.253	[0.230 , 0.275]
pink	0.042	[0.028 , 0.057]	diamond	0.187	[0.171 , 0.205]
purple	0.015	[0.002 , 0.030]	circle	0.191	[0.175 , 0.204]

Table 3: A summary of the posterior estimates of D_c and D_s values from our Experiment. Note that our values are reported in seconds, in contrast to Table 2, which follows (Buetti et al., 2019) and reports the slopes in milliseconds.

482 We now combine the *single-feature* search slopes, D_c and D_s , to predict the
 483 *double-feature* conditions ($D_{c,s}$) using Equations 2, 3 and 4 and above. The results
 484 are summarised in Figure 4. We find that while the collinear contrast model has
 485 the highest R^2 (0.922, compared to $R^2 = 0.884$ for best feature, and $R^2 = 0.916$ for
 486 orthogonal contrast), the orthogonal contrast model is the most accurate, both in
 487 terms of mean absolute error (0.165, compared to 0.185 for best feature and 0.271
 488 for collinear) and having a regression slope closest to 1 (1 compared to 0.753 and
 489 1.48). Therefore, Hypothesis 3 does not hold: orthogonal contrast rather than
 490 collinear contrast offers the best prediction of search slopes in the double-feature
 491 condition.

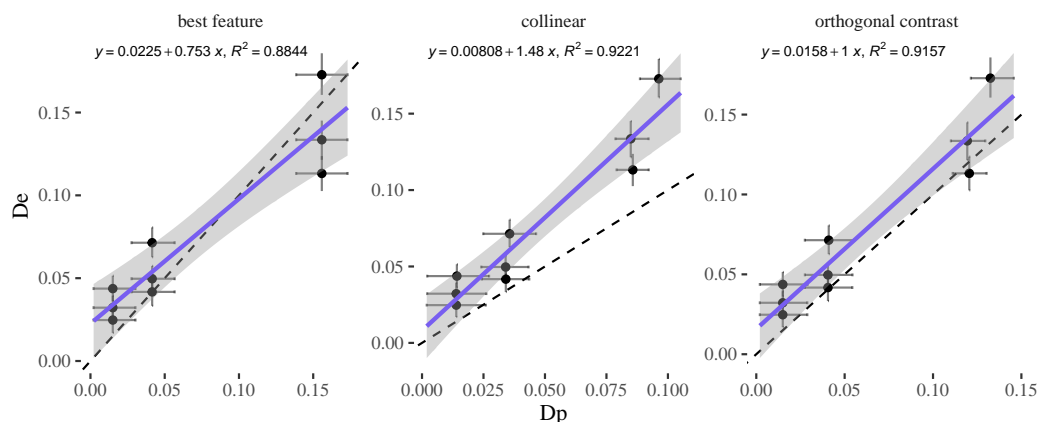


Figure 4: Predicting $D_{c,s}$ from D_c and D_s . The x-axis shows our predictions, D_p , using the best feature, collinear contrast, and orthogonal contrast models.

5.4. Hypothesis 4: Reaction Time Predictions

Upon reflection, the approach to model comparison we outlined in our registered analysis was limited in a number of ways. Our original plan was to use the posterior predictions from a model trained on the single-feature data to act as a prior for the double-feature data. While we initially thought this would be an elegant approach, there are a large number of parameters that are outside the main focus of this paper yet still require priors (intercepts, group level variance and residual variance). Furthermore, while the methods for estimating $D_{c,s}$ presented above give good predictions in terms of the mean value, it is not clear that the standard deviation for these distributions will be accurate. As such, we have developed a new, simpler method for this final comparison. To maintain full transparency, we present both methods here.

5.4.1. Registered Method

Our final hypothesis concerns how well the different feature combination models perform when predicting reaction times. We find very little difference between the three methods in terms of LOO model weights: 0.318 for best feature, 0.346 for collinear and 0.336 for orthogonal contrast.

5.4.2. Updated Method

Our new method for exploring this hypothesis involves taking $n = 100$ samples of the fixed effects from both the model fitted to the single-feature data and

the model fitted to the double-feature data. Each of these samples includes an intercept (a), slope (D), non-decision time (ndt), and residual variance (σ). We then take the parameters from the double-feature model, but replace the D values with our predicted D using the single-feature model. Finally the predicted mean $\log(rt)$ is calculated for each feature and number of distractors. These are then compared to the empirical reaction times and we compute the absolute error.

We can also calculate an upper-bound by carrying out the above process, but without replacing the fitted $D_{c,s}$ with the predicted. This allows us to report ‘relative absolute error’. As all of the methods under consideration make identical predictions for trials with no distractors, these are omitted from this calculation.

The results of this procedure are in-line with the registered analysis presented above: all three methods perform well relative to our baseline (see Table 4).

metric	abs error		
	lower	median	upper
orthogonal	0.994	1.00	1.02
collinear	0.990	1.01	1.05
best feature	0.999	1.01	1.02

Table 4: How well can we predict RTs using D_p (collinear, best feature or orthogonal contrast) comped to using D_e ? A value of 1 means that our estimates of D derived from the single-feature trials does an equally good job at predicting the double-feature trials as using the D fit to the data.

6. Planned Explorations

Our interpretation of the null/neutral results for Hypothesis 4 (the prediction of reaction times) is that the differences in predictions from the three contrast combination methods are small relative to the (i) individual differences between participants and (ii) trial-to-trial variability due to target eccentricity. Thus, in our exploratory analysis, we investigate how incorporating these factors affects our conclusions.

6.1. Individual Differences

We start this exploratory analysis looking at how the D_c and D_s values vary from participant to participant. From Figure 5 (*left*) we can see that there is considerable variation between observers - in fact, the variation from one observer to the next is often larger than the variation across features. To investigate this further we calculated the correlations between each of the features, by calculating

537 Pearson's r for each sample from our posterior, which gives us a full posterior dis-
 538 tribution for the correlations. We can see in Figure 5 (*right*) that while both the D_c
 539 and D_s are correlated within feature classes (~ 0.75), there is no correlation of any
 540 of the colour features with any of the shape features. The individual differences
 541 for the *double-feature* conditions are much less pronounced - these conditions are
 542 easy and the search slopes are quite close to flat. Hence, the correlations are all
 543 much weaker, presumably due to range restriction.

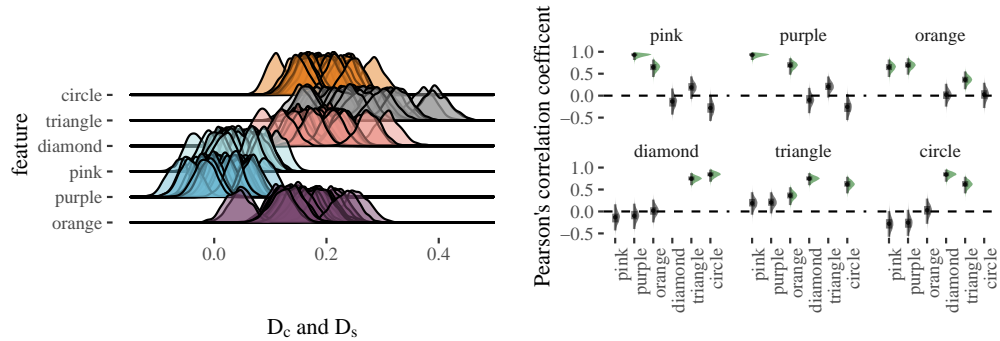


Figure 5: Individual differences in D_c and D_s . (*left*) Posterior probability distributions for D_c and D_s for each individual. (*right*) Estimated correlations between each of the D_c and D_s .

544 Given these results, it is perhaps unsurprising that our analysis for Hypothesis
 545 4 leads to an inconclusive result for distinguishing between the three contrast com-
 546 bination methods. Perhaps taking these individual differences into account when
 547 we predict reaction times will lead to improved power to discriminate between
 548 the models. However, before we do so, we will also investigate incorporating
 549 information about target eccentricity into the model.

550 6.2. Target Eccentricity

551 It is well known that there are eccentricity effects in visual search, with reac-
 552 tion times being longer for targets that are further away from fixation (Carrasco
 553 et al., 1995). To investigate this in our dataset, we will use the same methods as
 554 above (fitting a multi-level shifted-lognormal model) but now including an addi-
 555 tional factor that represents how far the target was from the fixation cross. This
 556 is coded as a three-level categorical factor representing which ring contained the
 557 target (see stimulus details, above). Allowing for interactions with the *feature* and
 558 $\log N_T$ increases the number of fixed effect parameters in the model from XX to
 559 XX.

$$y \sim 0 + r + r : f : \log(N_T) + (1|id) \quad (5)$$

560 We experimented with including r in the random effect structure, but this
 561 proved difficult to fit. We also had to revise the priors used in our registered analy-
 562 sis, in order to lower the intercept. Full details can be found in the supplementary
 563 materials.

564 After obtaining a model that passed all convergence checks, we examined the
 565 posterior distribution for the effect of *ring*. Figure 6 paints an interesting and
 566 complex picture in which some features (e.g. some colours, particularly those
 567 that are more distinct from the target colour) are clearly leading to ‘pre-attentive
 568 search’ in which response times are unaffected by either the number of distractors
 569 or target eccentricity. However, shape features seem to be strongly affected by
 570 eccentricity, particularly when there are multiple distractors in the stimulus.

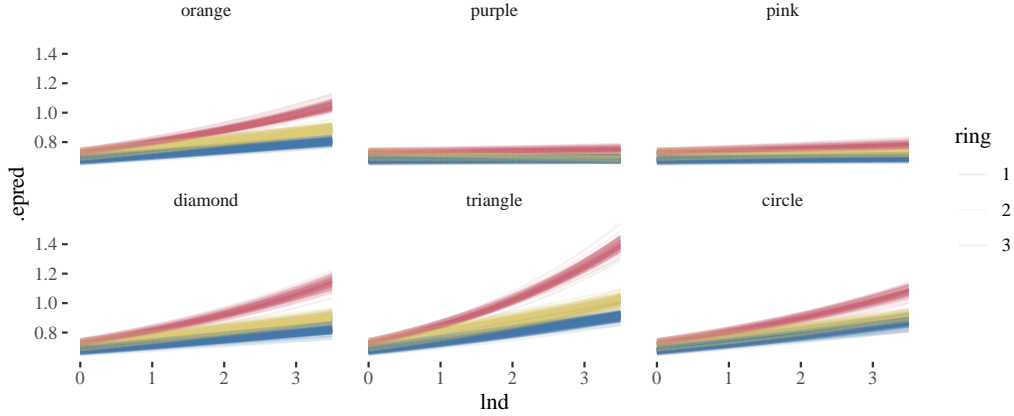


Figure 6: Fixed effects for predicting the effect of ring, feature and number of distractors on response times. SWITCH TO HPDI PLOT TO BE CONSISTENT WITH WHAT WE USED BEFORE. Shaded regions represent 97% HPDI. We can see that *ring* has an effect on search slopes, and that this effect is more pronounced for some features (i.e., triangles) than others.

571 We can now compute our predictions (D_p) for $D_{c,s}$ taking the *ring* into ac-
 572 count. Doing so leads us to a similar result as before with orthogonal contrast
 573 outperforming the best feature and collinear measures in terms of absolute error
 574 (0.023 compared to 0.025 (best feature) and 0.034 (collinear)). However, the re-
 575 gression slopes are all relatively similar (0.90 for best feature, 1.58 for collinear
 576 and 1.15 for orthogonal contrast).

577 6.3. Predicting Response Times

578 We will now test to see if we can discriminate between the three contrast
 579 combination methods when we take target eccentricity (ring) and individual-level
 580 slopes into account. We use the same model comparison as before (see Sup-
 581 plementary Materials for full code) and find orthogonal contrast performs best,
 582 closely followed by best feature.

metric	abs error		
	lower	median	upper
orthogonal	1.01	1.00	1.04
collinear	1.03	1.00	5.15
best feature	1.03	1.00	1.07

Table 5: How well can we predict RTs using D_p (collinear, best feature or orthogonal contrast) comped to using D_e when using a model containing the ring of the target? A value of 1 means that our estimates of D derived from the single-feature trials does an equally good job at predicting the double-feature trials as using the D fit to the data.

583 6.4. Issues with the Collinear Contrast method

584 The collinear contrast method performs very poorly in this test. To explain
 585 this, we can look back at Equation 4 and realise that empirical data is not required
 586 to reject this hypothesis as a suitable method for predicting search slopes in feature
 587 search. This is because when search slopes are close to 0, it is possible that we will
 588 observe negative values in the empirical data. Breaking down our data to compute
 589 search slopes for each person and each target eccentricity increases the chances
 590 of this being observed. Looking at Equation 4 we can see that $D_1 \sim -D_2 \Rightarrow$
 591 $1/D_1 + 1/D_2 \sim 0$. This leads to our estimated $D = \frac{1}{1/D_1 + 1/D_2} \gg \gg D_1, D_2$ which
 592 is clearly incorrect.

593 7. General Discussion

594 In this paper, we aimed to test the extent to which the results of Buetti et al.
 595 (2019) replicate and generalise, using a new modelling approach. Our results
 596 allow us to confirm our pre-registered hypotheses 1 and 2. Firstly, a shifted-
 597 lognormal distribution of response times outperforms normal and lognormal dis-
 598 tributions, demonstrating that reaction time data are best modelled by a skewed
 599 distribution with an offset. Similarly, we confirmed that the number of distractors
 600 has a log-linear effect in this model, in line with the predictions of TCS theory.

We also replicated other aspects of the original Buetti et al. (2019) paper with a different experimental set up, such as to observing shallower search slopes for colour features compared to shape features.

We do not find support for our pre-registered hypotheses 3 and 4. For predicting D in the double-feature conditions, our analyses found that the orthogonal contrast model was favoured over collinear, which is not in line with the registered hypothesis, which predicted that the collinear contrast model would be best (in line with Buetti et al. (2019)). Similarly, for hypothesis 4, we found that there was relatively little difference between the three combination methods for prediction of trial-by-trial reaction times. Our exploratory analyses suggest that incorporating additional factors (e.g. individual differences in participant D_c and D_s values, and the eccentricity of the target) allows better discrimination between models, but again suggests that the orthogonal contrast combination method gives the best predictions.

7.1. *Modelling of reaction times*

In much of the literature on visual search, mean reaction times are modelled using a simple linear model $\bar{y} = bN_T + a$ (e.g. Treisman and Gormican (1988); Rosenholtz et al. (2012); Hughes et al. (2016)). The b coefficients are often referred to as “search slopes” and are often treated as measurements of theoretical importance. Our results indicate that a shifted-lognormal model that is loglinear in N_T offers a much better fit to the data ($\log(y) - ndt = b \log(N_T) + a$), which is perhaps not surprising, given the properties of reaction time data, where valid responses normally begin at around 100ms, and the distribution often has a long “tail” of slower responses.

However, there have been concerted efforts within the literature to model reaction time distributions more effectively: indeed, Buetti et al. (2019) use $\log N_T$ when computing their search slopes. In terms of reaction time distributions, log transformations are frequently taught as a way to normalise reaction time data (although often with caveats regarding how this can change the interpretation of the results (Osborne, 2002)) and are frequently used in analysing reaction time data e.g. (Clarke et al., 2022b). Researchers have also looked at other distributions to assess which offer the best fit to empirical response times in visual search. For example, Palmer et al. (2011) compared ex-Gaussian, ex-Wald, Gamma, and Weibull distributions and found that the distributions with exponential components offer a better fit to the data. Our results are in line with this. However, we opted to use a shifted-lognormal distribution in our analysis above for mostly pragmatic reasons, as these more complex distributions are often computationally

638 difficult to fit ⁴. It has also been argued that trying to select a “correct” distribu-
639 tion is likely to be problematic for empirical data, which is probably a mixture
640 of multiple components (Wolfe et al., 2010). Similarly, some recent approaches
641 make use of drift-diffusion methods (e.g. Wolfe and Van Wert (2010); Yu et al.
642 (2022); Corbett and Smith (2020)), though again these models can be challenging,
643 particularly when considering how to interpret the parameters (Evans and Wagen-
644 makers, 2019; Bompas et al., 2023). While important, these debates are outside
645 the scope of the present Registered Report.

646 Despite these previous findings, the use of linear search slopes is still prevalent
647 in the visual search literature. Our work shows that these choices of distribution
648 can influence results and conclusions (see section 7.2 below), and therefore we
649 recommend that other researchers consider carefully how they want to model their
650 data. Even in the case where the search slopes are the primary outcome measure
651 of interest (as opposed to the potentially more ‘cognitive’ parameters of e.g. Wald
652 distributions, or drift diffusion models), we demonstrate that more sophisticated
653 approaches that better account for the data distribution can be taken with relative
654 ease.

655 7.2. *Discriminating between combination methods*

656 CHECK ALL THIS; AL THINKS THAT THIER ORIG DATA + OUR ANAL-
657 YSIS METHODS LEADS TO SAME CONCLUSION AS OUR DATA + OUR
658 METHODS

659 In Buetti et al. (2019), the collinear contrast integration model was found to
660 provide the best fit for their data, providing a more precise prediction than the
661 orthogonal contrast combination model (as measured by both the closeness of the
662 slope of the regression line to one, and the mean average prediction error). Accep-
663 ting this model of how the combination process works has theoretical assumptions
664 e.g. it implies that colour and shape contrasts independently contribute to atten-
665 tional guidance. However, we did not find strong support for this model, instead
666 finding that the orthogonal contrast combination model was better. This does not
667 seem to be something inherent to our slightly altered methods, as we were able to
668 replicate the original Buetti et al. (2019) findings using our methods on their data,
669 and our pilot analysis also suggested the collinear contrast model had the lowest
670 mean error for that (small) dataset.

671 One possibility is that our small modifications to the experimental stimuli

⁴See: <https://discourse.mc-stan.org/t/model-fails-to-converge-when-using-brms/9062>

672 changed the strategy that participants used. However, this seems unlikely given
673 that we only made changes to the colour of the stimuli, a manipulation that Buetti
674 et al. (2019) also used, with no changes to their overall conclusions. The orthog-
675 onal contrast method would arguably be more likely for feature dimensions that
676 are not independent of each other, but the colour and shape dimensions used in
677 our stimuli are similar to those used previously (and our exploratory correlation
678 analyses suggest that they can be considered independent feature dimensions).

679 Another possibility is that because some participants had negative search slopes,
680 the collinear contrast model predicts implausibly large reaction times, due to the
681 mathematical formulation of this model, leading to worse predictions. Given that
682 negative search slopes do occur in some situations (Utochkin, 2013), we suggest
683 that a future improvement for the collinear contrast integration model would be to
684 modify it to be able to give sensible predictions in these situations.

685 Finally, we would argue that it is difficult from these results to definitively
686 make a decision about which model is best: all three models give very similar
687 predictive weights during our model evaluation process. One challenge is that
688 in general, the double feature searches are easy, and therefore the search slopes
689 are fairly flat and there is not much variability to allow different models to make
690 different predictions. For the current paradigm, a fruitful approach for future re-
691 search could be to consider only trials in which there are a large number of dis-
692 tractors: the small differences in predicted search slope diverge as D_T increases,
693 leading to larger differences in predicted reaction times.

694 7.2.1. Individual differences

695 Our (planned) exploratory analysis of the individual differences in search slopes
696 suggests that there are large differences from one observer to the next. Indeed
697 in some cases, these are larger than the differences from one feature to another.
698 The difference between the steepest and shallowest search slopes (fixed effects) is
699 0.238 ($D_{triangle} = 0.253$ 3 while $D_{purple} = 0.015$). If we compare this to the range
700 of observer search slopes within a feature, we find this varies from 0.242 ($D_{triangle}$
701 per-observer ranges from 0.395 to 0.152) to 0.149 (D_{pink} ranges from -0.065 to
702 0.092). This suggests a challenge for modelling based on average performance:
703 can we be sure that averages represent a meaningful summary of the data, given
704 that we see very clear individual differences? It could certainly be argued that ob-
705 servers might be using different strategies, and thus some members of the sample
706 population might use (for example) a collinear combination strategy, while others
707 use an orthogonal contrast strategy. Variable strategies have been found for other
708 search behaviour (Clarke et al., 2022a; Kristjánsson et al., 2014; Proulx, 2011;

Li et al., 2022), highlighting the importance of considering individual differences when understanding behaviour.

We also found that search slopes were correlated within feature, but not between: i.e, knowing that an observer’s search slope for a colour condition allows us to predict their search slopes for the other colour conditions, but not any of the shape conditions. However, given the block design of our experiment, it is possible that this reflects a type of priming effect: knowing the search slope for a feature in the first block tells allows us to predict the search slopes of the other features in that block, but tells us nothing of the observer’s behaviour in the second block. Understanding whether these correlations reflect something about an observer’s behaviour with different features, or instead how an observer’s behaviour changes over time, would be an interesting question for future research.

7.2.2. *Eccentricity*

(Buetti et al., 2019) argues that the “odd one out” processing undertaken in this type of task can be done in parallel, with observers using peripheral vision to distinguish between target and distractors, and that there is systematic variation in reaction times as a function of set size associated with parallel processing. However, the experimental design did not preclude slower, serial search (eye movements were not monitored, and participants had up to five seconds to make a response). The relatively strong eccentricity effects we found during our exploratory analyses (a model with target ring number included was a better predictor of the data than one without) also suggests the possibility that, at least in some cases, peripheral information was insufficient (or at least, observers felt it was insufficient) to make judgements. This supports the idea that it may not be helpful to distinguish between serial and parallel search, and many models now assume that one mechanism underlies all different types of search (Wolfe, 1998). DO WE WANT TO ALSO CITE HULLMAN’S DEMISE OF ITEM SEARCH PAPER HERE???? Given that the experiment was not designed to test eccentricity effects and this analysis was exploratory, we make no strong claims about what this finding might mean for Target Contrast Signal Theory Lleras et al. (2020). Instead, our claim is simply that this modelling methodology is useful precisely because it can incorporate a wider range of factors easily, giving us a better insight into what is driving behaviour in visual search, and helping to test model assumptions.

7.3. *Conclusions and future directions*

In the current paper, we have independently reproduced the findings of Buetti et al. (2019) by extending their modelling to a multi-level framework. We have

used a Bayesian approach, but note that this is in many ways entirely arbitrary: all of the modelling decisions we have taken would be possible within a frequentist framework as well. We also aimed to replicate the previous findings by running a within-subjects experiment, and broadly find that the Target Contrast Signal Theory does a good job of predicting the data. When using single-feature search slopes to predict double-feature search slopes, we do not replicate the previous finding that the collinear contrast integration method outperforms other options, but instead find that all combination methods do reasonably well, and in this particular experimental design, it may be difficult to conclusively distinguish between them.

One of the clear benefits of Target Contrast Signal Theory (Lleras et al., 2020) is its quantitative nature, allowing it to be empirically tested in a straightforward manner. Here, we demonstrate that we can independently replicate many aspects of TCS, while also offering extensions to the model that we hope will stimulate more research and refinement of this theory. Some suggestions for possible future directions and hypotheses that could be tested include:

1. It is relatively straightforward to make predictions about the mean reaction time per participant in the double-feature search condition: however, we have not attempted to predict an individual’s trial-to-trial variance for different features, which could improve the model fit further.
2. We find correlations within feature classes (i.e. D_c and D_s) but not between: however, these may be a side-effect of the block design of the experiment. A future experiment could randomise trial type in order to more fully understand the nature of these correlations.
3. To more fully explore which combination model best predicts the data, we suggest a) modifying the collinear contrast model to make sensible predictions with negative search slopes b) focusing on trials with a larger number of distractors and c) modifying the experimental design to enforce parallel processing e.g. by making the display gaze contingent.

Computational modelling approaches alongside detailed, quantitative theory building has been argued to be one way to improve the reliability of psychological research (Oberauer and Lewandowsky, 2019; Guest and Martin, 2021). By combining this approach with fully open datasets and analysis scripts, we can hopefully begin to take a more “distributed collaborative network” approach

781 (Moshontz et al., 2018) to our scientific questions. As such, we would like to
782 conclude by encouraging other researchers to critique, build on and improve the
783 approach we have taken in this manuscript, in order to further improve our ability
784 to model performance in visual search tasks.

785 **Conflict of interest**

786 The authors declare that they have no conflict of interest.

787 **Acknowledgements**

788 This work was supported by an Economic and Social Research Council grant
789 (ES/S016120/1) to ADFC and employing AN.

790 **References**

- 791 Stefanie I Becker. The role of target–distractor relationships in guiding attention
792 and the eyes in visual search. *Journal of Experimental Psychology: General*,
793 139(2):247, 2010.
- 794 Stefanie I Becker, Christian Valuch, and Ulrich Ansorge. Color priming in pop-
795 out search depends on the relative color of the target. *Frontiers in psychology*,
796 5:289, 2014.
- 797 Aline Bompas, Petroc Sumner, and Craig Hedge. Non-decision time: the higg’s
798 boson of decision. *bioRxiv*, pages 2023–02, 2023.
- 799 Simona Buetti, Deborah A Cronin, Anna M Madison, Zhiyuan Wang, and Ale-
800 jandro Lleras. Towards a better understanding of parallel visual processing in
801 human vision: Evidence for exhaustive analysis of visual information. *Journal*
802 *of Experimental Psychology: General*, 145(6):672, 2016.
- 803 Simona Buetti, Jing Xu, and Alejandro Lleras. Predicting how color and shape
804 combine in the human visual system to direct attention. *Scientific reports*, 9(1):
805 1–11, 2019.
- 806 Marisa Carrasco, Denise L Evert, Irene Chang, and Svetlana M Katz. The eccen-
807 tricity effect: Target eccentricity affects performance on conjunction searches.
808 *Perception & psychophysics*, 57:1241–1261, 1995.

- 809 Kyle R Cave and Jeremy M Wolfe. Modeling the role of parallel processing in
810 visual search. *Cognitive psychology*, 22(2):225–271, 1990.
- 811 Alasdair DF Clarke, Jessica L Irons, Warren James, Andrew B Leber, and
812 Amelia R Hunt. Stable individual differences in strategies within, but not be-
813 tween, visual search tasks. *Quarterly Journal of Experimental Psychology*, 75
814 (2):289–296, 2022a.
- 815 Alasdair DF Clarke, Anna Nowakowska, and Amelia R Hunt. Visual search habits
816 and the spatial structure of scenes. *Attention, Perception, & Psychophysics*, 84
817 (6):1874–1885, 2022b.
- 818 Elaine A Corbett and Philip L Smith. A diffusion model analysis of target detec-
819 tion in near-threshold visual search. *Cognitive Psychology*, 120:101289, 2020.
- 820 John Duncan and Glyn W Humphreys. Visual search and stimulus similarity.
821 *Psychological review*, 96(3):433, 1989.
- 822 Nathan J Evans and Eric-Jan Wagenmakers. Evidence accumulation models: Cur-
823 rent limitations and future directions. 2019.
- 824 Andrew Gelman and Jennifer Hill. *Data analysis using regression and multi-
825 level/hierarchical models*. Cambridge university press, 2006.
- 826 Olivia Guest and Andrea E Martin. How computational modeling can force theory
827 building in psychological science. *Perspectives on Psychological Science*, 16
828 (4):789–802, 2021.
- 829 Anna E Hughes, Rosy V Southwell, Iain D Gilchrist, and David J Tolhurst. Quan-
830 tifying peripheral and foveal perceived differences in natural image patches to
831 predict visual search performance. *Journal of vision*, 16(10):18–18, 2016.
- 832 Johan Hulleman and Christian NL Olivers. On the brink: The demise of the item
833 in visual search moves closer. *Behavioral and Brain Sciences*, 40, 2017.
- 834 Jessica L Irons and Andrew B Leber. Choosing attentional control settings in a
835 dynamically changing environment. *Attention, Perception, & Psychophysics*,
836 78(7):2031–2048, 2016.
- 837 Jessica L Irons and Andrew B Leber. Characterizing individual variation in the
838 strategic use of attentional control. *Journal of Experimental Psychology: Hu-
839 man Perception and Performance*, 44(10):1637, 2018.

- 840 Laurent Itti and Christof Koch. A saliency-based search mechanism for overt and
841 covert shifts of visual attention. *Vision research*, 40(10-12):1489–1506, 2000.
- 842 Laurent Itti, Christof Koch, and Ernst Niebur. A model of saliency-based visual
843 attention for rapid scene analysis. *IEEE Transactions on pattern analysis and*
844 *machine intelligence*, 20(11):1254–1259, 1998.
- 845 Paul D Kieffaber, Emily S Kappenman, Misty Bodkins, Anantha Shekhar, Brian F
846 O’Donnell, and William P Hetrick. Switch and maintenance of task set in
847 schizophrenia. *Schizophrenia research*, 84(2-3):345–358, 2006.
- 848 Christof Koch and Shimon Ullman. Shifts in selective visual attention: towards
849 the underlying neural circuitry. In *Matters of intelligence*, pages 115–141.
850 Springer, 1987.
- 851 Kathryn Koehler, Fei Guo, Sheng Zhang, and Miguel P Eckstein. What do
852 saliency models predict? *Journal of vision*, 14(3):14–14, 2014.
- 853 Iuliia Kotseruba, Calden Wloka, Amir Rasouli, and John K Tsotsos. Do saliency
854 models detect odd-one-out targets? new datasets and evaluations. *arXiv*
855 *preprint arXiv:2005.06583*, 2020.
- 856 Árni Kristjánsson, Ómar I Jóhannesson, and Ian M Thornton. Common attentional
857 constraints in visual foraging. *PloS one*, 9(6):e100752, 2014.
- 858 Joseph Krummenacher and Hermann J Müller. Dynamic weighting of feature di-
859 mensions in visual search: behavioral and psychophysiological evidence. *Front-*
860 *iers in psychology*, 3:221, 2012.
- 861 Walden Y Li, Molly R McKinney, Jessica L Irons, and Andrew B Leber. As-
862 sessing the generality of strategy optimization across distinct attentional tasks.
863 *Journal of Experimental Psychology: Human Perception and Performance*, 48
864 (6):582, 2022.
- 865 Heinrich René Liesefeld and Hermann J Müller. A theoretical attempt to revive
866 the serial/parallel-search dichotomy. *Attention, Perception, & Psychophysics*,
867 82(1):228–245, 2020.
- 868 Heinrich René Liesefeld, Rani Moran, Marius Usher, Hermann J Müller, and
869 Michael Zehetleitner. Search efficiency as a function of target saliency: The
870 transition from inefficient to efficient search and beyond. *Journal of Experi-*
871 *mental Psychology: Human Perception and Performance*, 42(6):821, 2016.

- 872 Alejandro Lleras, Zhiyuan Wang, Anna Madison, and Simona Buetti. Predicting
873 search performance in heterogeneous scenes: Quantifying the impact of homo-
874 geneity effects in efficient search. *Collabra: Psychology*, 5(1), 2019.
- 875 Alejandro Lleras, Zhiyuan Wang, Gavin Jun Peng Ng, Kirk Ballew, Jing Xu, and
876 Simona Buetti. A target contrast signal theory of parallel processing in goal-
877 directed search. *Attention, Perception, & Psychophysics*, pages 1–32, 2020.
- 878 Anna Madison, Alejandro Lleras, and Simona Buetti. The role of crowding in par-
879 allel search: Peripheral pooling is not responsible for logarithmic efficiency in
880 parallel search. *Attention, Perception, & Psychophysics*, 80(2):352–373, 2018.
- 881 Dora Matzke and Eric-Jan Wagenmakers. Psychological interpretation of the ex-
882 gaussian and shifted wald parameters: A diffusion model analysis. *Psycho-*
883 *nomic bulletin & review*, 16(5):798–817, 2009.
- 884 Richard McElreath. *Statistical rethinking: A Bayesian course with examples in R*
885 *and Stan*. Chapman and Hall/CRC, 2020.
- 886 Rani Moran, Michael Zehetleitner, Hermann J Mueller, and Marius Usher. Com-
887 petitive guided search: Meeting the challenge of benchmark rt distributions.
888 *Journal of Vision*, 13(8):24–24, 2013.
- 889 Rani Moran, Michael Zehetleitner, Heinrich René Liesefeld, Hermann J Müller,
890 and Marius Usher. Serial vs. parallel models of attention in visual search: ac-
891 counting for benchmark rt-distributions. *Psychonomic bulletin & review*, 23(5):
892 1300–1315, 2016.
- 893 Rani Moran, Heinrich René Liesefeld, Marius Usher, and Hermann J Muller. An
894 appeal against the item’s death sentence: Accounting for diagnostic data pat-
895 terns with an item-based model of visual search. *Behavioral and Brain Sci-*
896 *ences*, 40:e148, 2017.
- 897 J Toby Mordkoff and Steven Yantis. An interactive race model of divided at-
898 tention. *Journal of Experimental Psychology: Human Perception and Perform-*
899 *ance*, 17(2):520, 1991.
- 900 Hannah Moshontz, Lorne Campbell, Charles R Ebersole, Hans IJzerman,
901 Heather L Urry, Patrick S Forscher, Jon E Grahe, Randy J McCarthy, Erica D
902 Musser, Jan Antfolk, et al. The psychological science accelerator: Advancing

- 903 psychology through a distributed collaborative network. *Advances in Methods*
904 *and Practices in Psychological Science*, 1(4):501–515, 2018.
- 905 Gavin JP Ng, Simona Buetti, Trisha N Patel, and Alejandro Lleras. Prioritiza-
906 tion in visual attention does not work the way you think it does. *Journal of*
907 *Experimental Psychology: Human Perception and Performance*, 2020.
- 908 Gavin Jun Peng Ng, Alejandro Lleras, and Simona Buetti. Fixed-target efficient
909 search has logarithmic efficiency with and without eye movements. *Attention,*
910 *Perception, & Psychophysics*, 80(7):1752–1762, 2018.
- 911 Anna Nowakowska, Alasdair DF Clarke, and Amelia R Hunt. Human visual
912 search behaviour is far from ideal. *Proceedings of the Royal Society B: Biolog-*
913 *ical Sciences*, 284(1849):20162767, 2017.
- 914 Klaus Oberauer and Stephan Lewandowsky. Addressing the theory crisis in psy-
915 chology. *Psychonomic bulletin & review*, 26:1596–1618, 2019.
- 916 Jason Osborne. Notes on the use of data transformations. *Practical assessment,*
917 *research, and evaluation*, 8(1):6, 2002.
- 918 Evan M Palmer, Todd S Horowitz, Antonio Torralba, and Jeremy M Wolfe. What
919 are the shapes of response time distributions in visual search? *Journal of ex-*
920 *perimental psychology: human perception and performance*, 37(1):58, 2011.
- 921 Derrick Parkhurst, Klintan Law, and Ernst Niebur. Modeling the role of salience
922 in the allocation of overt visual attention. *Vision research*, 42(1):107–123, 2002.
- 923 Jonathan Peirce, Jeremy R Gray, Sol Simpson, Michael MacAskill, Richard
924 Höchenberger, Hiroyuki Sogo, Erik Kastman, and Jonas Kristoffer Lindeløv.
925 Psychopy2: Experiments in behavior made easy. *Behavior research methods*,
926 51(1):195–203, 2019.
- 927 Michael J Proulx. Individual differences and metacognitive knowledge of visual
928 search strategy. *PLoS One*, 6(10):e27043, 2011.
- 929 Dragan Rangelov, Hermann J Müller, and Michael Zehetleitner. Failure to pop
930 out: Feature singletons do not capture attention under low signal-to-noise ratio
931 conditions. *Journal of Experimental Psychology: General*, 146(5):651, 2017.

- 932 Ruth Rosenholtz, Jie Huang, Alvin Raj, Benjamin J Balas, and Livia Ilie. A sum-
 933 mary statistic representation in peripheral vision explains visual search. *Journal*
 934 *of vision*, 12(4):14–14, 2012.
- 935 Benjamin W Tatler. The central fixation bias in scene viewing: Selecting an op-
 936 timal viewing position independently of motor biases and image feature distri-
 937 butions. *Journal of vision*, 7(14):4–4, 2007.
- 938 Benjamin W Tatler, Mary M Hayhoe, Michael F Land, and Dana H Ballard. Eye
 939 guidance in natural vision: Reinterpreting salience. *Journal of vision*, 11(5):
 940 5–5, 2011.
- 941 Anne Treisman and Stephen Gormican. Feature analysis in early vision: evidence
 942 from search asymmetries. *Psychological review*, 95(1):15, 1988.
- 943 Anne M Treisman and Garry Gelade. A feature-integration theory of attention.
 944 *Cognitive psychology*, 12(1):97–136, 1980.
- 945 Igor S Utochkin. Visual search with negative slopes: The statistical power of
 946 numerosity guides attention. *Journal of vision*, 13(3):18–18, 2013.
- 947 Zhiyuan Wang, Simona Buetti, and Alejandro Lleras. Predicting search perfor-
 948 mance in heterogeneous visual search scenes with real-world objects. *Collabra:*
 949 *Psychology*, 3(1), 2017.
- 950 Jeremy M Wolfe. What can 1 million trials tell us about visual search? *Psycho-*
 951 *logical Science*, 9(1):33–39, 1998.
- 952 Jeremy M Wolfe. Approaches to visual search: Feature integration theory and
 953 guided search. *Oxford handbook of attention*, pages 11–55, 2014.
- 954 Jeremy M Wolfe and Michael J Van Wert. Varying target prevalence reveals two
 955 dissociable decision criteria in visual search. *Current biology*, 20(2):121–124,
 956 2010.
- 957 Jeremy M Wolfe, Kyle R Cave, and Susan L Franzel. Guided search: an alterna-
 958 tive to the feature integration model for visual search. *Journal of Experimental*
 959 *Psychology: Human perception and performance*, 15(3):419, 1989.
- 960 Jeremy M Wolfe, Evan M Palmer, and Todd S Horowitz. Reaction time distri-
 961 butions constrain models of visual search. *Vision research*, 50(14):1304–1311,
 962 2010.

- 963 Zoe Jing Xu, Alejandro Lleras, and Simona Buetti. Predicting how surface texture
964 and shape combine in the human visual system to direct attention. *Scientific*
965 *reports*, 11(1):1–13, 2021.
- 966 Xinger Yu, Timothy D Hanks, and Joy J Geng. Attentional guidance and match
967 decisions rely on different template information during visual search. *Psycho-*
968 *logical science*, 33(1):105–120, 2022.
- 969 Lingyun Zhang, Matthew H Tong, Tim K Marks, Honghao Shan, and Garrison W
970 Cottrell. Sun: A bayesian framework for saliency using natural statistics. *Jour-*
971 *nal of vision*, 8(7):32–32, 2008.