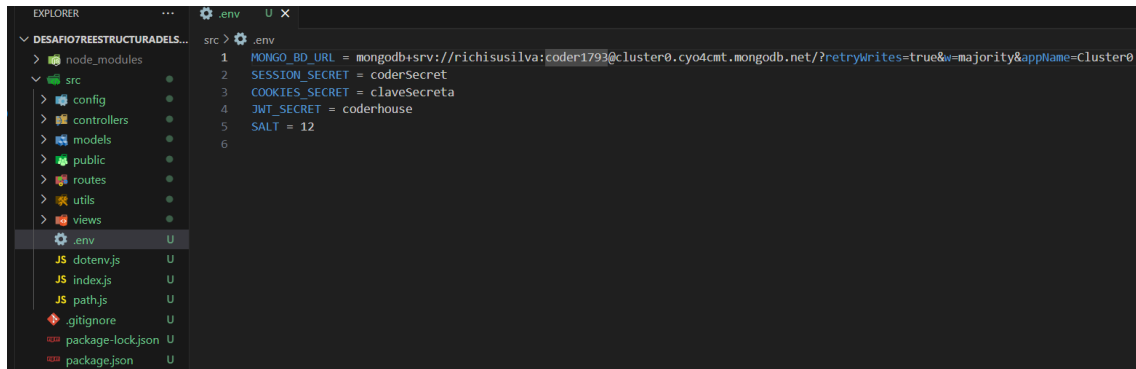


ARCHIVO .env

A screenshot of a Visual Studio Code editor window. The Explorer sidebar on the left shows a project structure with folders like 'node_modules', 'src', 'config', 'controllers', 'models', 'public', 'routes', 'utils', and 'views'. Below these are files including '.env', '.dotenv.js', 'index.js', 'path.js', '.gitignore', 'package-lock.json', and 'package.json'. The '.env' file is selected and its content is displayed in the main editor area. The content of the .env file is as follows:

```
1 MONGO_DB_URL = mongodb+srv://richisusilva:coder1793@cluster0.cyo4cmt.mongodb.net/?retryWrites=true&w=majority&appName=Cluster0
2 SESSION_SECRET = coderSecret
3 COOKIES_SECRET = claveSecreta
4 JWT_SECRET = coderhouse
5 SALT = 12
6
```

```
MONGO_DB_URL =
mongodb+srv://richisusilva:coder1793@cluster0.cyo4cmt.mongodb.net/?retryW
rites=true&w=majority&appName=Cluster0
SESSION_SECRET = coderSecret
COOKIES_SECRET = claveSecreta
JWT_SECRET = coderhouse
SALT = 12
```